


Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2462MHz Ant. 1+2-MIMO with Antenna(YIJIA)		

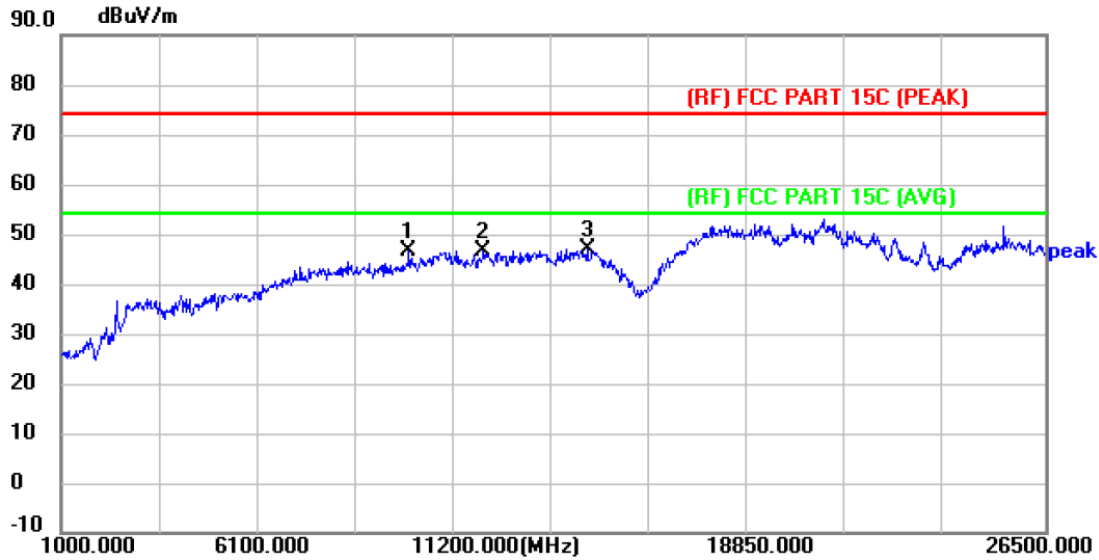


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10001.500	42.91	3.76	46.67	74.00	-27.33	peak	P
2	11939.500	39.18	7.36	46.54	74.00	-27.46	peak	P
3 *	14642.500	37.72	9.28	47.00	74.00	-27.00	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2462MHz Ant.1+2-MIMO with Antenna(YIJIA)		

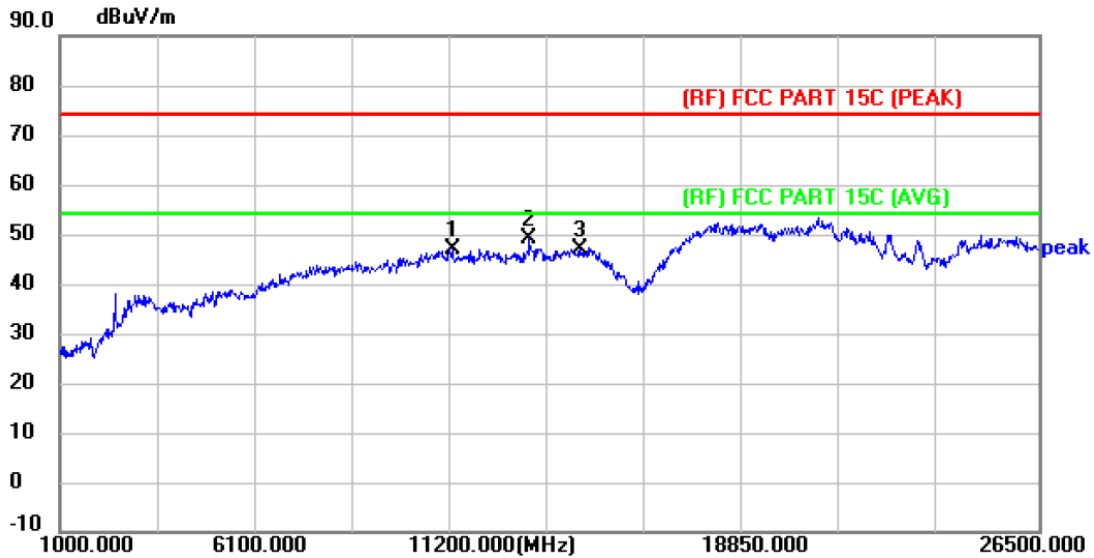

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11225.500	40.60	6.38	46.98	74.00	-27.02	peak	P
2 *	13240.000	41.00	7.96	48.96	74.00	-25.04	peak	P
3	14540.500	37.78	9.17	46.95	74.00	-27.05	peak	P

**Remark:**


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



# Attachment C--Restricted Bands Requirement Test Data

## Radiation Test

Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX b Mode 2412MHz Ant.2-SISO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

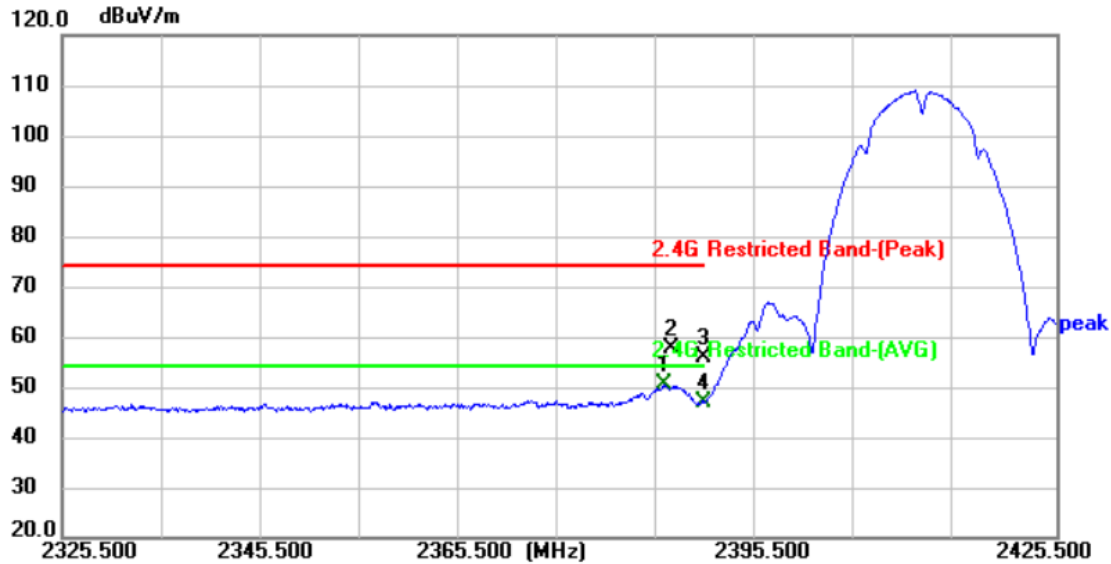


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2386.000	40.80	9.87	50.67	54.00	-3.33	AVG	P
2	2386.700	47.93	9.87	57.80	74.00	-16.20	peak	P
3	2390.000	46.00	9.88	55.88	74.00	-18.12	peak	P
4	2390.000	37.25	9.88	47.13	54.00	-6.87	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX b Mode 2412MHz Ant.2-SISO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

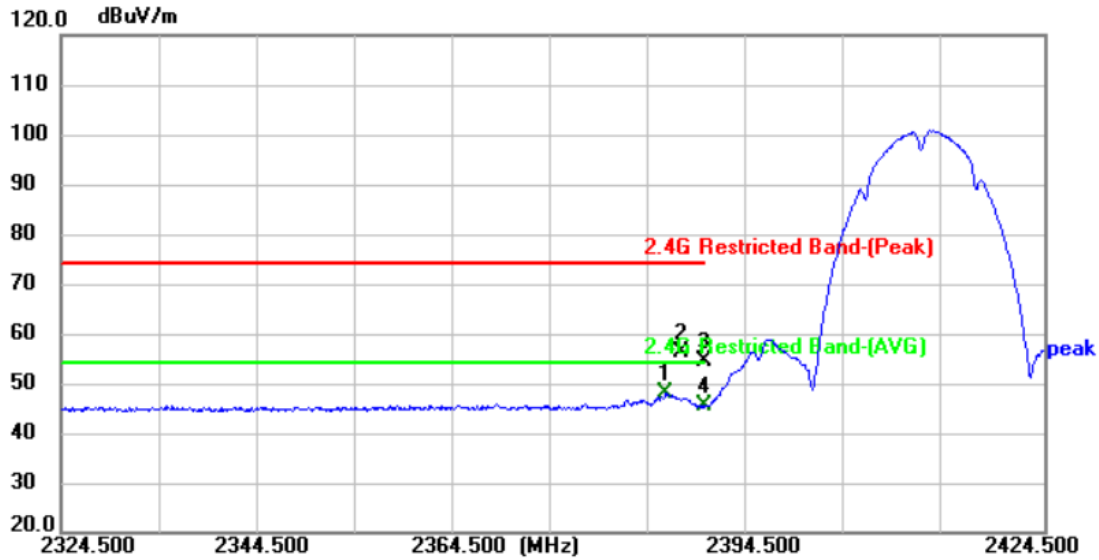


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2386.000	38.06	9.87	47.93	54.00	-6.07	AVG	P
2	2387.500	46.38	9.87	56.25	74.00	-17.75	peak	P
3	2390.000	44.72	9.88	54.60	74.00	-19.40	peak	P
4	2390.000	35.58	9.88	45.46	54.00	-8.54	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX b Mode 2462MHz Ant.2-SISO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

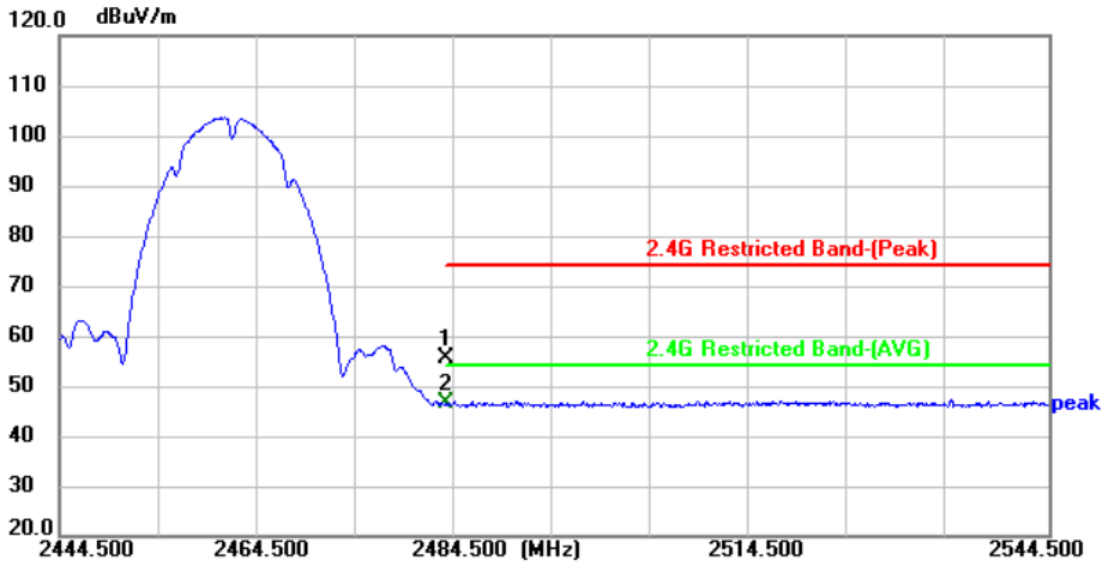


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	45.55	10.06	55.61	74.00	-18.39	peak	P
2 *	2483.500	36.46	10.06	46.52	54.00	-7.48	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX b Mode 2462MHz Ant.2-SISO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

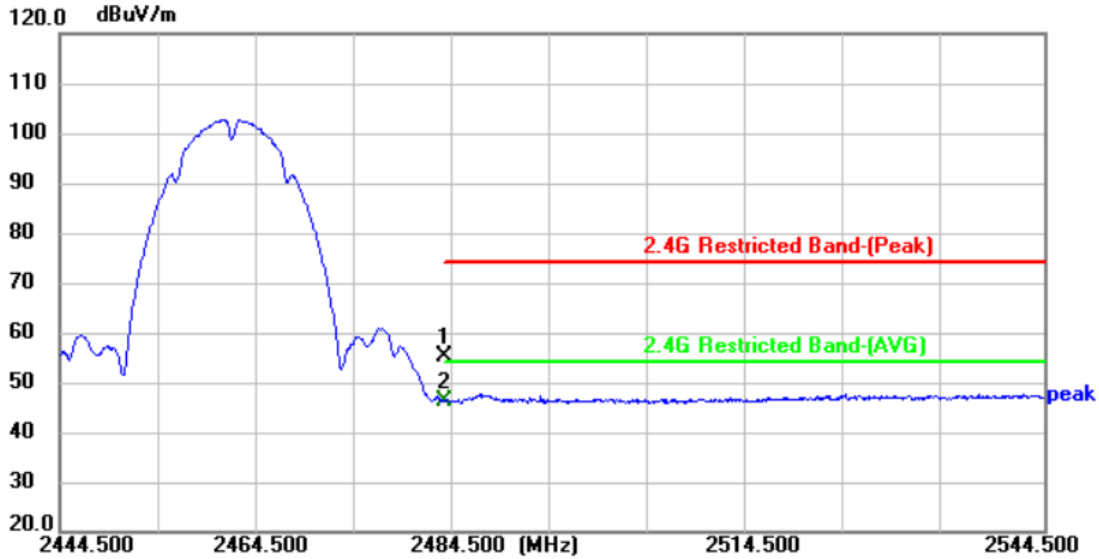


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	44.96	10.06	55.02	74.00	-18.98	peak	P
2 *	2483.500	36.19	10.06	46.25	54.00	-7.75	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX g Mode 2412MHz Ant.2-SISO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

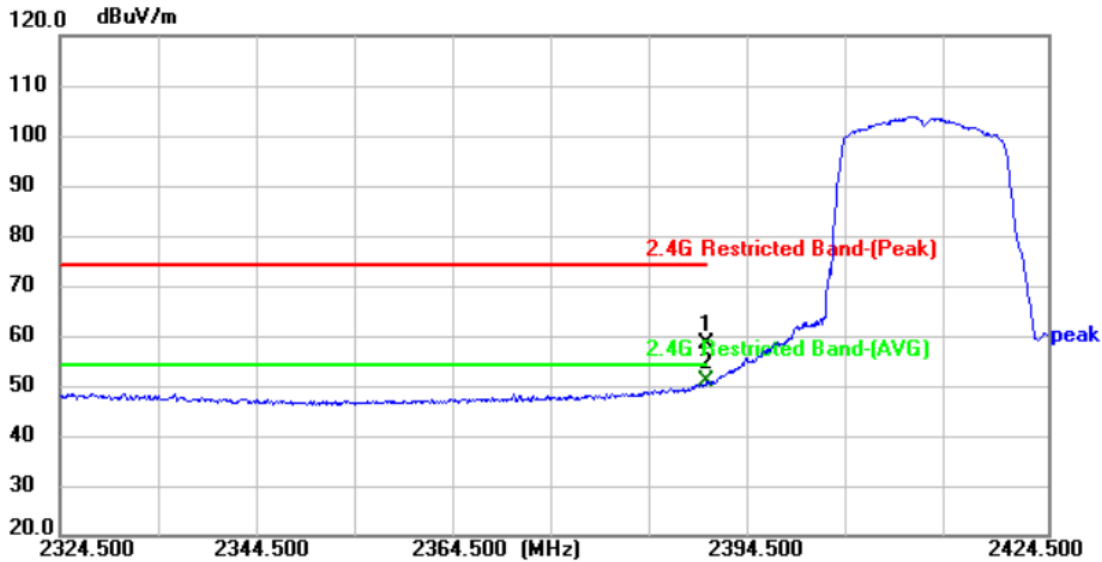


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	48.44	9.88	58.32	74.00	-15.68	peak	P
2 *	2390.000	40.92	9.88	50.80	54.00	-3.20	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX g Mode 2412MHz Ant.2-SISO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

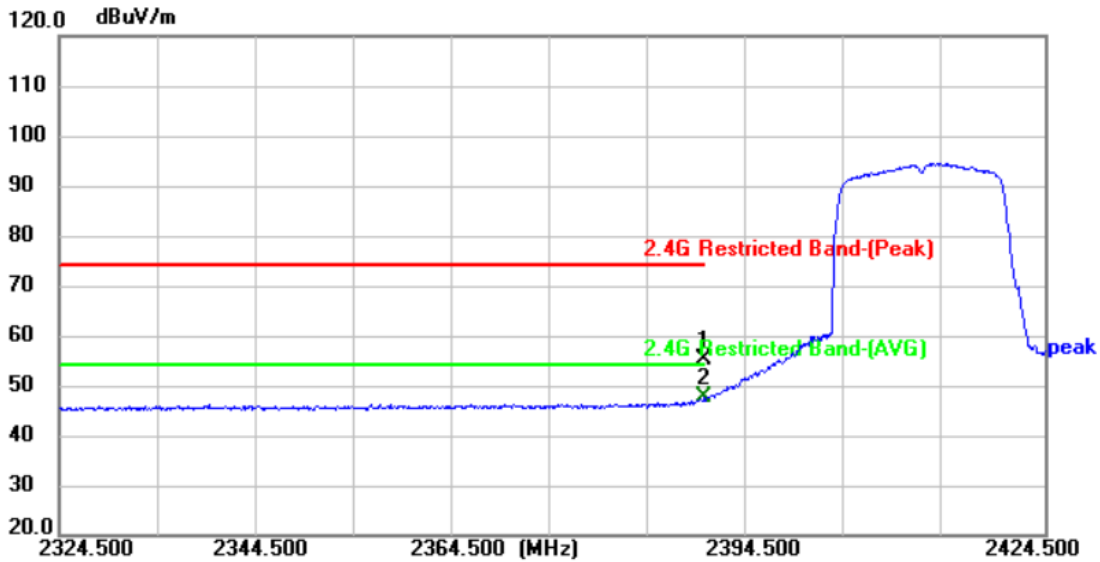

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	45.29	9.88	55.17	74.00	-18.83	peak	P
2 *	2390.000	37.69	9.88	47.57	54.00	-6.43	AVG	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX g Mode 2462MHz Ant.2-SISO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

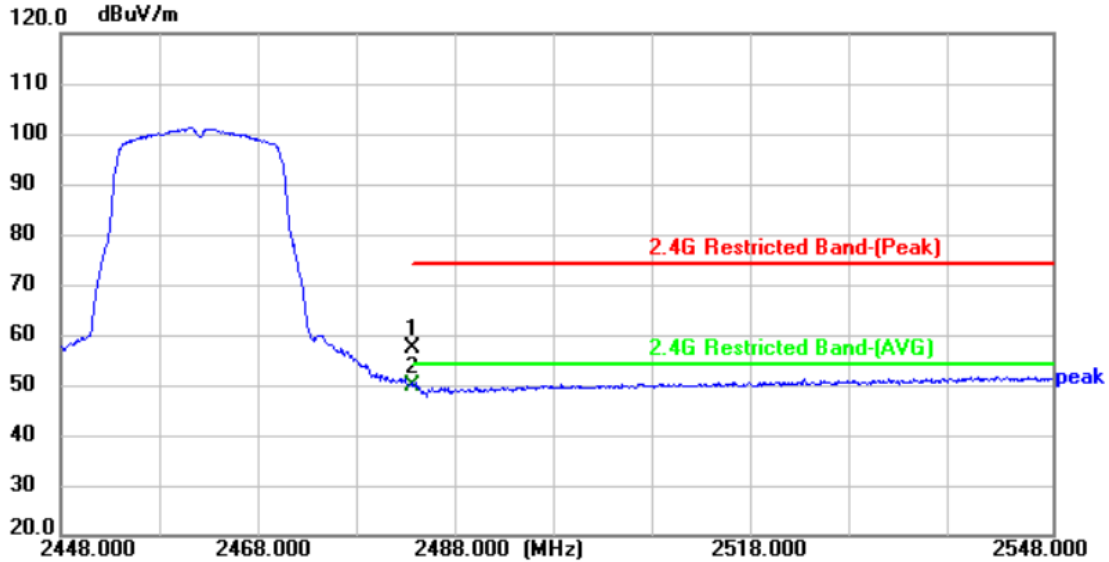


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	47.38	10.06	57.44	74.00	-16.56	peak	P
2 *	2483.500	39.71	10.06	49.77	54.00	-4.23	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX g Mode 2462MHz Ant.2-SISO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

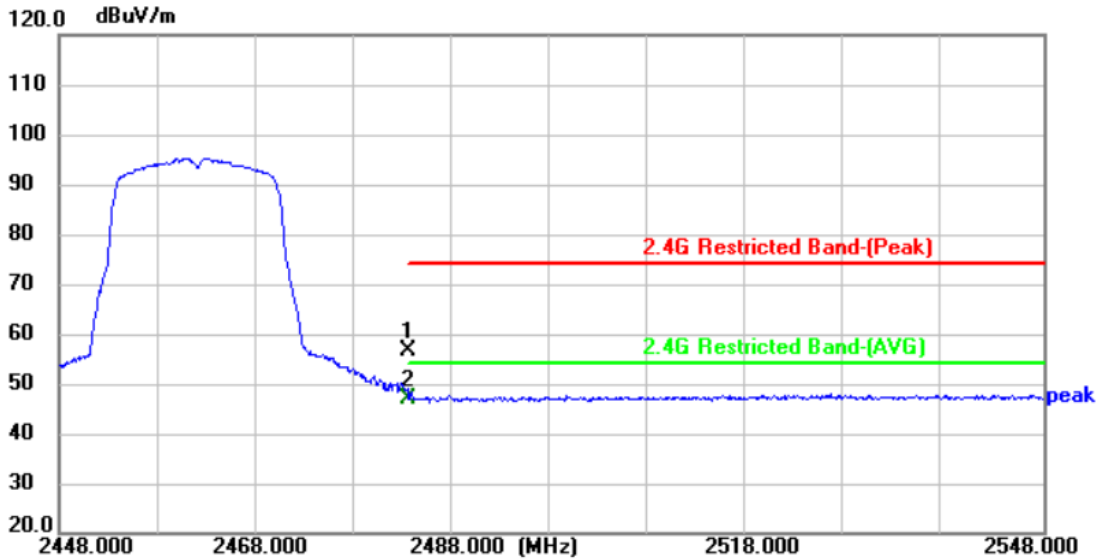


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	46.71	10.06	56.77	74.00	-17.23	peak	P
2 *	2483.500	37.00	10.06	47.06	54.00	-6.94	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2412MHz Ant.1+2-MIMO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

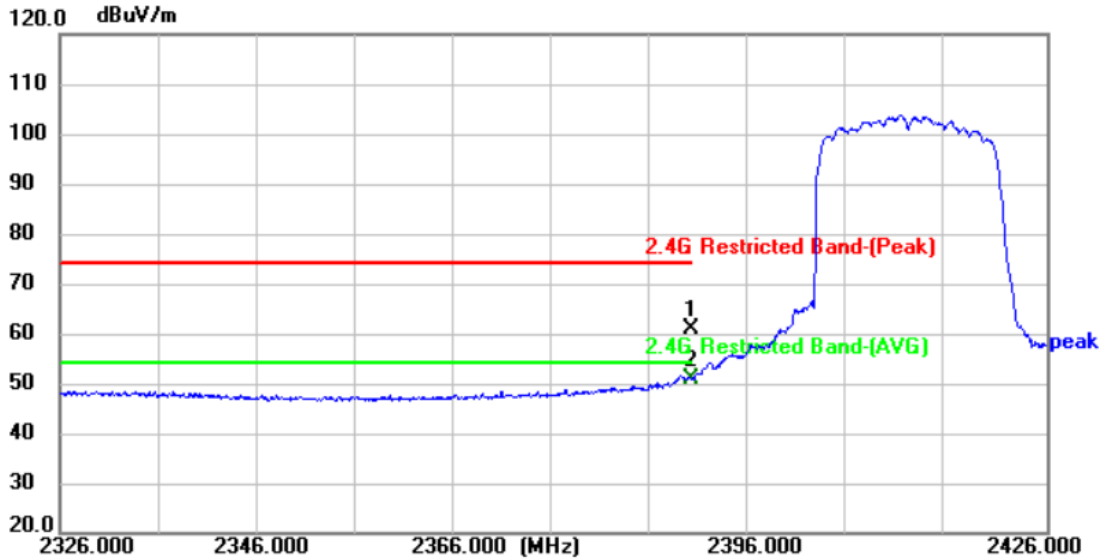


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	51.17	9.88	61.05	74.00	-12.95	peak	P
2 *	2390.000	41.14	9.88	51.02	54.00	-2.98	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2412MHz Ant.1+2-MIMO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

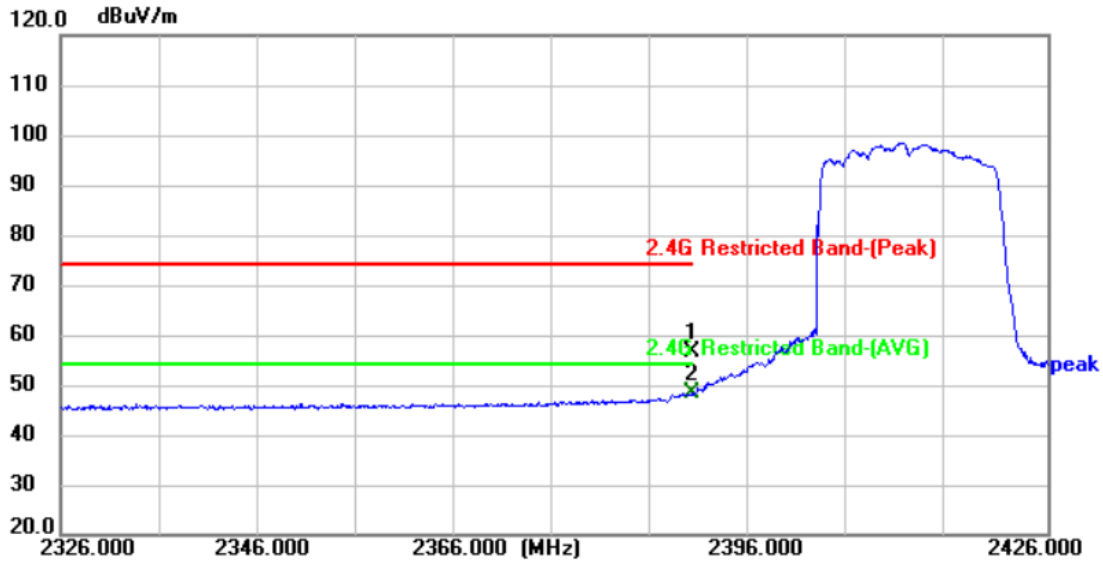


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	46.69	9.88	56.57	74.00	-17.43	peak	P
2 *	2390.000	38.36	9.88	48.24	54.00	-5.76	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2462MHz Ant.1+2-MIMO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

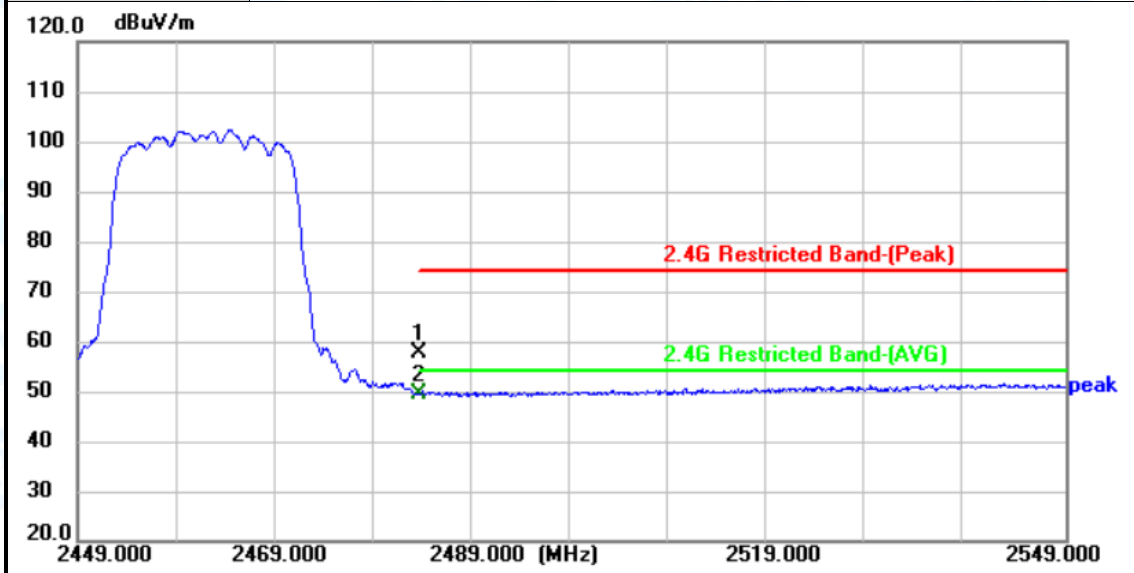


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	47.58	10.06	57.64	74.00	-16.36	peak	P
2 *	2483.500	39.51	10.06	49.57	54.00	-4.43	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2462MHz Ant.1+2-MIMO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

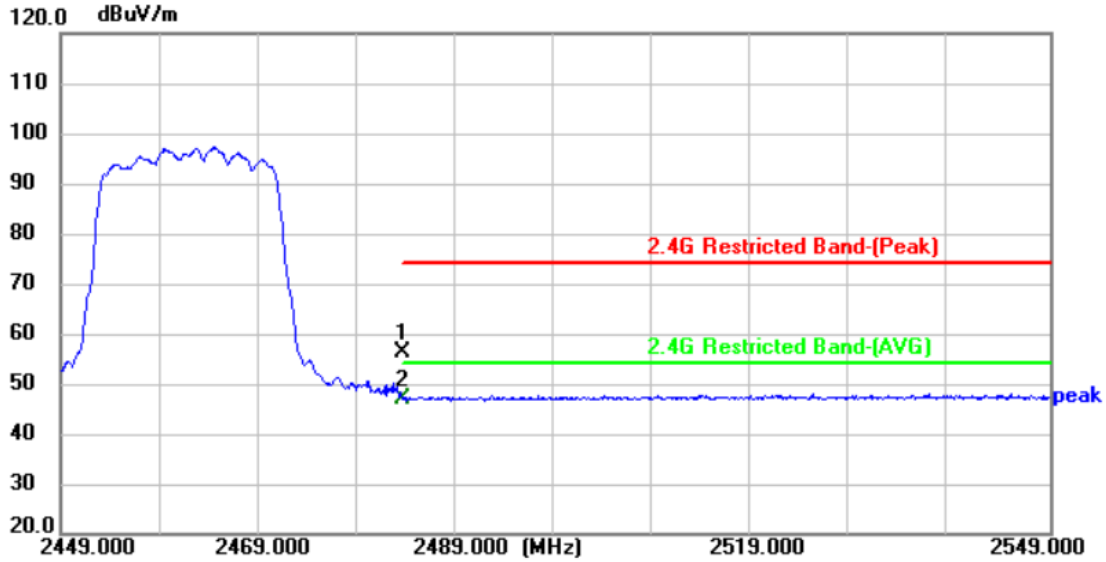


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	46.06	10.06	56.12	74.00	-17.88	peak	P
2 *	2483.500	37.07	10.06	47.13	54.00	-6.87	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2422MHz Ant.1+2-MIMO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

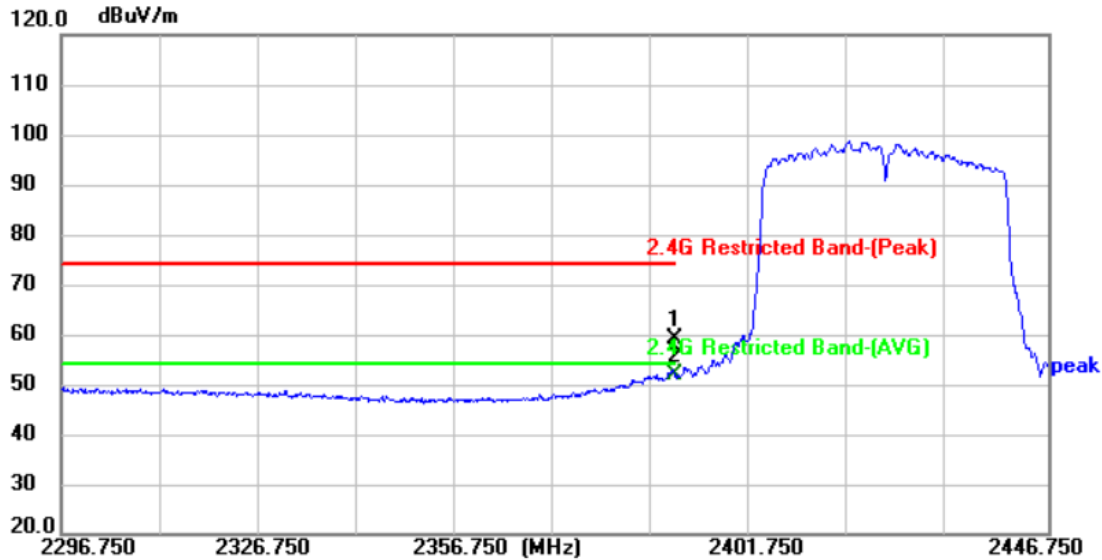


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	49.35	9.88	59.23	74.00	-14.77	peak	P
2 *	2390.000	41.92	9.88	51.80	54.00	-2.20	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2422MHz Ant.1+2-MIMO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

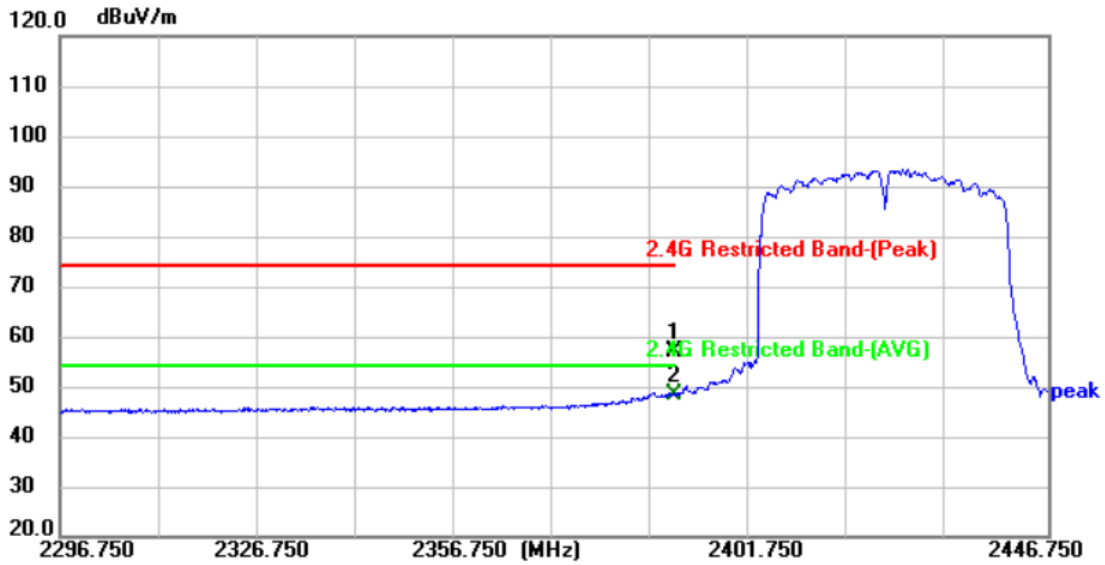

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	47.08	9.88	56.96	74.00	-17.04	peak	P
2 *	2390.000	38.42	9.88	48.30	54.00	-5.70	AVG	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2452MHz Ant.1+2-MIMO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

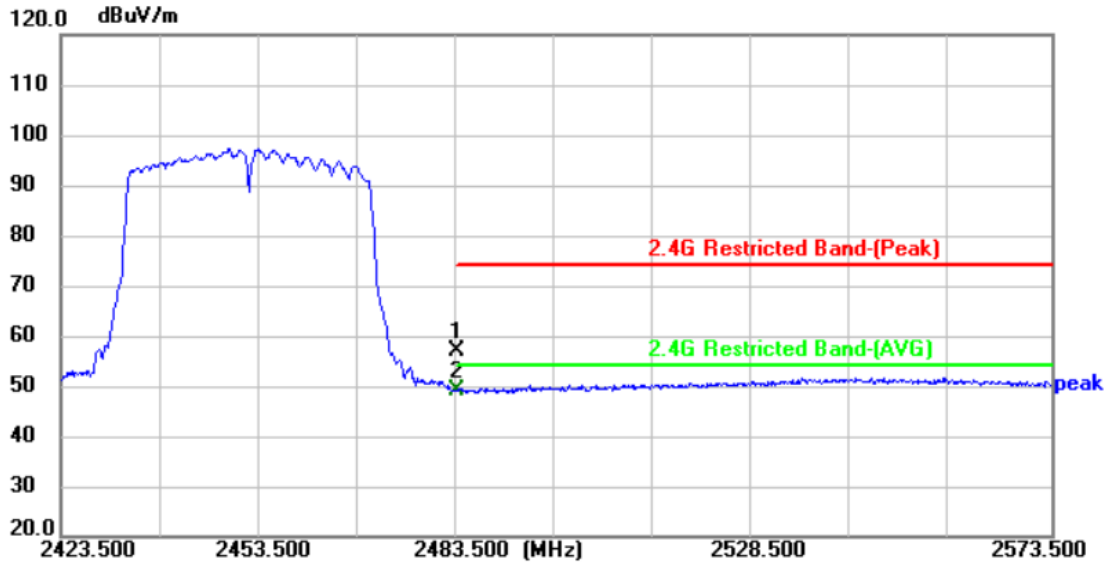


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	46.80	10.06	56.86	74.00	-17.14	peak	P
2 *	2483.500	39.06	10.06	49.12	54.00	-4.88	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	23.7°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2452MHz Ant.1+2-MIMO with Antenna(XINGHE)		
Remark:	Only worse case is reported.		

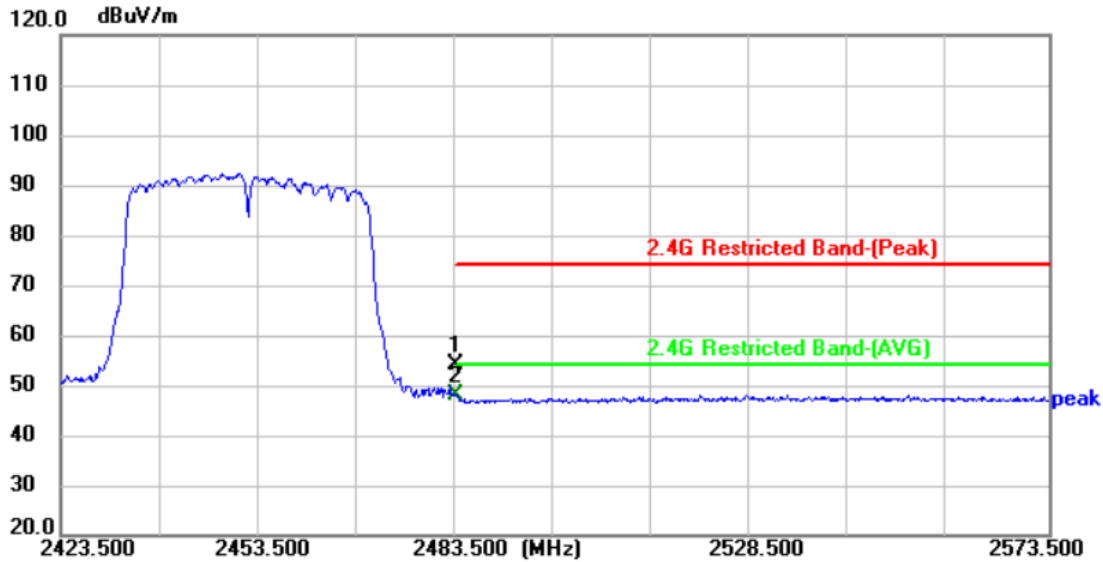


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	43.92	10.06	53.98	74.00	-20.02	peak	P
2 *	2483.500	37.83	10.06	47.89	54.00	-6.11	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX b Mode 2412MHz Ant.2-SISO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

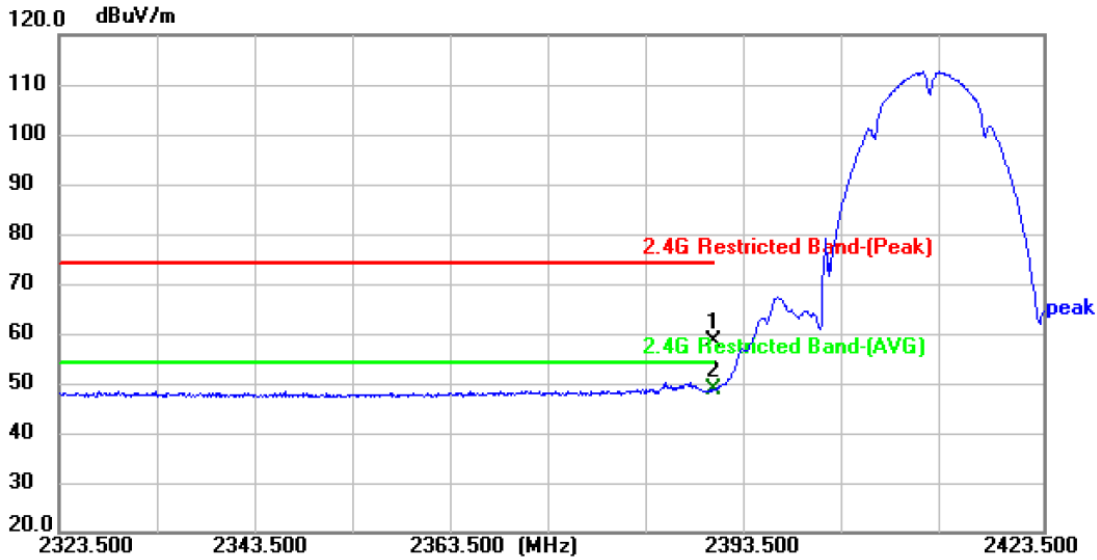


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	46.35	11.88	58.23	74.00	-15.77	peak	P
2 *	2390.000	36.77	11.88	48.65	54.00	-5.35	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX b Mode 2412MHz Ant.2-SISO with Antenna(YIJA)		
Remark:	Only worse case is reported.		

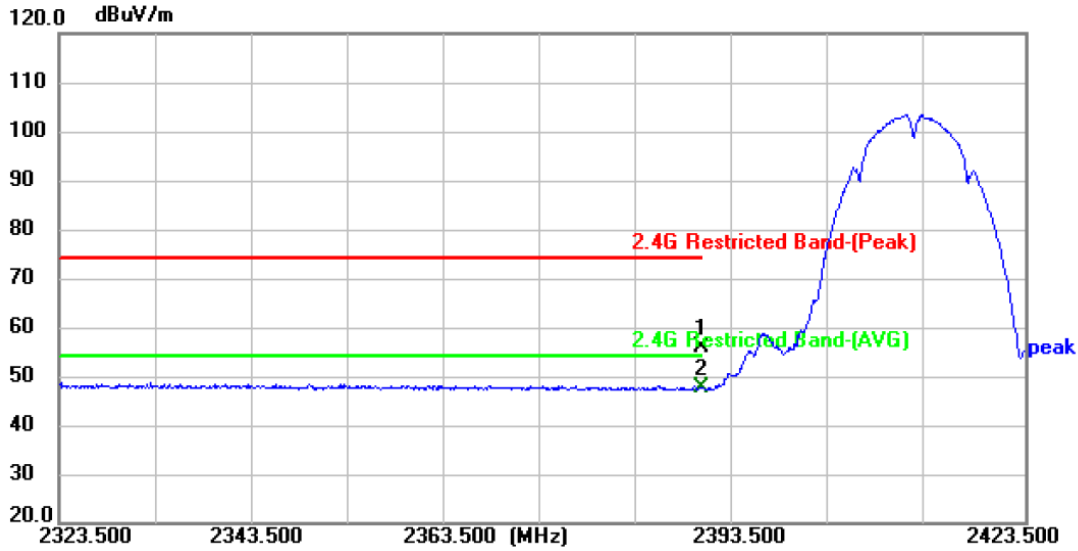


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	44.08	11.88	55.96	74.00	-18.04	peak	P
2 *	2390.000	35.81	11.88	47.69	54.00	-6.31	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX b Mode 2462MHz Ant.2-SISO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

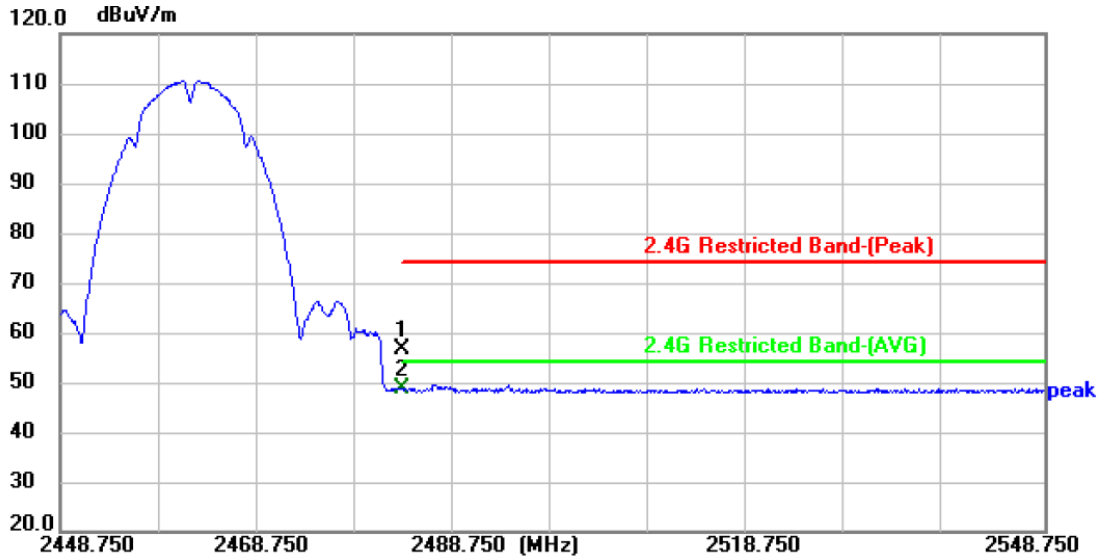


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	44.56	12.06	56.62	74.00	-17.38	peak	P
2 *	2483.500	36.79	12.06	48.85	54.00	-5.15	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX b Mode 2462MHz Ant.2-SISO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

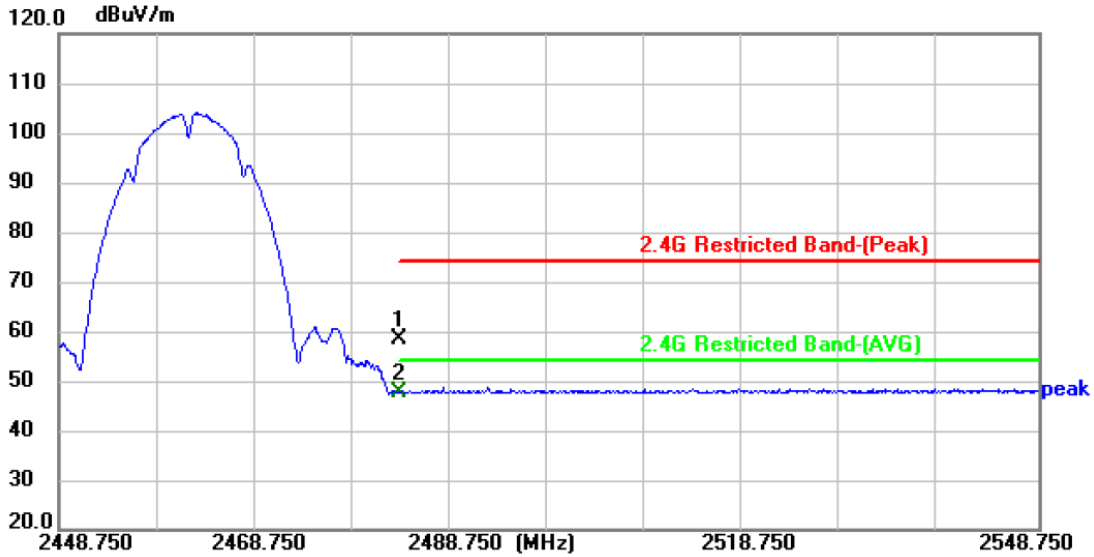


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	46.43	12.06	58.49	74.00	-15.51	peak	P
2 *	2483.500	35.64	12.06	47.70	54.00	-6.30	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX g Mode 2412MHz Ant.2-SISO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

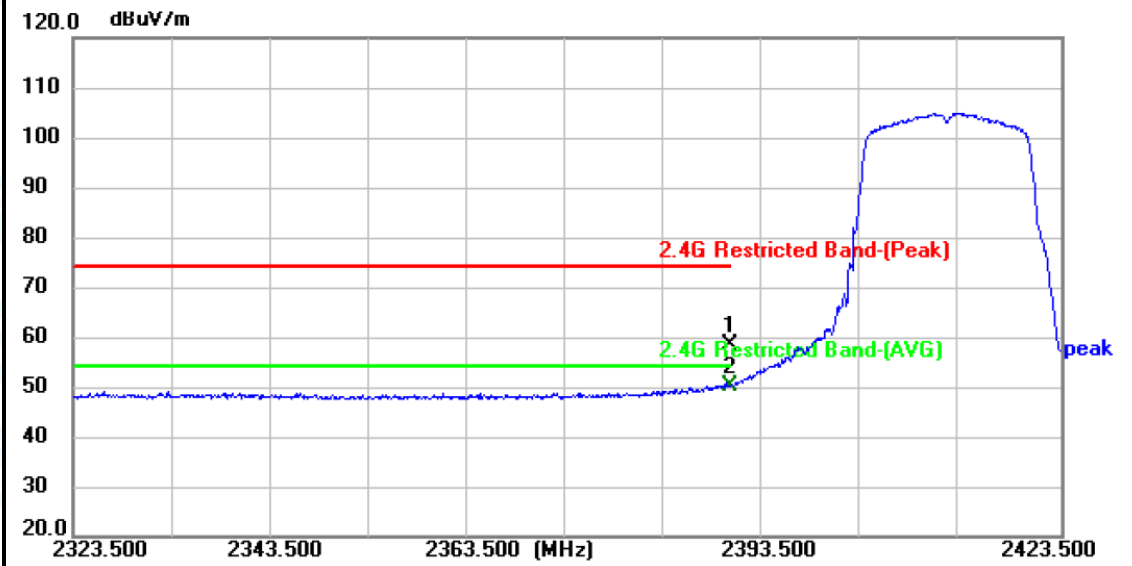


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	46.59	11.88	58.47	74.00	-15.53	peak	P
2 *	2390.000	38.45	11.88	50.33	54.00	-3.67	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX g Mode 2412MHz Ant.2-SISO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

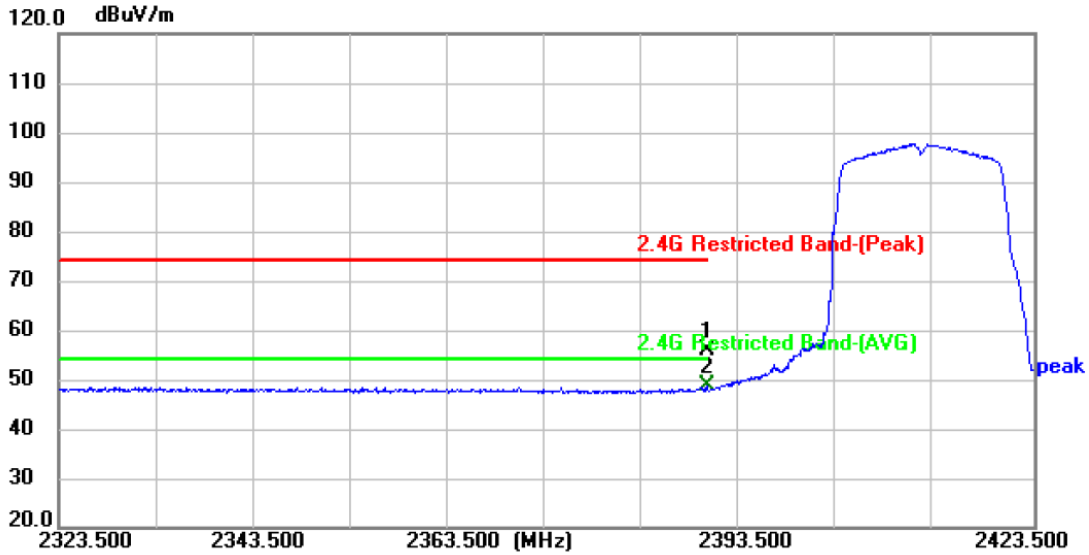

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	43.99	11.88	55.87	74.00	-18.13	peak	P
2 *	2390.000	36.88	11.88	48.76	54.00	-5.24	AVG	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX g Mode 2462MHz Ant.2-SISO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

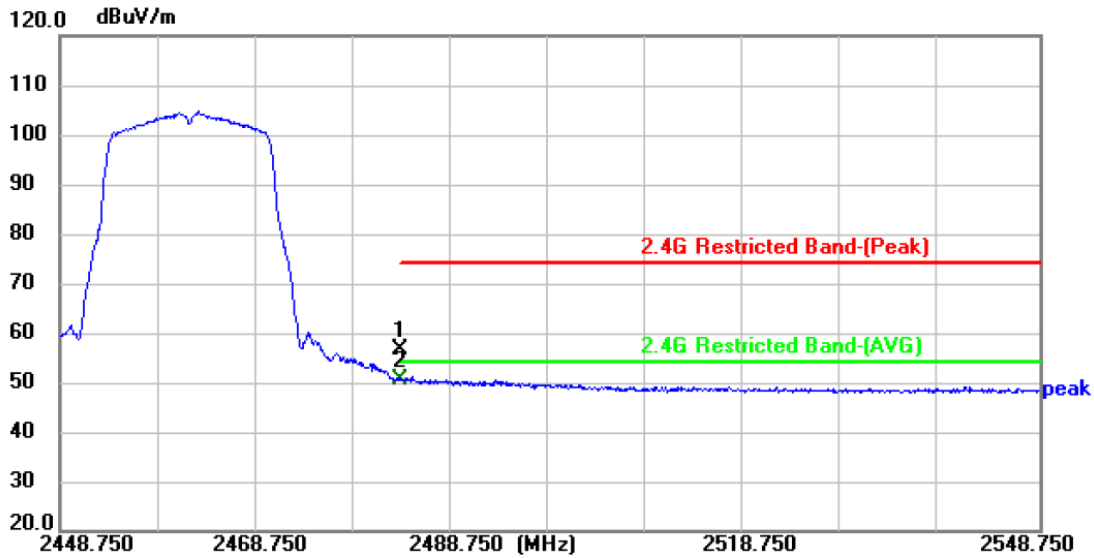


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	44.48	12.06	56.54	74.00	-17.46	peak	P
2 *	2483.500	38.55	12.06	50.61	54.00	-3.39	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX g Mode 2462MHz Ant.2-SISO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

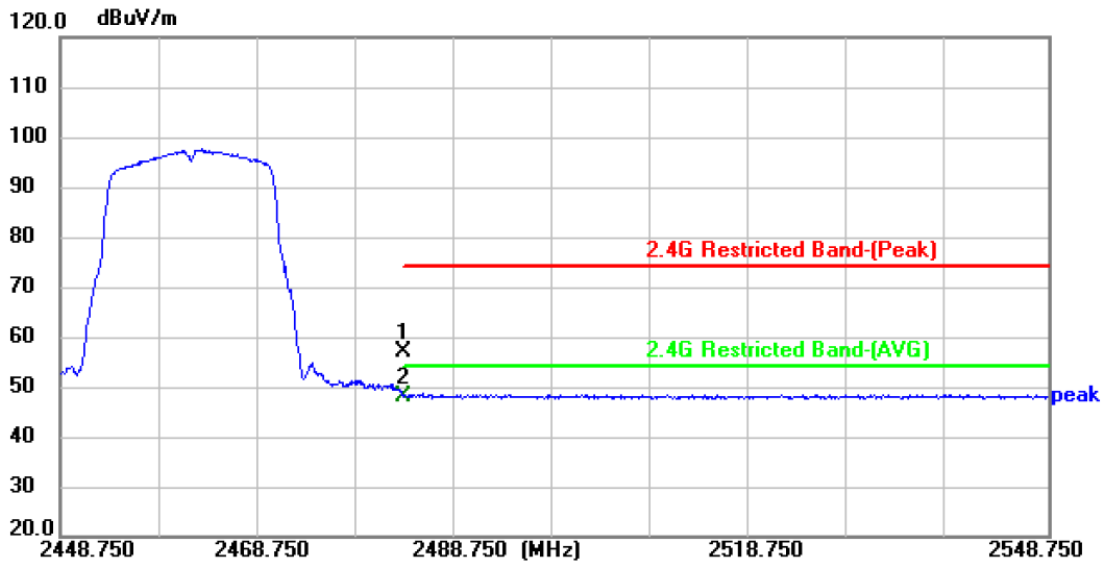


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	44.83	12.06	56.89	74.00	-17.11	peak	P
2 *	2483.500	35.88	12.06	47.94	54.00	-6.06	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2412MHz Ant.1+2-MIMO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

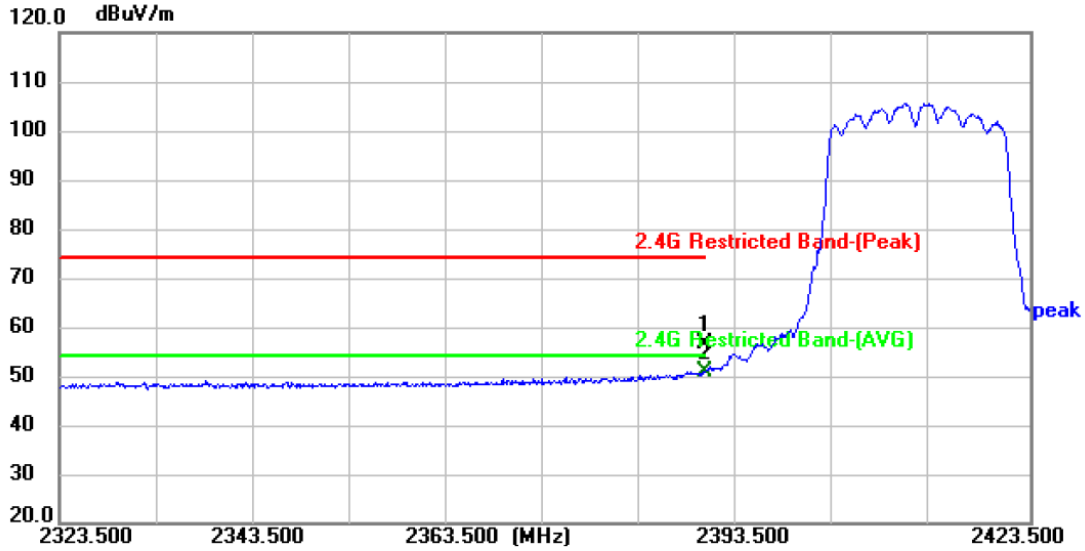


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	44.77	11.88	56.65	74.00	-17.35	peak	P
2 *	2390.000	39.09	11.88	50.97	54.00	-3.03	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2412MHz Ant.1+2-MIMO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

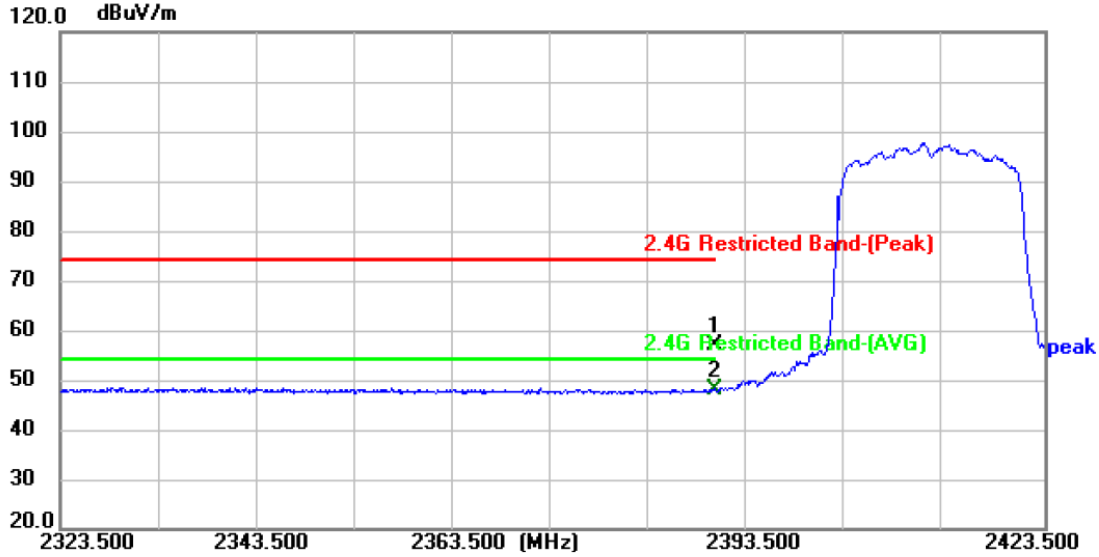


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	44.91	11.88	56.79	74.00	-17.21	peak	P
2 *	2390.000	36.00	11.88	47.88	54.00	-6.12	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2462MHz Ant.1+2-MIMO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

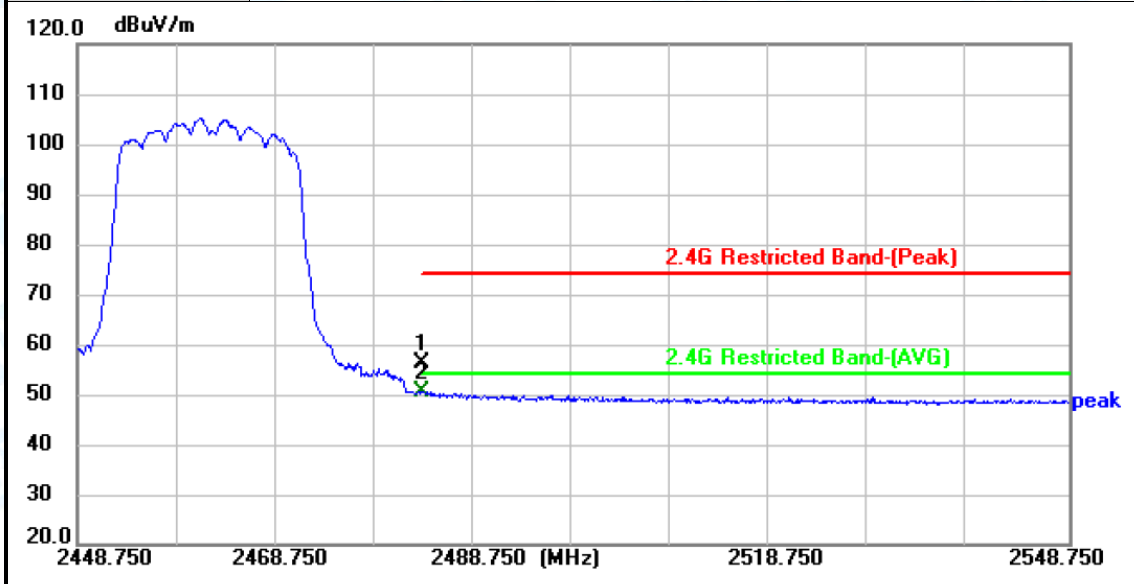


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	44.09	12.06	56.15	74.00	-17.85	peak	P
2 *	2483.500	38.34	12.06	50.40	54.00	-3.60	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2462MHz Ant.1+2-MIMO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

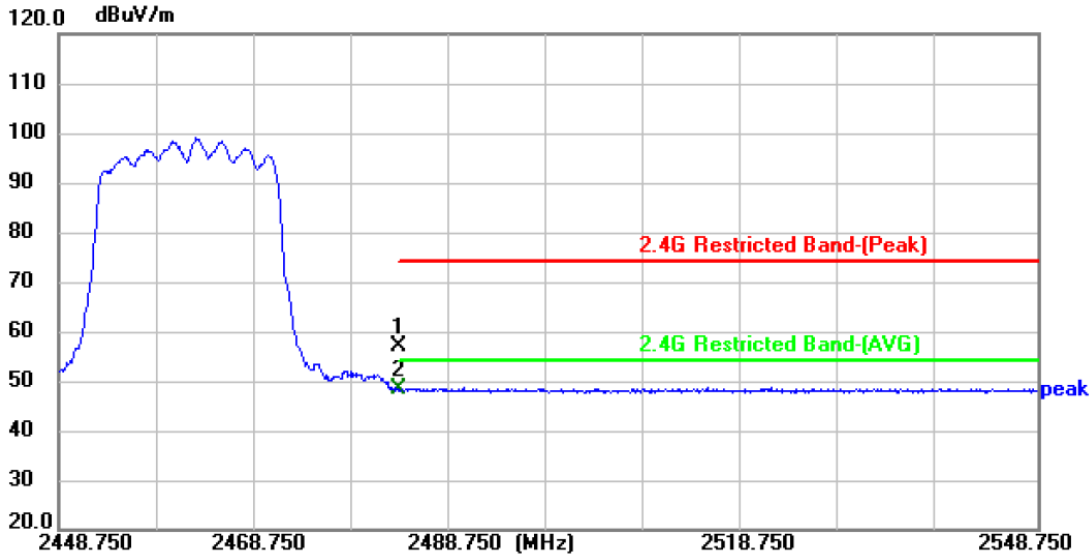


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	44.86	12.06	56.92	74.00	-17.08	peak	P
2 *	2483.500	36.19	12.06	48.25	54.00	-5.75	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2422MHz Ant.1+2-MIMO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

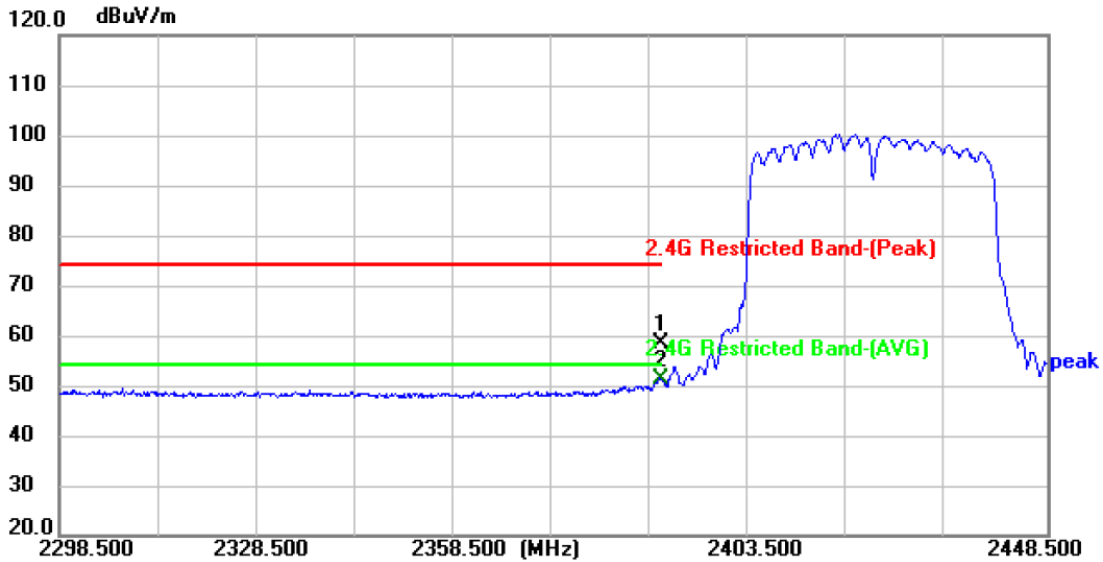


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	46.47	11.88	58.35	74.00	-15.65	peak	P
2 *	2390.000	39.30	11.88	51.18	54.00	-2.82	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2422MHz Ant.1+2-MIMO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

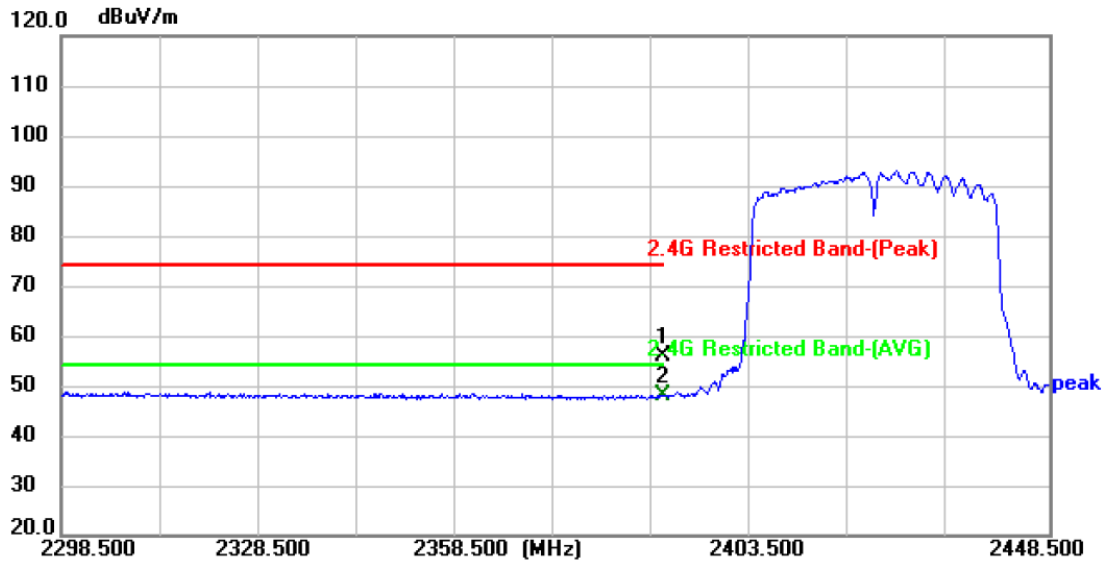

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	43.99	11.88	55.87	74.00	-18.13	peak	P
2 *	2390.000	36.04	11.88	47.92	54.00	-6.08	AVG	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2452MHz Ant.1+2-MIMO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

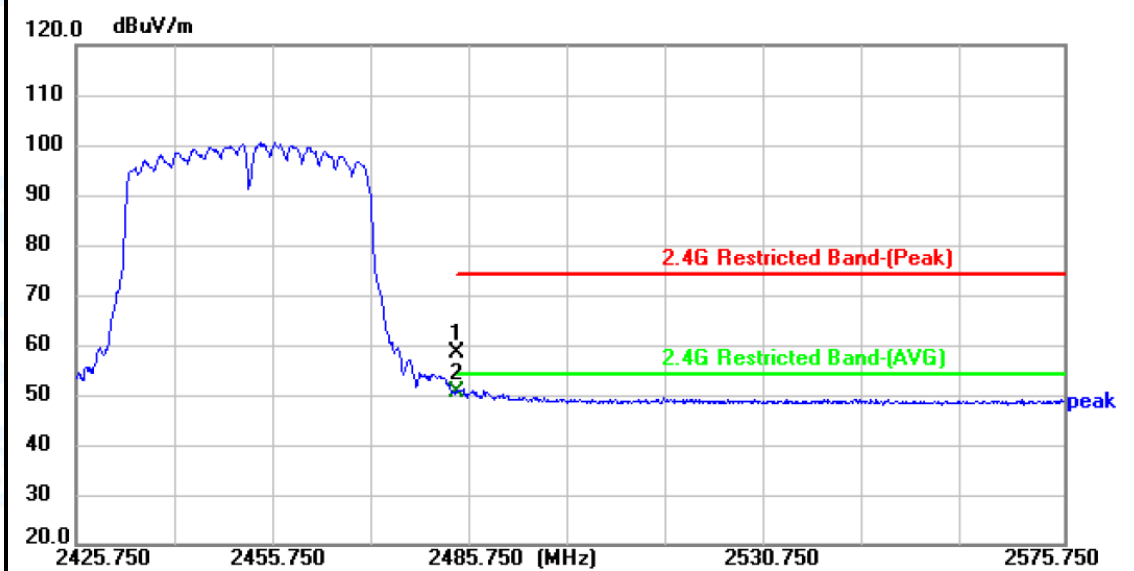


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	46.16	12.06	58.22	74.00	-15.78	peak	P
2 *	2483.500	38.51	12.06	50.57	54.00	-3.43	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.2°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2452MHz Ant.1+2-MIMO with Antenna(YIJIA)		
Remark:	Only worse case is reported.		

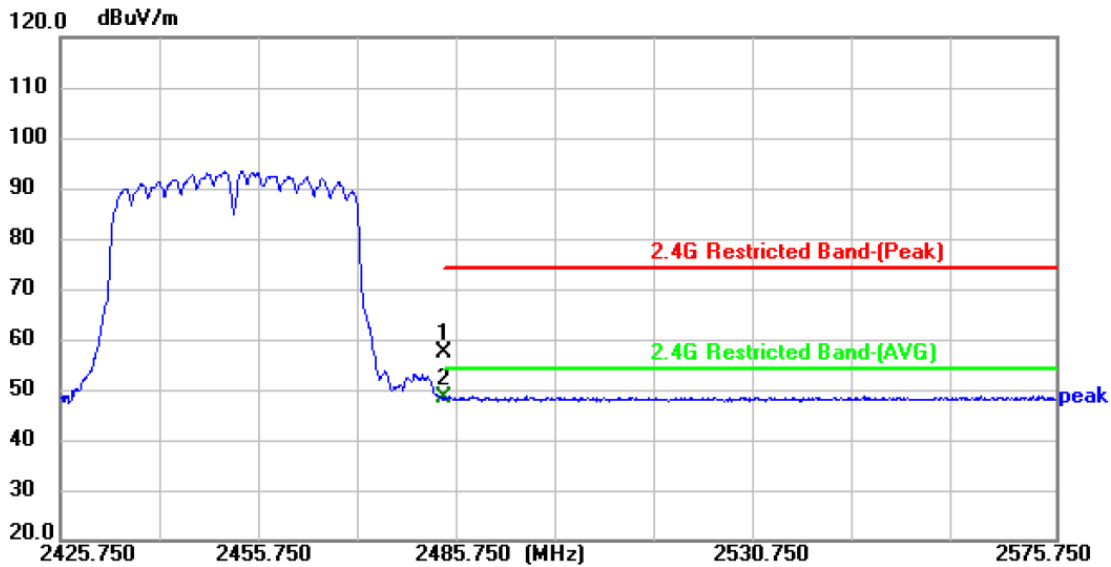

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	45.37	12.06	57.43	74.00	-16.57	peak	P
2 *	2483.500	36.37	12.06	48.43	54.00	-5.57	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

-----END OF THE REPORT-----

