
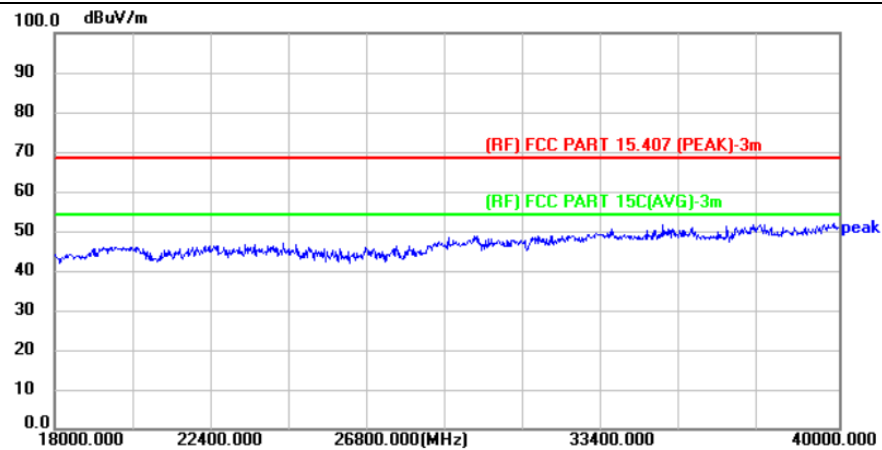


Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT20) Mode 5580MHz with Antenna(XINGHE)		

Horizontal

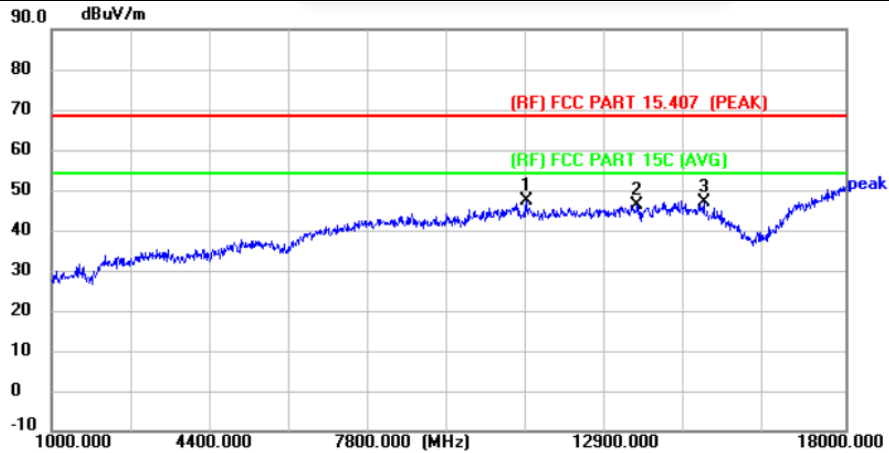

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11166.000	40.88	6.28	47.16	68.30	-21.14	peak	P
2	13546.000	38.00	8.22	46.22	68.30	-22.08	peak	P
3	14974.000	37.50	9.63	47.13	68.30	-21.17	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT20) Mode 5580MHz with Antenna(XINGHE)		

Vertical

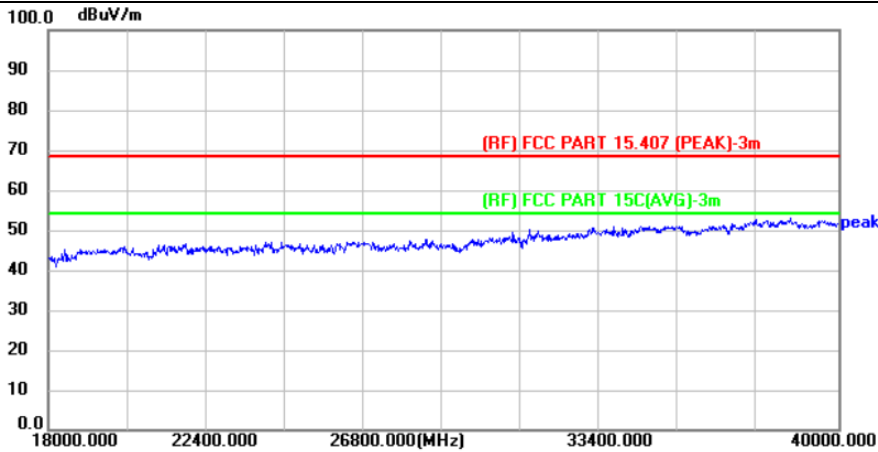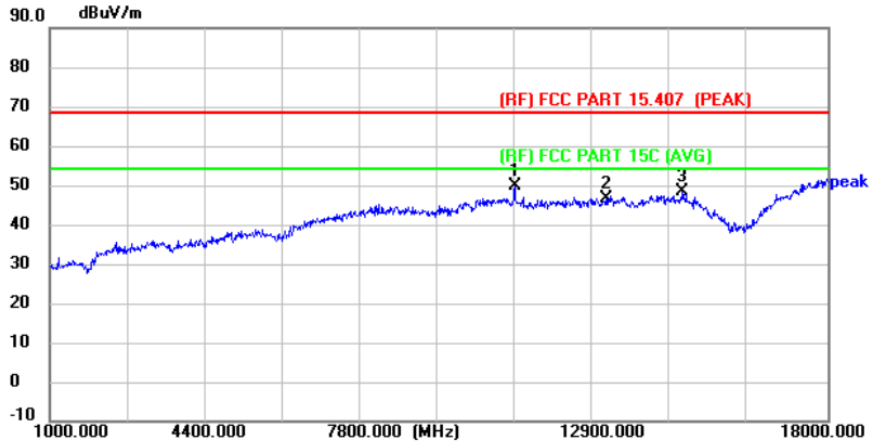

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11166.000	43.58	6.28	49.86	68.30	-18.44	peak	P
2	13172.000	38.69	7.91	46.60	68.30	-21.70	peak	P
3	14838.000	38.80	9.48	48.28	68.30	-20.02	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT20) Mode 5720MHz with Antenna(XINGHE)		

Horizontal

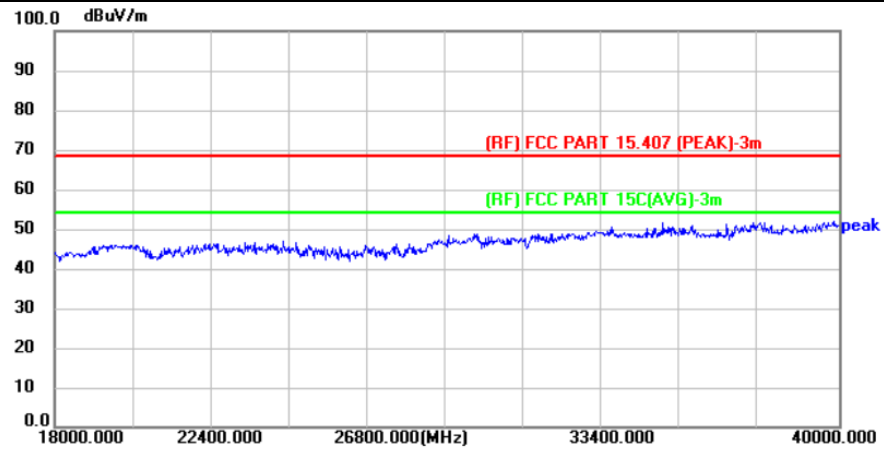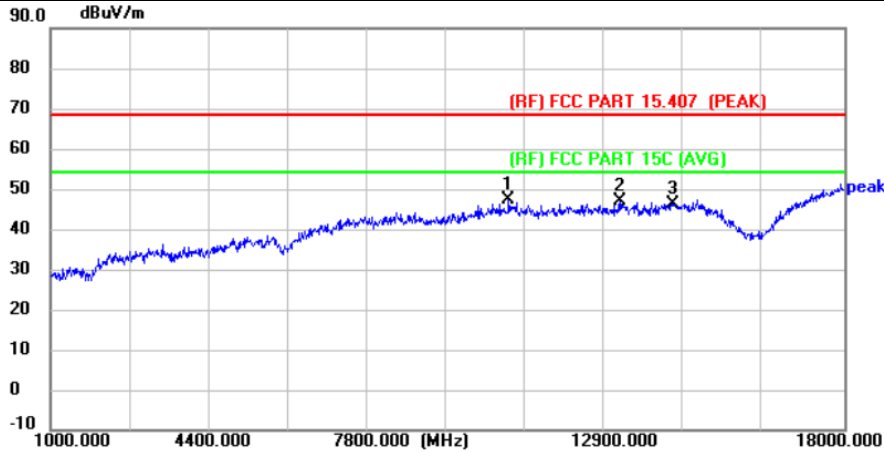

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10809.000	41.60	5.61	47.21	68.30	-21.09	peak	P
2	13206.000	39.03	7.93	46.96	68.30	-21.34	peak	P
3	14345.000	37.44	8.97	46.41	68.30	-21.89	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT20) Mode 5720MHz with Antenna(XINGHE)		

Vertical

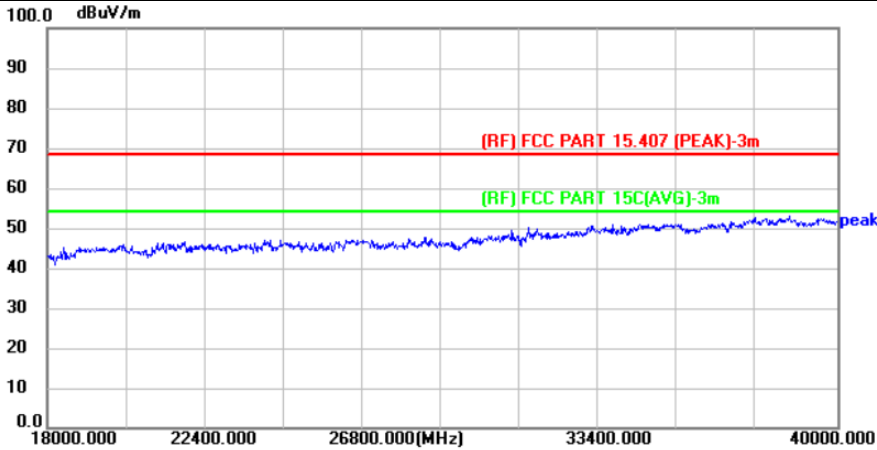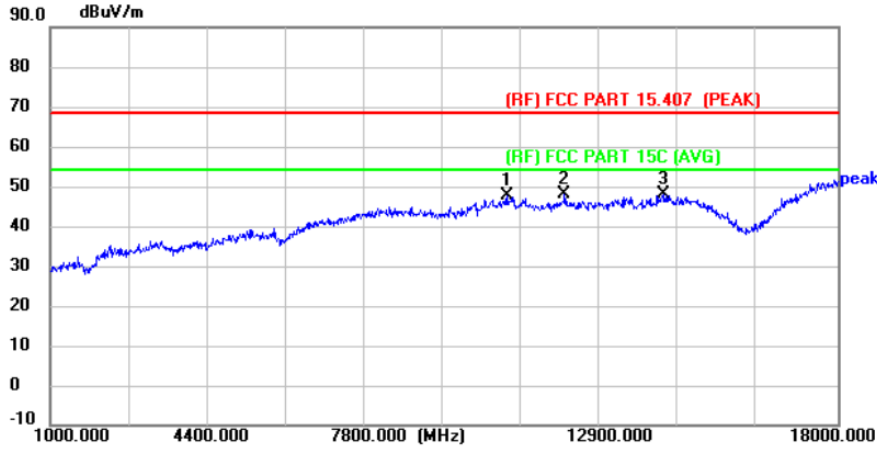

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10877.000	41.84	5.76	47.60	68.30	-20.70	peak	P
2 *	12101.000	40.55	7.48	48.03	68.30	-20.27	peak	P
3	14226.000	39.02	8.85	47.87	68.30	-20.43	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5500MHz with Antenna(XINGHE)		

Horizontal

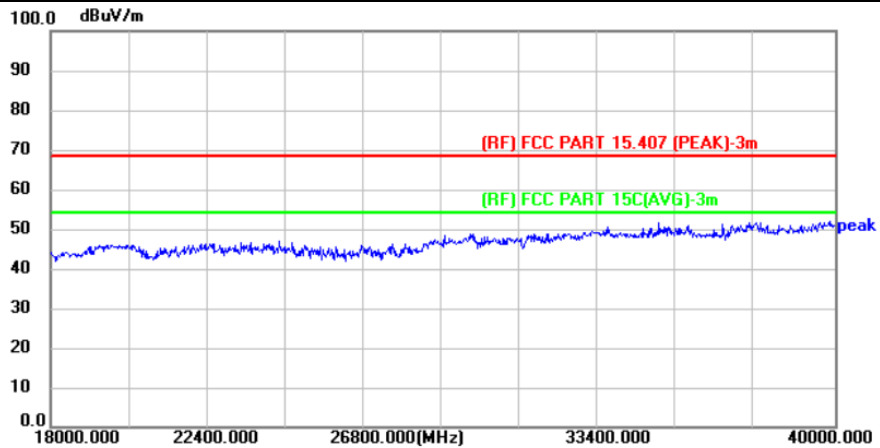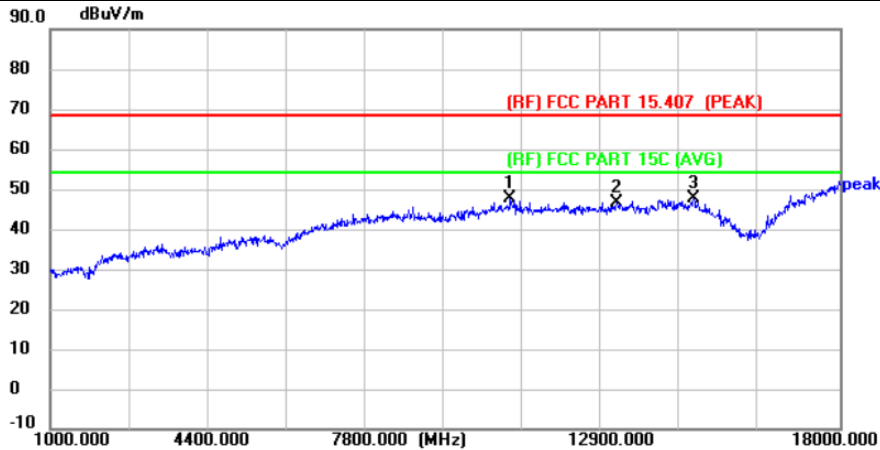

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10911.000	41.80	5.84	47.64	68.30	-20.66	peak	P
2	13189.000	38.70	7.92	46.62	68.30	-21.68	peak	P
3 *	14855.000	38.20	9.51	47.71	68.30	-20.59	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5500MHz with Antenna(XINGHE)		

Vertical

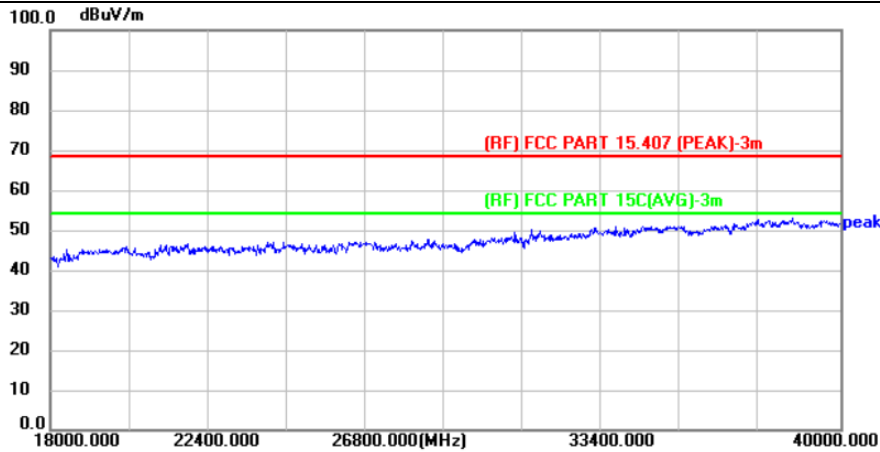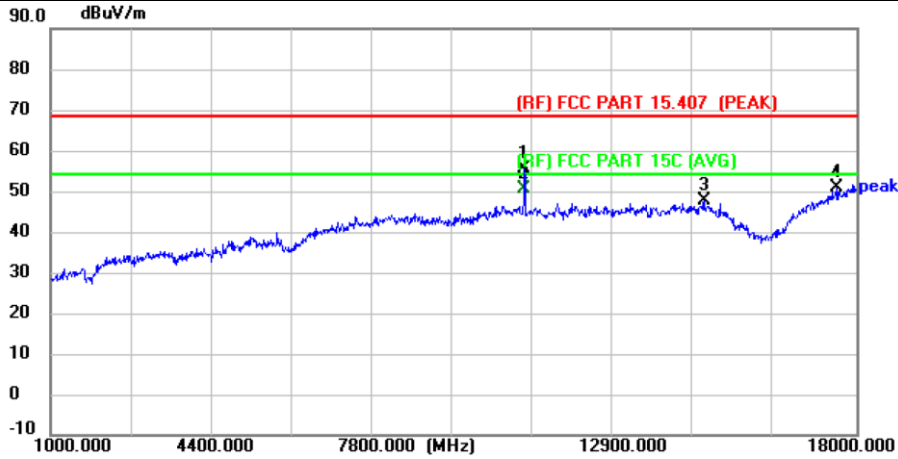

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10996.000	49.31	6.05	55.36	68.30	-12.94	peak	P
2 *	10996.000	44.59	6.05	50.64	54.00	-3.36	AVG	P
3	14787.000	38.12	9.44	47.56	68.30	-20.74	peak	P
4	17592.000	36.17	14.73	50.90	68.30	-17.40	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5580MHz with Antenna(XINGHE)		

Horizontal

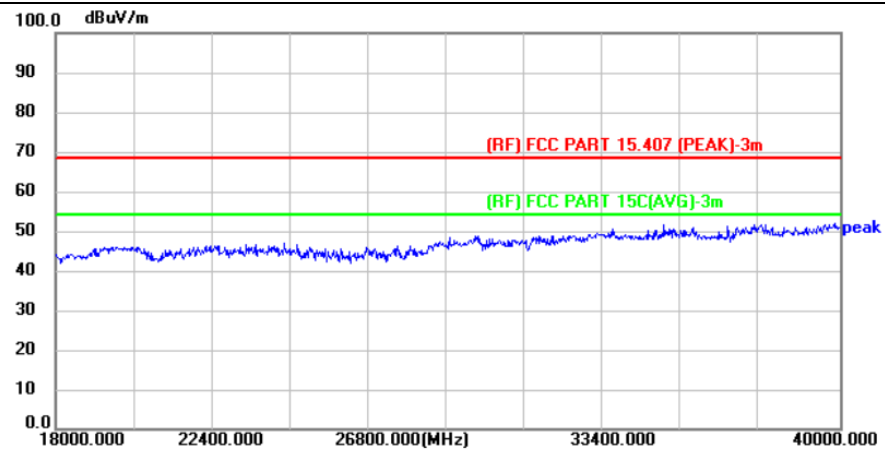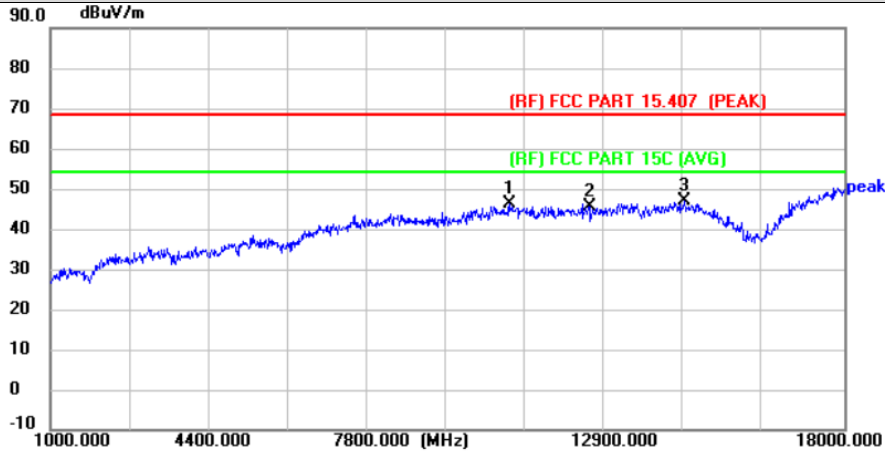

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10826.000	40.43	5.65	46.08	68.30	-22.22	peak	P
2	12543.000	37.86	7.62	45.48	68.30	-22.82	peak	P
3 *	14566.000	37.61	9.21	46.82	68.30	-21.48	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5580MHz with Antenna(XINGHE)		

Vertical

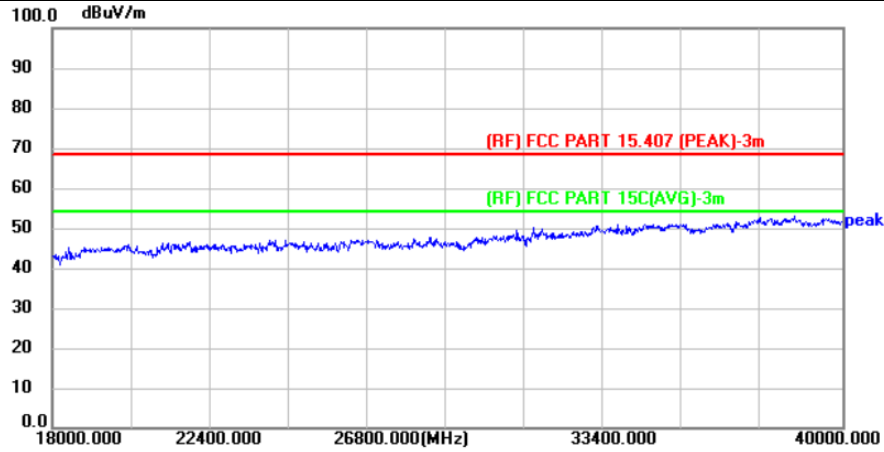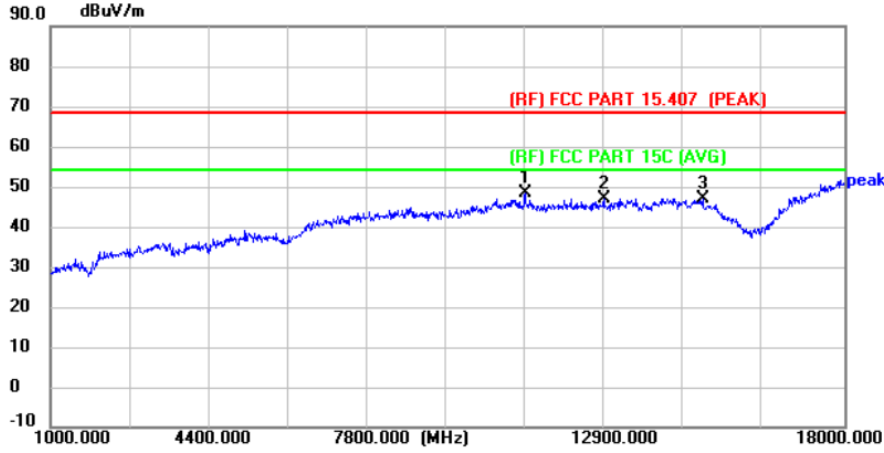

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11166.000	42.08	6.28	48.36	68.30	-19.94	peak	P
2	12849.000	39.20	7.72	46.92	68.30	-21.38	peak	P
3	14974.000	37.28	9.63	46.91	68.30	-21.39	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5720MHz with Antenna(XINGHE)		

Horizontal

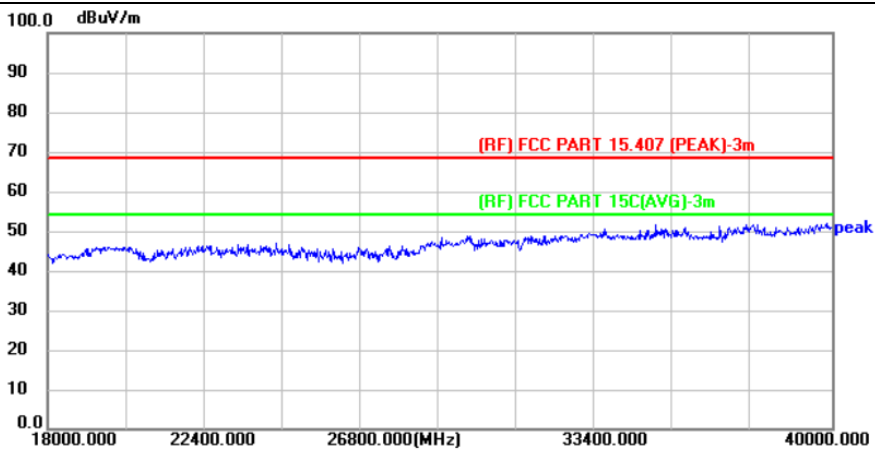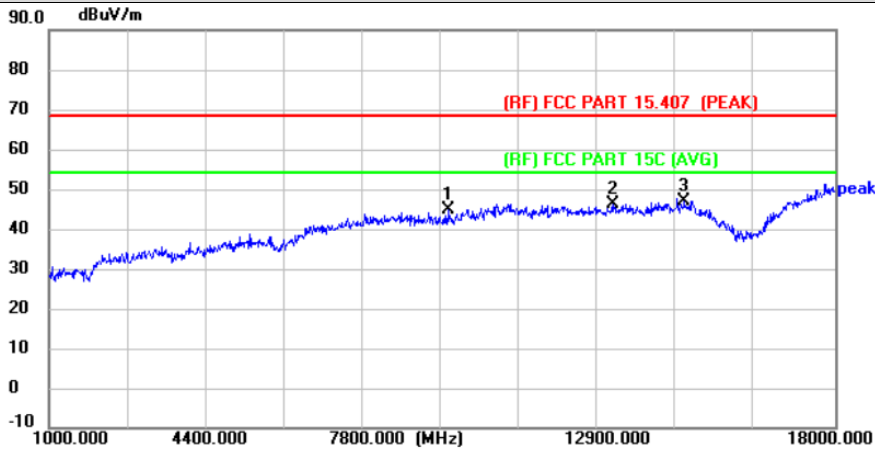

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9653.000	42.21	2.49	44.70	68.30	-23.60	peak	P
2	13189.000	38.44	7.92	46.36	68.30	-21.94	peak	P
3 *	14736.000	37.74	9.38	47.12	68.30	-21.18	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5720MHz with Antenna(XINGHE)		

Vertical

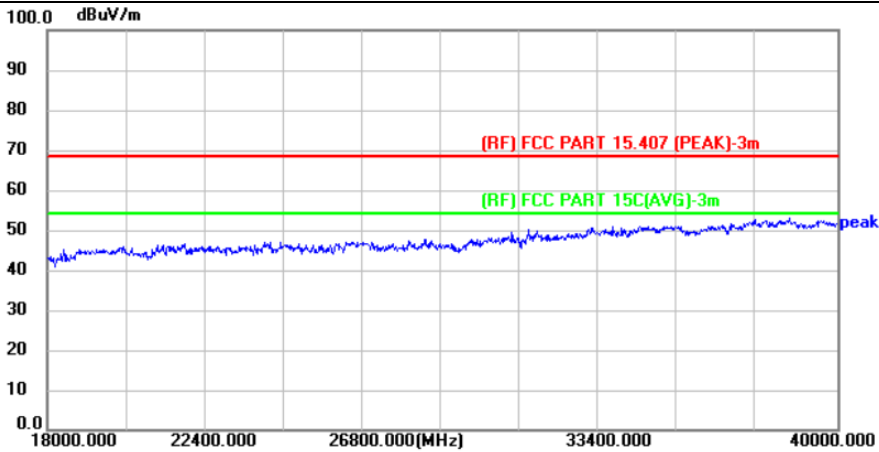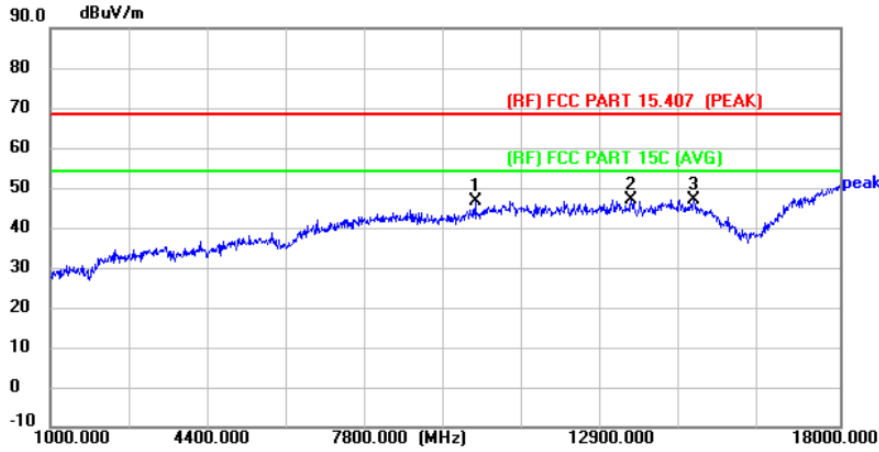

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10146.000	42.45	4.10	46.55	68.30	-21.75	peak	P
2	13512.000	38.67	8.19	46.86	68.30	-21.44	peak	P
3 *	14855.000	37.50	9.51	47.01	68.30	-21.29	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5745MHz with Antenna(XINGHE)		

Horizontal

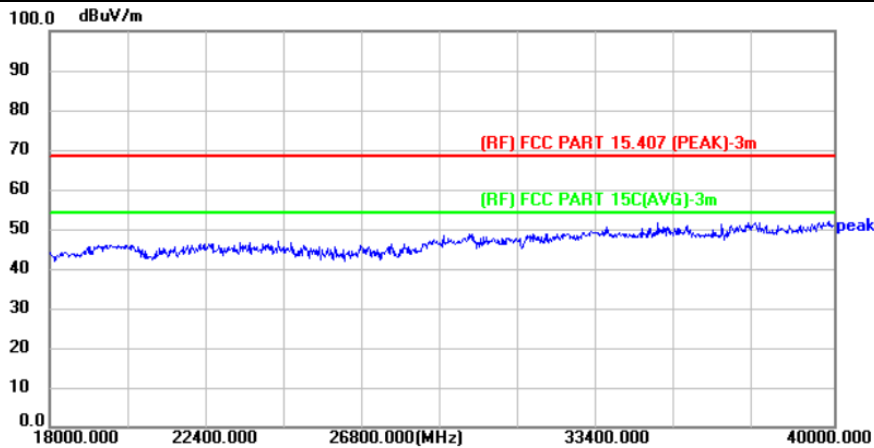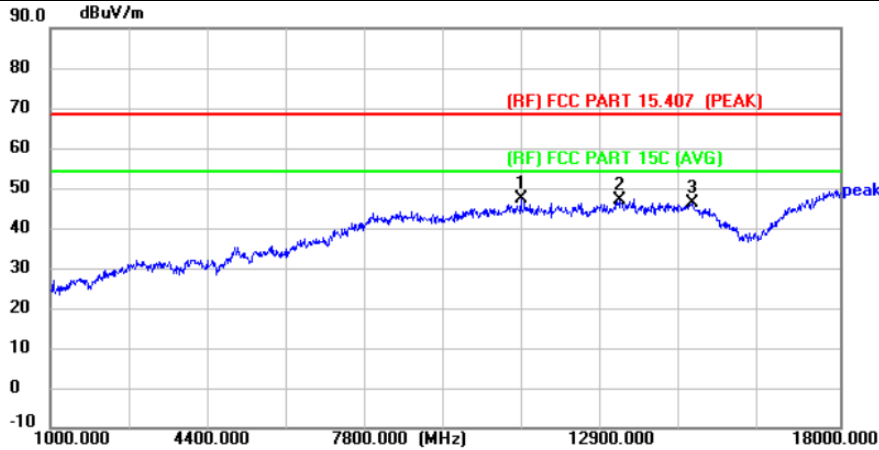

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11132.000	46.91	0.24	47.15	68.30	-21.15	peak	P
2	13274.000	45.04	1.99	47.03	68.30	-21.27	peak	P
3	14821.000	42.64	3.47	46.11	68.30	-22.19	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5745MHz with Antenna(XINGHE)		

Vertical

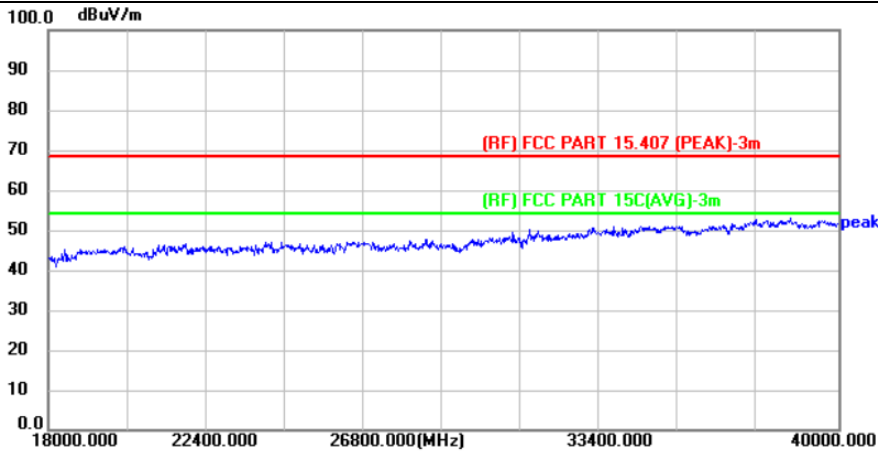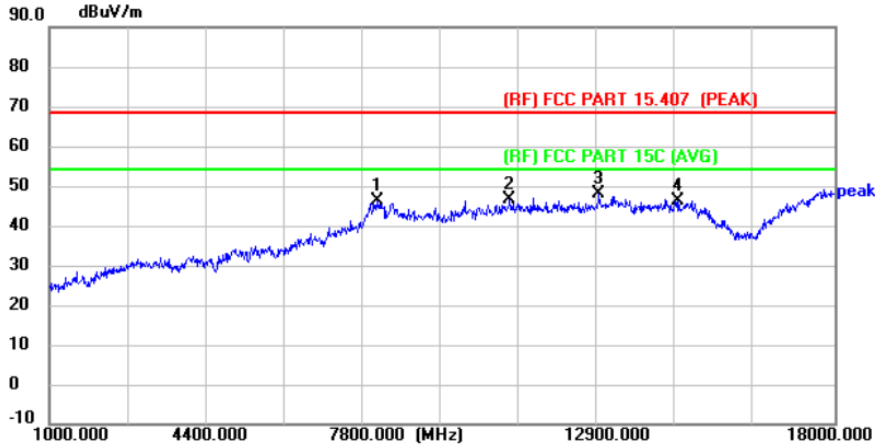

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8089.000	53.48	-7.21	46.27	68.30	-22.03	peak	P
2	10962.000	46.78	-0.04	46.74	68.30	-21.56	peak	P
3 *	12900.000	46.34	1.73	48.07	68.30	-20.23	peak	P
4	14600.000	42.94	3.24	46.18	68.30	-22.12	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5785MHz with Antenna(XINGHE)		

Horizontal

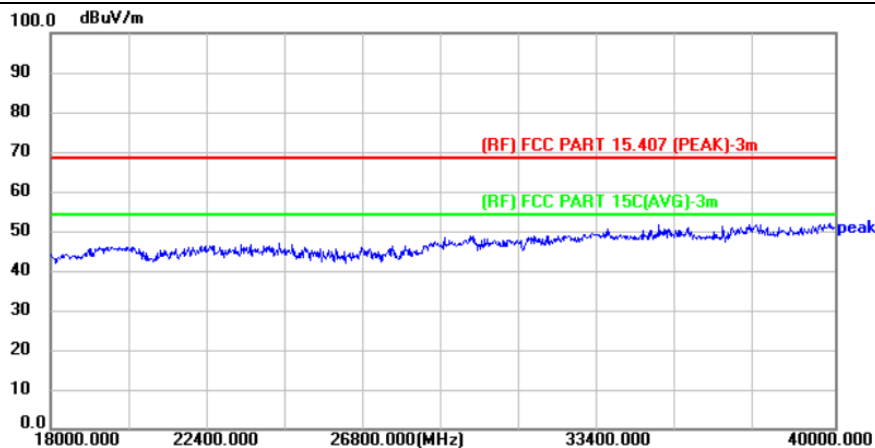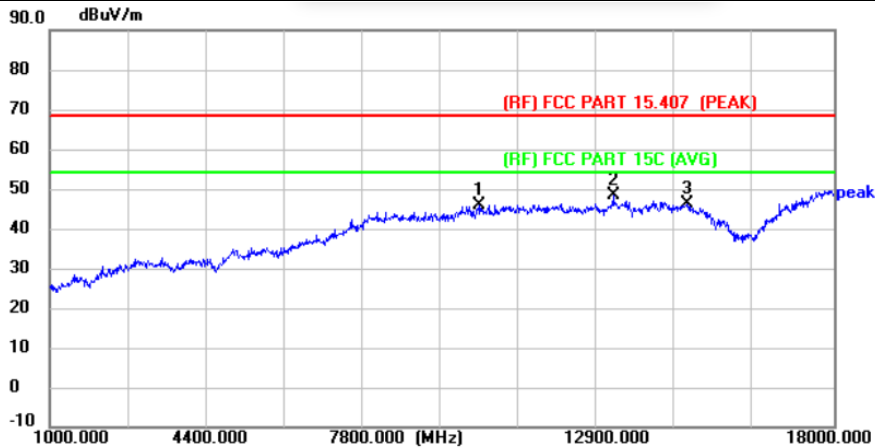

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10299.000	47.50	-1.55	45.95	68.30	-22.35	peak	P
2 *	13223.000	46.56	1.95	48.51	68.30	-19.79	peak	P
3	14838.000	42.84	3.48	46.32	68.30	-21.98	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5785MHz with Antenna(XINGHE)		

Vertical

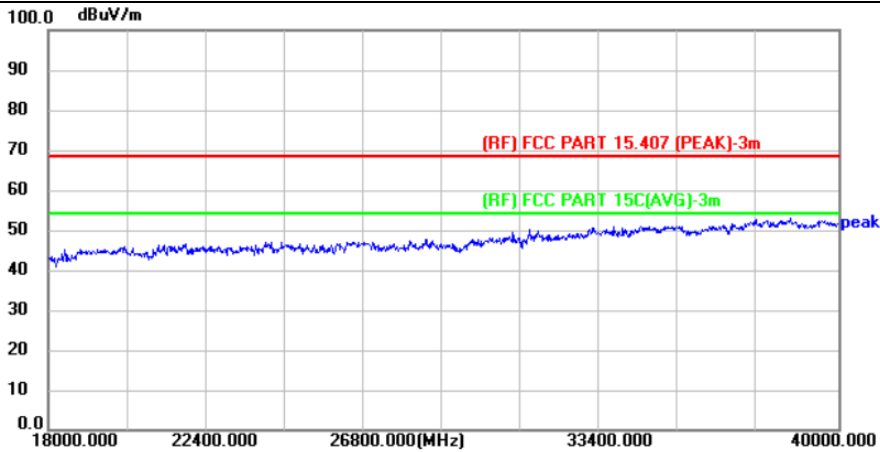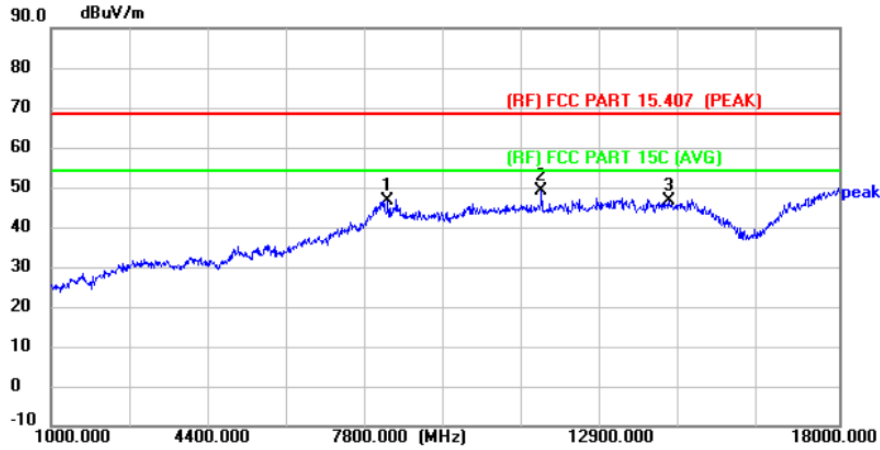

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8259.000	53.72	-6.98	46.74	68.30	-21.56	peak	P
2 *	11574.000	48.32	0.84	49.16	68.30	-19.14	peak	P
3	14328.000	43.75	2.95	46.70	68.30	-21.60	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5825MHz with Antenna(XINGHE)		

Horizontal

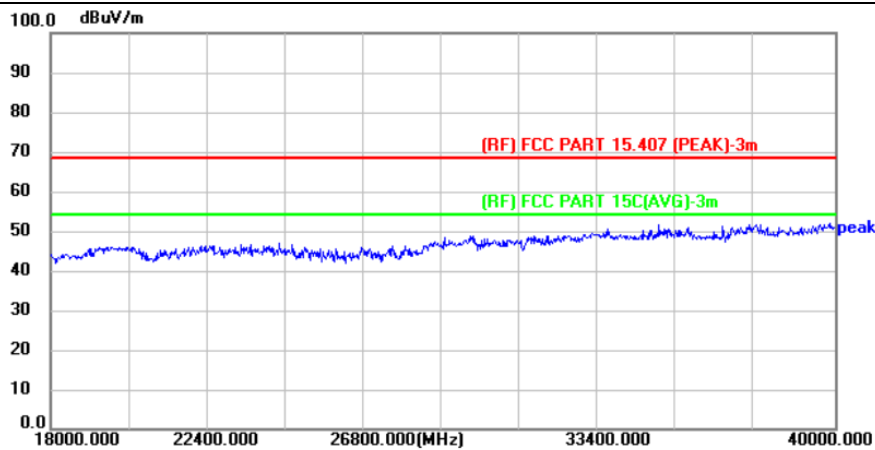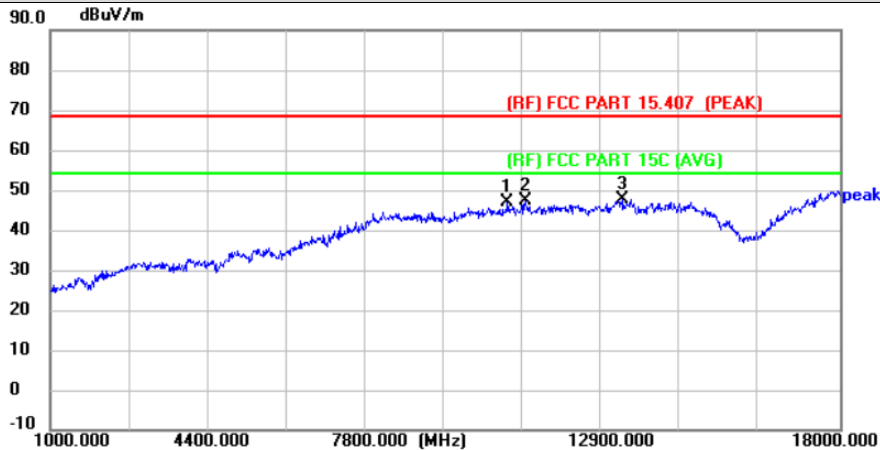

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10843.000	47.17	-0.31	46.86	68.30	-21.44	peak	P
2	11234.000	46.78	0.38	47.16	68.30	-21.14	peak	P
3 *	13308.000	45.49	2.02	47.51	68.30	-20.79	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5825MHz with Antenna(XINGHE)		

Vertical

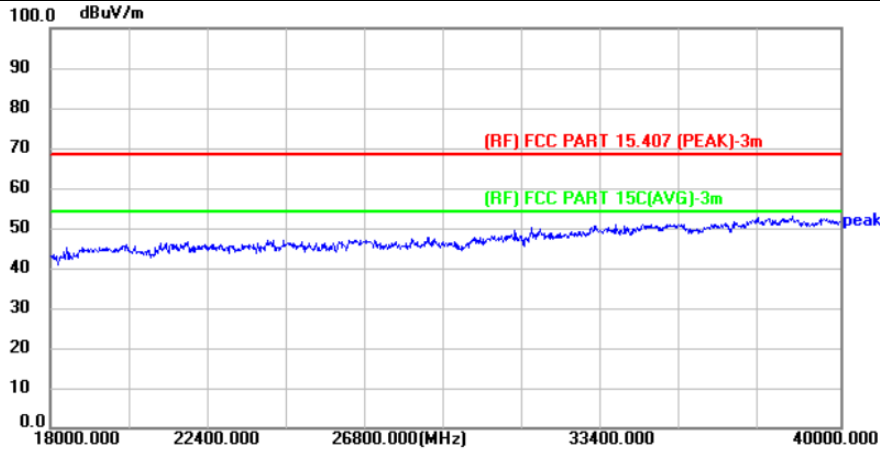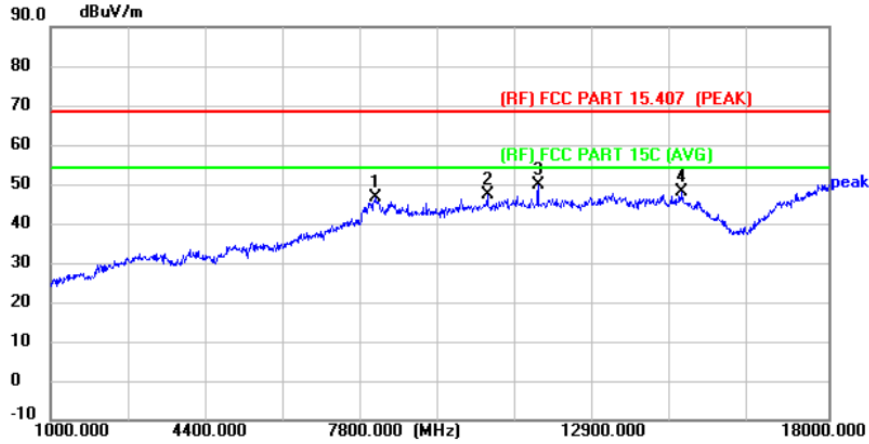

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8106.000	53.68	-7.19	46.49	68.30	-21.81	peak	P
2	10554.000	48.19	-0.97	47.22	68.30	-21.08	peak	P
3 *	11659.000	48.88	0.98	49.86	68.30	-18.44	peak	P
4	14804.000	44.57	3.45	48.02	68.30	-20.28	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT20) Mode 5745MHz with Antenna(XINGHE)		

Horizontal

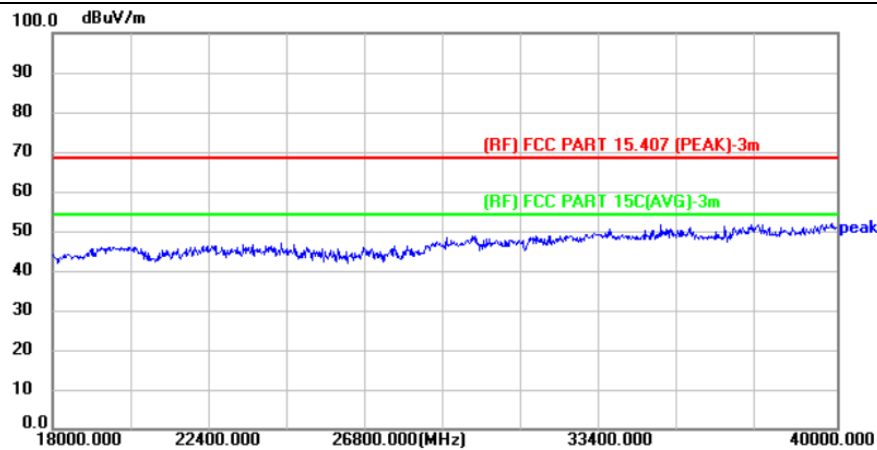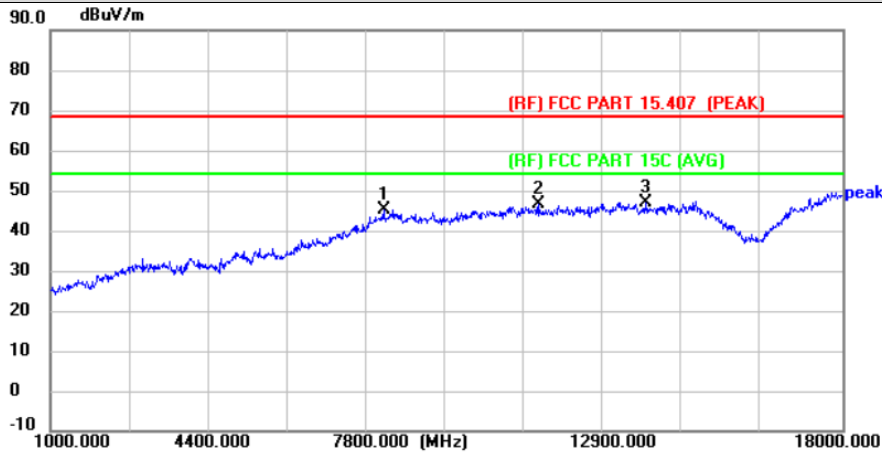

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8157.000	52.43	-7.12	45.31	68.30	-22.99	peak	P
2	11489.000	45.77	0.73	46.50	68.30	-21.80	peak	P
3 *	13767.000	44.45	2.41	46.86	68.30	-21.44	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT20) Mode 5745MHz with Antenna(XINGHE)		

Vertical

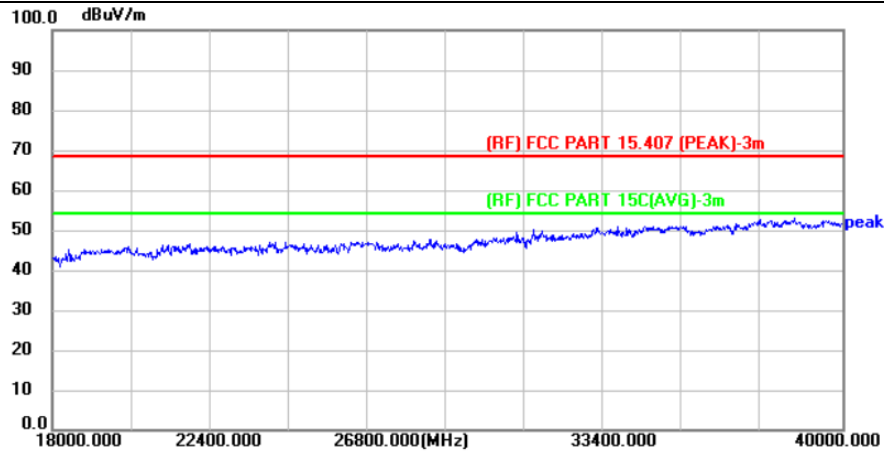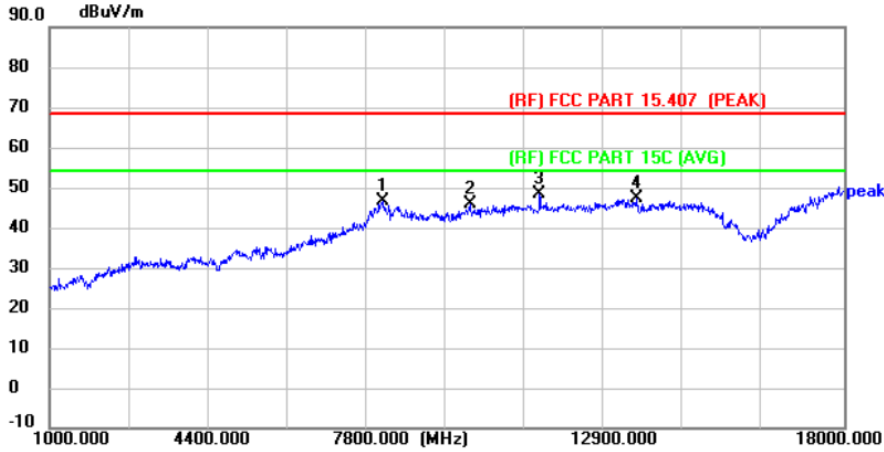

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8140.000	53.72	-7.14	46.58	68.30	-21.72	peak	P
2	9993.000	48.16	-2.27	45.89	68.30	-22.41	peak	P
3 *	11489.000	47.57	0.73	48.30	68.30	-20.00	peak	P
4	13580.000	44.90	2.25	47.15	68.30	-21.15	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT20) Mode 5785MHz with Antenna(XINGHE)		

Horizontal

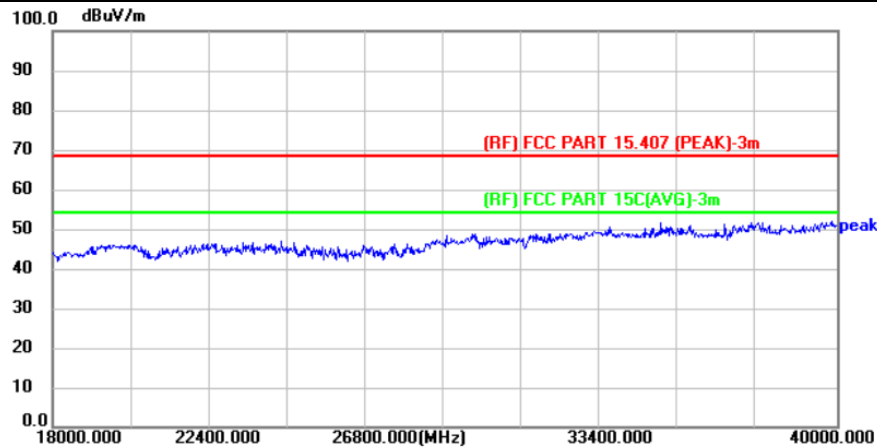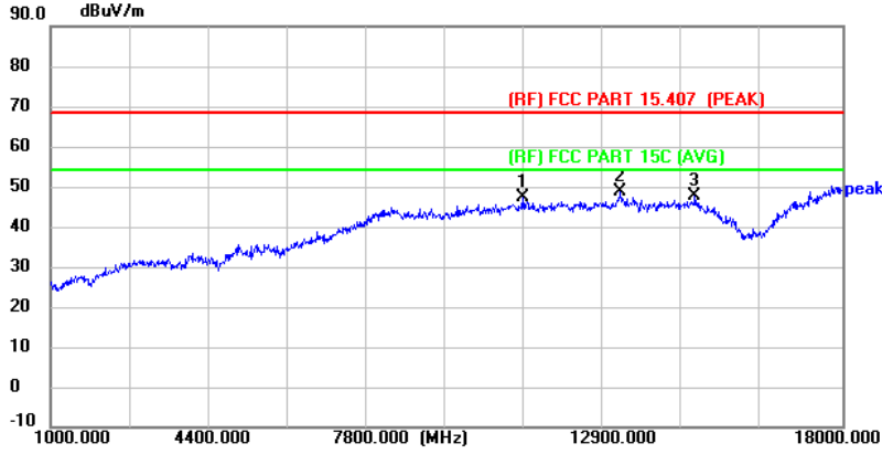

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11132.000	47.15	0.24	47.39	68.30	-20.91	peak	P
2 *	13240.000	46.85	1.96	48.81	68.30	-19.49	peak	P
3	14838.000	44.20	3.48	47.68	68.30	-20.62	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT20) Mode 5785MHz with Antenna(XINGHE)		

Vertical

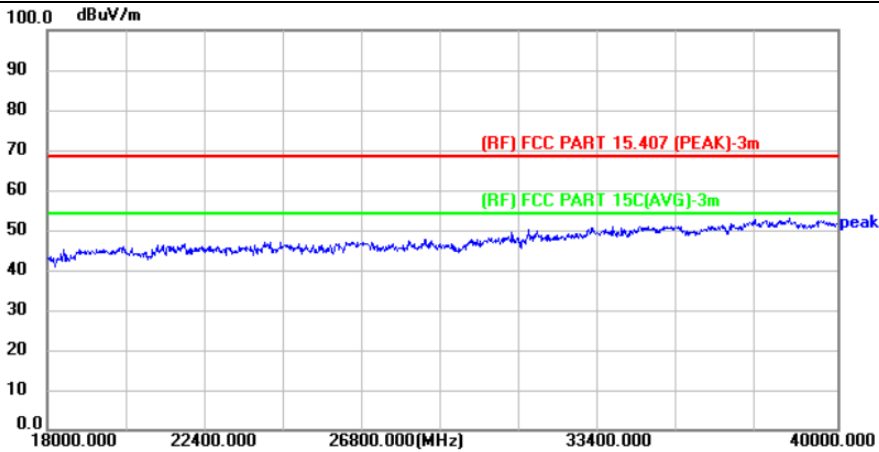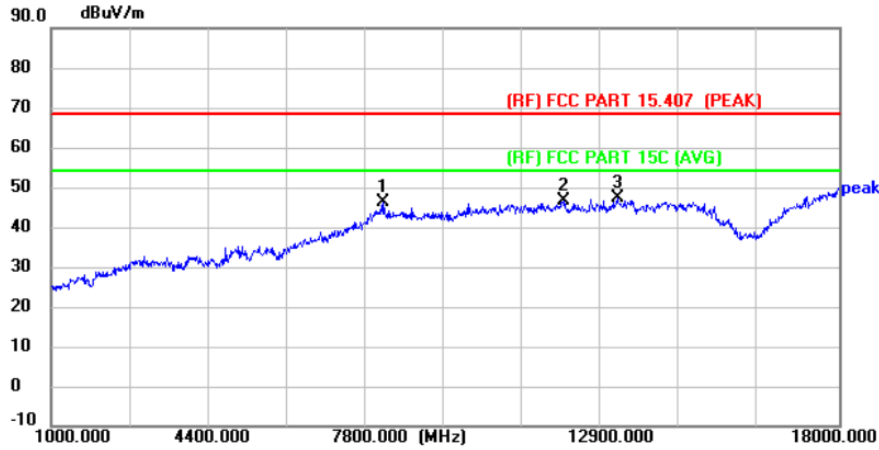

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8157.000	53.23	-7.12	46.11	68.30	-22.19	peak	P
2	12050.000	45.00	1.46	46.46	68.30	-21.84	peak	P
3 *	13223.000	45.32	1.95	47.27	68.30	-21.03	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT20) Mode 5825MHz with Antenna(XINGHE)		

Horizontal

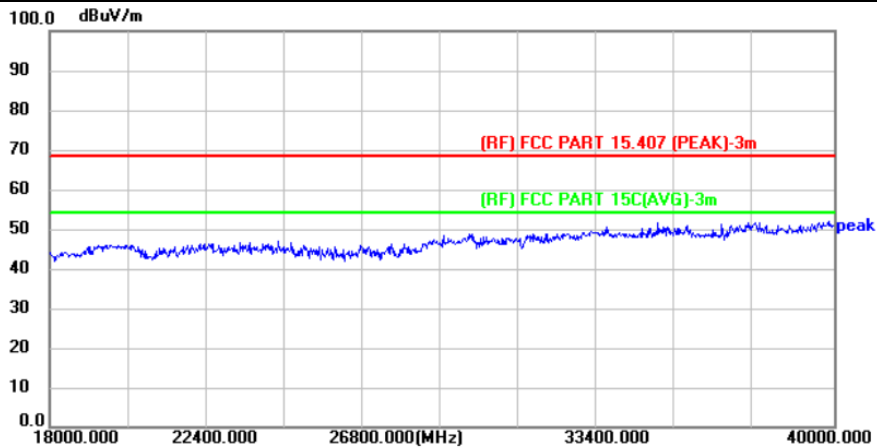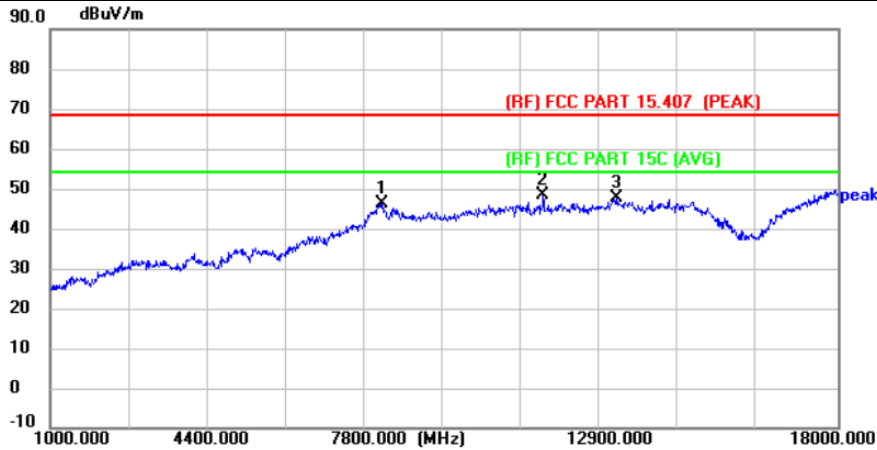

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8174.000	53.52	-7.10	46.42	68.30	-21.88	peak	P
2 *	11642.000	47.45	0.96	48.41	68.30	-19.89	peak	P
3	13223.000	45.56	1.95	47.51	68.30	-20.79	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT20) Mode 5825MHz with Antenna(XINGHE)		

Vertical

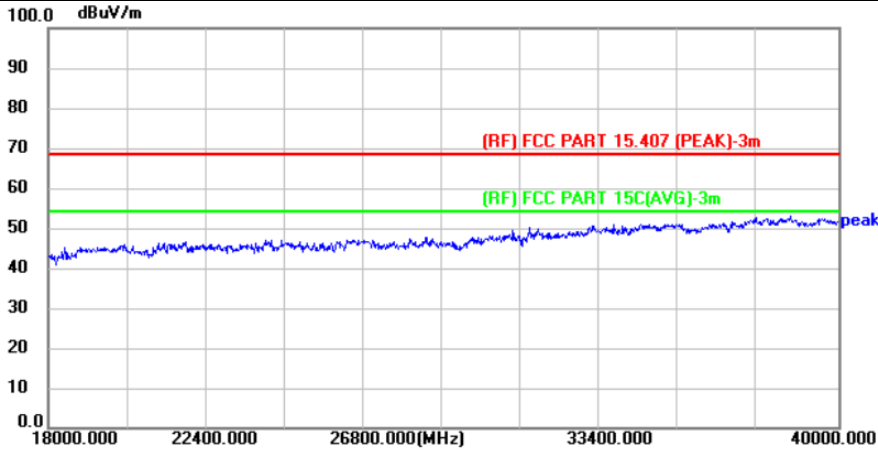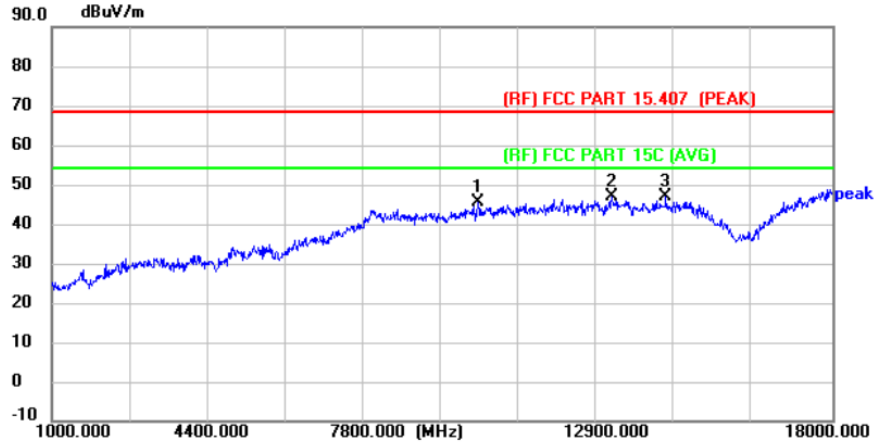

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10282.000	47.11	-1.60	45.51	68.30	-22.79	peak	P
2	13206.000	44.96	1.93	46.89	68.30	-21.41	peak	P
3 *	14379.000	43.99	3.01	47.00	68.30	-21.30	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz with Antenna(XINGHE)		

Horizontal

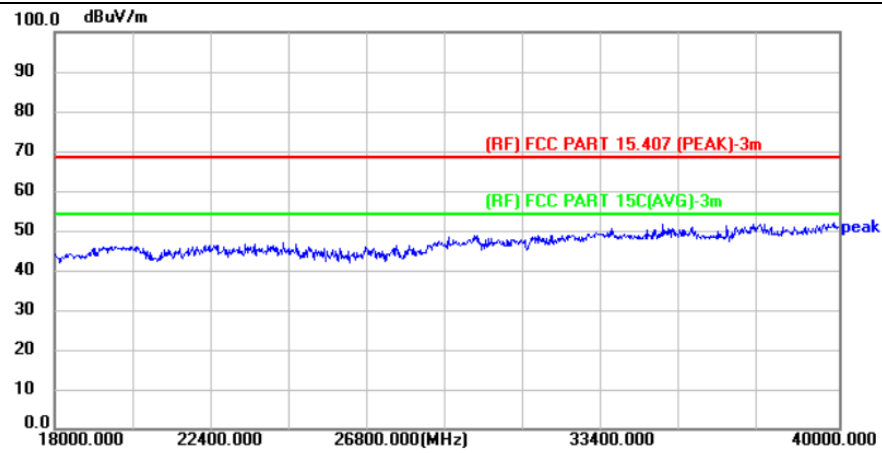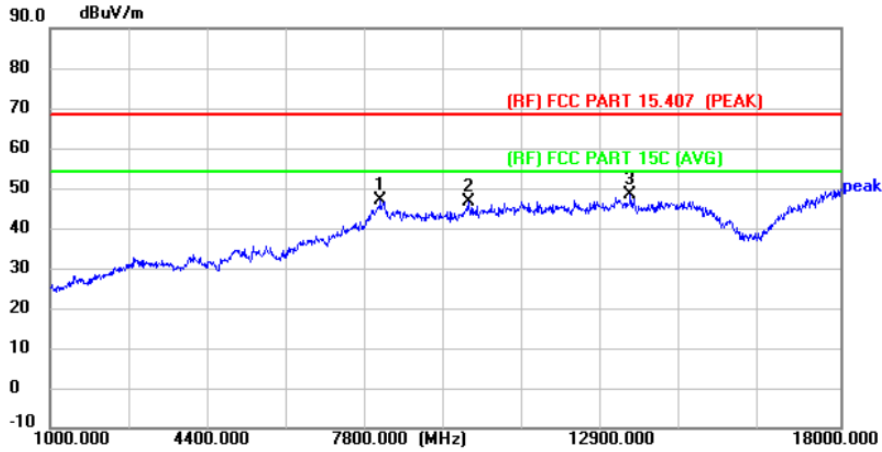

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8106.000	54.16	-7.19	46.97	68.30	-21.33	peak	P
2	9993.000	48.93	-2.27	46.66	68.30	-21.64	peak	P
3 *	13478.000	46.31	2.17	48.48	68.30	-19.82	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz with Antenna(XINGHE)		

Vertical

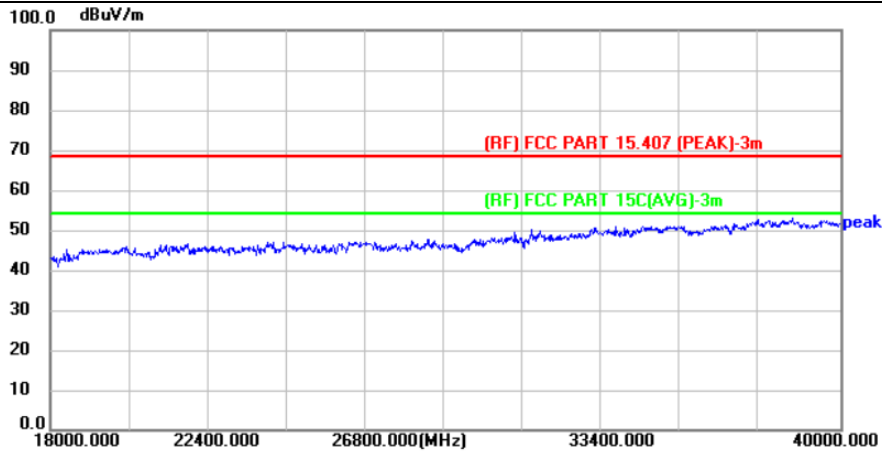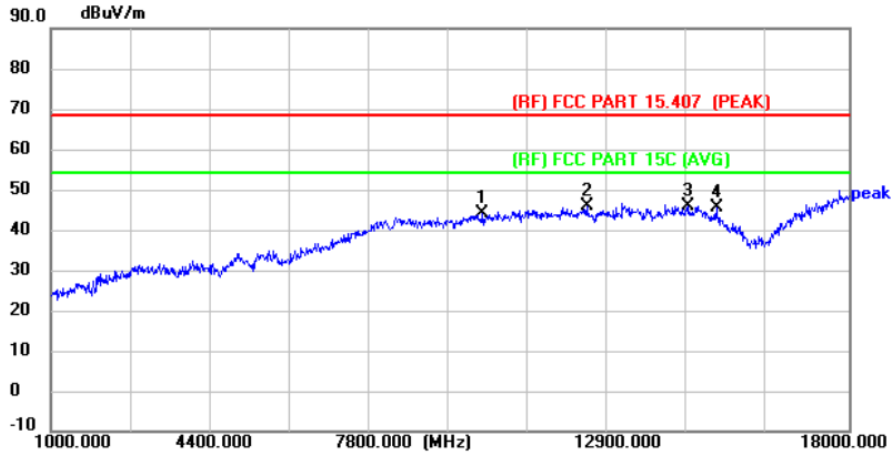

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10197.000	45.77	-1.78	43.99	68.30	-24.31	peak	P
2 *	12424.000	44.32	1.58	45.90	68.30	-22.40	peak	P
3	14566.000	42.67	3.21	45.88	68.30	-22.42	peak	P
4	15178.000	42.64	3.00	45.64	68.30	-22.66	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz with Antenna(XINGHE)		

Horizontal

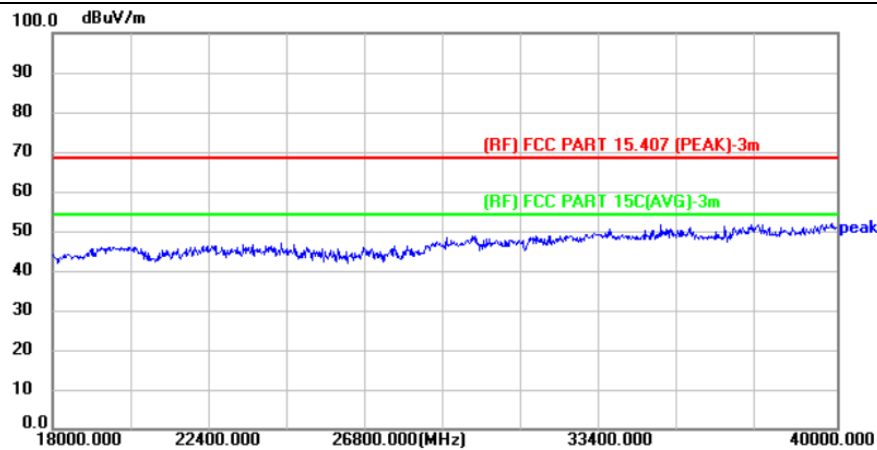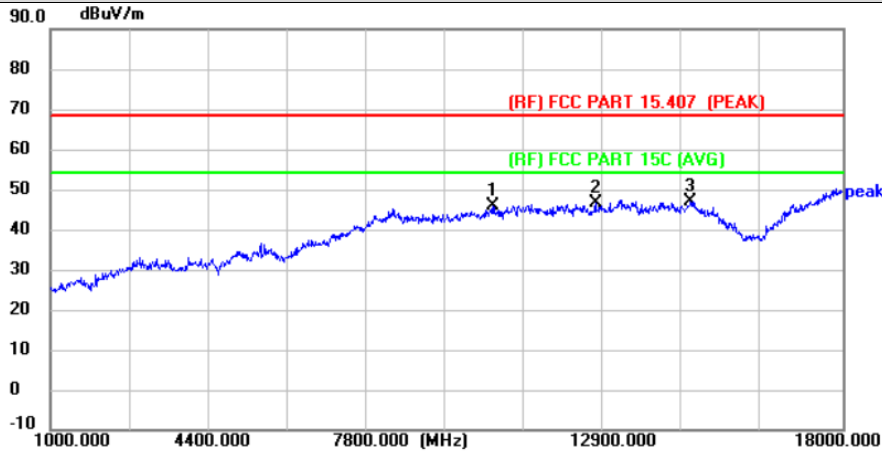

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10486.000	47.13	-1.13	46.00	68.30	-22.30	peak	P
2	12696.000	44.77	1.67	46.44	68.30	-21.86	peak	P
3 *	14736.000	43.67	3.38	47.05	68.30	-21.25	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz with Antenna(XINGHE)		

Vertical

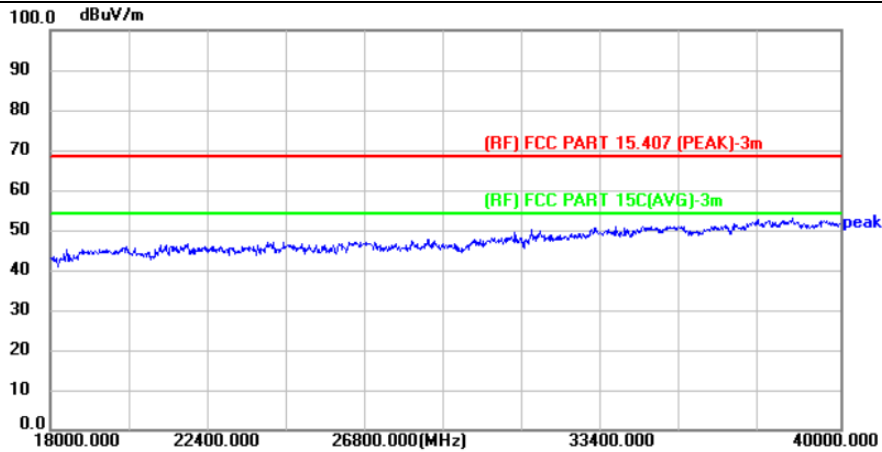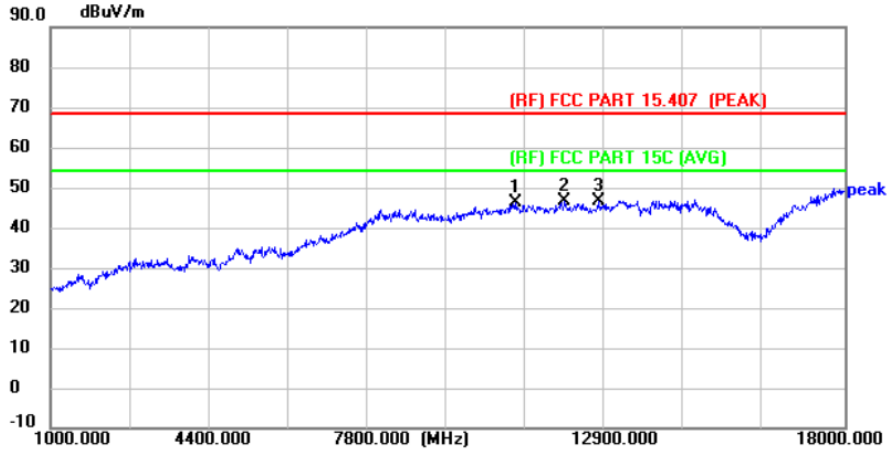

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10945.000	46.34	-0.08	46.26	68.30	-22.04	peak	P
2 *	12016.000	45.20	1.46	46.66	68.30	-21.64	peak	P
3	12747.000	44.92	1.69	46.61	68.30	-21.69	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz with Antenna(XINGHE)		

Horizontal

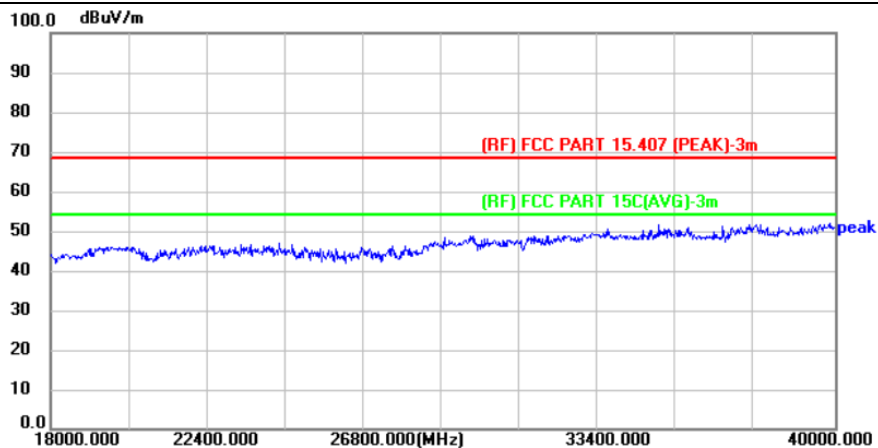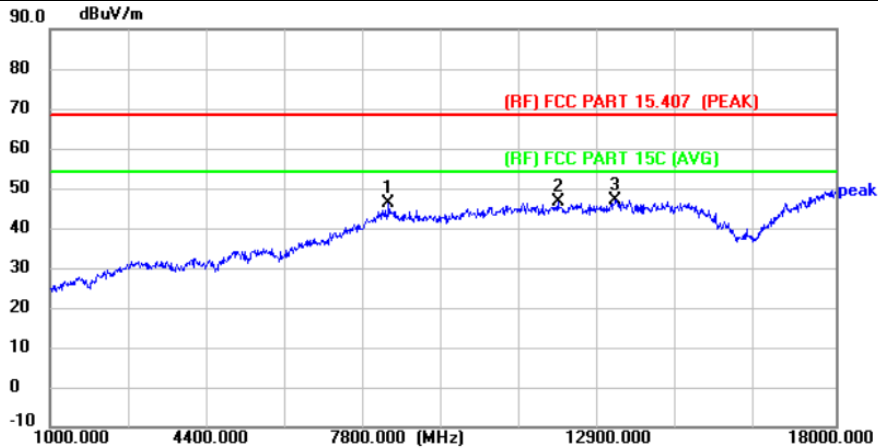

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8327.000	52.99	-6.87	46.12	68.30	-22.18	peak	P
2	11999.000	45.26	1.45	46.71	68.30	-21.59	peak	P
3 *	13240.000	45.18	1.96	47.14	68.30	-21.16	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz with Antenna(XINGHE)		

Vertical

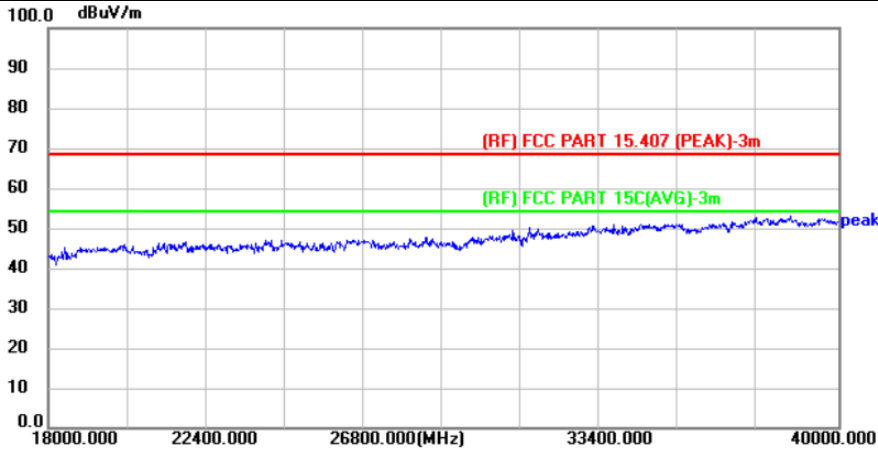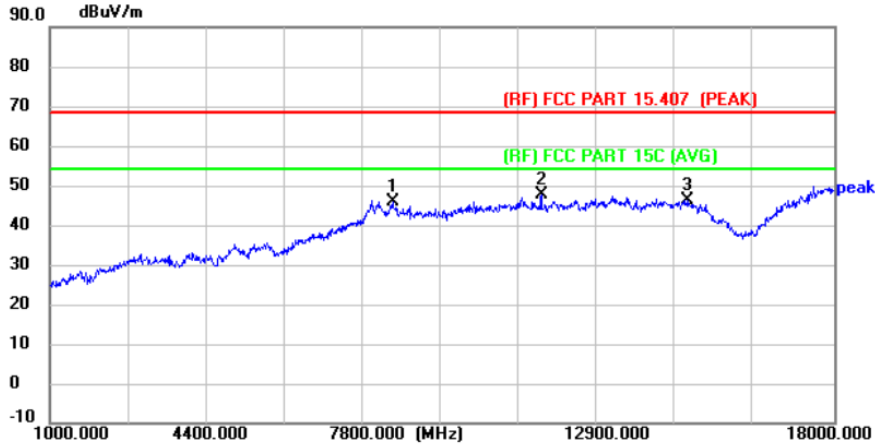

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8429.000	52.79	-6.73	46.06	68.30	-22.24	peak	P
2 *	11659.000	46.54	0.98	47.52	68.30	-20.78	peak	P
3	14838.000	42.90	3.48	46.38	68.30	-21.92	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5190MHz with Antenna(XINGHE)		

Horizontal

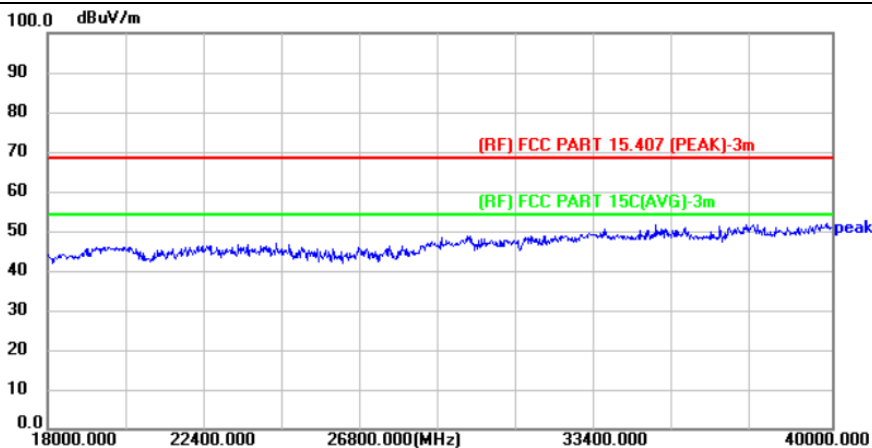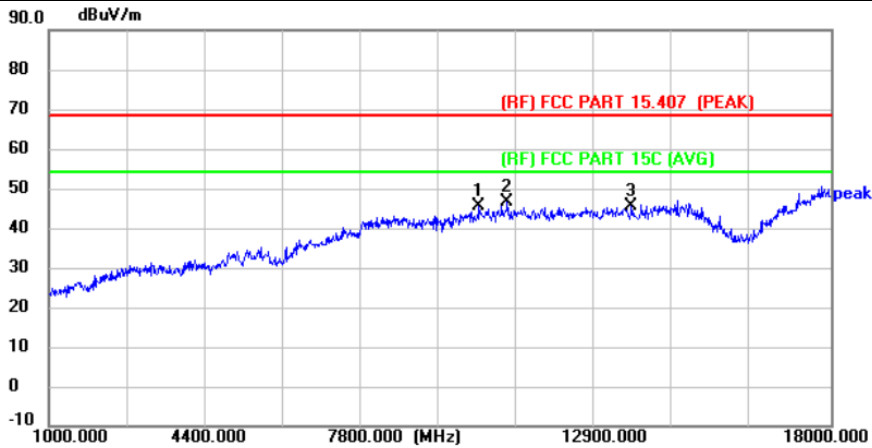

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10350.000	46.80	-1.44	45.36	68.30	-22.94	peak	P
2 *	10962.000	46.51	-0.04	46.47	68.30	-21.83	peak	P
3	13665.000	43.07	2.33	45.40	68.30	-22.90	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5190MHz with Antenna(XINGHE)		

Vertical

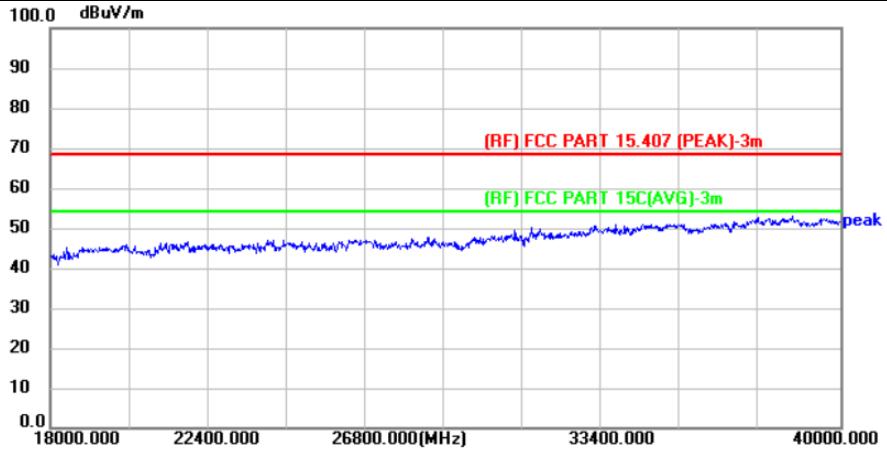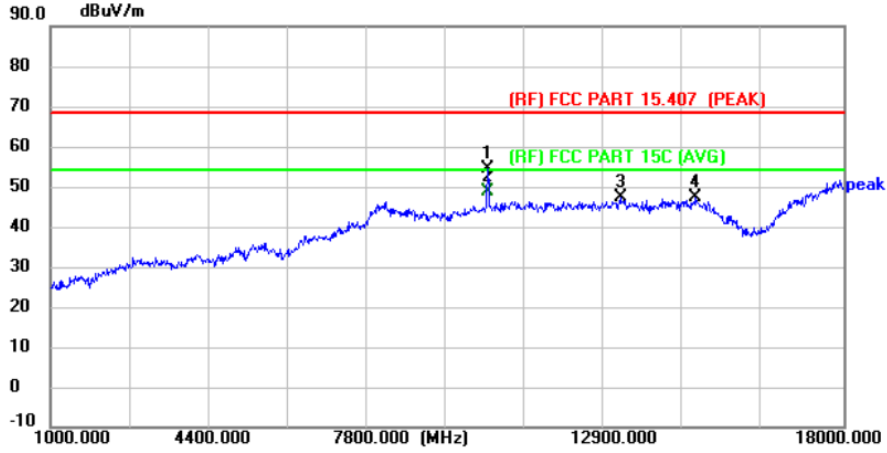

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10384.000	55.72	-1.36	54.36	68.30	-13.94	peak	P
2 *	10384.000	50.01	-1.36	48.65	54.00	-5.35	AVG	P
3	13223.000	45.41	1.95	47.36	68.30	-20.94	peak	P
4	14838.000	44.00	3.48	47.48	68.30	-20.82	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5230MHz with Antenna(XINGHE)		

Horizontal

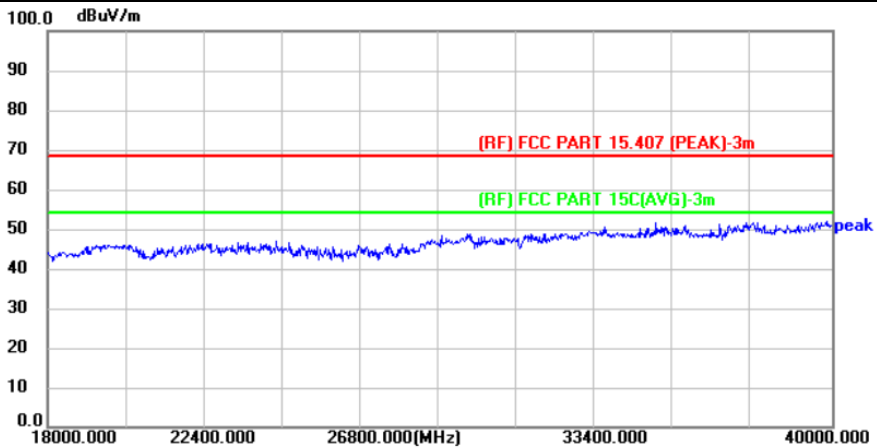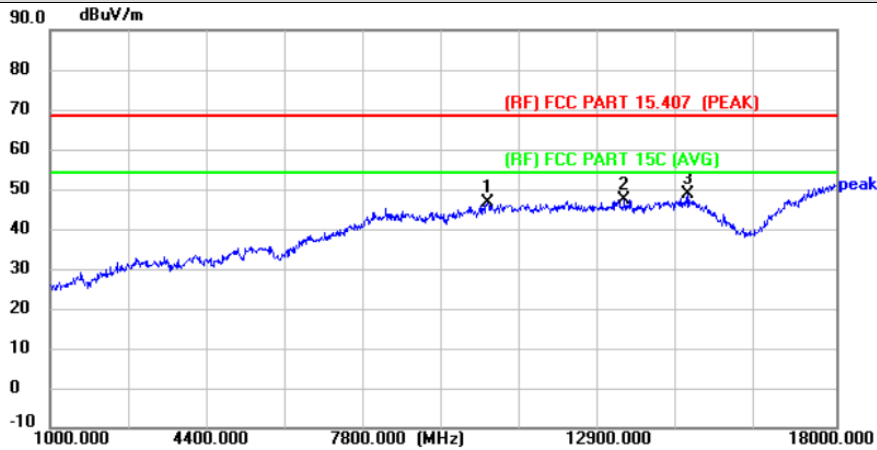

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10469.000	47.95	-1.17	46.78	68.30	-21.52	peak	P
2	13427.000	45.32	2.12	47.44	68.30	-20.86	peak	P
3 *	14787.000	45.24	3.44	48.68	68.30	-19.62	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5230MHz with Antenna(XINGHE)		

Vertical

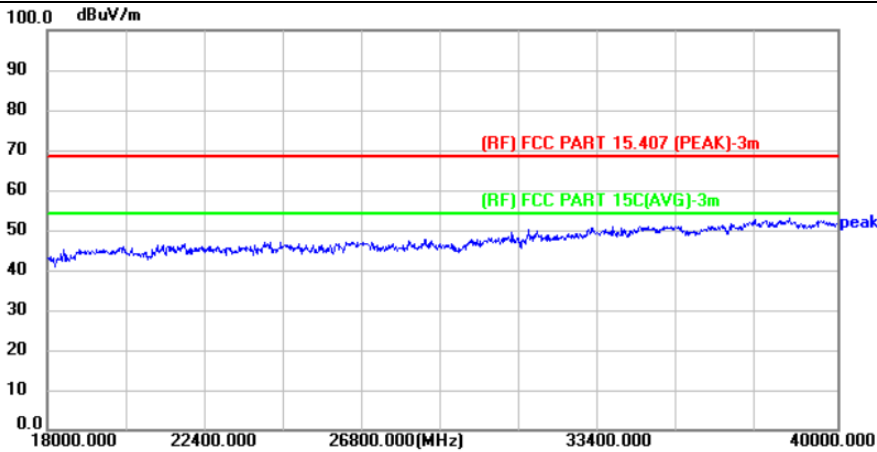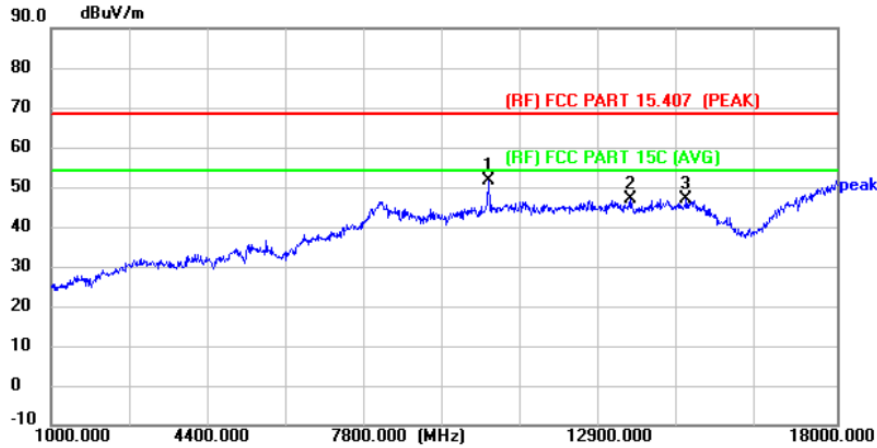

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10452.000	52.64	-1.20	51.44	68.30	-16.86	peak	P
2	13529.000	44.61	2.21	46.82	68.30	-21.48	peak	P
3	14736.000	43.76	3.38	47.14	68.30	-21.16	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz with Antenna(XINGHE)		

Horizontal

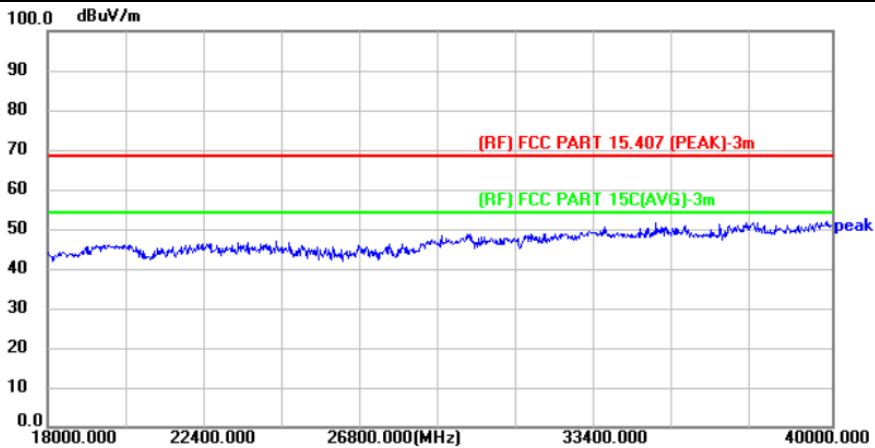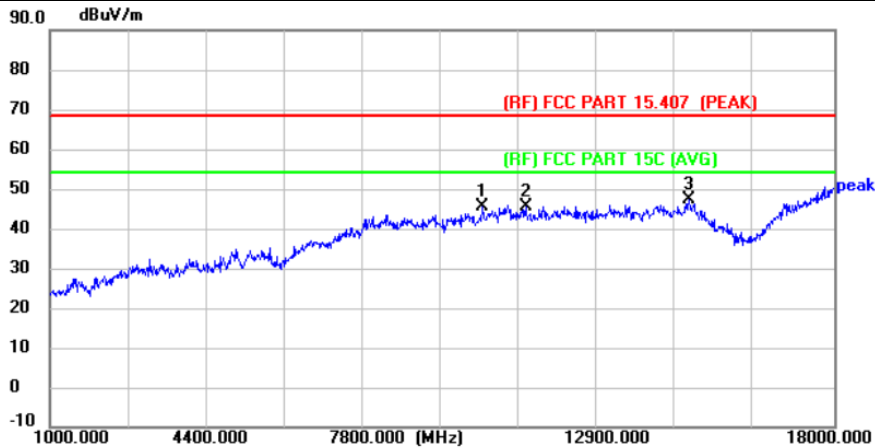

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10384.000	46.92	-1.36	45.56	68.30	-22.74	peak	P
2	11319.000	45.02	0.49	45.51	68.30	-22.79	peak	P
3 *	14855.000	43.97	3.51	47.48	68.30	-20.82	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz with Antenna(XINGHE)		

Vertical

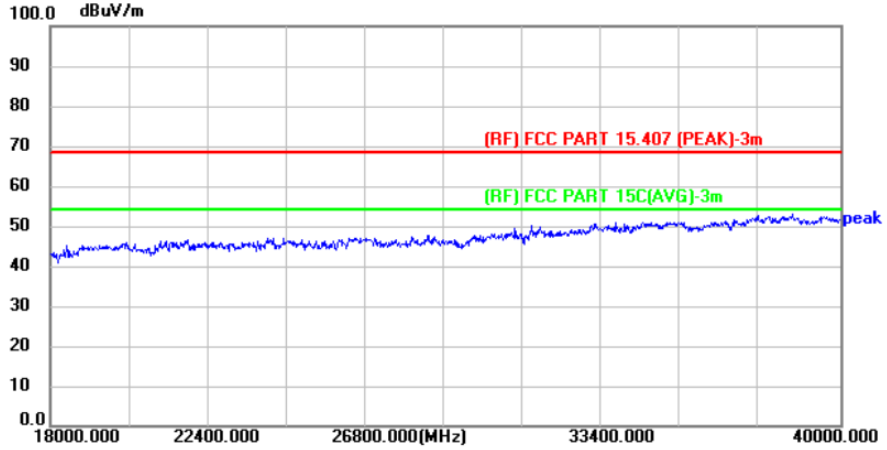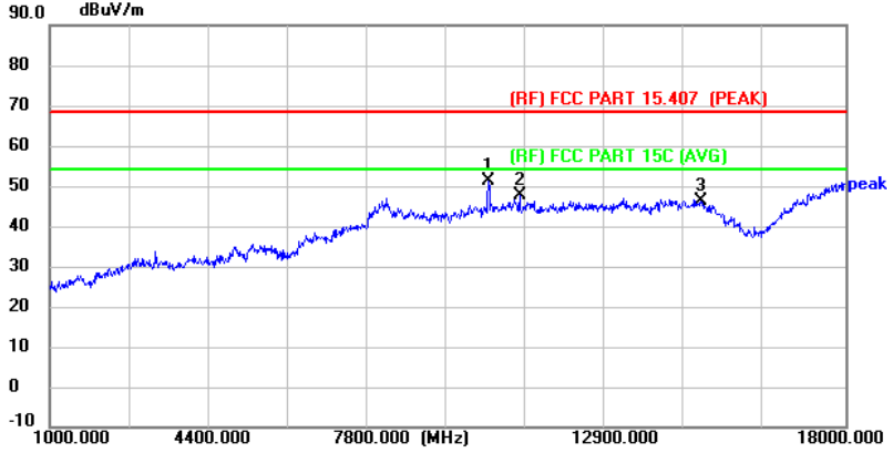

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10384.000	52.69	-1.36	51.33	68.30	-16.97	peak	P
2	11047.000	47.54	0.12	47.66	68.30	-20.64	peak	P
3	14923.000	42.59	3.57	46.16	68.30	-22.14	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz with Antenna(XINGHE)		

Horizontal

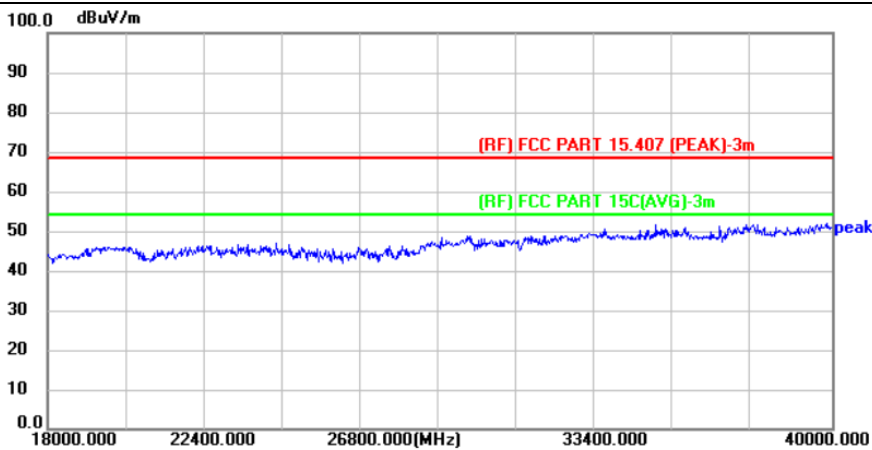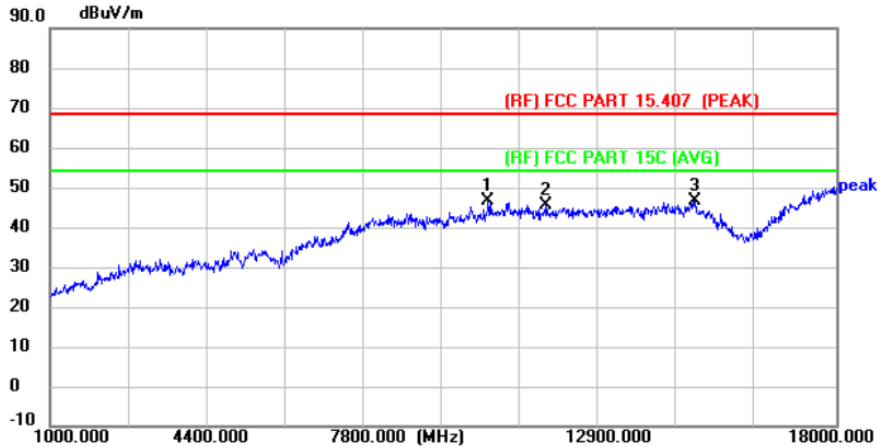

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10469.000	47.82	-1.17	46.65	68.30	-21.65	peak	P
2	11727.000	44.63	1.08	45.71	68.30	-22.59	peak	P
3 *	14957.000	43.15	3.61	46.76	68.30	-21.54	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz with Antenna(XINGHE)		

Vertical

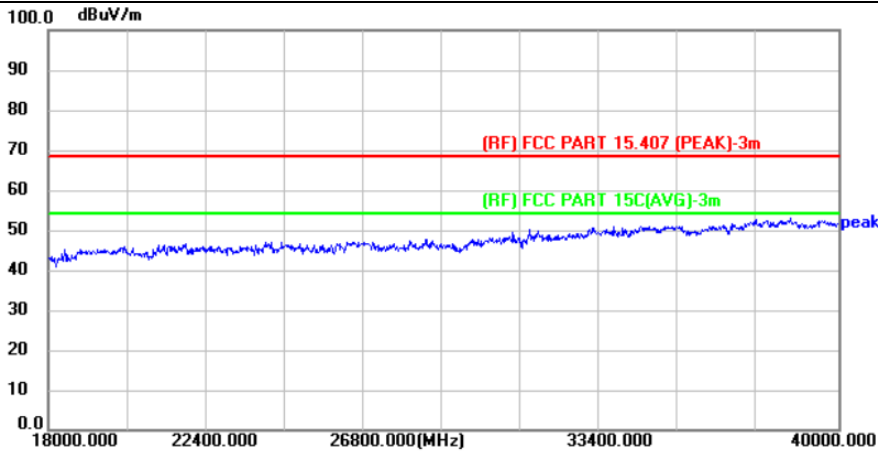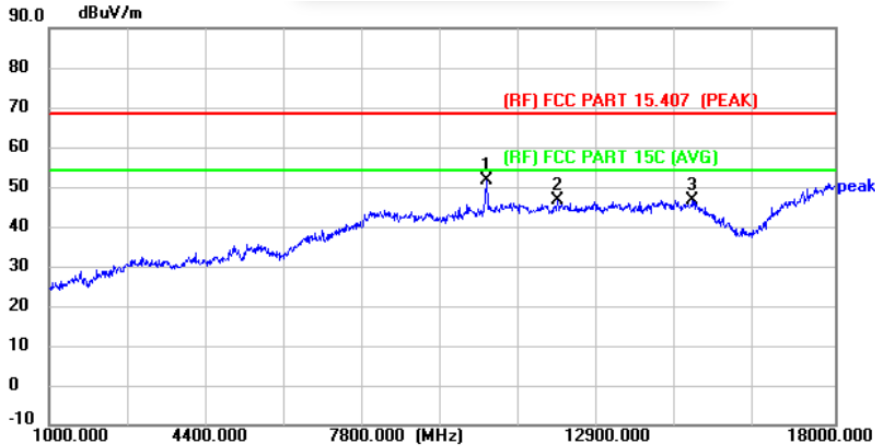

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10452.000	52.73	-1.20	51.53	68.30	-16.77	peak	P
2	12016.000	45.23	1.46	46.69	68.30	-21.61	peak	P
3	14923.000	43.15	3.57	46.72	68.30	-21.58	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5270MHz with Antenna(XINGHE)		

Horizontal

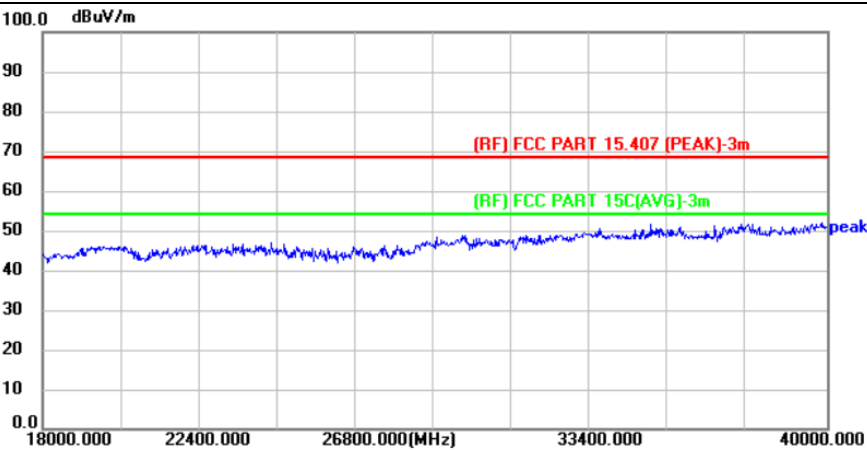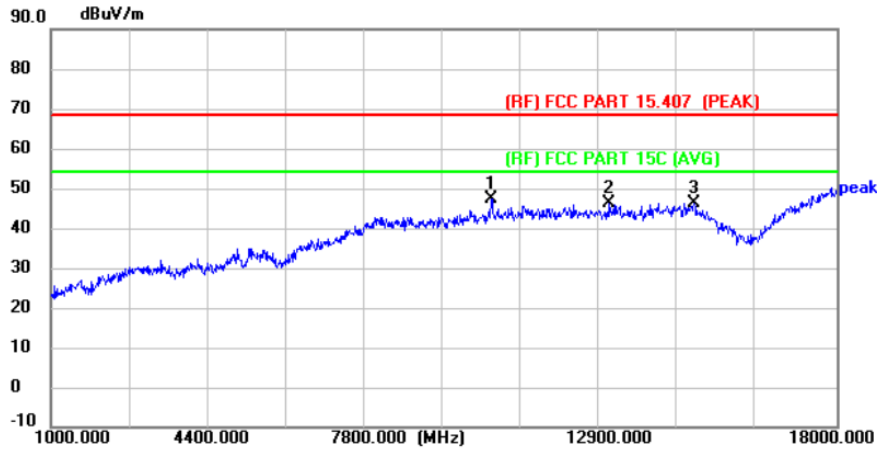

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10537.000	48.33	-1.02	47.31	68.30	-20.99	peak	P
2	13087.000	44.41	1.84	46.25	68.30	-22.05	peak	P
3	14906.000	42.80	3.56	46.36	68.30	-21.94	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5270MHz with Antenna(XINGHE)		

Vertical

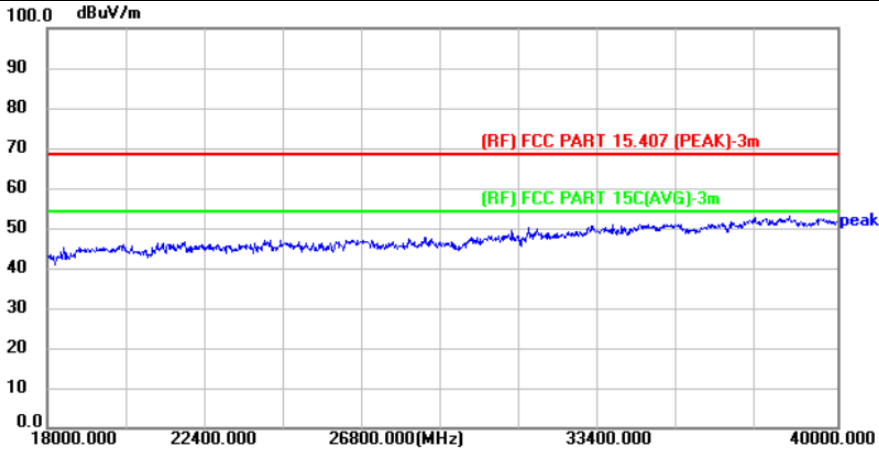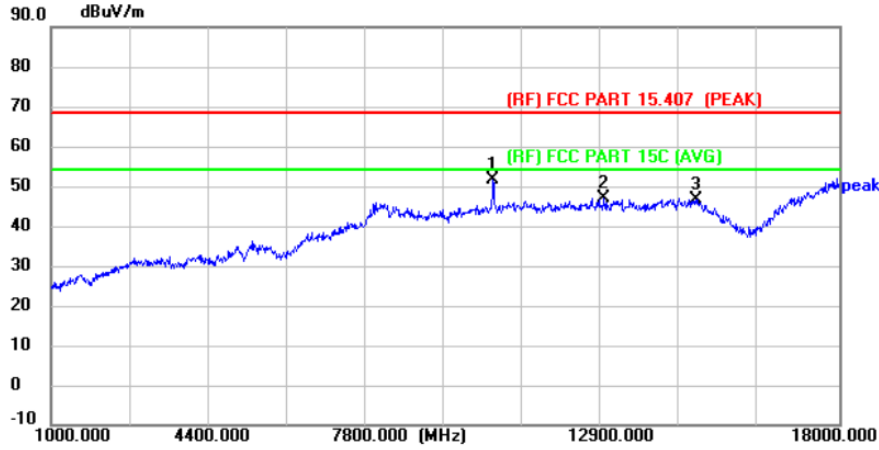

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10537.000	52.47	-1.02	51.45	68.30	-16.85	peak	P
2	12934.000	45.13	1.74	46.87	68.30	-21.43	peak	P
3	14906.000	43.20	3.56	46.76	68.30	-21.54	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5310MHz with Antenna(XINGHE)		

Horizontal

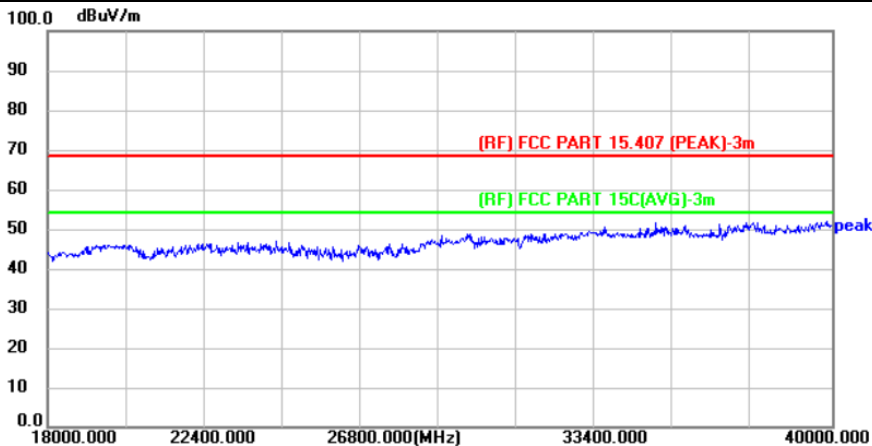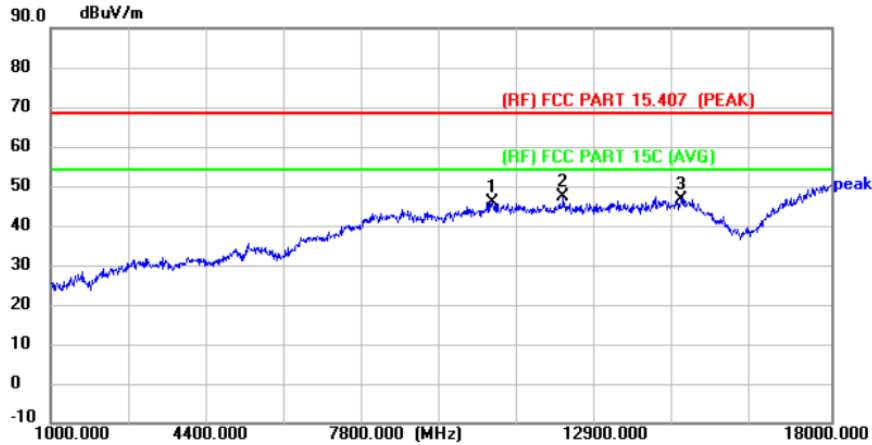

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10605.000	46.79	-0.85	45.94	68.30	-22.36	peak	P
2 *	12169.000	45.87	1.50	47.37	68.30	-20.93	peak	P
3	14719.000	43.12	3.36	46.48	68.30	-21.82	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5310MHz with Antenna(XINGHE)		

Vertical

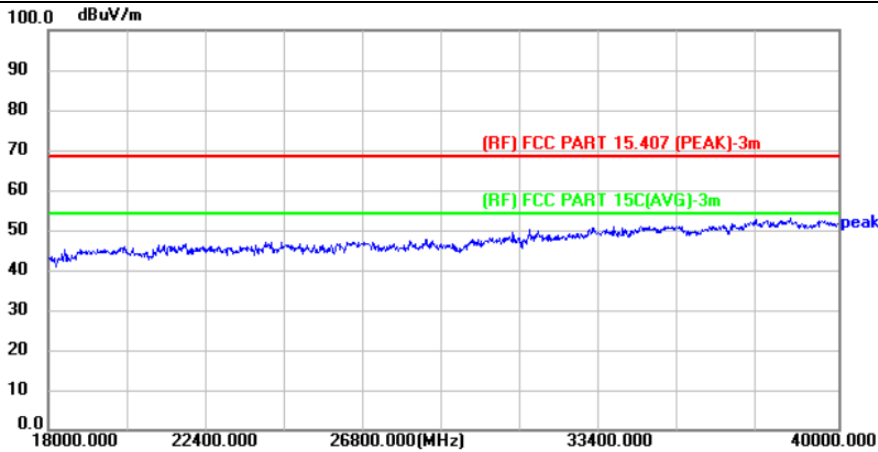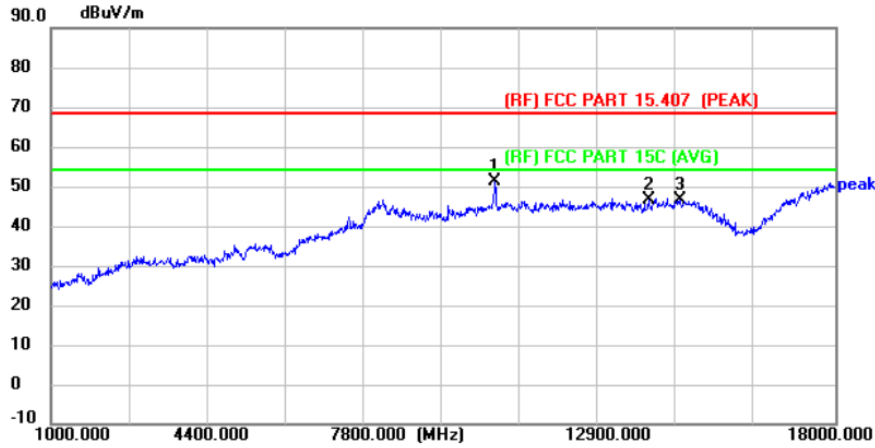

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10622.000	52.19	-0.81	51.38	68.30	-16.92	peak	P
2	13954.000	44.05	2.57	46.62	68.30	-21.68	peak	P
3	14634.000	43.31	3.27	46.58	68.30	-21.72	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz with Antenna(XINGHE)		

Horizontal

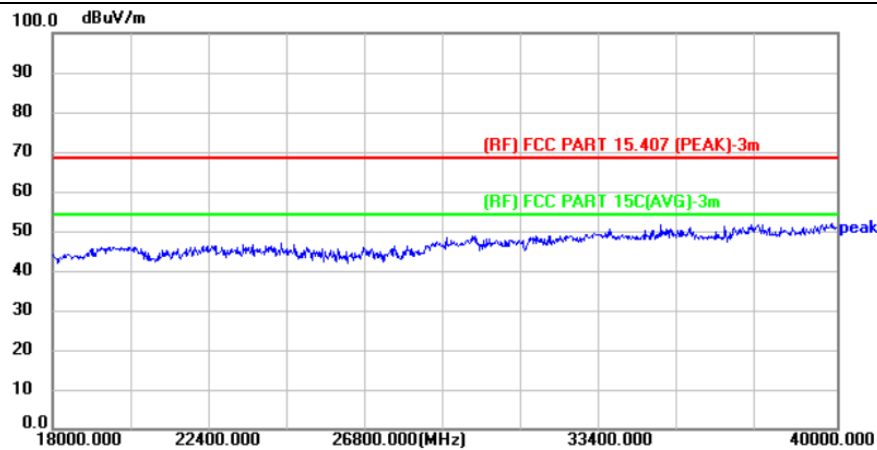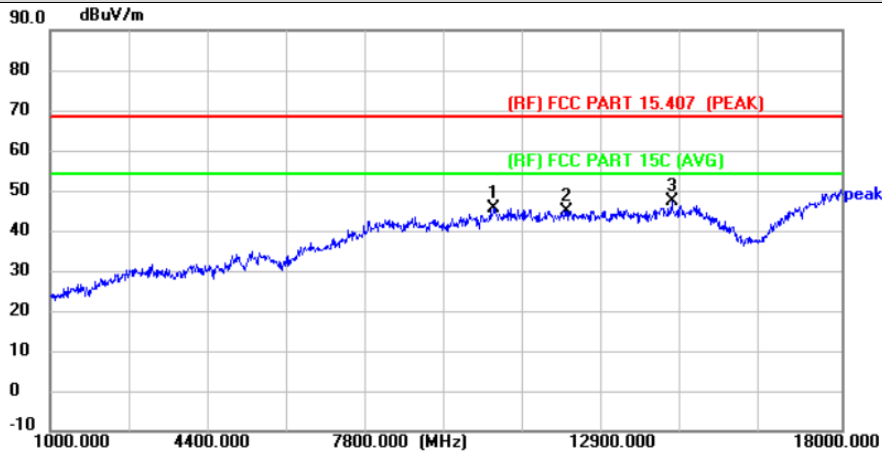

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10537.000	46.68	-1.02	45.66	68.30	-22.64	peak	P
2	12101.000	43.52	1.48	45.00	68.30	-23.30	peak	P
3 *	14362.000	44.30	3.00	47.30	68.30	-21.00	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz with Antenna(XINGHE)		

Vertical

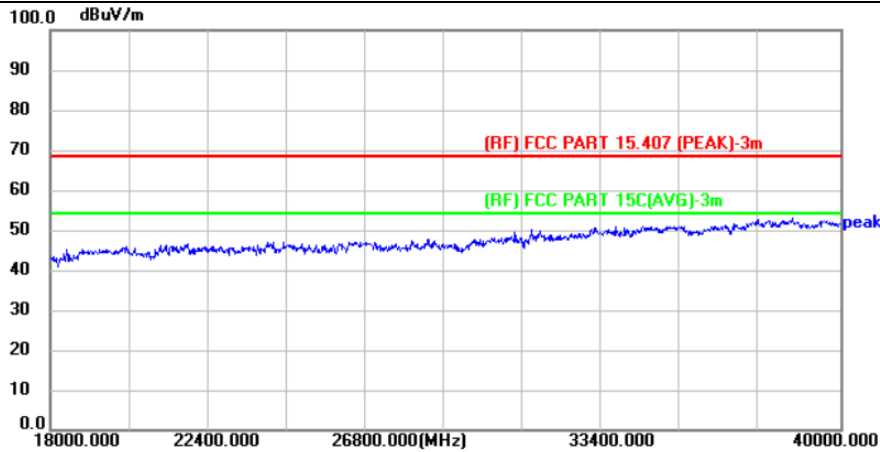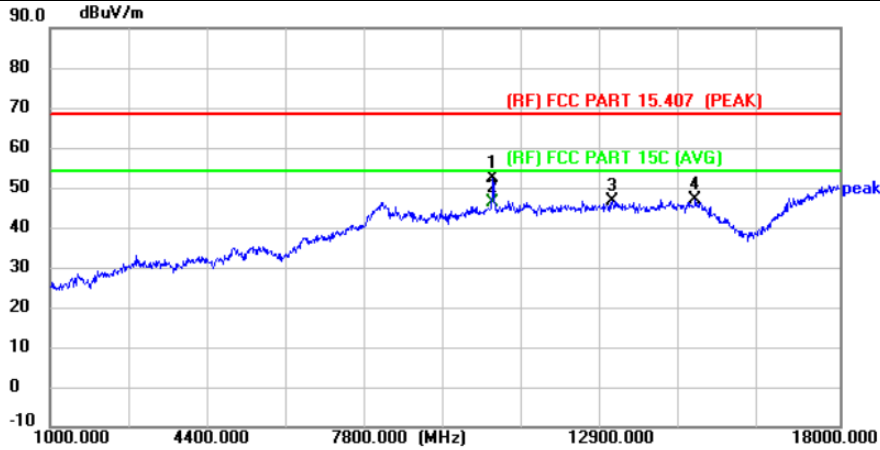

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10537.000	53.19	-1.02	52.17	68.30	-16.13	peak	P
2 *	10537.000	47.27	-1.02	46.25	54.00	-7.75	AVG	P
3	13104.000	44.74	1.85	46.59	68.30	-21.71	peak	P
4	14889.000	43.41	3.54	46.95	68.30	-21.35	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz with Antenna(XINGHE)		

Horizontal

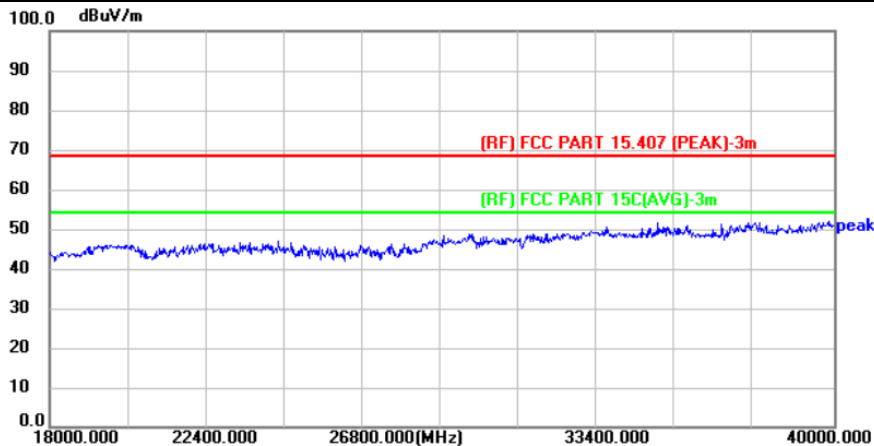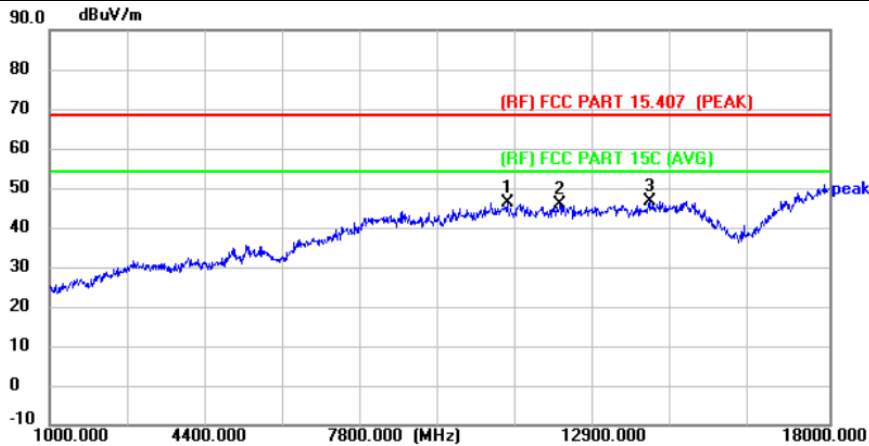

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10979.000	46.32	-0.01	46.31	68.30	-21.99	peak	P
2	12135.000	44.25	1.50	45.75	68.30	-22.55	peak	P
3 *	14073.000	43.95	2.69	46.64	68.30	-21.66	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz with Antenna(XINGHE)		

Vertical

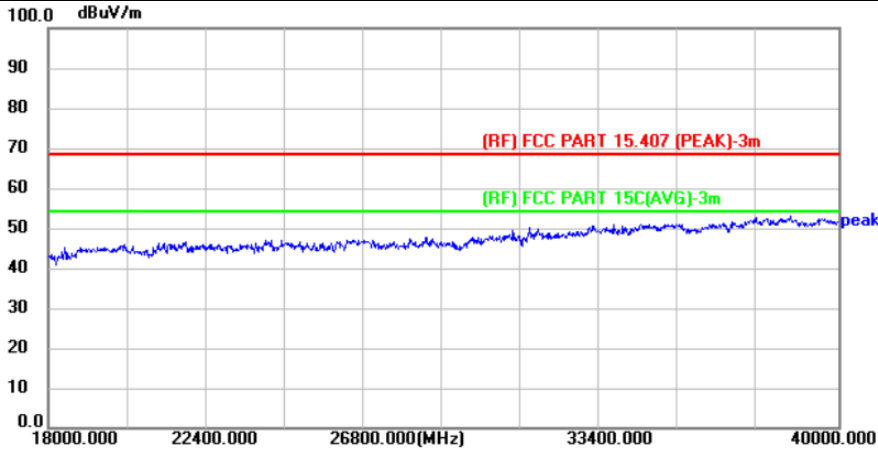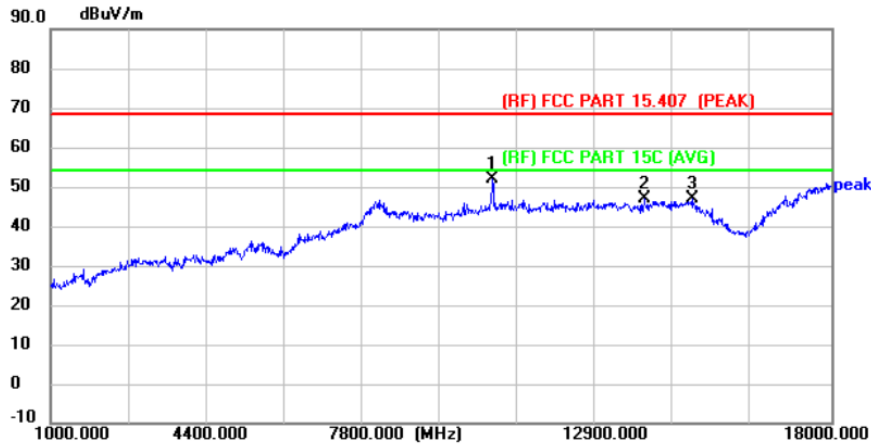

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10622.000	52.65	-0.81	51.84	68.30	-16.46	peak	P
2	13920.000	44.40	2.54	46.94	68.30	-21.36	peak	P
3	14991.000	43.17	3.65	46.82	68.30	-21.48	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5510MHz with Antenna(XINGHE)		

Horizontal

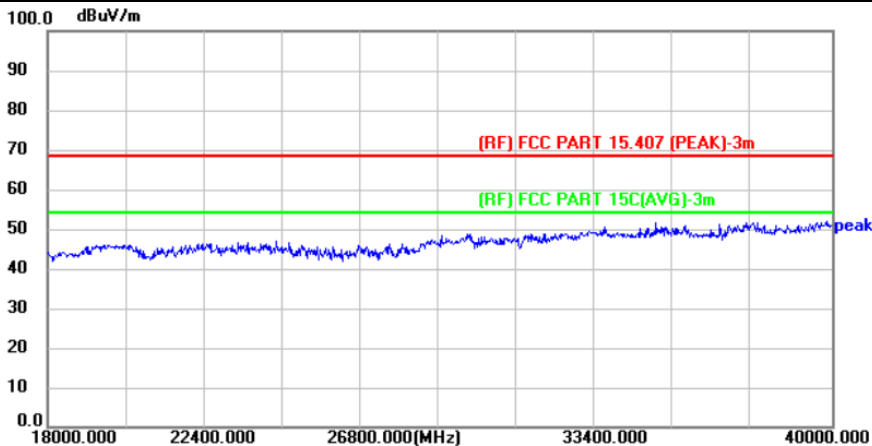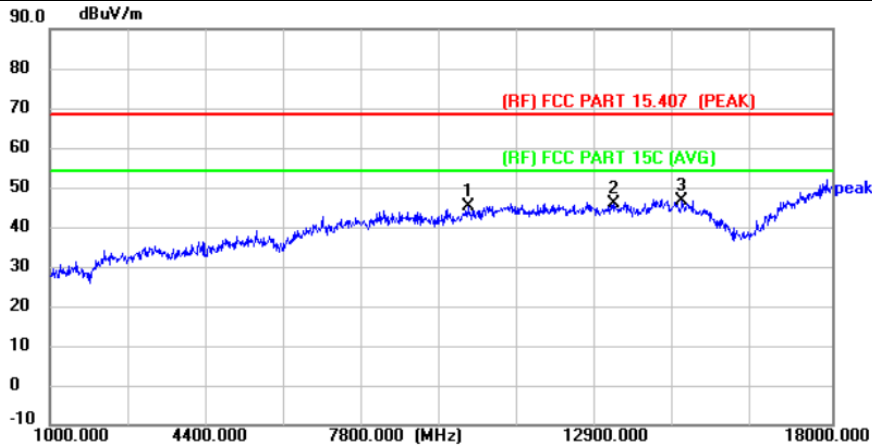

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10112.000	41.16	4.01	45.17	68.30	-23.13	peak	P
2	13274.000	37.91	7.99	45.90	68.30	-22.40	peak	P
3 *	14736.000	37.24	9.38	46.62	68.30	-21.68	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5510MHz with Antenna(XINGHE)		

Vertical

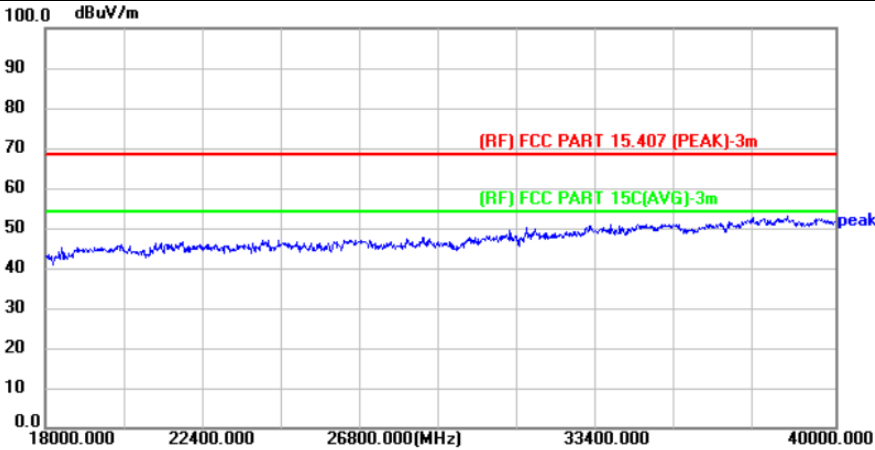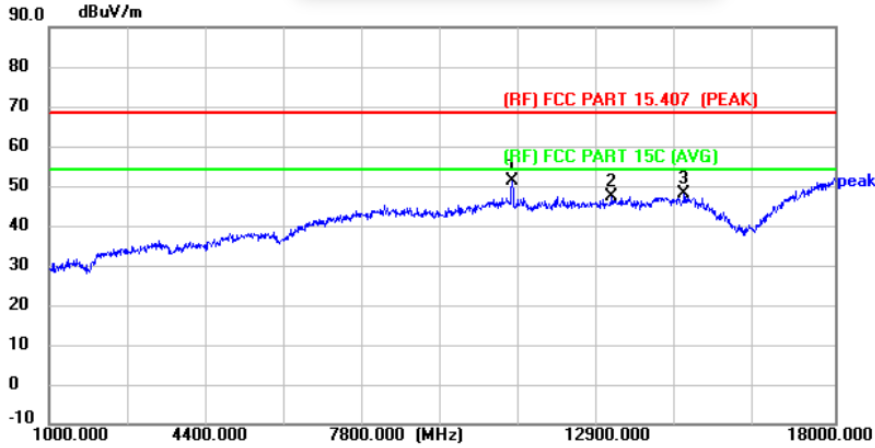

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11013.000	45.07	6.07	51.14	68.30	-17.16	peak	P
2	13172.000	39.29	7.91	47.20	68.30	-21.10	peak	P
3	14736.000	38.66	9.38	48.04	68.30	-20.26	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5550MHz with Antenna(XINGHE)		

Horizontal

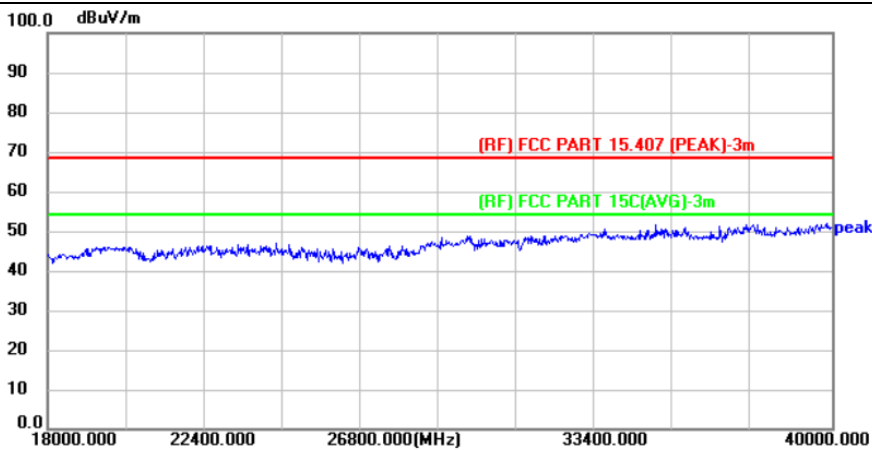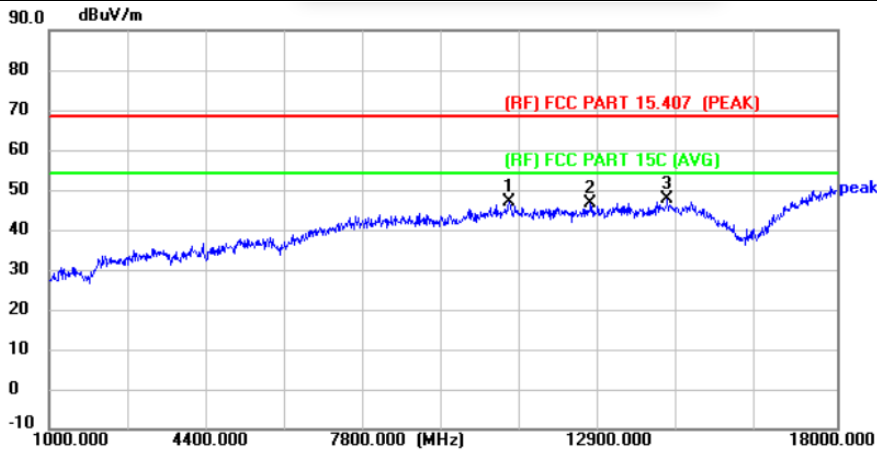

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10928.000	41.08	5.88	46.96	68.30	-21.34	peak	P
2	12679.000	38.82	7.66	46.48	68.30	-21.82	peak	P
3 *	14345.000	38.60	8.97	47.57	68.30	-20.73	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5550MHz with Antenna(XINGHE)		

Vertical

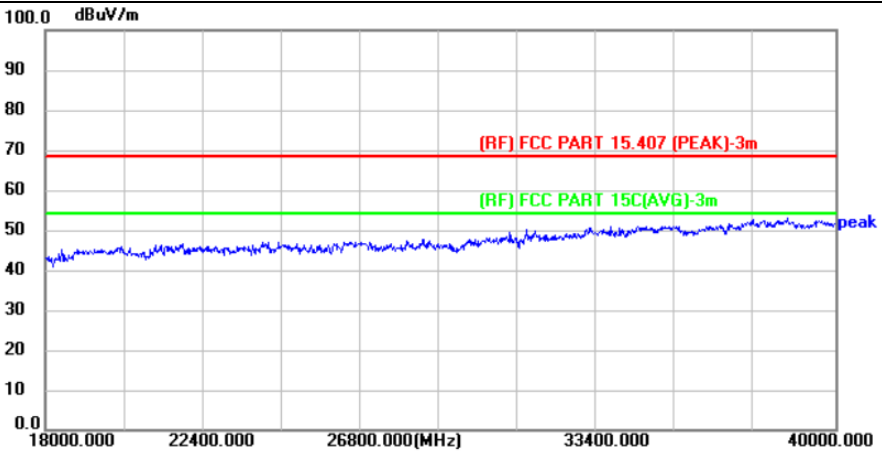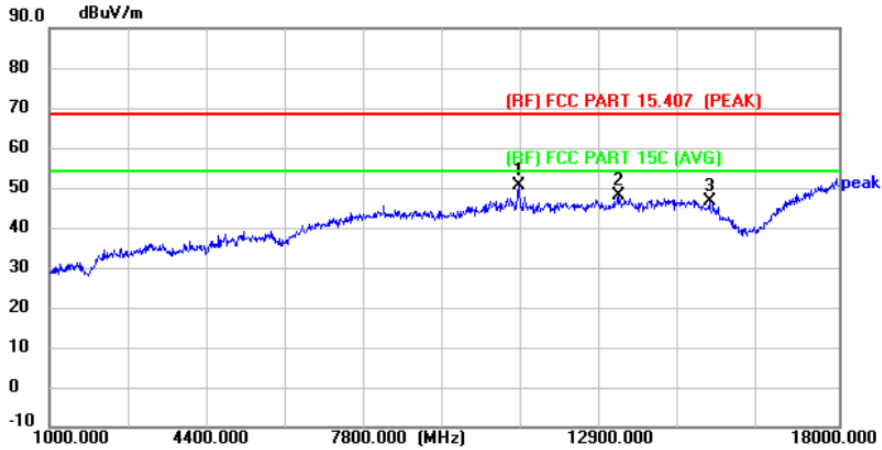

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11098.000	44.38	6.19	50.57	68.30	-17.73	peak	P
2	13274.000	39.88	7.99	47.87	68.30	-20.43	peak	P
3	15212.000	37.56	8.89	46.45	68.30	-21.85	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5710MHz with Antenna(XINGHE)		

Horizontal

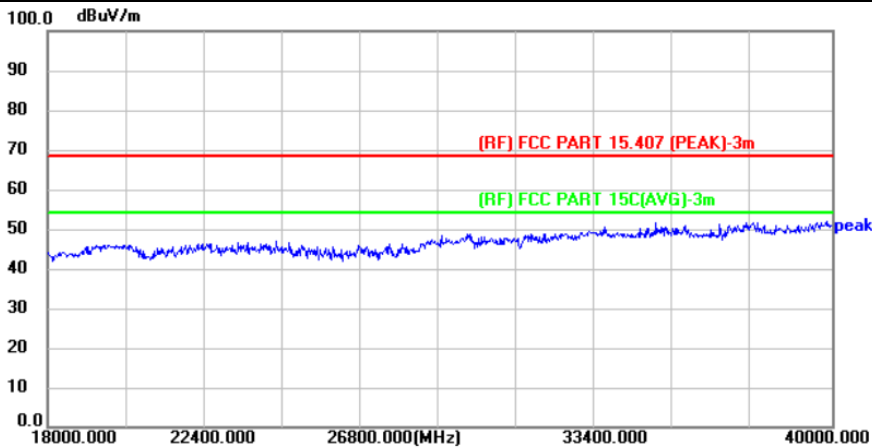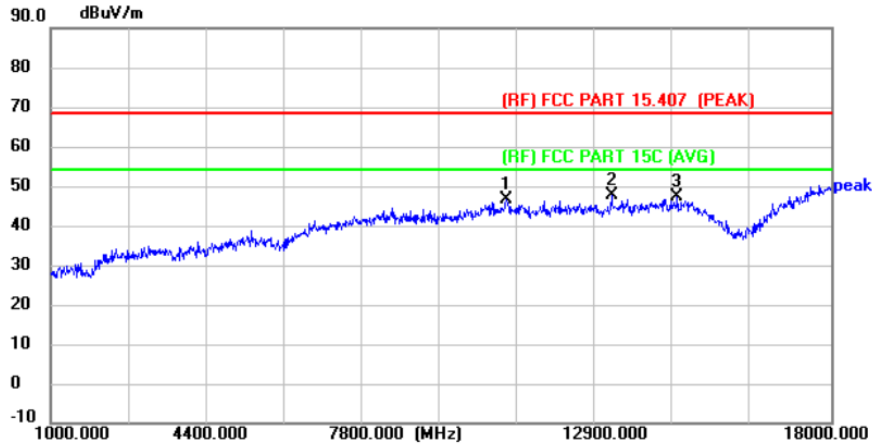

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10928.000	40.67	5.88	46.55	68.30	-21.75	peak	P
2 *	13223.000	39.69	7.95	47.64	68.30	-20.66	peak	P
3	14651.000	37.86	9.30	47.16	68.30	-21.14	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5710MHz with Antenna(XINGHE)		

Vertical

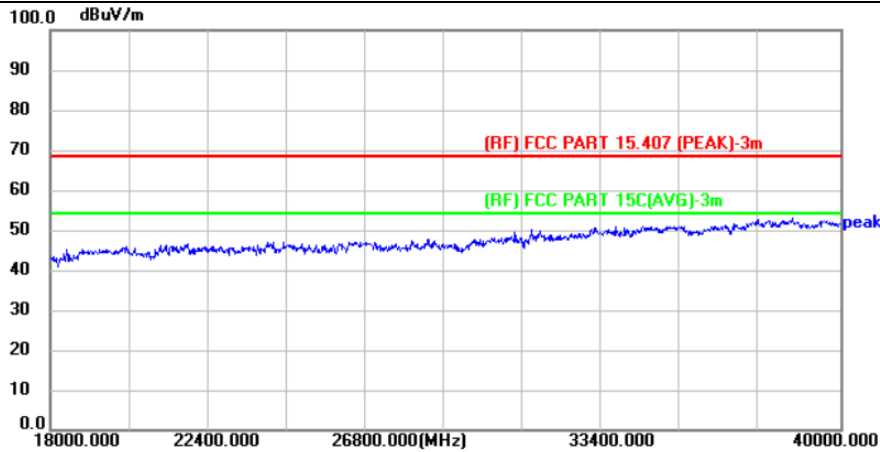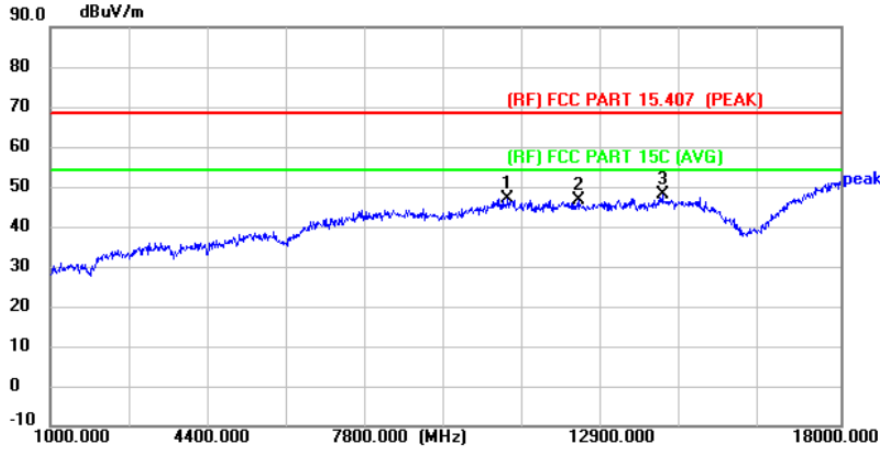

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10843.000	41.43	5.69	47.12	68.30	-21.18	peak	P
2	12373.000	38.89	7.56	46.45	68.30	-21.85	peak	P
3 *	14175.000	39.23	8.80	48.03	68.30	-20.27	peak	P


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz with Antenna(XINGHE)		

Horizontal

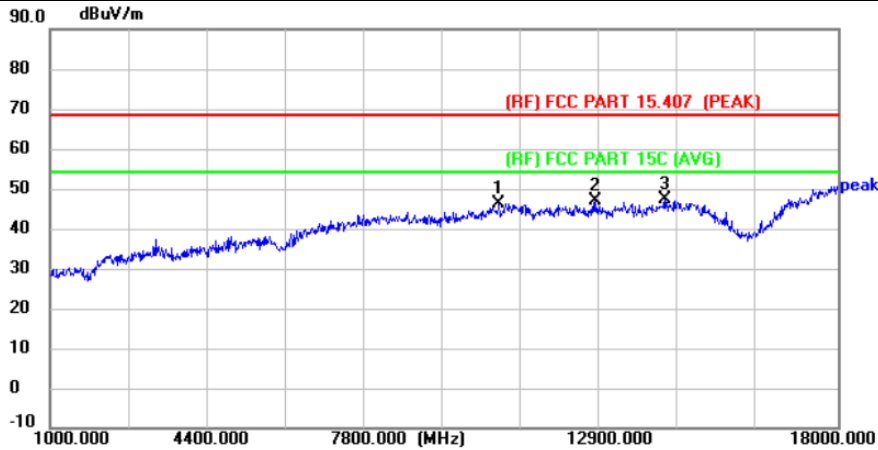

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10690.000	40.98	5.35	46.33	68.30	-21.97	peak	P
2	12781.000	39.14	7.69	46.83	68.30	-21.47	peak	P
3 *	14277.000	38.58	8.91	47.49	68.30	-20.81	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz with Antenna(XINGHE)		

Vertical

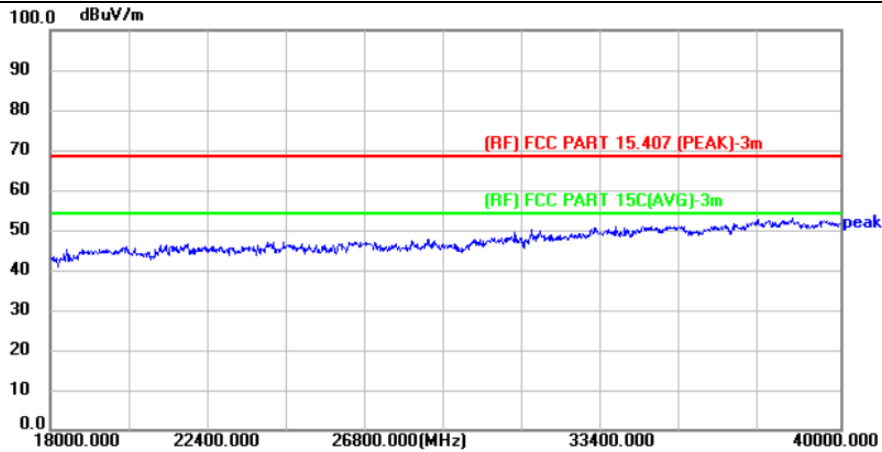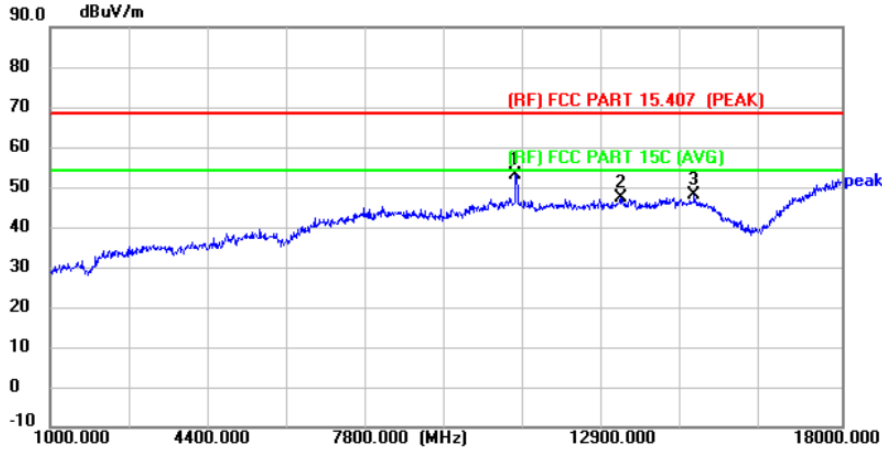

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10996.000	46.98	6.05	53.03	68.30	-15.27	peak	P
2	13274.000	39.31	7.99	47.30	68.30	-21.00	peak	P
3	14838.000	38.72	9.48	48.20	68.30	-20.10	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz with Antenna(XINGHE)		

Horizontal

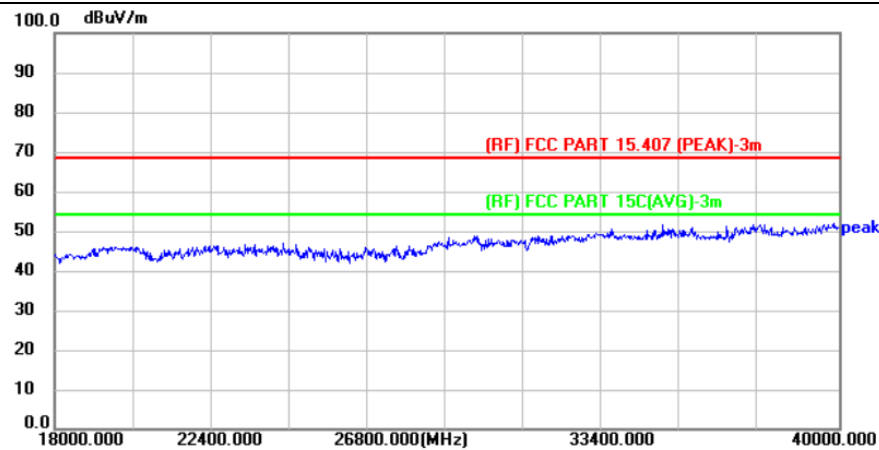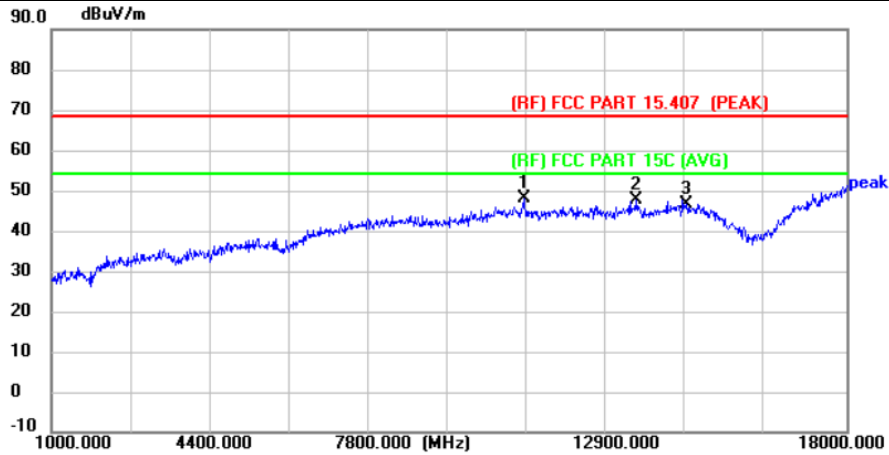

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11098.000	41.72	6.19	47.91	68.30	-20.39	peak	P
2	13495.000	39.34	8.18	47.52	68.30	-20.78	peak	P
3	14566.000	37.47	9.21	46.68	68.30	-21.62	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz with Antenna(XINGHE)		

Vertical

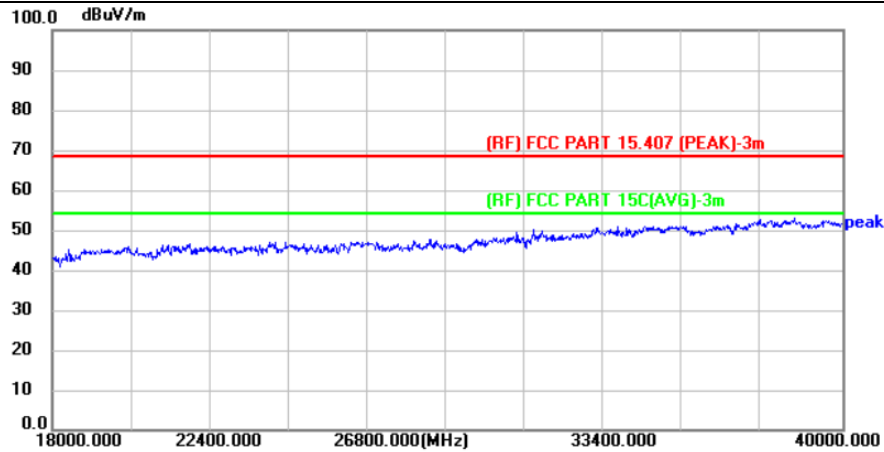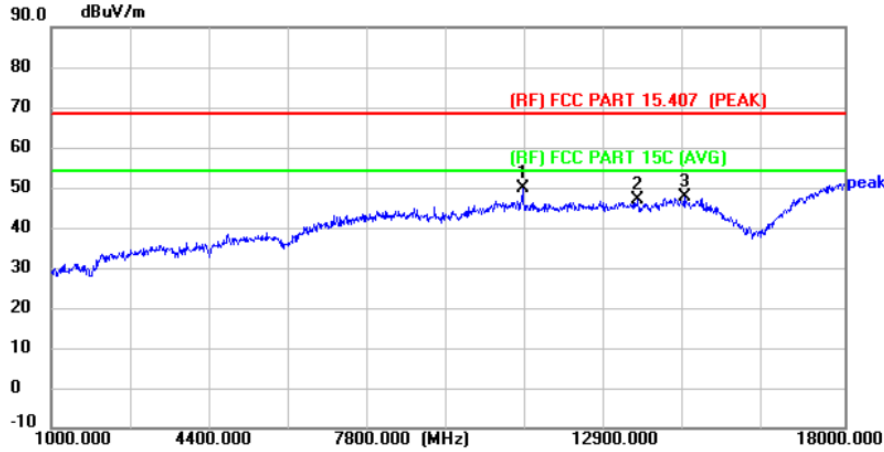

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11098.000	43.71	6.19	49.90	68.30	-18.40	peak	P
2	13580.000	38.65	8.25	46.90	68.30	-21.40	peak	P
3	14566.000	38.45	9.21	47.66	68.30	-20.64	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5710MHz with Antenna(XINGHE)		

Horizontal

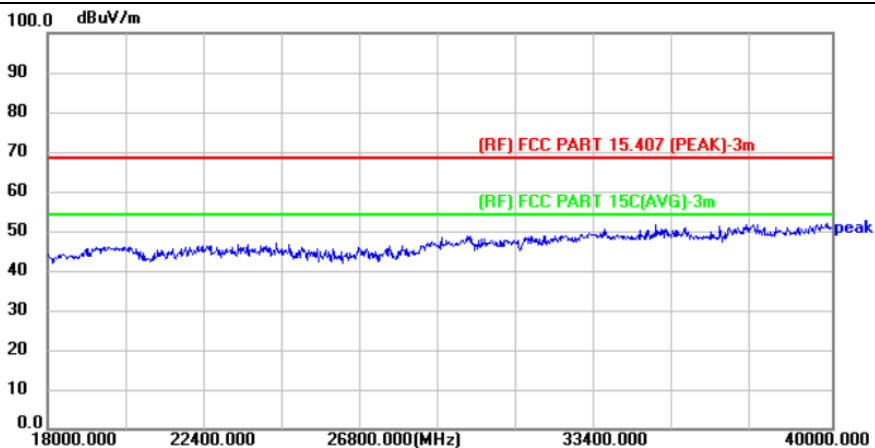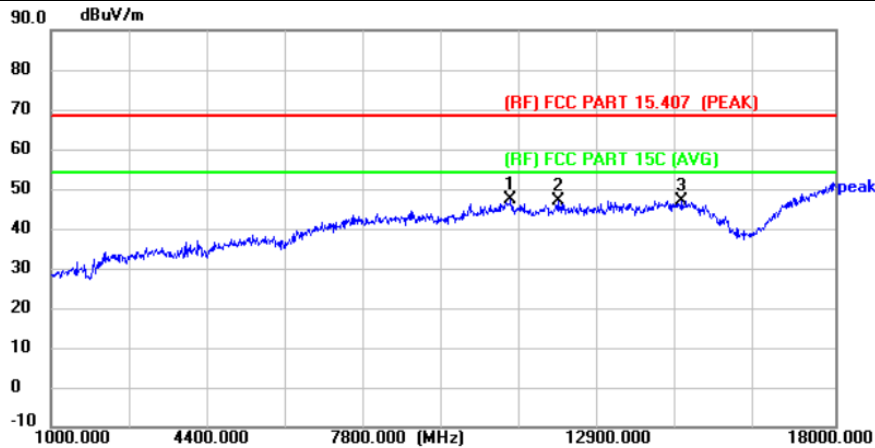

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10962.000	41.34	5.96	47.30	68.30	-21.00	peak	P
2	11999.000	39.62	7.45	47.07	68.30	-21.23	peak	P
3	14685.000	37.65	9.33	46.98	68.30	-21.32	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5710MHz with Antenna(XINGHE)		

Vertical

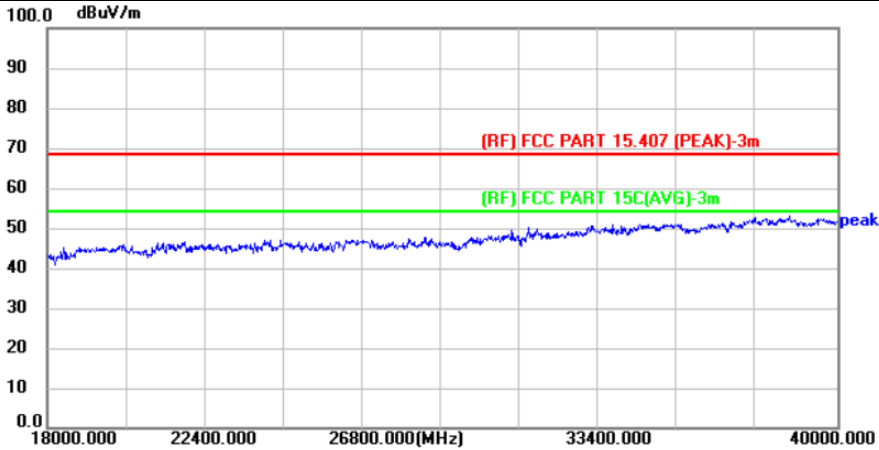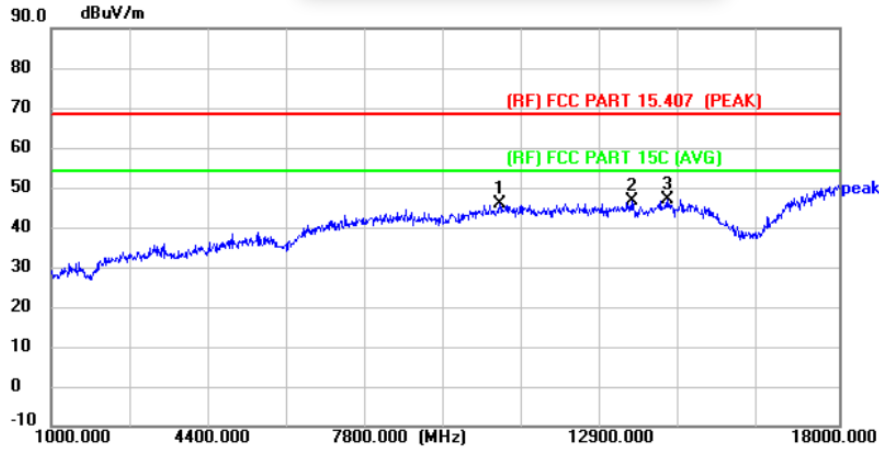

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10690.000	40.39	5.35	45.74	68.30	-22.56	peak	P
2	13529.000	38.42	8.21	46.63	68.30	-21.67	peak	P
3 *	14311.000	37.94	8.94	46.88	68.30	-21.42	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5755MHz with Antenna(XINGHE)		

Horizontal

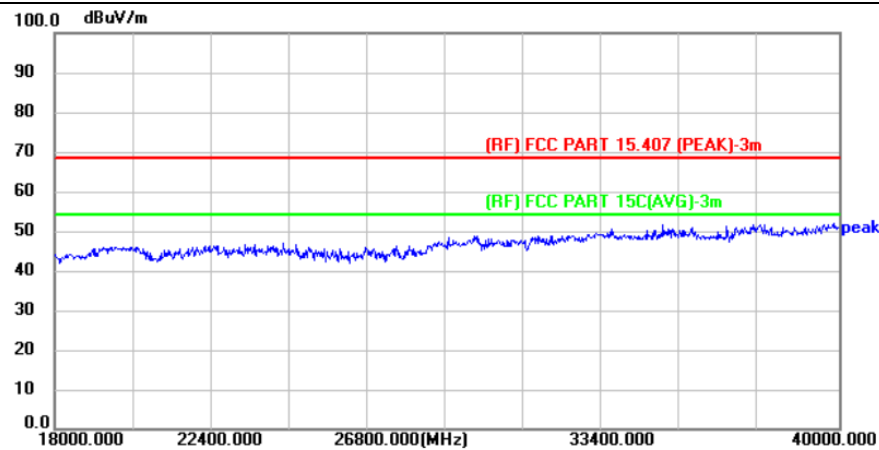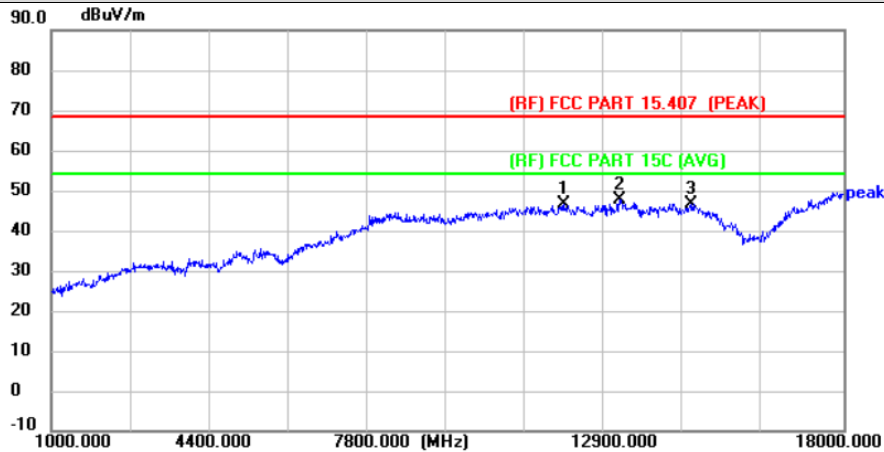

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	12016.000	45.15	1.46	46.61	68.30	-21.69	peak	P
2 *	13206.000	45.88	1.93	47.81	68.30	-20.49	peak	P
3	14719.000	43.24	3.36	46.60	68.30	-21.70	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5755MHz with Antenna(XINGHE)		

Vertical

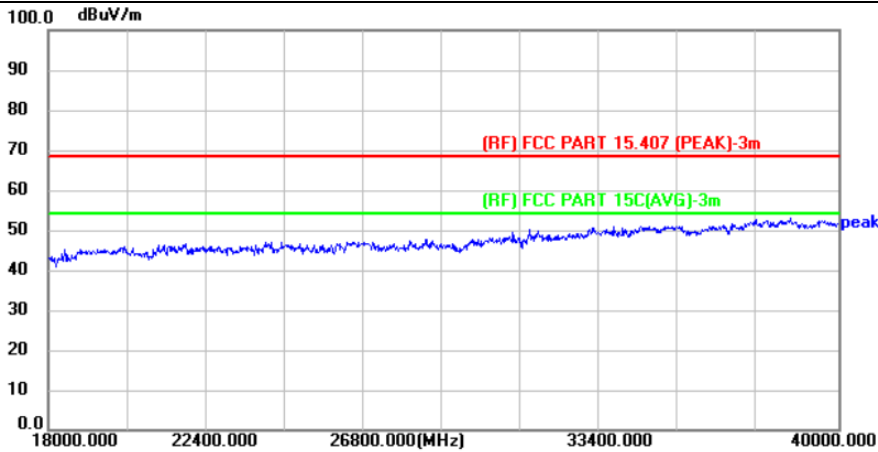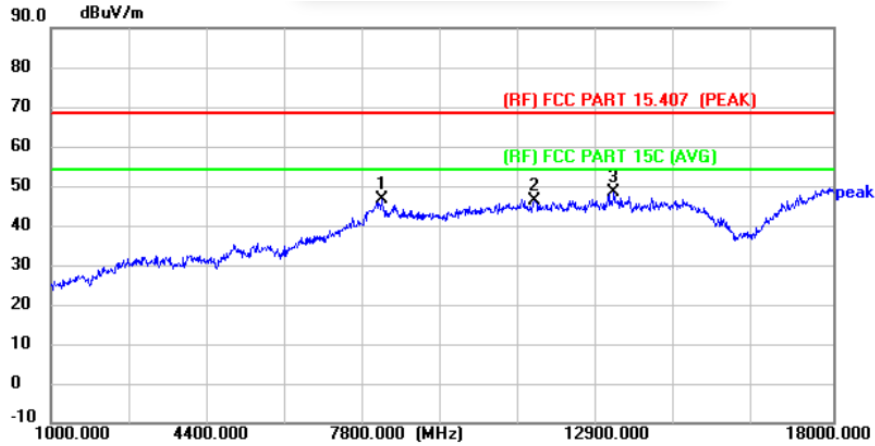

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8208.000	53.68	-7.04	46.64	68.30	-21.66	peak	P
2	11506.000	45.67	0.75	46.42	68.30	-21.88	peak	P
3 *	13240.000	46.59	1.96	48.55	68.30	-19.75	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5795MHz with Antenna(XINGHE)		

Horizontal

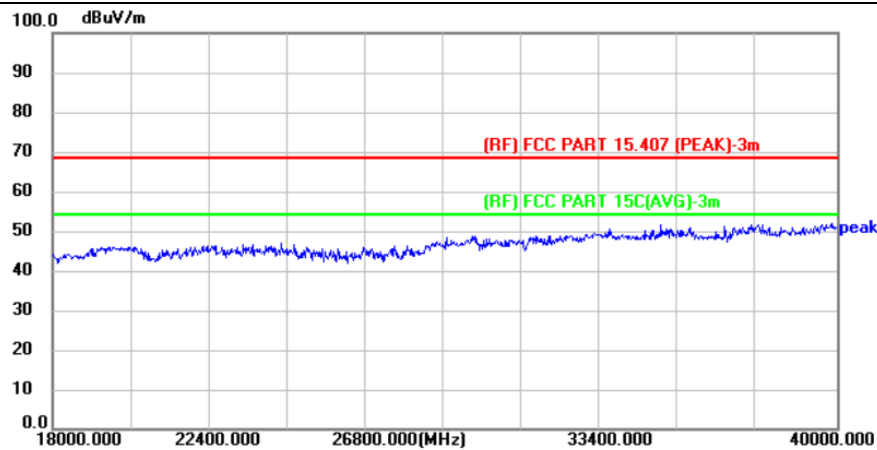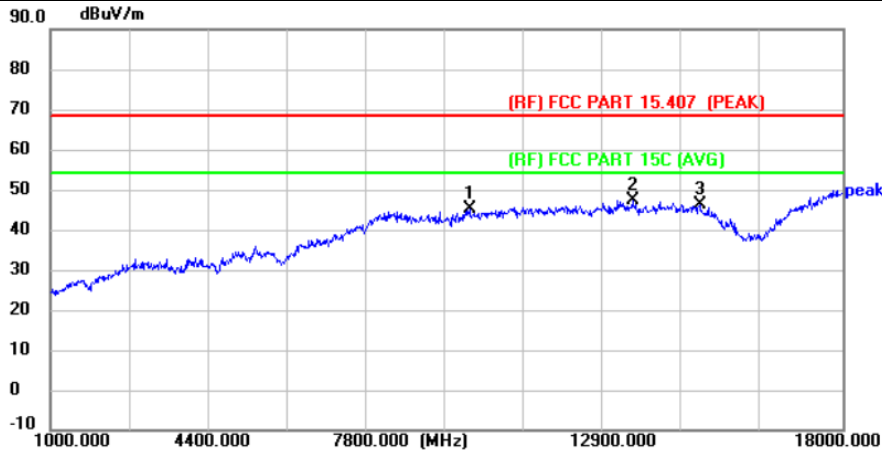

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9993.000	47.37	-2.27	45.10	68.30	-23.20	peak	P
2 *	13495.000	45.28	2.18	47.46	68.30	-20.84	peak	P
3	14940.000	42.83	3.59	46.42	68.30	-21.88	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n(HT40) Mode 5795MHz with Antenna(XINGHE)		

Vertical

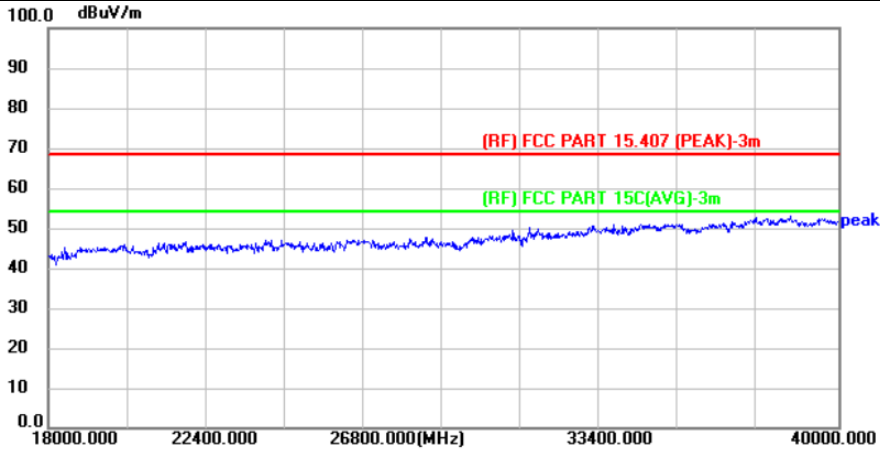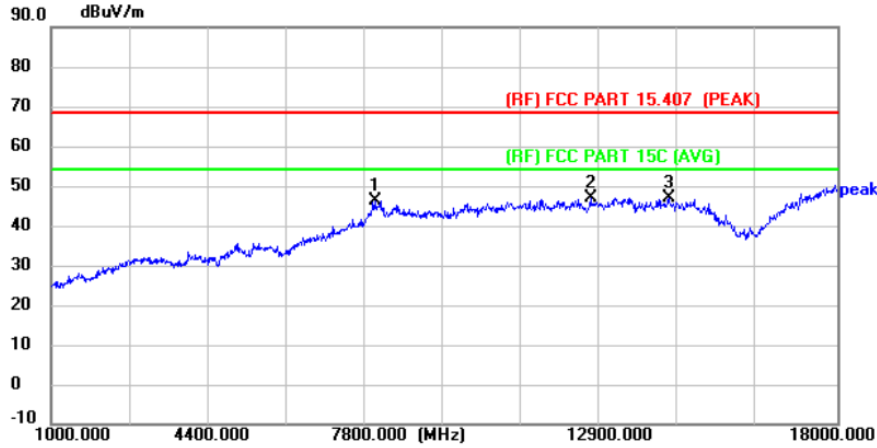

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8004.000	53.66	-7.33	46.33	68.30	-21.97	peak	P
2	12662.000	45.22	1.65	46.87	68.30	-21.43	peak	P
3 *	14362.000	43.96	3.00	46.96	68.30	-21.34	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz with Antenna(XINGHE)		

Horizontal

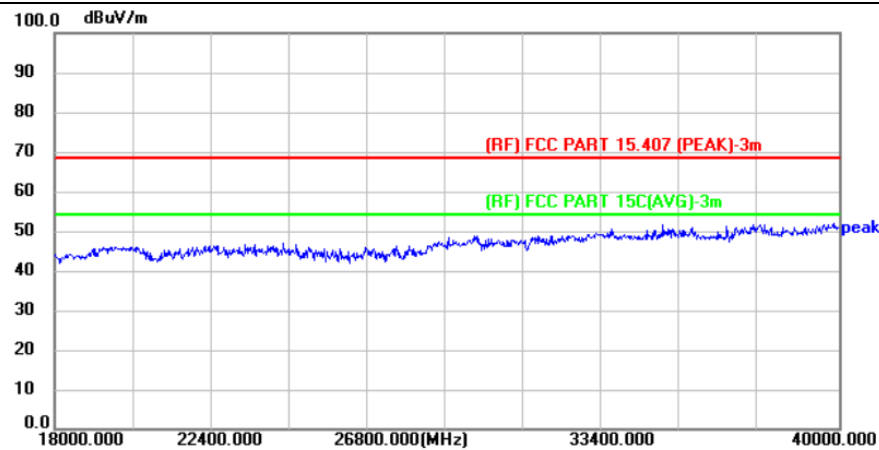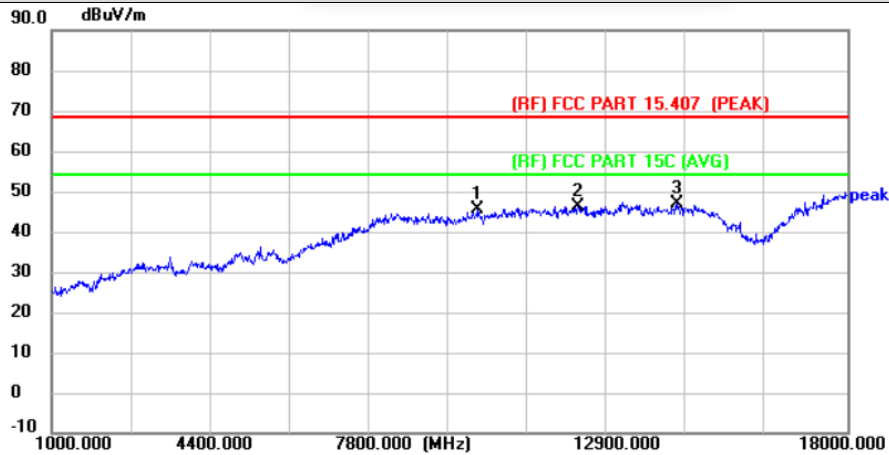

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10112.000	47.44	-1.99	45.45	68.30	-22.85	peak	P
2	12237.000	44.80	1.53	46.33	68.30	-21.97	peak	P
3 *	14362.000	43.94	3.00	46.94	68.30	-21.36	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz with Antenna(XINGHE)		

Vertical

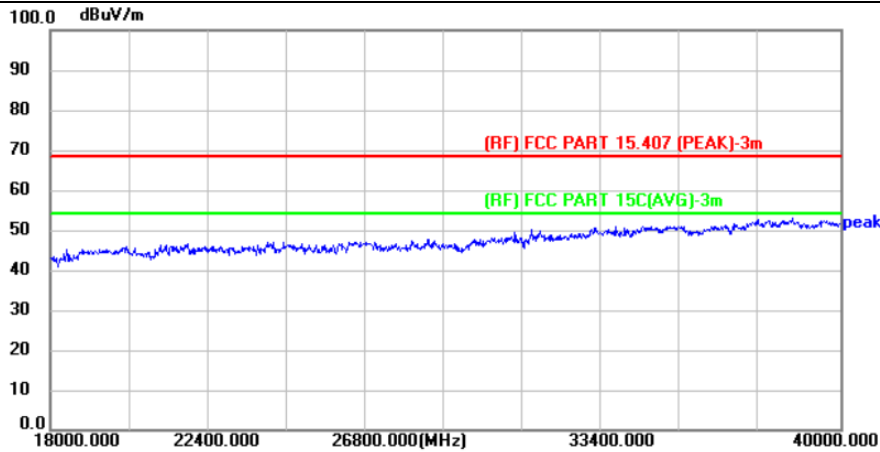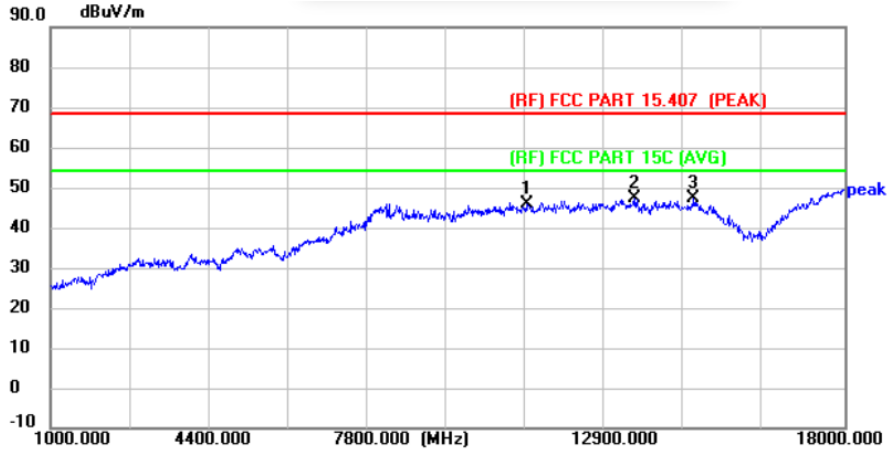

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11217.000	45.52	0.35	45.87	68.30	-22.43	peak	P
2 *	13495.000	45.00	2.18	47.18	68.30	-21.12	peak	P
3	14770.000	43.74	3.42	47.16	68.30	-21.14	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz with Antenna(XINGHE)		

Horizontal

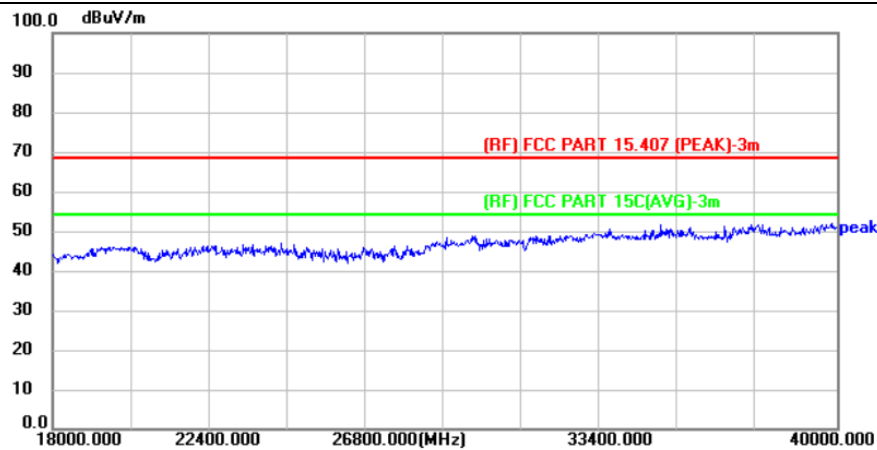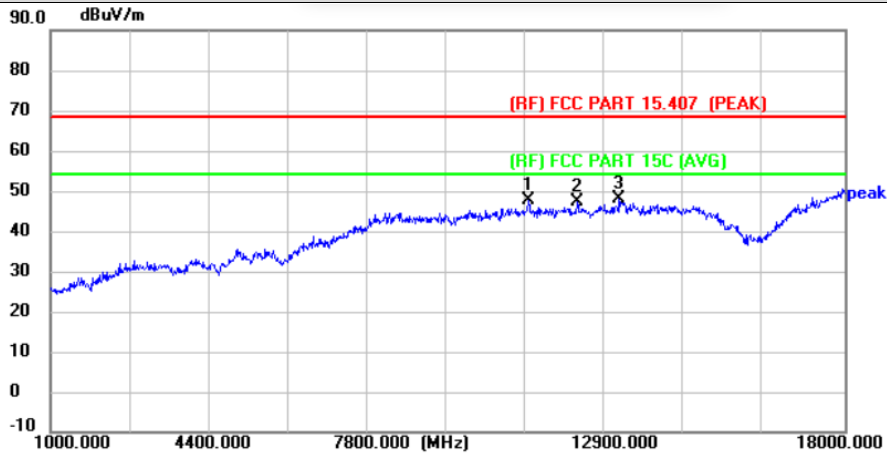

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11234.000	47.20	0.38	47.58	68.30	-20.72	peak	P
2	12288.000	45.93	1.54	47.47	68.30	-20.83	peak	P
3 *	13172.000	45.96	1.91	47.87	68.30	-20.43	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz with Antenna(XINGHE)		

Vertical

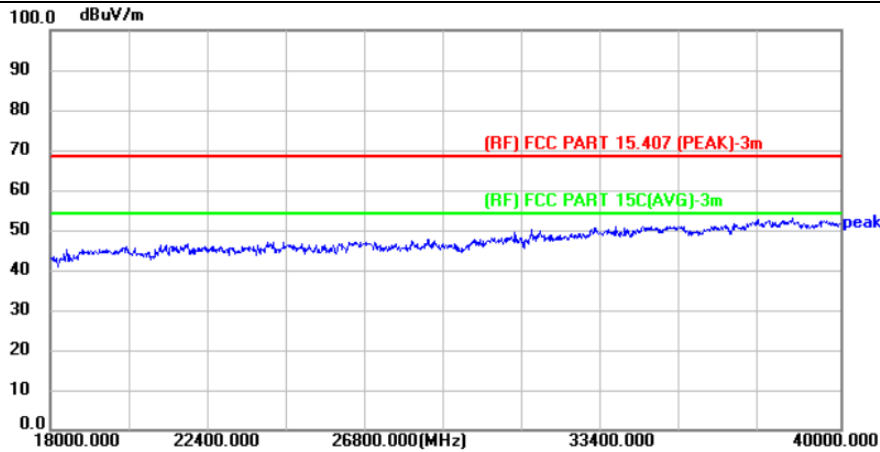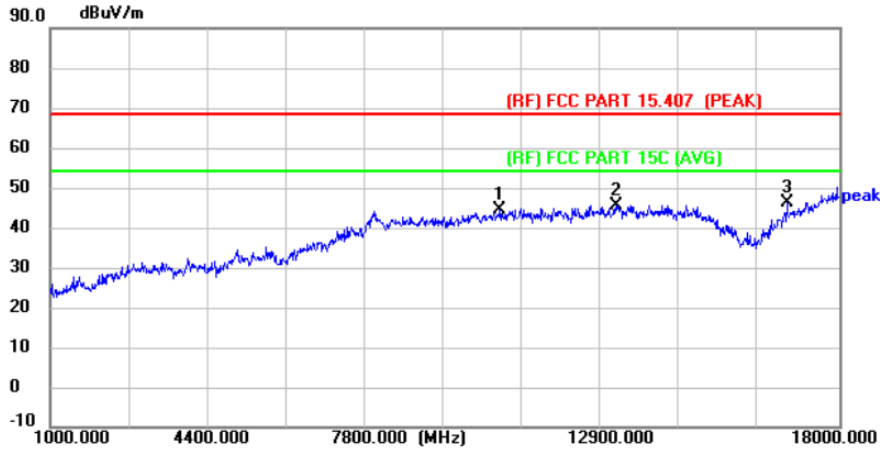

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10690.000	45.05	-0.65	44.40	68.30	-23.90	peak	P
2	13189.000	43.54	1.92	45.46	68.30	-22.84	peak	P
3 *	16878.000	41.93	4.31	46.24	68.30	-22.06	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz with Antenna(XINGHE)		

Horizontal

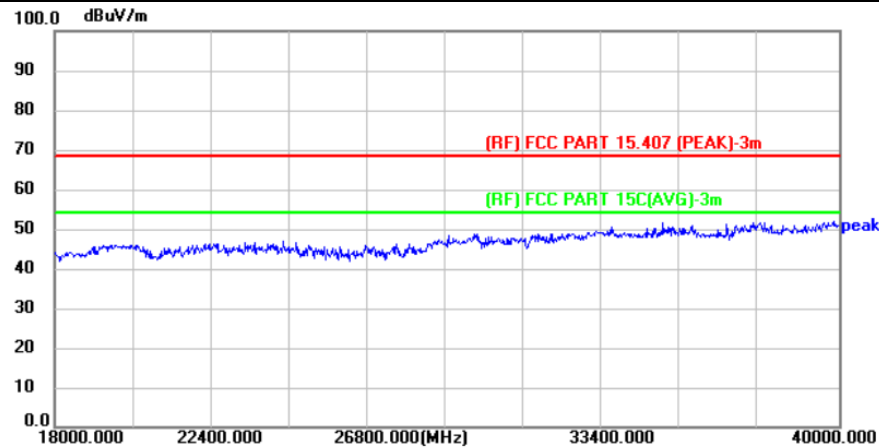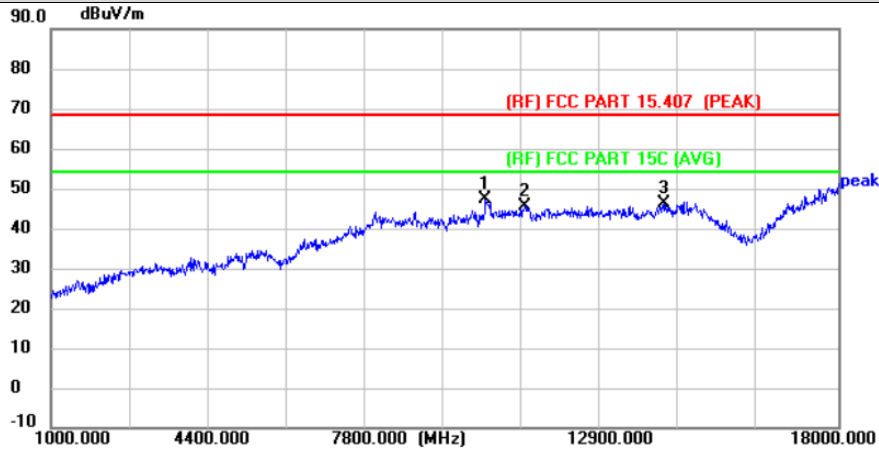

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10384.000	48.67	-1.36	47.31	68.30	-20.99	peak	P
2	11234.000	45.30	0.38	45.68	68.30	-22.62	peak	P
3	14226.000	43.29	2.85	46.14	68.30	-22.16	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz with Antenna(XINGHE)		

Vertical

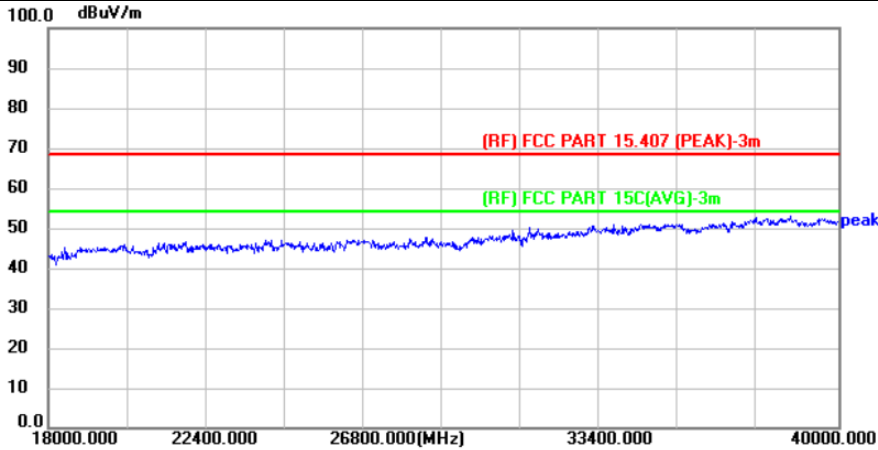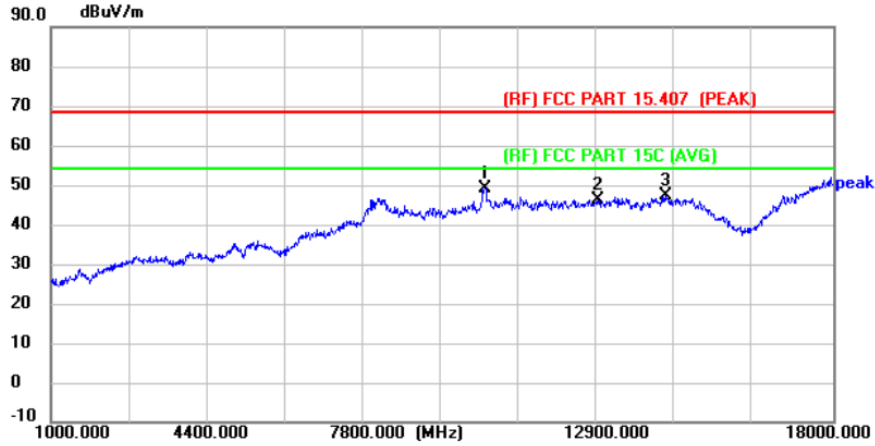

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10435.000	50.47	-1.25	49.22	68.30	-19.08	peak	P
2	12883.000	44.64	1.72	46.36	68.30	-21.94	peak	P
3	14362.000	44.20	3.00	47.20	68.30	-21.10	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz with Antenna(XINGHE)		

Horizontal

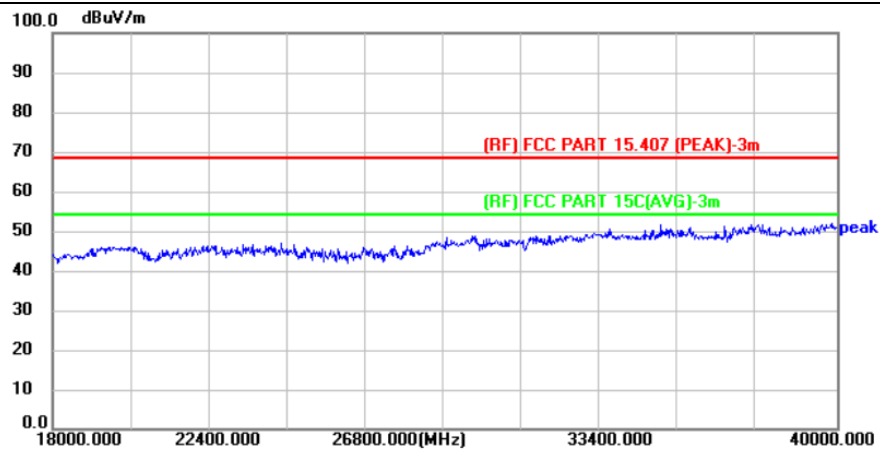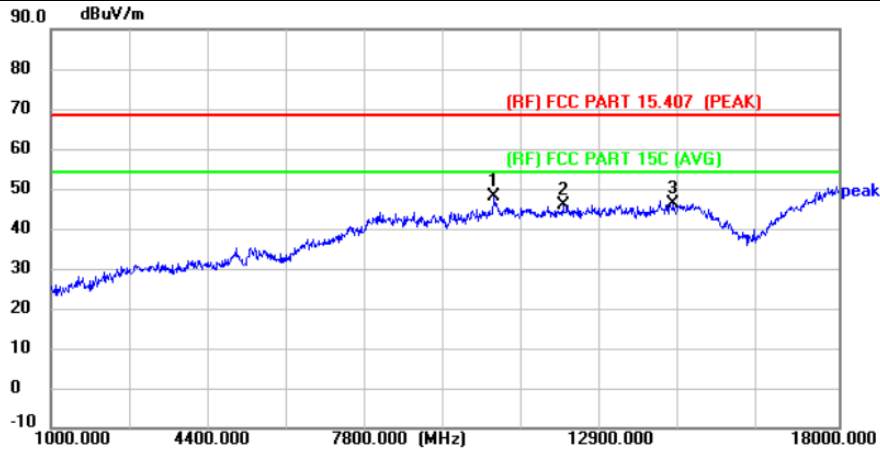

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10571.000	48.94	-0.93	48.01	68.30	-20.29	peak	P
2	12050.000	44.58	1.46	46.04	68.30	-22.26	peak	P
3	14430.000	43.27	3.06	46.33	68.30	-21.97	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz with Antenna(XINGHE)		

Vertical

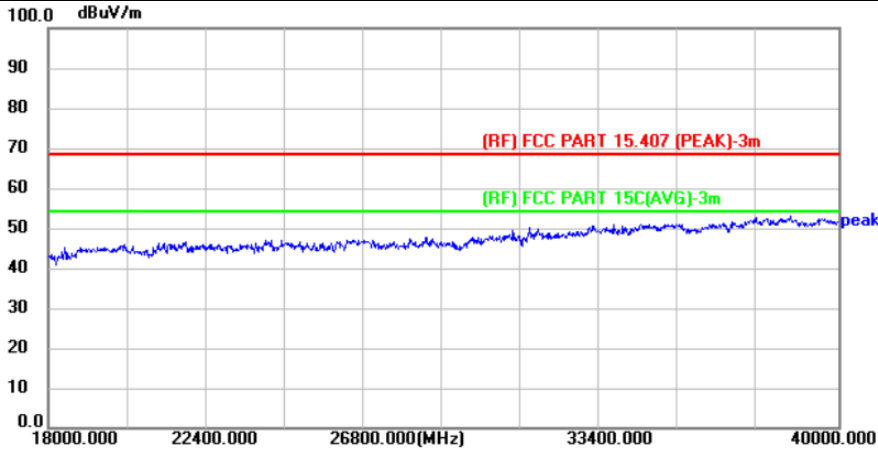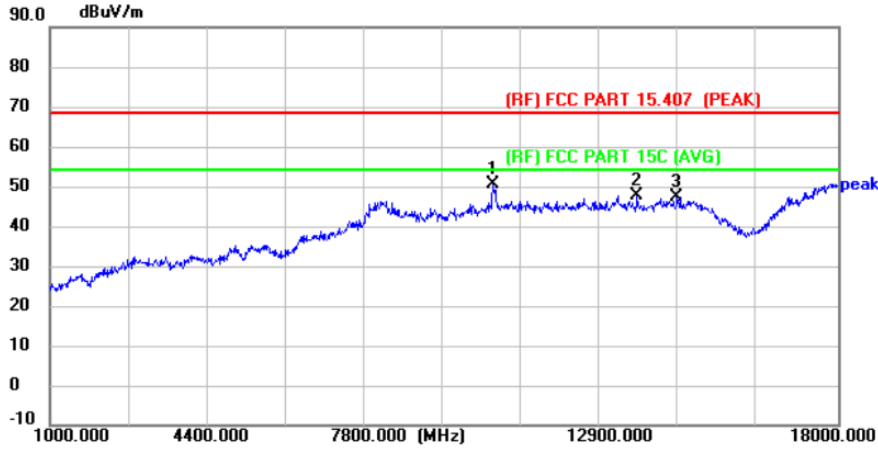

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10571.000	51.55	-0.93	50.62	68.30	-17.68	peak	P
2	13665.000	45.19	2.33	47.52	68.30	-20.78	peak	P
3	14532.000	44.08	3.17	47.25	68.30	-21.05	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz with Antenna(XINGHE)		

Horizontal

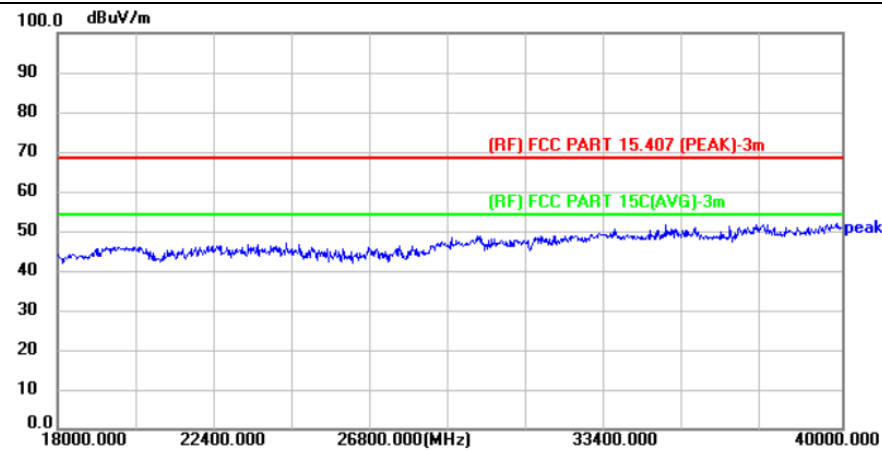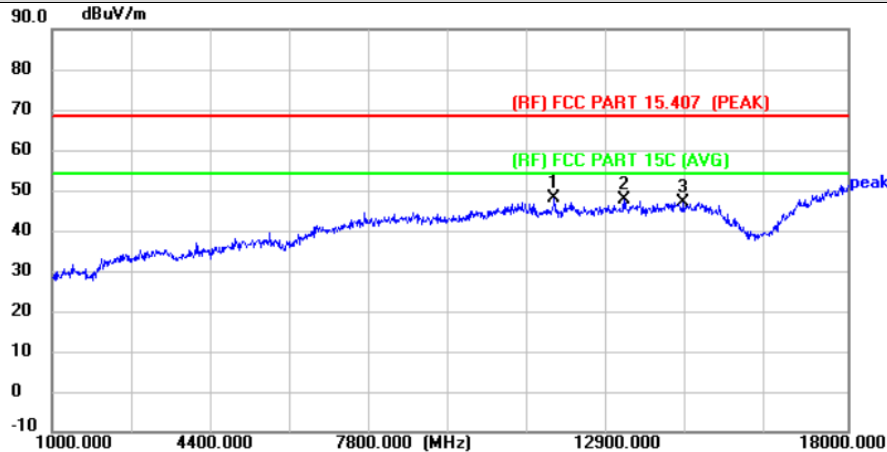

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11727.000	40.85	7.08	47.93	68.30	-20.37	peak	P
2	13240.000	39.60	7.96	47.56	68.30	-20.74	peak	P
3	14498.000	37.92	9.13	47.05	68.30	-21.25	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz with Antenna(XINGHE)		

Vertical

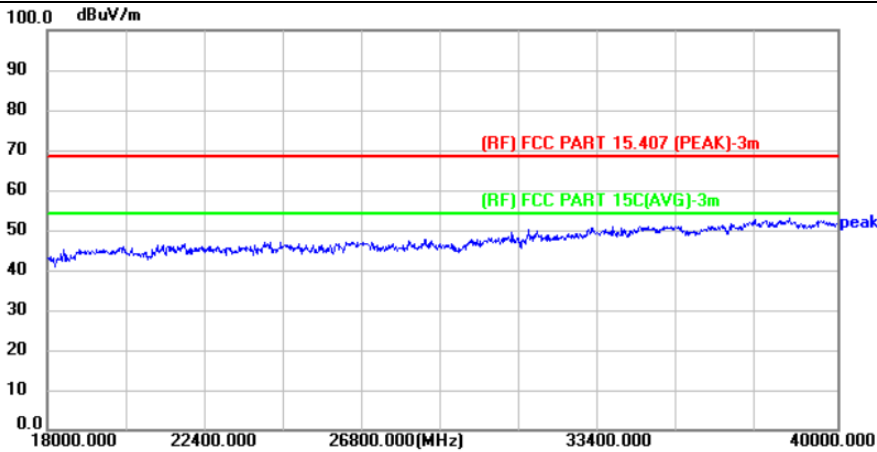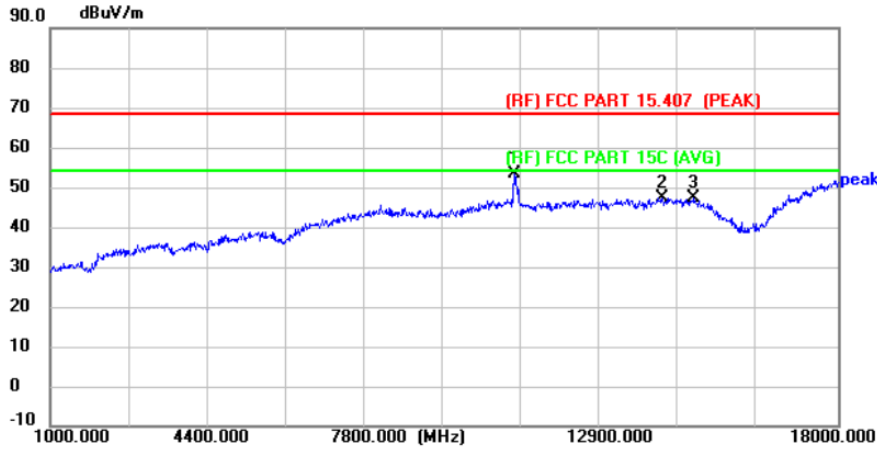

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11013.000	47.26	6.07	53.33	68.30	-14.97	peak	P
2	14209.000	38.41	8.83	47.24	68.30	-21.06	peak	P
3	14889.000	37.76	9.54	47.30	68.30	-21.00	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz with Antenna(XINGHE)		

Horizontal

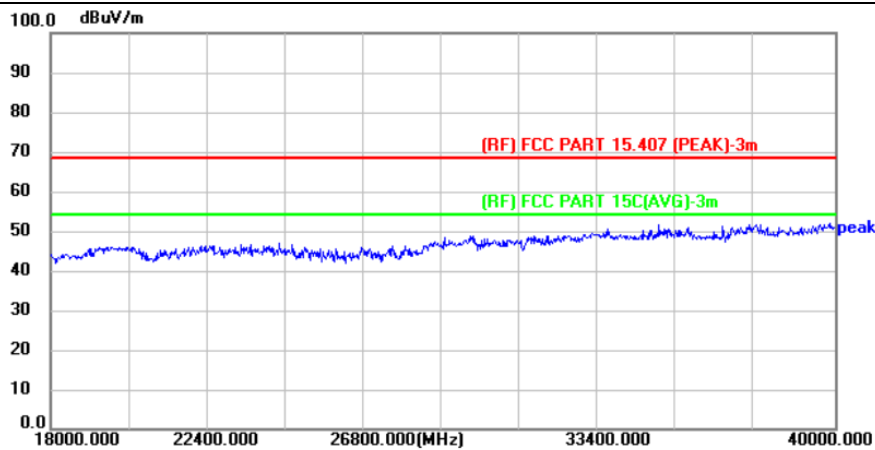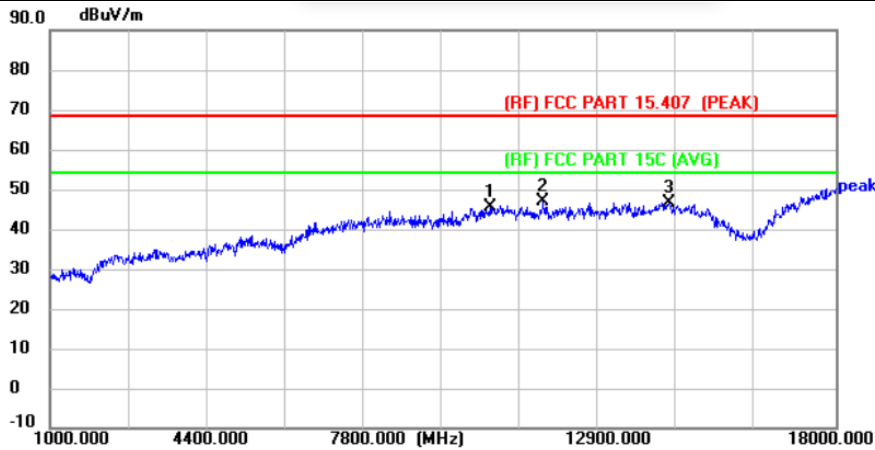

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10537.000	40.63	4.98	45.61	68.30	-22.69	peak	P
2 *	11676.000	39.91	7.01	46.92	68.30	-21.38	peak	P
3	14396.000	37.73	9.03	46.76	68.30	-21.54	peak	P

emark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.

