
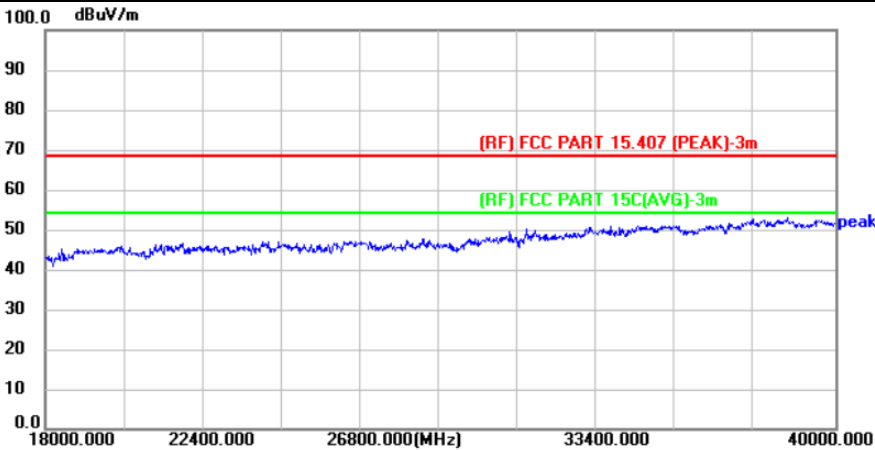


Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz with Antenna(XINGHE)		

**Vertical**

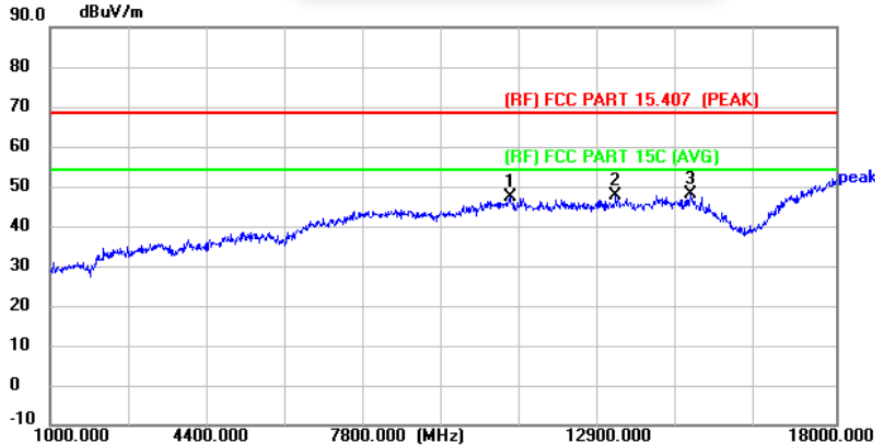

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10945.000	41.34	5.92	47.26	68.30	-21.04	peak	P
2	13240.000	39.65	7.96	47.61	68.30	-20.69	peak	P
3 *	14855.000	38.68	9.51	48.19	68.30	-20.11	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5690MHz with Antenna(XINGHE)		

**Horizontal**

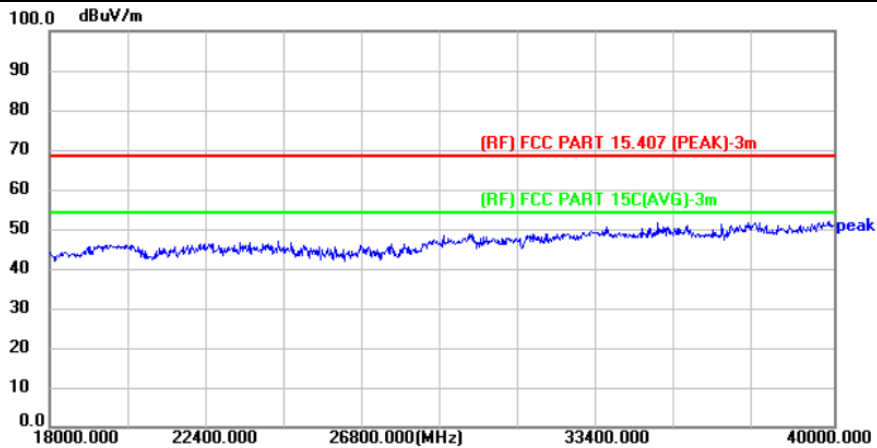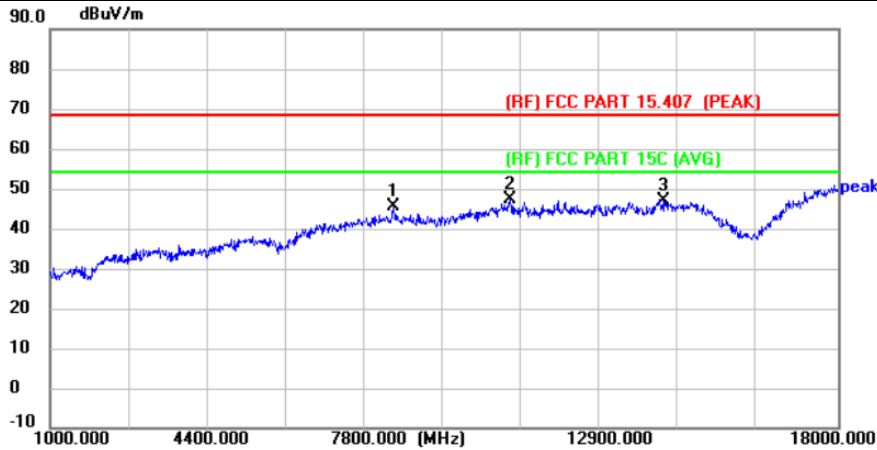

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8412.000	46.20	-0.75	45.45	68.30	-22.85	peak	P
2 *	10928.000	41.51	5.88	47.39	68.30	-20.91	peak	P
3	14243.000	38.04	8.86	46.90	68.30	-21.40	peak	P



**emark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5690MHz with Antenna(XINGHE)		

**Vertical**

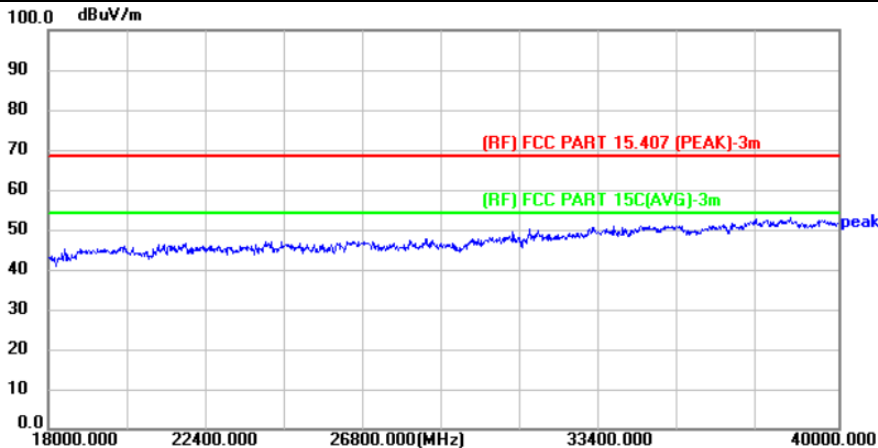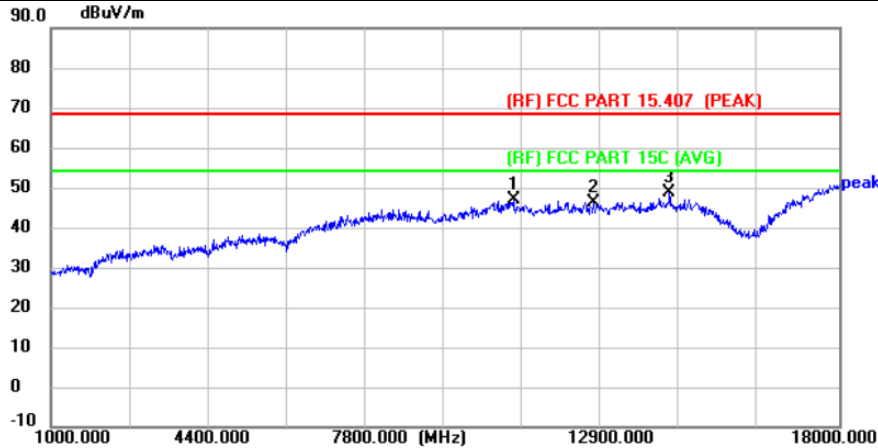

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10979.000	40.96	5.99	46.95	68.30	-21.35	peak	P
2	12696.000	38.56	7.67	46.23	68.30	-22.07	peak	P
3 *	14345.000	39.91	8.97	48.88	68.30	-19.42	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz with Antenna(XINGHE)		

**Horizontal**

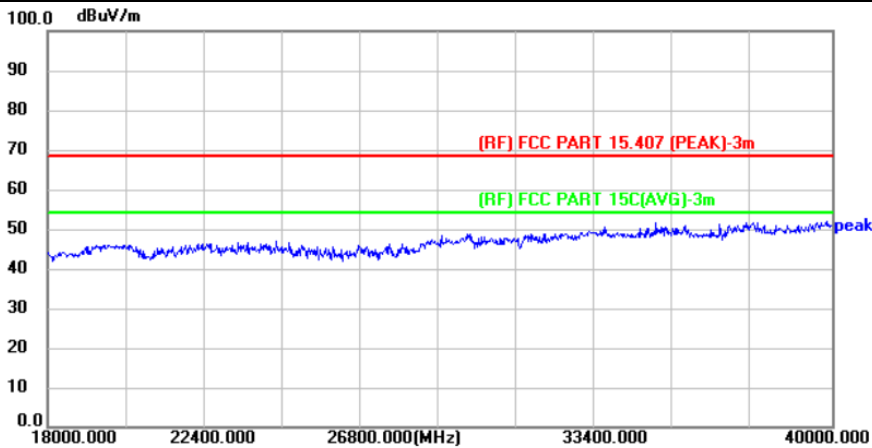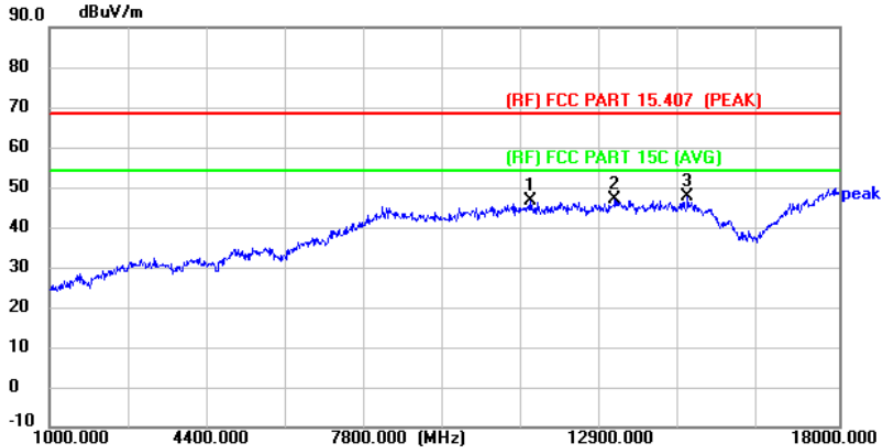

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11370.000	45.92	0.56	46.48	68.30	-21.82	peak	P
2	13172.000	45.22	1.91	47.13	68.30	-21.17	peak	P
3 *	14736.000	44.24	3.38	47.62	68.30	-20.68	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz with Antenna(XINGHE)		

**Vertical**

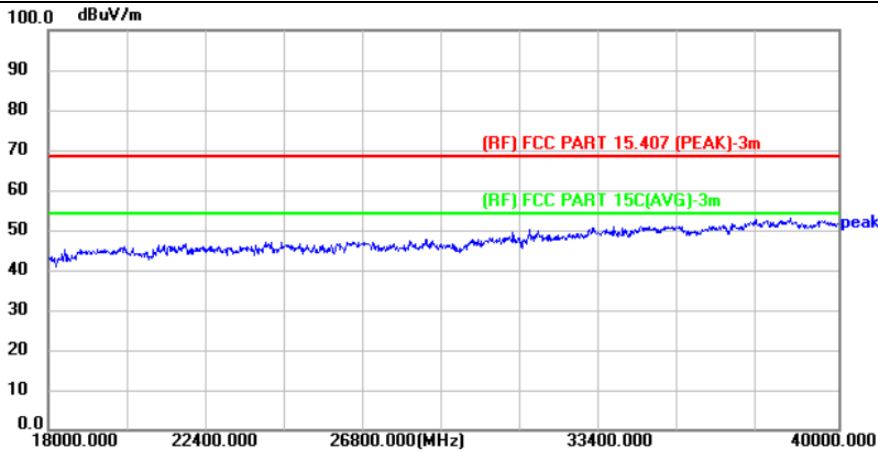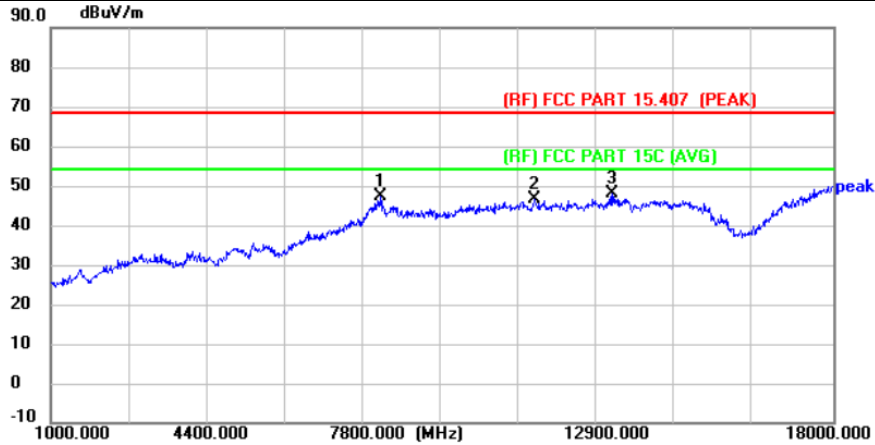

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8174.000	54.41	-7.10	47.31	68.30	-20.99	peak	P
2	11523.000	45.70	0.77	46.47	68.30	-21.83	peak	P
3 *	13189.000	46.21	1.92	48.13	68.30	-20.17	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5180MHz with Antenna(YIJIA)		

**Horizontal**

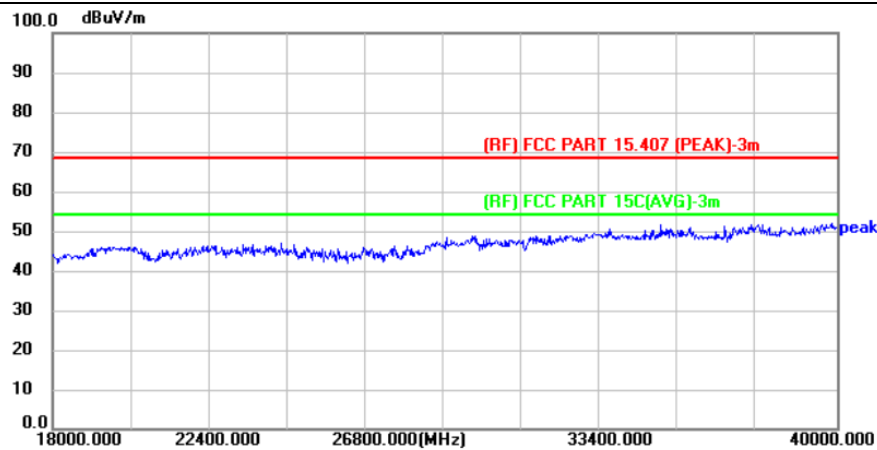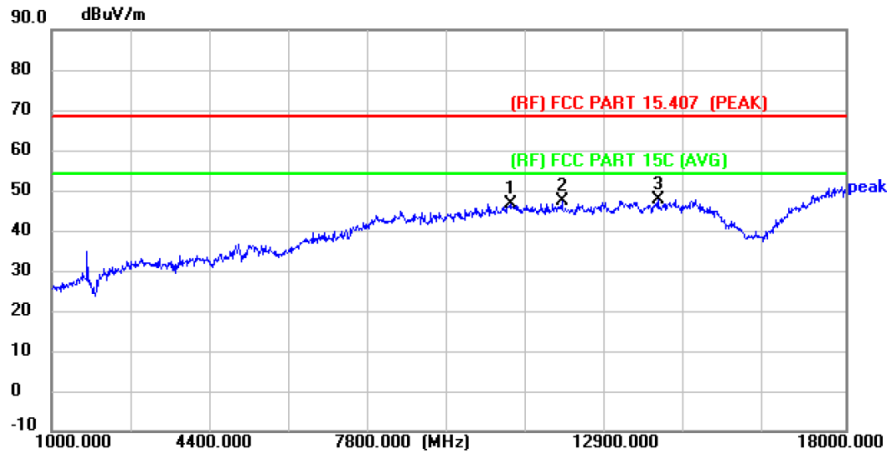

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10826.000	41.12	5.65	46.77	68.30	-21.53	peak	P
2	11931.000	39.83	7.36	47.19	68.30	-21.11	peak	P
3 *	13988.000	39.22	8.61	47.83	68.30	-20.47	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5180MHz with Antenna(YIJA)		

**Vertical**

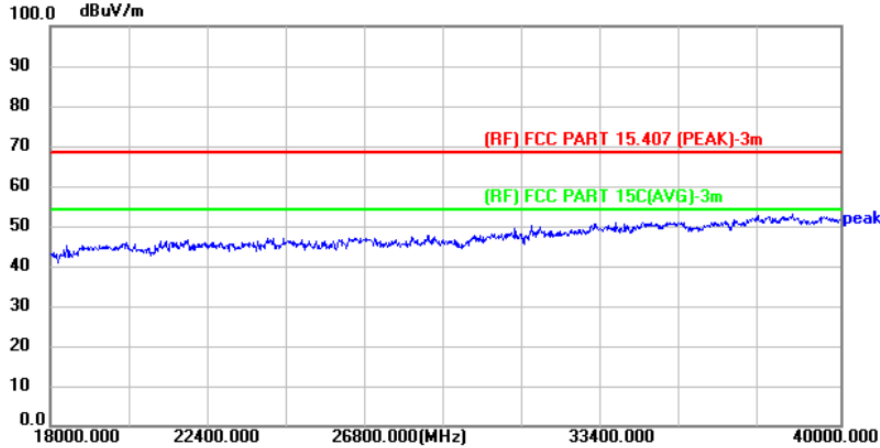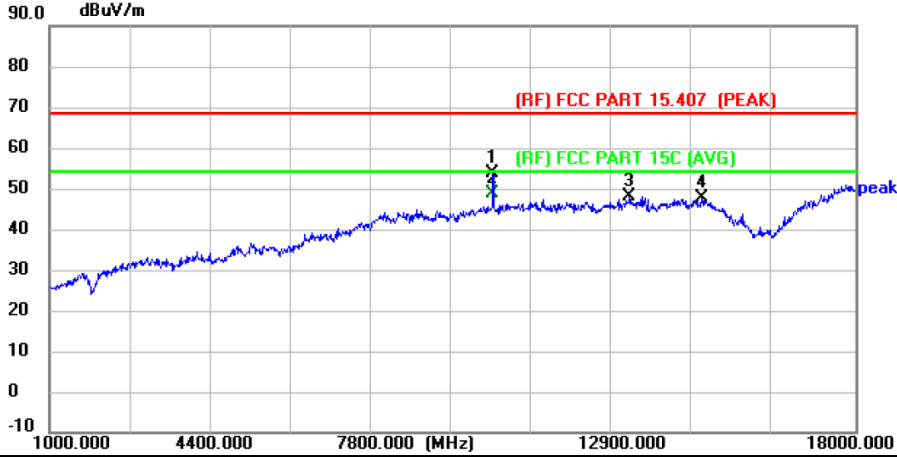



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10350.000	49.36	4.56	53.92	68.30	-14.38	peak	P
2 *	10350.000	44.36	4.56	48.92	54.00	-5.08	AVG	P
3	13240.000	40.13	7.96	48.09	68.30	-20.21	peak	P
4	14770.000	38.23	9.42	47.65	68.30	-20.65	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5320MHz with Antenna(YIJIA)		

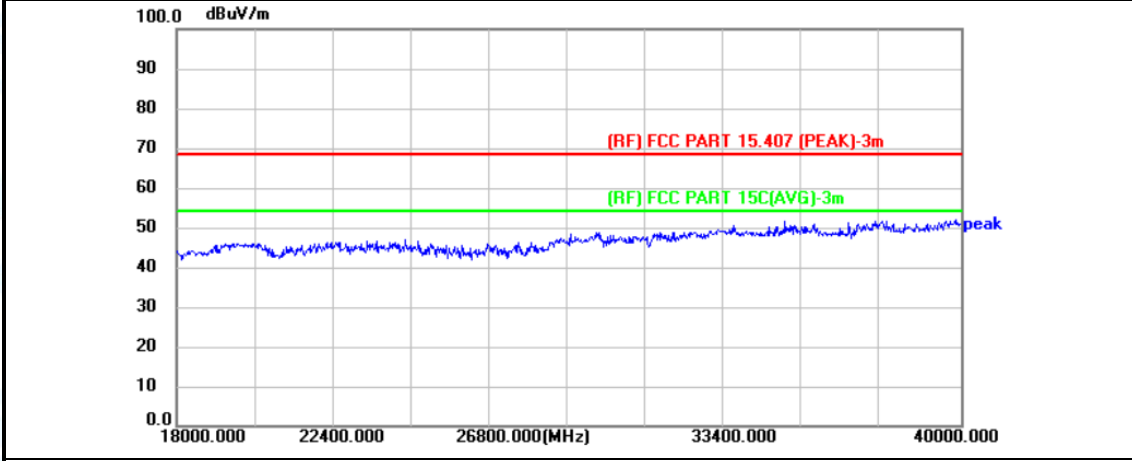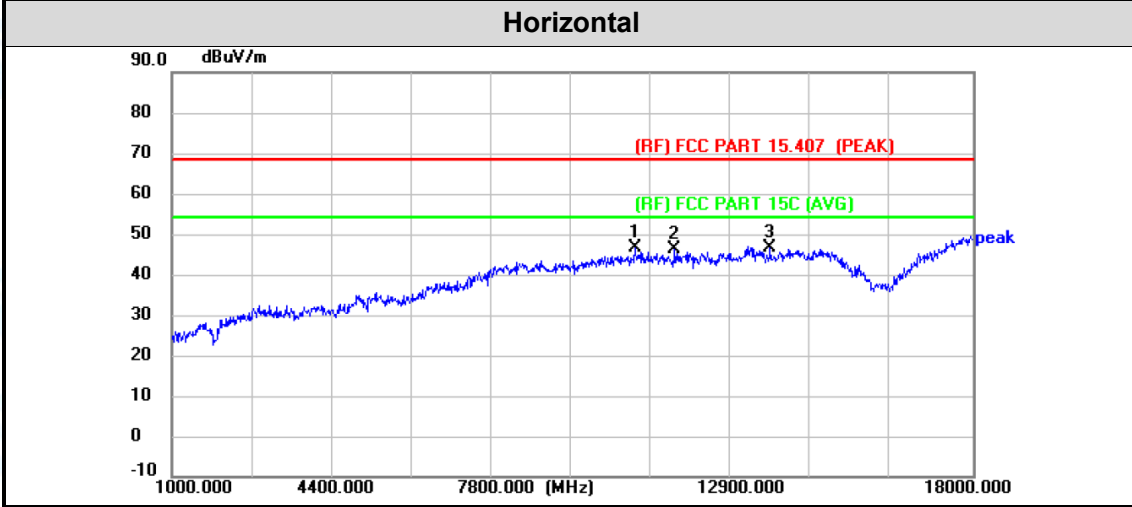

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10826.000	40.91	5.65	46.56	68.30	-21.74	peak	P
2	11676.000	39.15	7.01	46.16	68.30	-22.14	peak	P
3	13699.000	38.18	8.35	46.53	68.30	-21.77	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.





Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5320MHz with Antenna(YIJIA)		

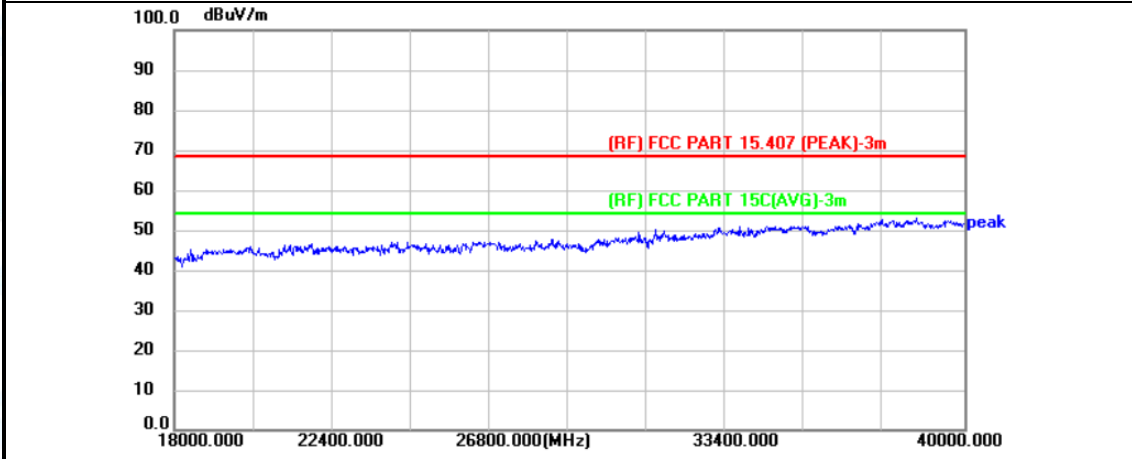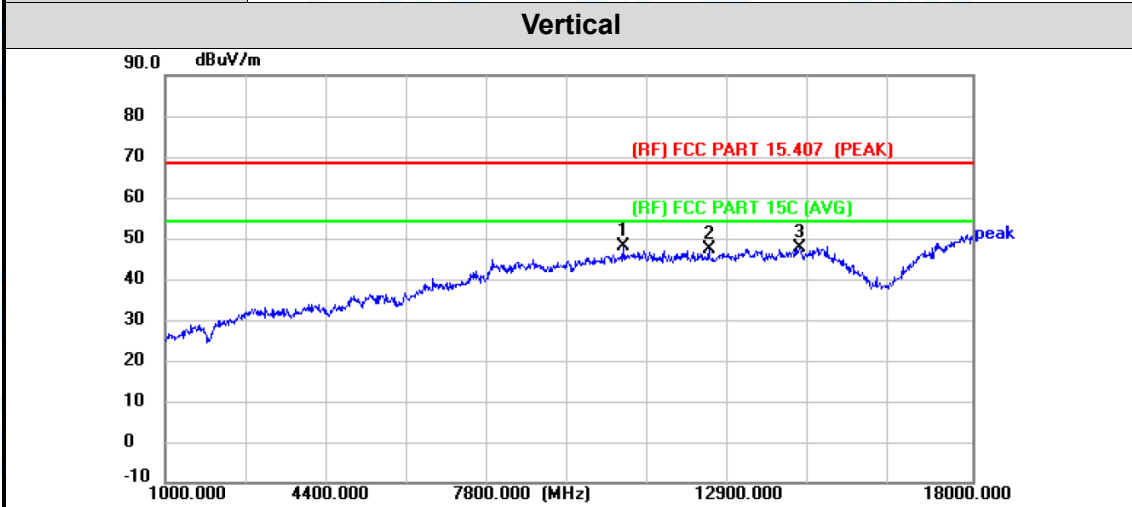

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10639.000	42.71	5.22	47.93	68.30	-20.37	peak	P
2	12458.000	39.87	7.59	47.46	68.30	-20.84	peak	P
3	14362.000	38.82	9.00	47.82	68.30	-20.48	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5500MHz with Antenna(YIJIA)		

**Horizontal**

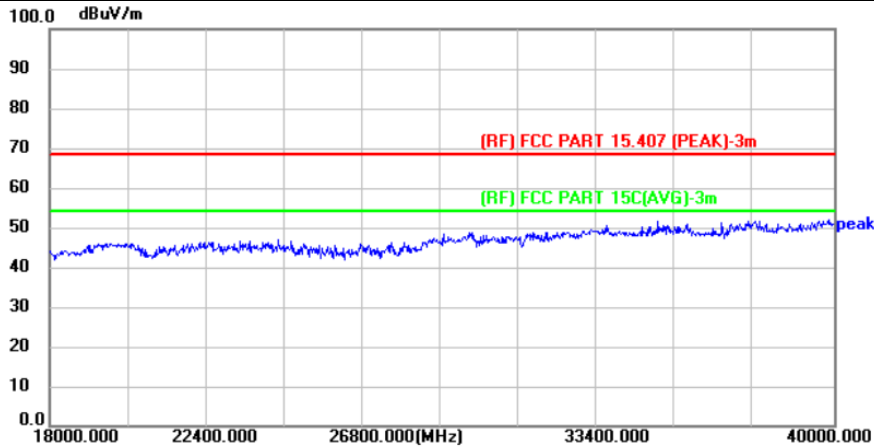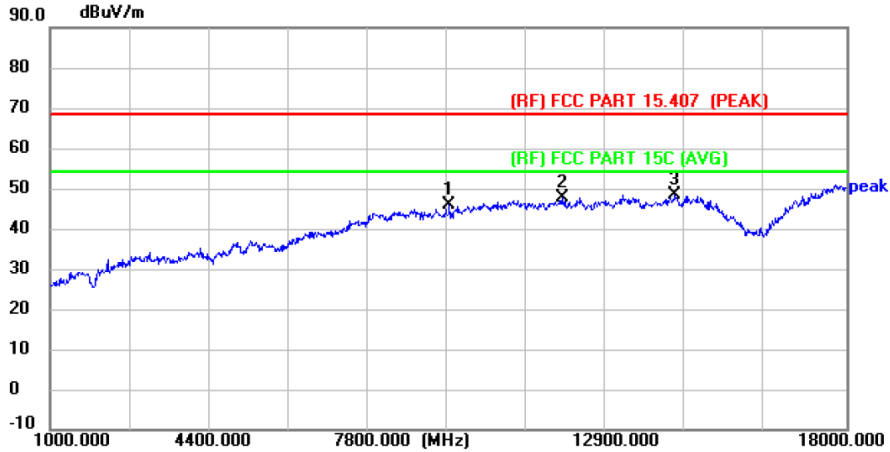

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9517.000	44.09	1.98	46.07	68.30	-22.23	peak	P
2	11931.000	40.32	7.36	47.68	68.30	-20.62	peak	P
3 *	14345.000	39.44	8.97	48.41	68.30	-19.89	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5500MHz with Antenna(YIJA)		

**Vertical**

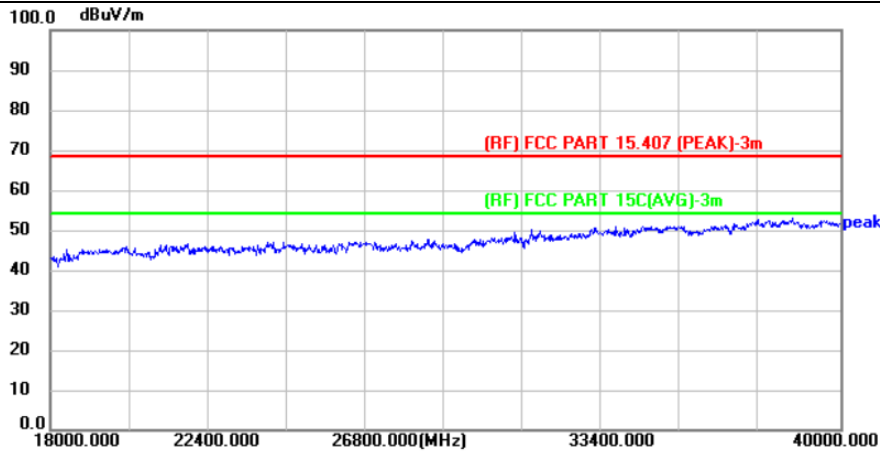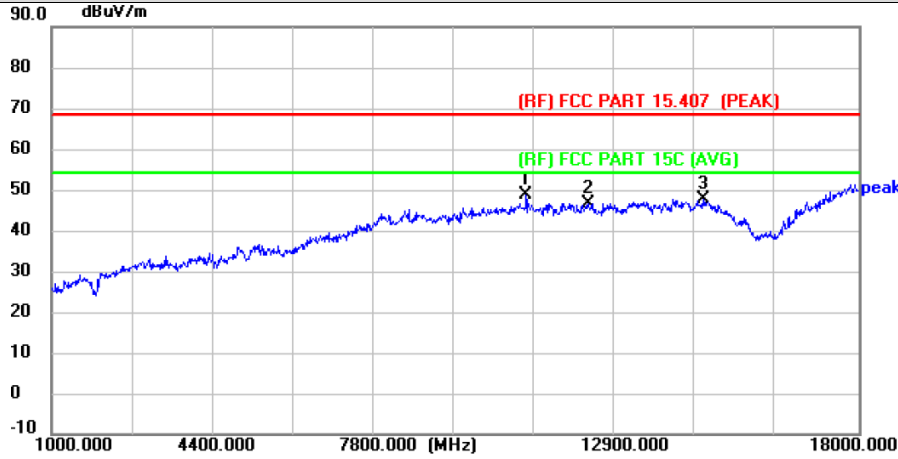

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10996.000	42.86	6.05	48.91	68.30	-19.39	peak	P
2	12305.000	39.14	7.55	46.69	68.30	-21.61	peak	P
3	14719.000	38.21	9.36	47.57	68.30	-20.73	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5825MHz with Antenna(YIJIA)		

**Horizontal**

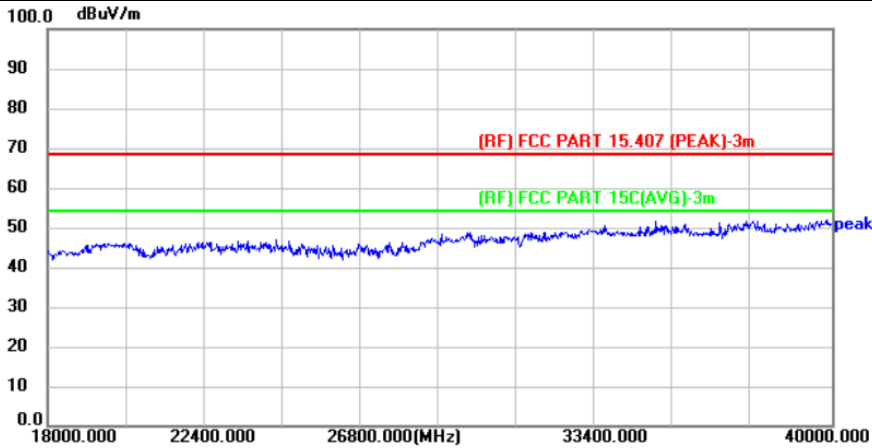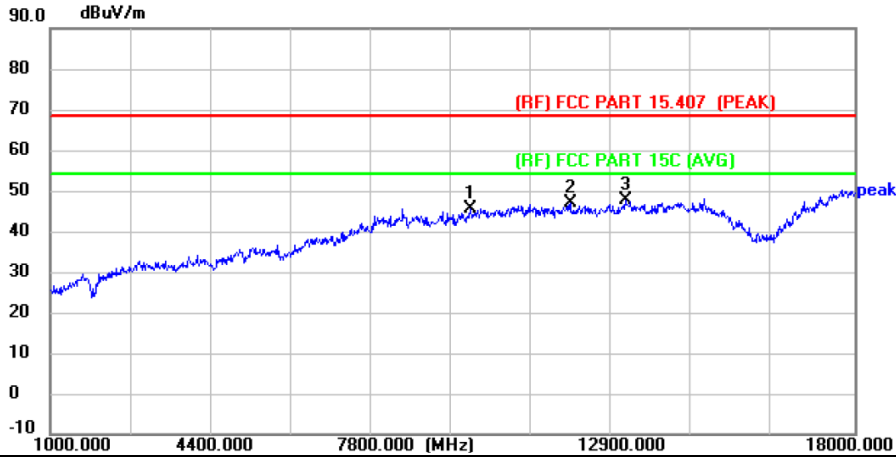

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9891.000	42.31	3.36	45.67	68.30	-22.63	peak	P
2	11999.000	39.56	7.45	47.01	68.30	-21.29	peak	P
3 *	13155.000	39.66	7.89	47.55	68.30	-20.75	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11a Mode 5825MHz with Antenna(YIJIA)		

**Vertical**

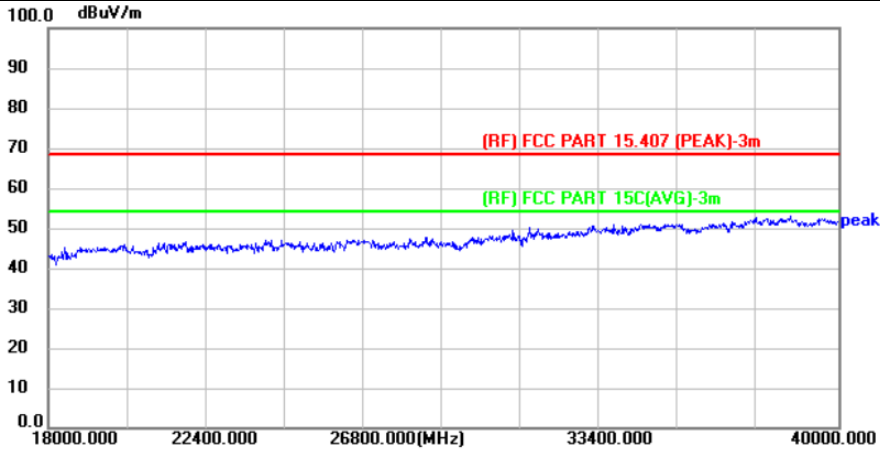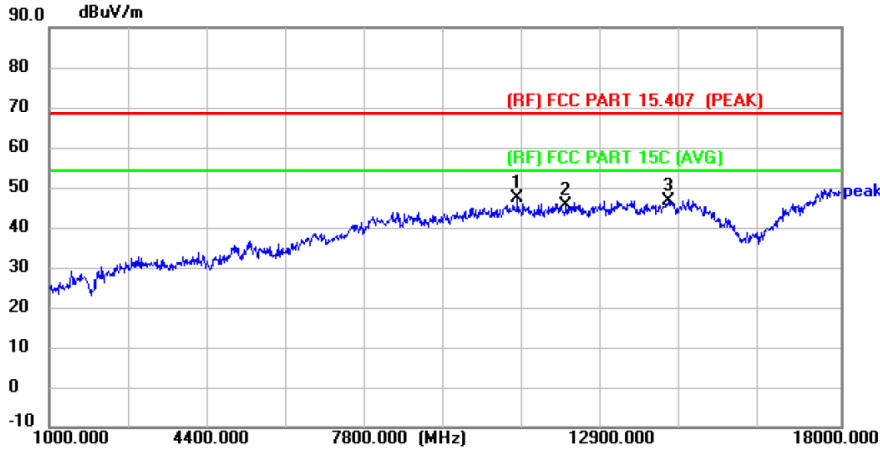

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11064.000	41.36	6.14	47.50	68.30	-20.80	peak	P
2	12101.000	38.19	7.48	45.67	68.30	-22.63	peak	P
3	14311.000	37.84	8.94	46.78	68.30	-21.52	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n20 Mode 5180MHz with Antenna(YIJIA)		

**Horizontal**

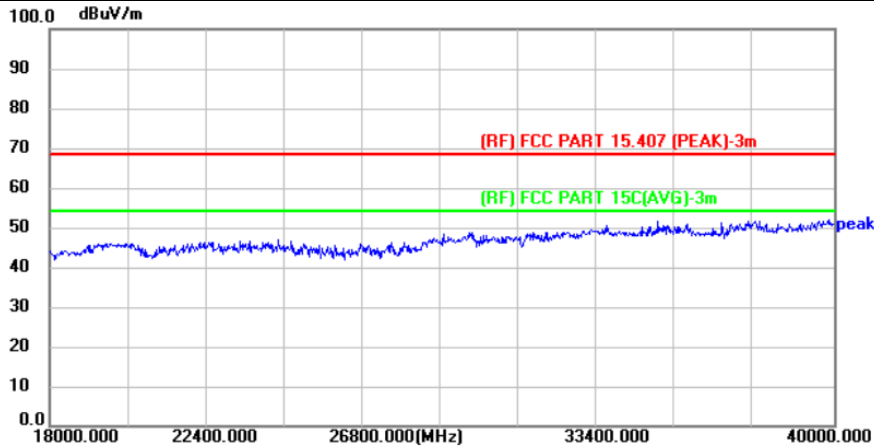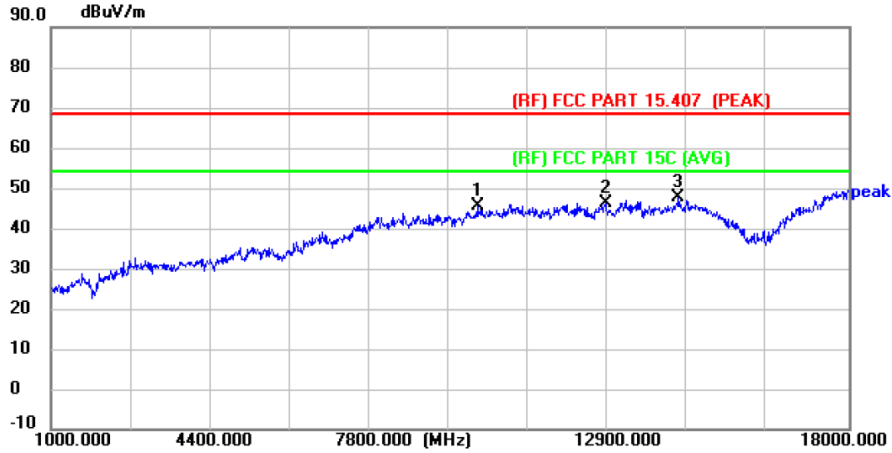



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10095.000	41.70	3.97	45.67	68.30	-22.63	peak	P
2	12815.000	38.48	7.70	46.18	68.30	-22.12	peak	P
3 *	14379.000	38.70	9.01	47.71	68.30	-20.59	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n20 Mode 5180MHz with Antenna(YIJA)		

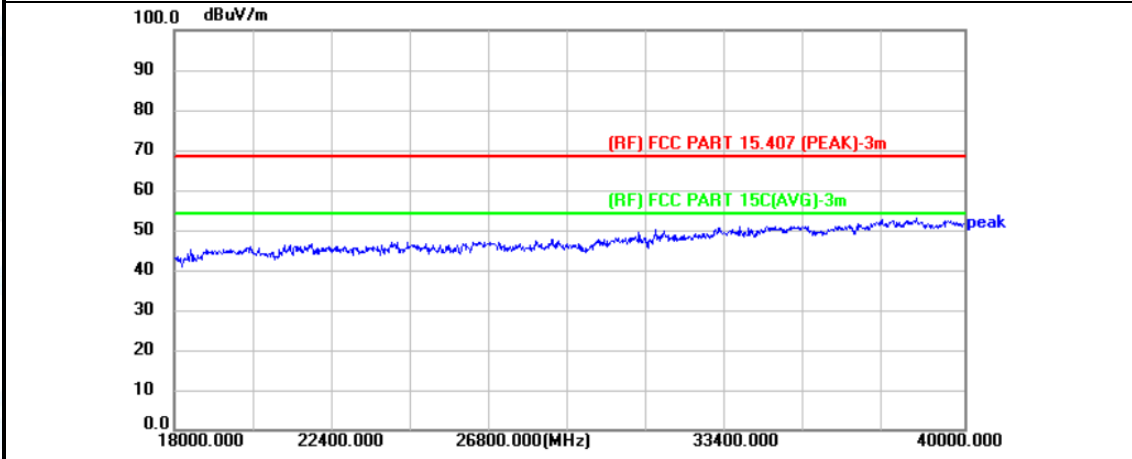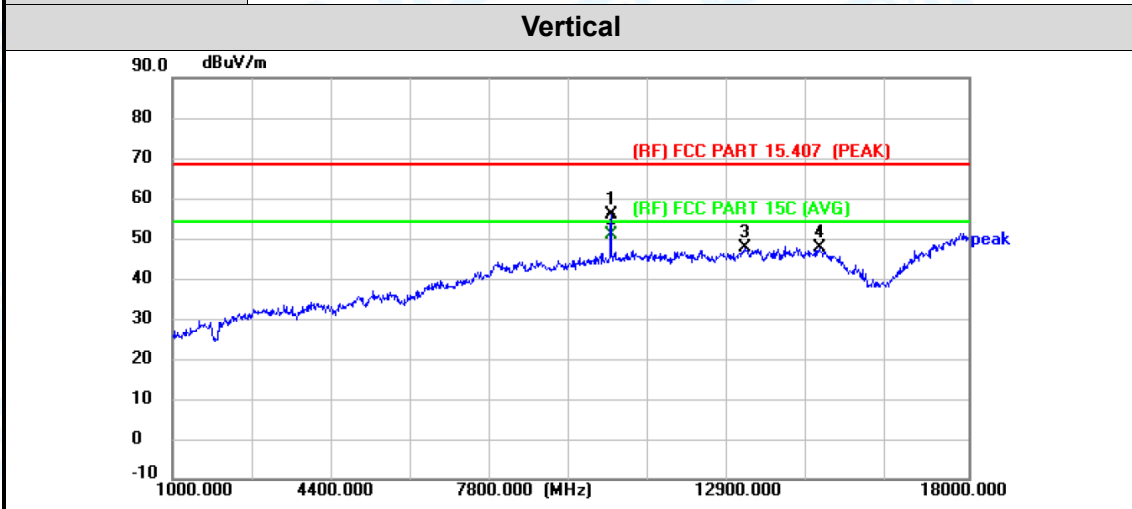

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10367.000	51.19	4.60	55.79	68.30	-12.51	peak	P
2 *	10367.000	46.19	4.60	50.79	54.00	-3.21	AVG	P
3	13223.000	39.65	7.95	47.60	68.30	-20.70	peak	P
4	14821.000	38.32	9.47	47.79	68.30	-20.51	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n20 Mode 5320MHz with Antenna(YIJA)		

**Horizontal**

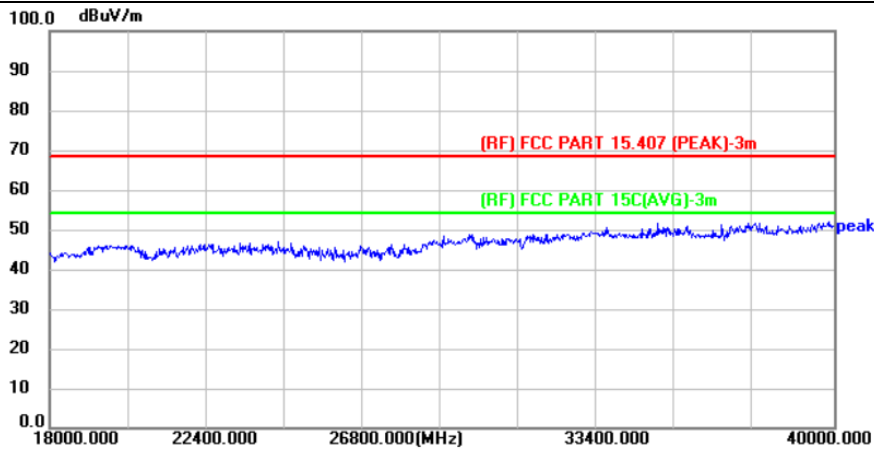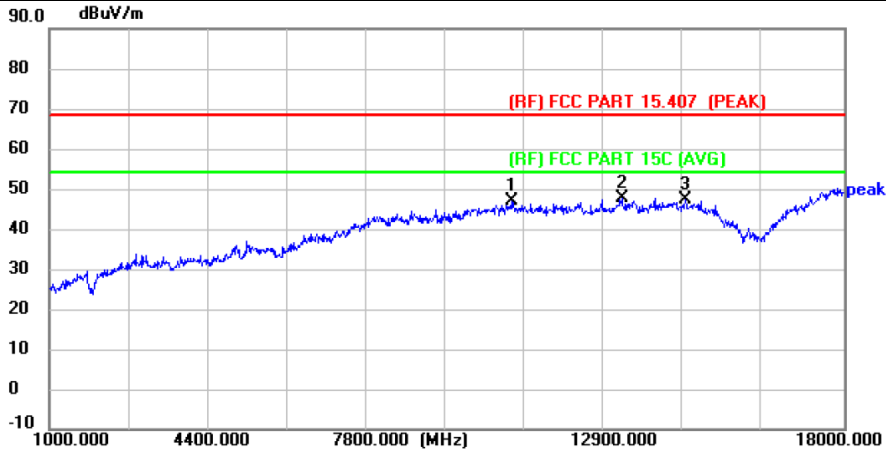

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10894.000	40.98	5.81	46.79	68.30	-21.51	peak	P
2 *	13257.000	39.76	7.98	47.74	68.30	-20.56	peak	P
3	14617.000	37.99	9.26	47.25	68.30	-21.05	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.





Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n20 Mode 5320MHz with Antenna(YIJIA)		

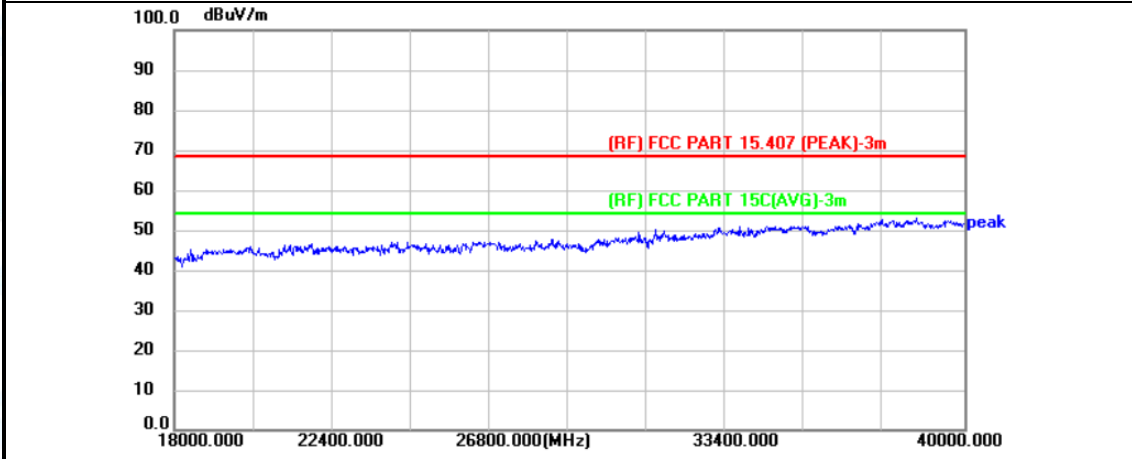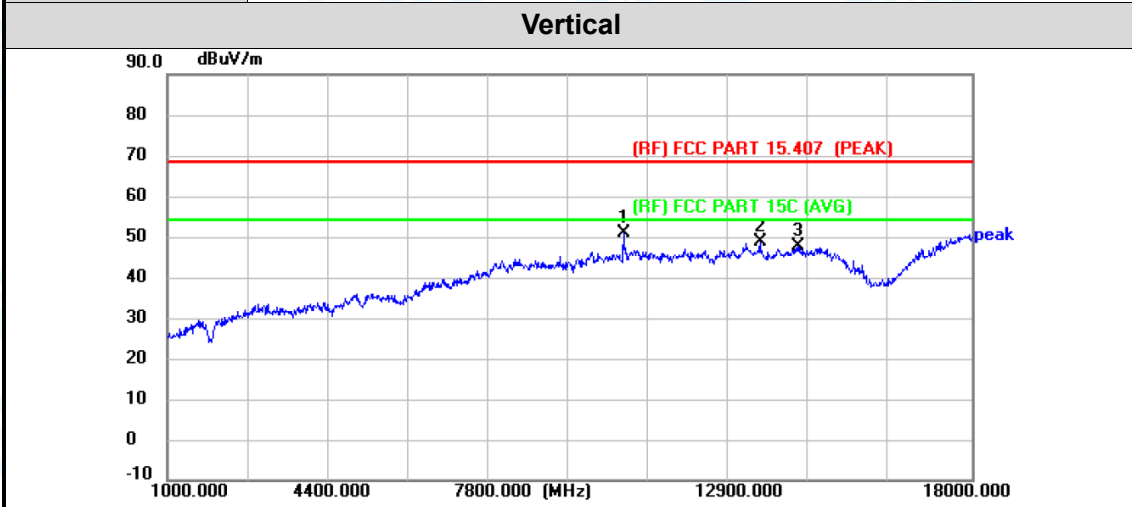



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10639.000	45.79	5.22	51.01	68.30	-17.29	peak	P
2	13529.000	40.70	8.21	48.91	68.30	-19.39	peak	P
3	14328.000	38.59	8.95	47.54	68.30	-20.76	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n20 Mode 5500MHz with Antenna(YIJA)		

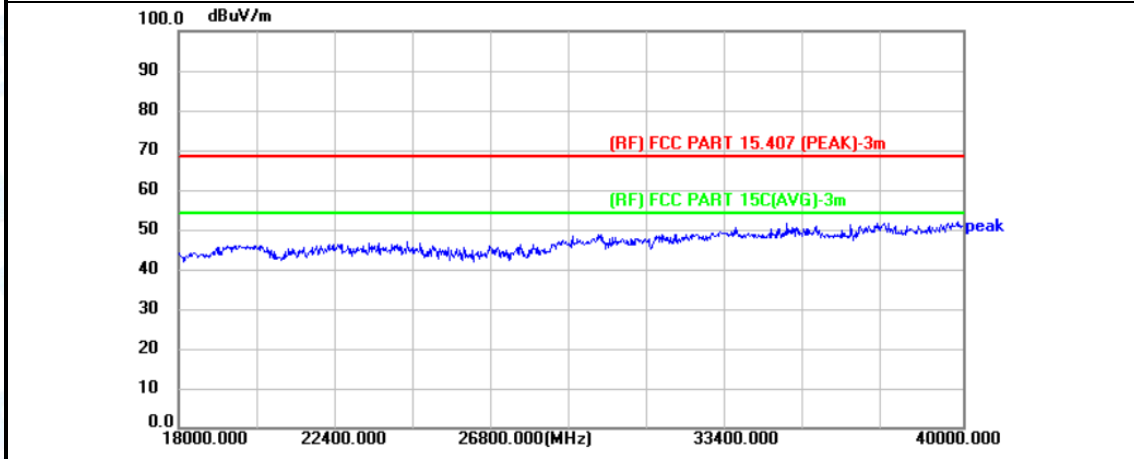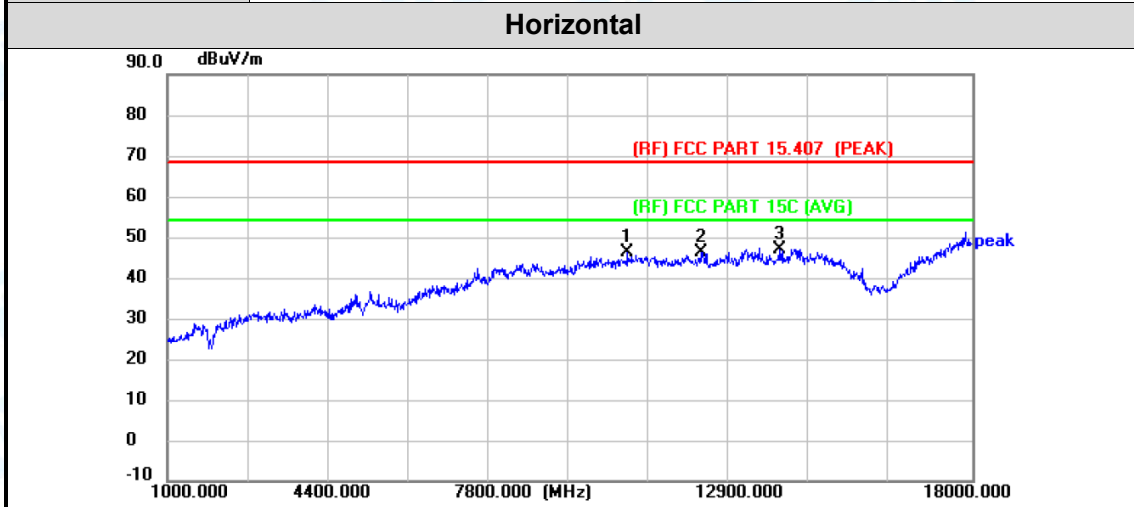

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10724.000	40.99	5.42	46.41	68.30	-21.89	peak	P
2	12271.000	38.87	7.53	46.40	68.30	-21.90	peak	P
3 *	13920.000	38.46	8.54	47.00	68.30	-21.30	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n20 Mode 5500MHz with Antenna(YIJIA)		

**Vertical**

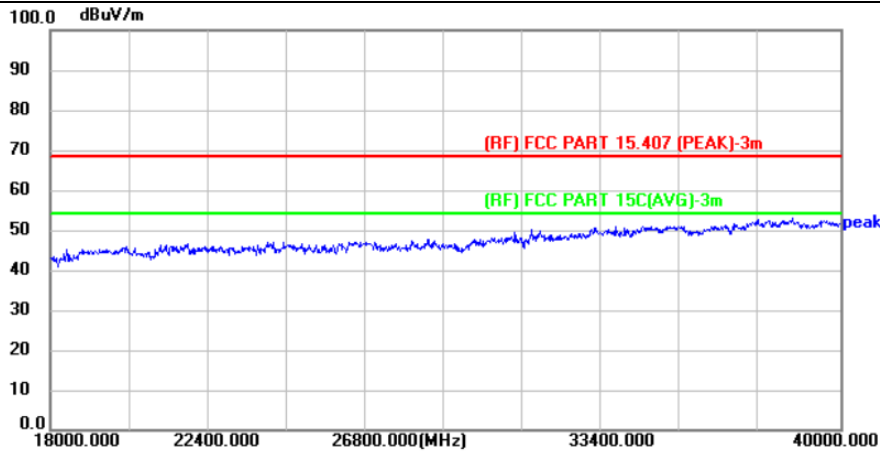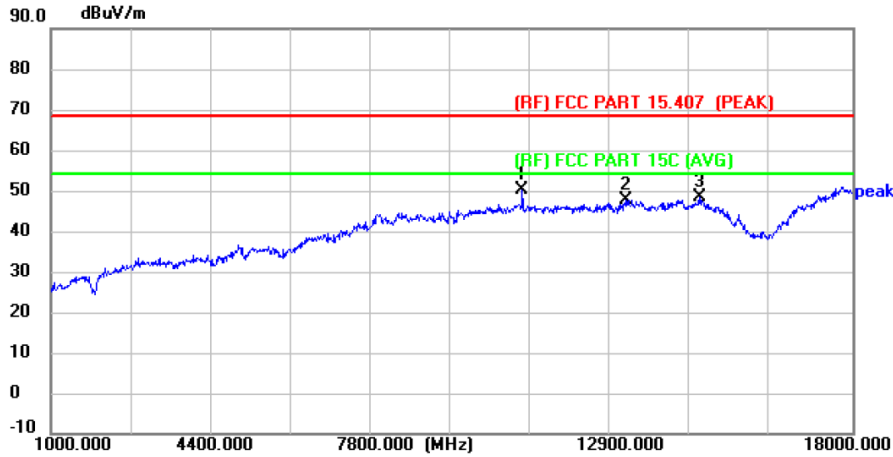

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10996.000	44.12	6.05	50.17	68.30	-18.13	peak	P
2	13189.000	39.78	7.92	47.70	68.30	-20.60	peak	P
3	14753.000	38.99	9.40	48.39	68.30	-19.91	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n20 Mode 5825MHz with Antenna(YIJA)		

**Horizontal**

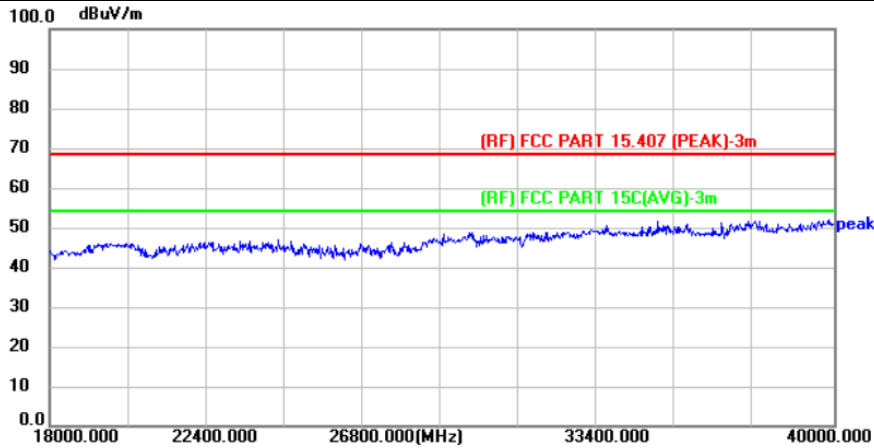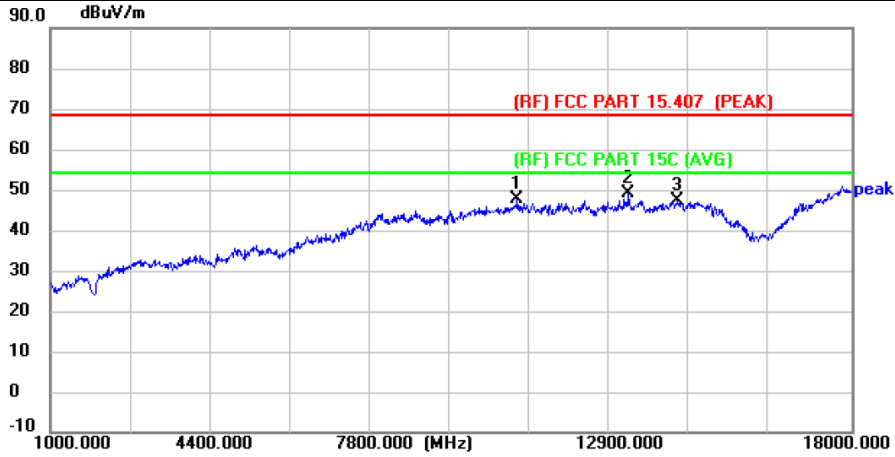



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10911.000	41.67	5.84	47.51	68.30	-20.79	peak	P
2 *	13274.000	40.99	7.99	48.98	68.30	-19.32	peak	P
3	14294.000	38.43	8.92	47.35	68.30	-20.95	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11n20 Mode 5825MHz with Antenna(YIJIA)		

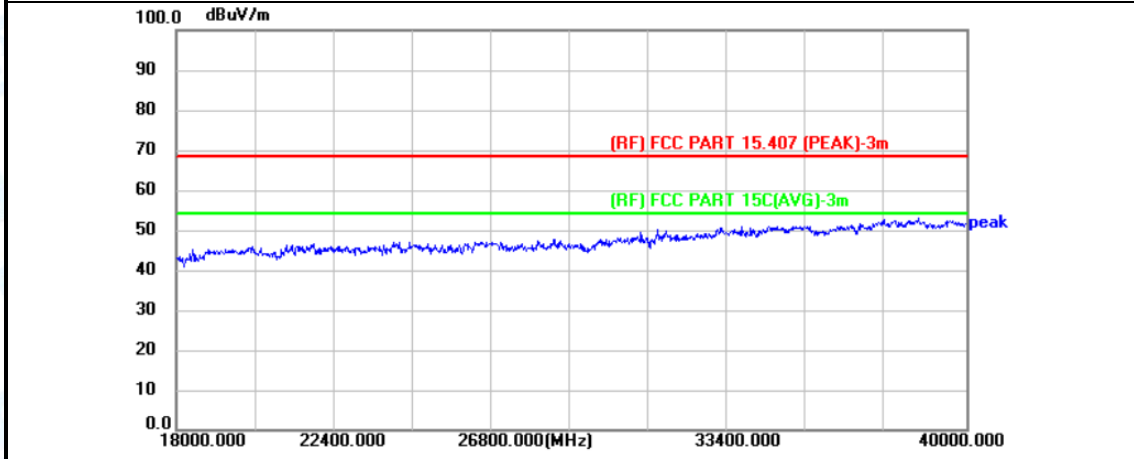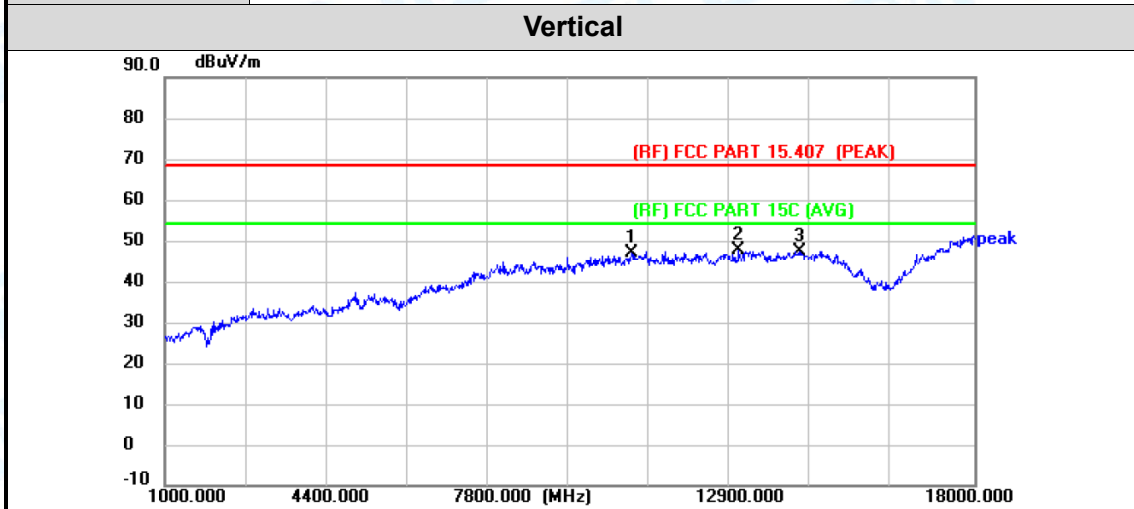

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10809.000	41.51	5.61	47.12	68.30	-21.18	peak	P
2 *	13053.000	39.86	7.81	47.67	68.30	-20.63	peak	P
3	14345.000	38.38	8.97	47.35	68.30	-20.95	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac20 Mode 5180MHz with Antenna(YIJIA)		

**Horizontal**

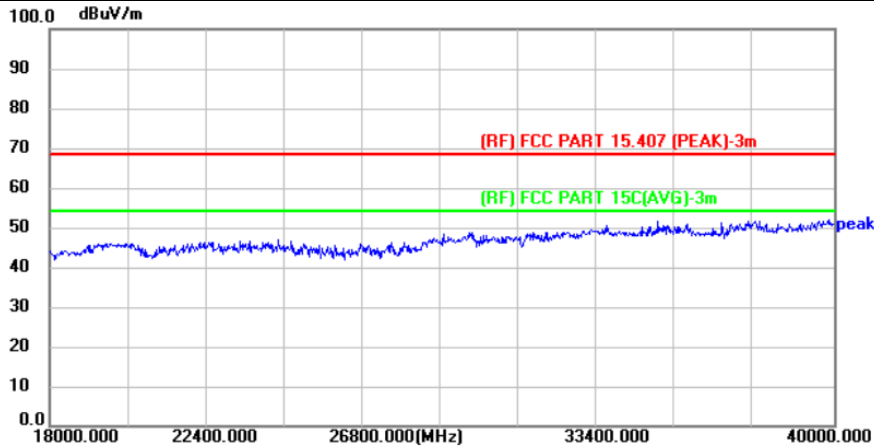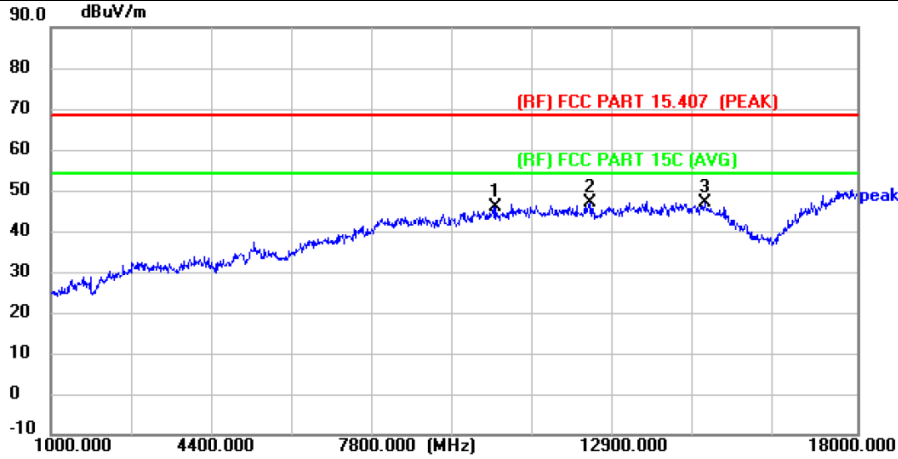

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10384.000	41.30	4.64	45.94	68.30	-22.36	peak	P
2 *	12356.000	39.51	7.56	47.07	68.30	-21.23	peak	P
3	14787.000	37.50	9.44	46.94	68.30	-21.36	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac20 Mode 5180MHz with Antenna(YIJIA)		

**Vertical**

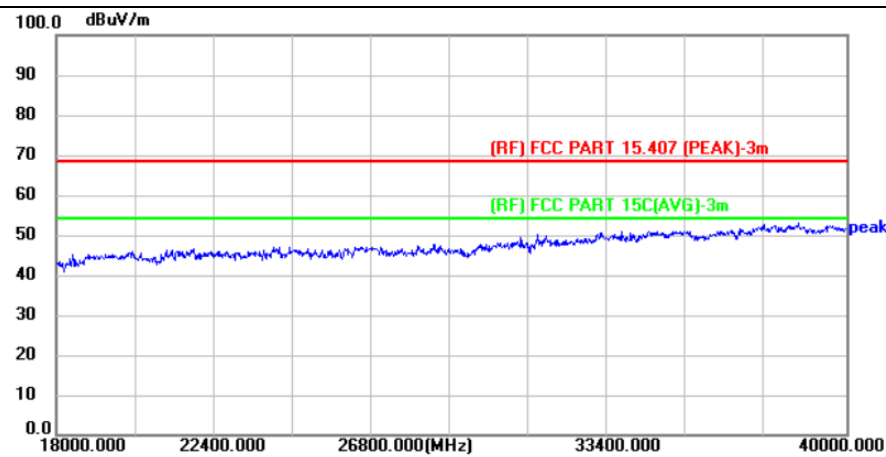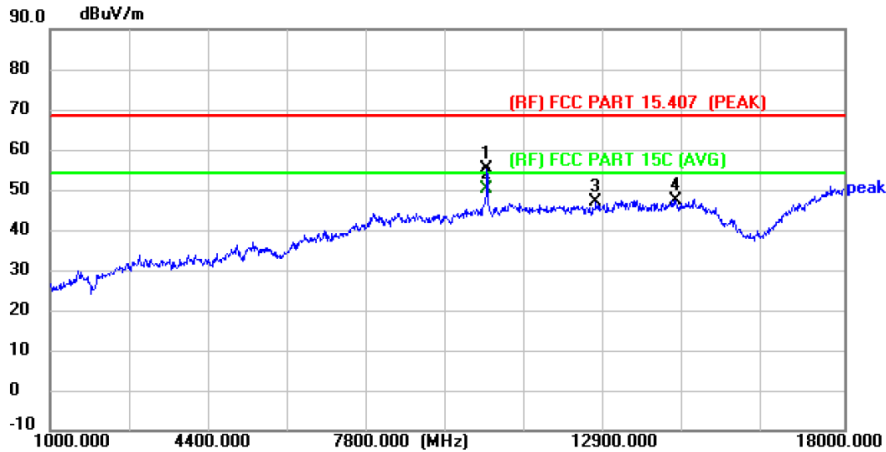

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10350.000	52.24	4.56	56.80	68.30	-11.50	peak	P
2 *	10350.000	48.24	4.56	52.80	54.00	-1.20	AVG	P
3	12679.000	39.21	7.66	46.87	68.30	-21.43	peak	P
4	14396.000	38.34	9.03	47.37	68.30	-20.93	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac20 Mode 5320MHz with Antenna(YIJIA)		

**Horizontal**

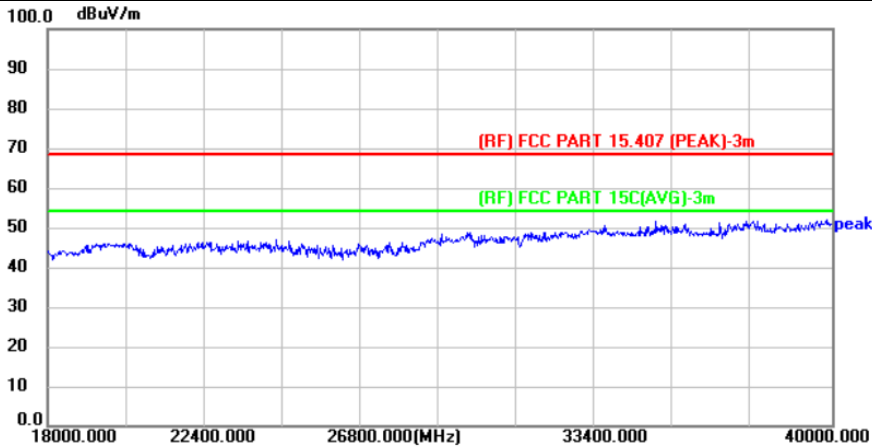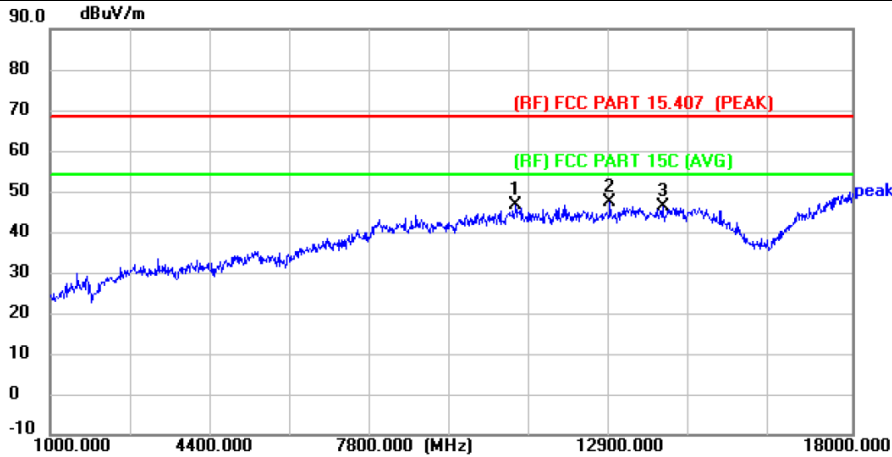

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10877.000	40.69	5.76	46.45	68.30	-21.85	peak	P
2 *	12866.000	39.61	7.72	47.33	68.30	-20.97	peak	P
3	13988.000	37.48	8.61	46.09	68.30	-22.21	peak	P

**Remark:**



1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.





Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac20 Mode 5320MHz with Antenna(YIJIA)		

**Vertical**

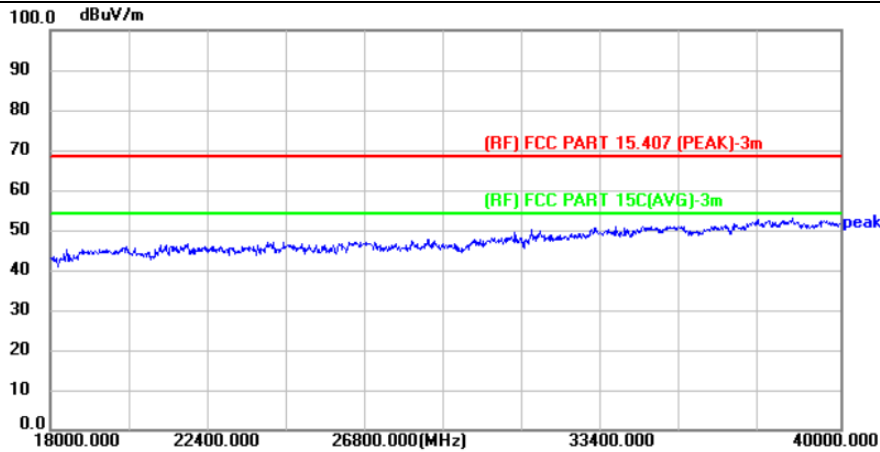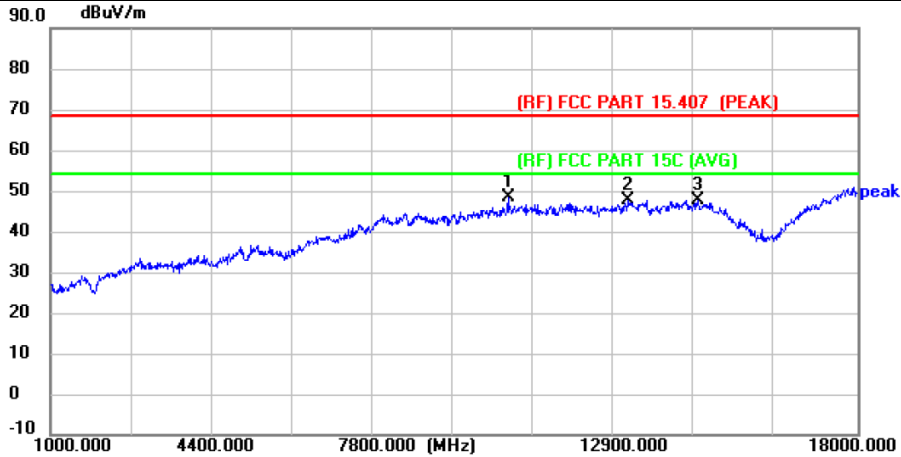

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10639.000	43.34	5.22	48.56	68.30	-19.74	peak	P
2	13172.000	39.86	7.91	47.77	68.30	-20.53	peak	P
3	14651.000	38.51	9.30	47.81	68.30	-20.49	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac20 Mode 5500MHz with Antenna(YIJIA)		

**Horizontal**

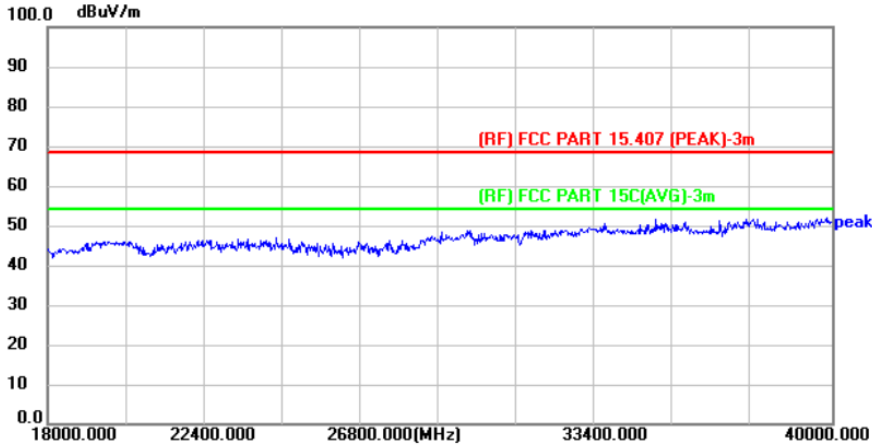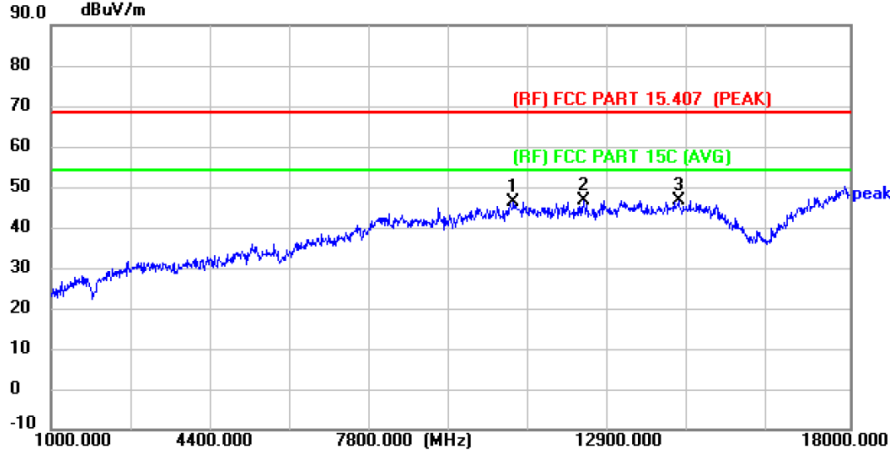

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10843.000	40.72	5.69	46.41	68.30	-21.89	peak	P
2	12339.000	39.05	7.56	46.61	68.30	-21.69	peak	P
3 *	14362.000	37.74	9.00	46.74	68.30	-21.56	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac20 Mode 5500MHz with Antenna(YIJIA)		

**Vertical**

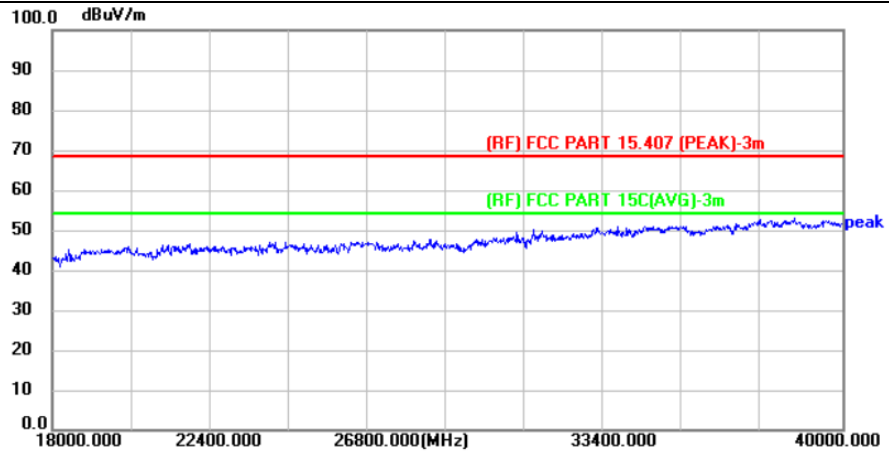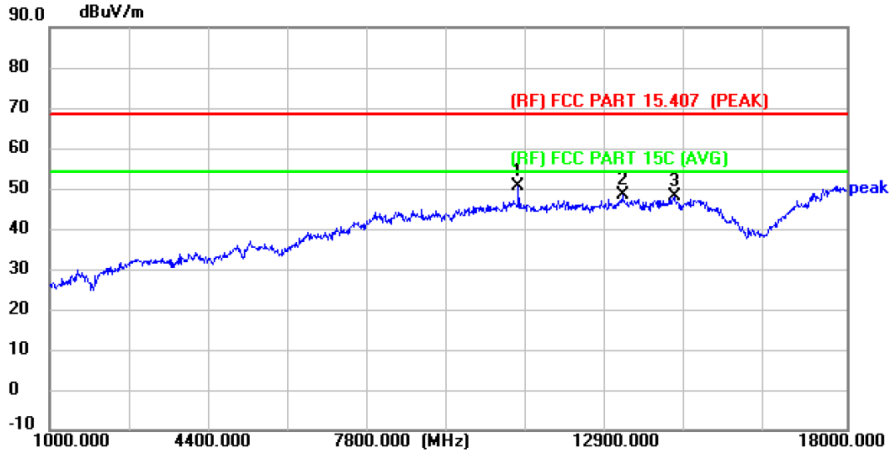



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10996.000	44.54	6.05	50.59	68.30	-17.71	peak	P
2	13223.000	40.47	7.95	48.42	68.30	-19.88	peak	P
3	14328.000	39.04	8.95	47.99	68.30	-20.31	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac20 Mode 5825MHz with Antenna(YIJIA)		

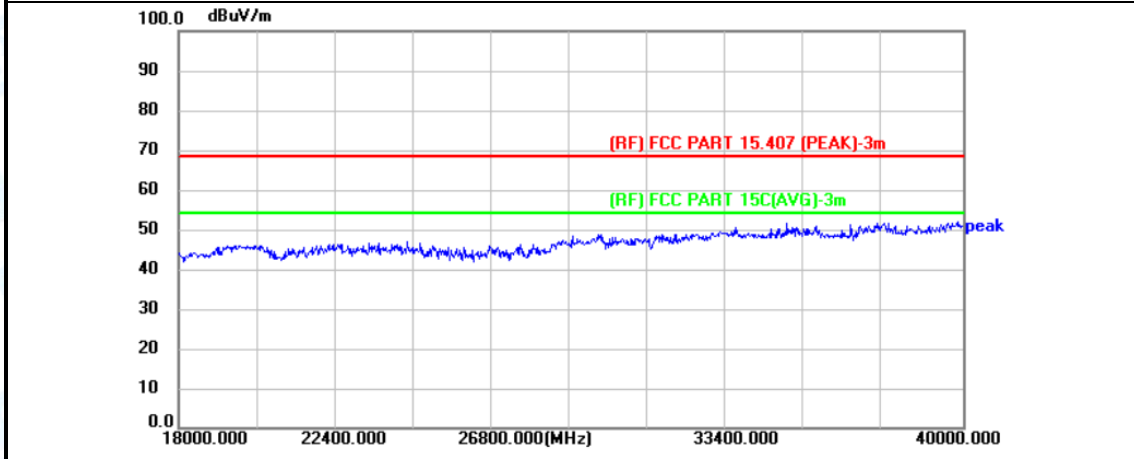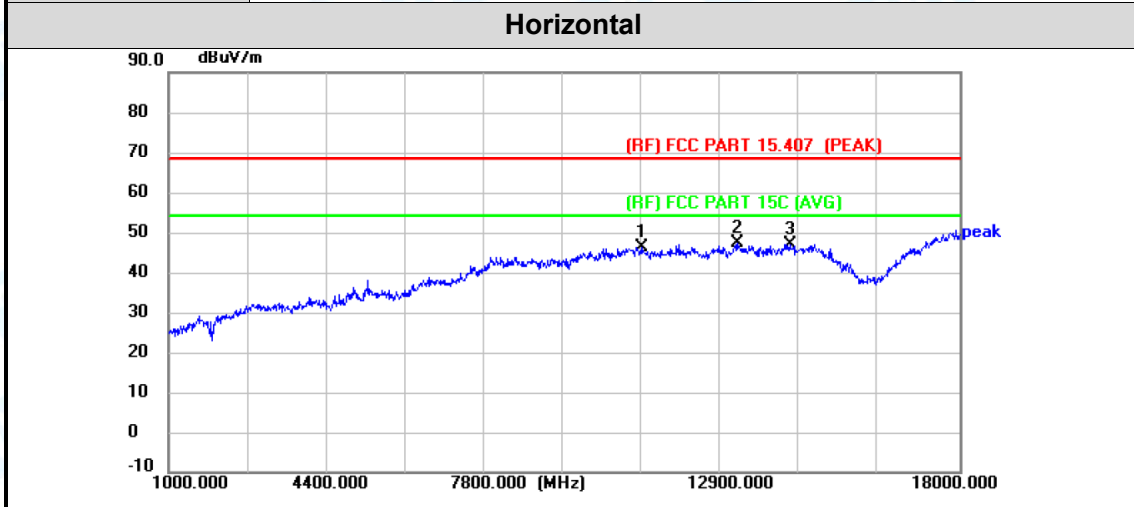

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11166.000	39.99	6.28	46.27	68.30	-22.03	peak	P
2 *	13223.000	39.21	7.95	47.16	68.30	-21.14	peak	P
3	14362.000	38.03	9.00	47.03	68.30	-21.27	peak	P



**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Temperature:	23.5°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Test Mode:	TX 802.11ac20 Mode 5825MHz with Antenna(YIJIA)		

**Vertical**

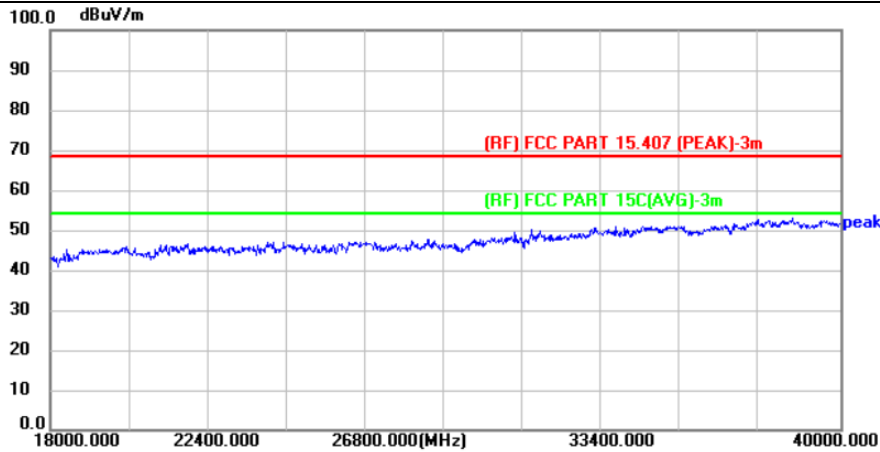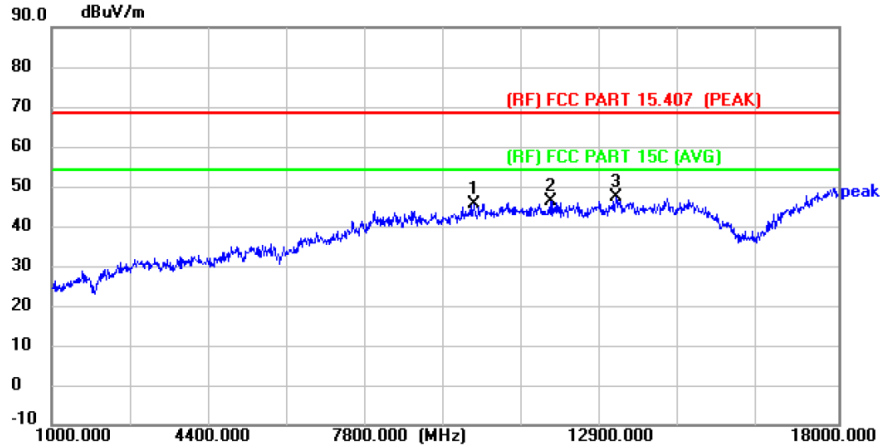

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10129.000	41.56	4.05	45.61	68.30	-22.69	peak	P
2	11778.000	39.19	7.15	46.34	68.30	-21.96	peak	P
3 *	13189.000	39.24	7.92	47.16	68.30	-21.14	peak	P

**Remark:**


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



# Attachment C-- Restricted Bands Requirement Test Data

## Radiation Test

Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

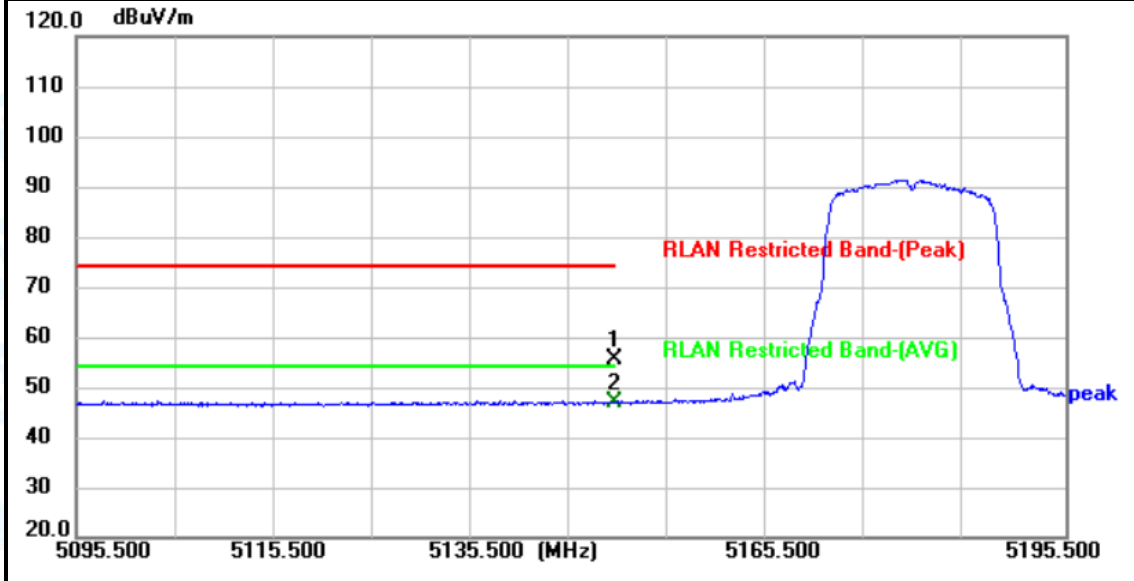


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	41.76	13.62	55.38	74.00	-18.62	peak	P
2 *	5150.000	33.32	13.62	46.94	54.00	-7.06	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

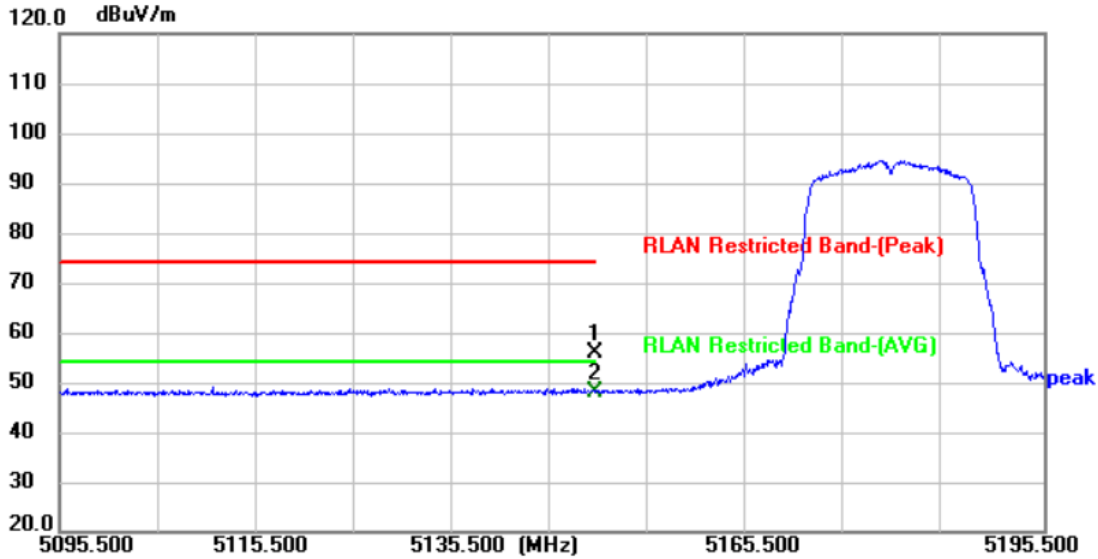


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	42.33	13.62	55.95	74.00	-18.05	peak	P
2 *	5150.000	34.37	13.62	47.99	54.00	-6.01	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

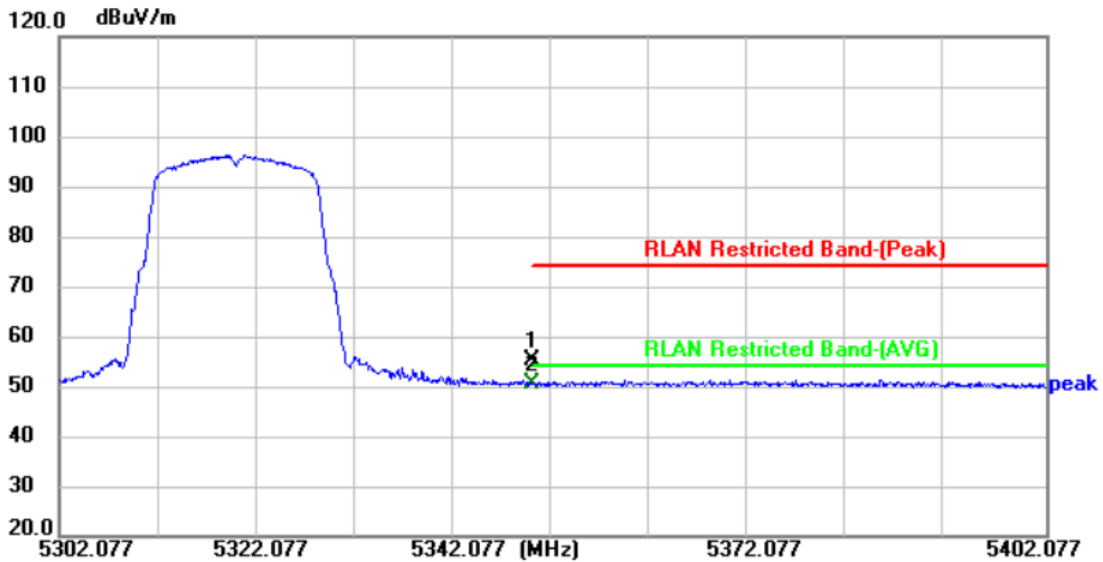

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	40.87	14.31	55.18	74.00	-18.82	peak	P
2 *	5350.000	36.29	14.31	50.60	54.00	-3.40	AVG	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)





Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

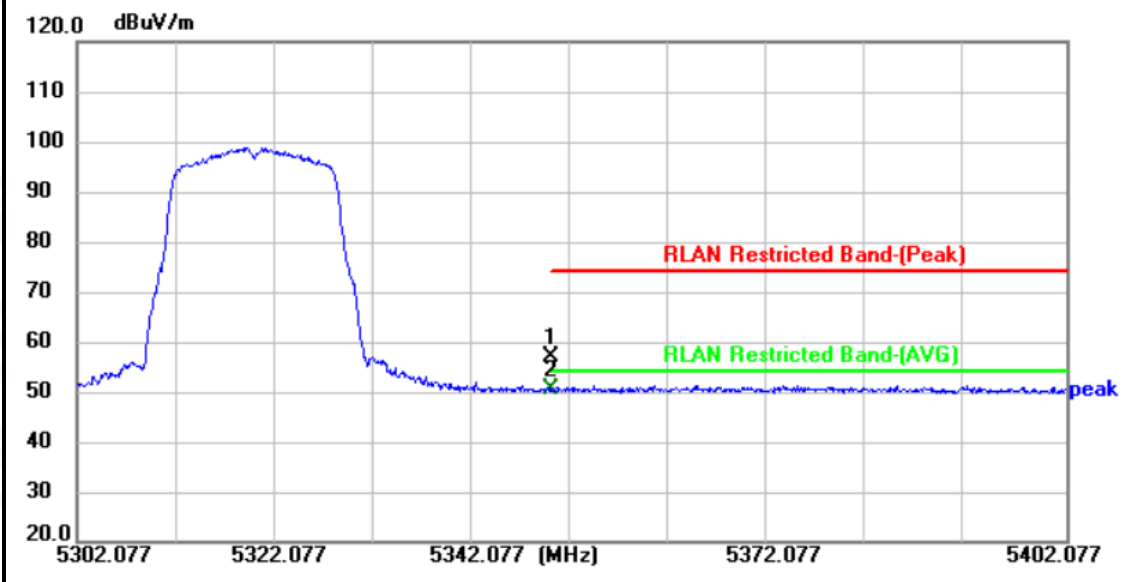


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	42.52	14.31	56.83	74.00	-17.17	peak	P
2 *	5350.000	36.28	14.31	50.59	54.00	-3.41	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

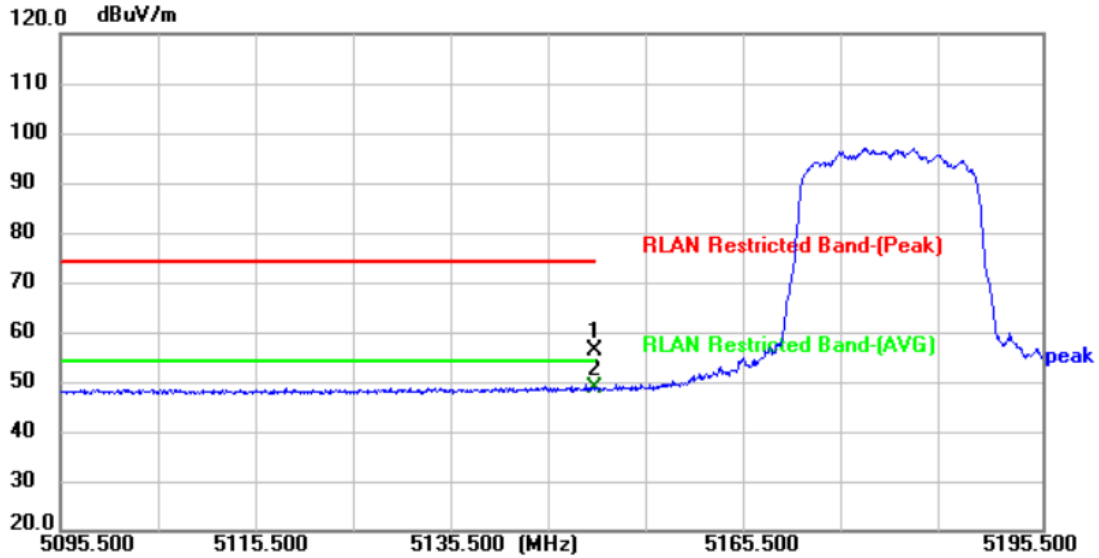


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	42.68	13.62	56.30	74.00	-17.70	peak	P
2 *	5150.000	34.96	13.62	48.58	54.00	-5.42	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

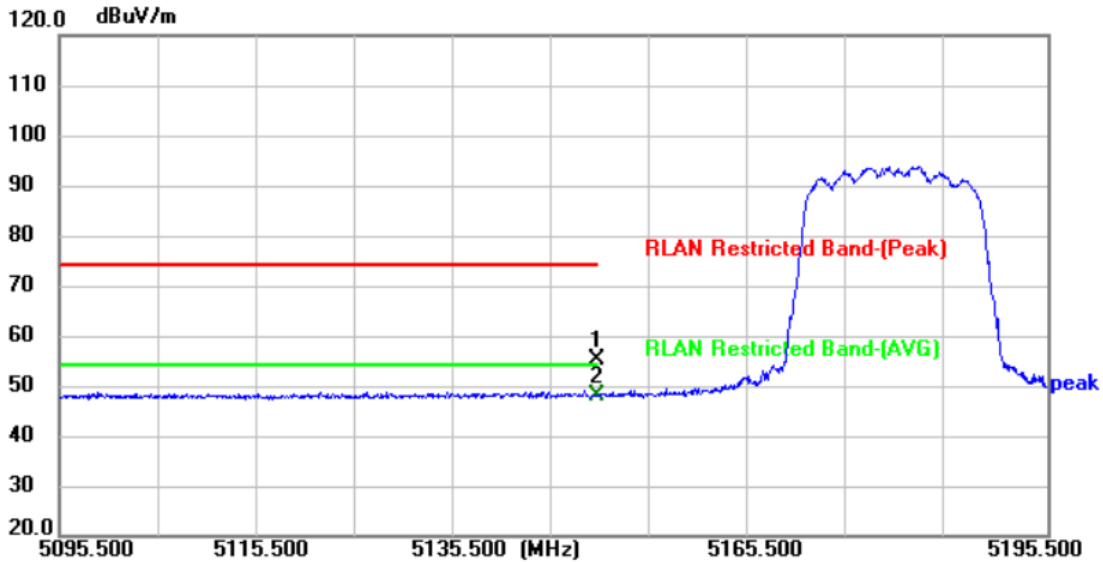


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	41.68	13.62	55.30	74.00	-18.70	peak	P
2 *	5150.000	34.34	13.62	47.96	54.00	-6.04	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

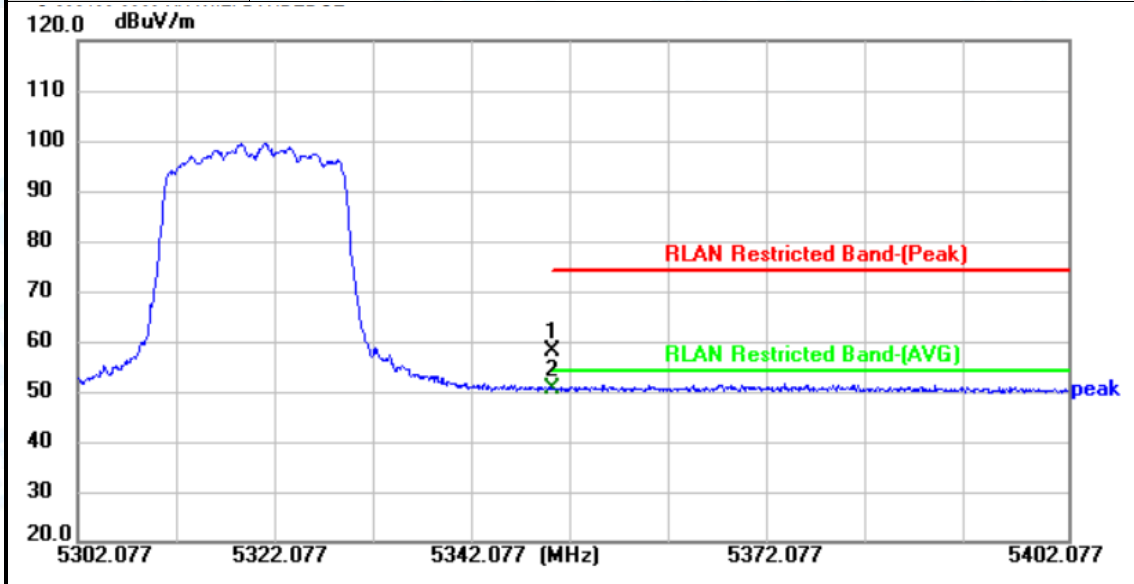


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.86	14.31	58.17	74.00	-15.83	peak	P
2 *	5350.000	36.17	14.31	50.48	54.00	-3.52	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

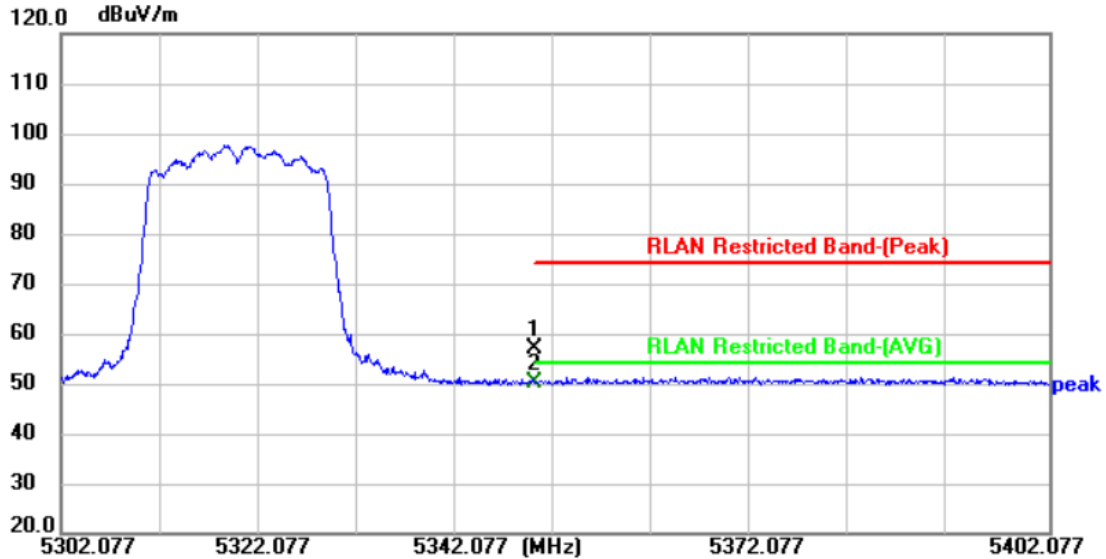


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	42.78	14.31	57.09	74.00	-16.91	peak	P
2 *	5350.000	35.78	14.31	50.09	54.00	-3.91	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

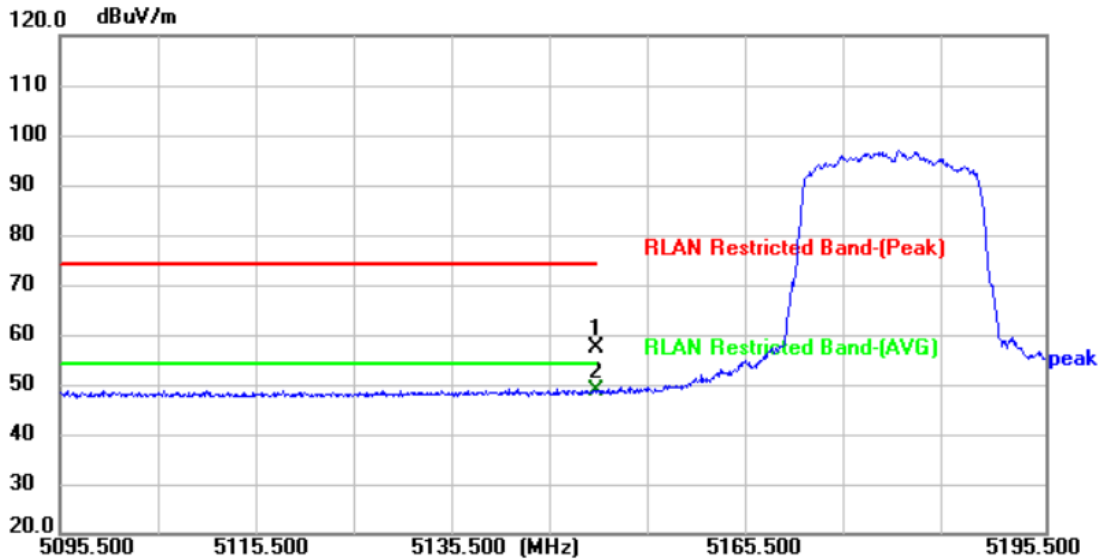


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	43.58	13.62	57.20	74.00	-16.80	peak	P
2 *	5150.000	35.01	13.62	48.63	54.00	-5.37	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

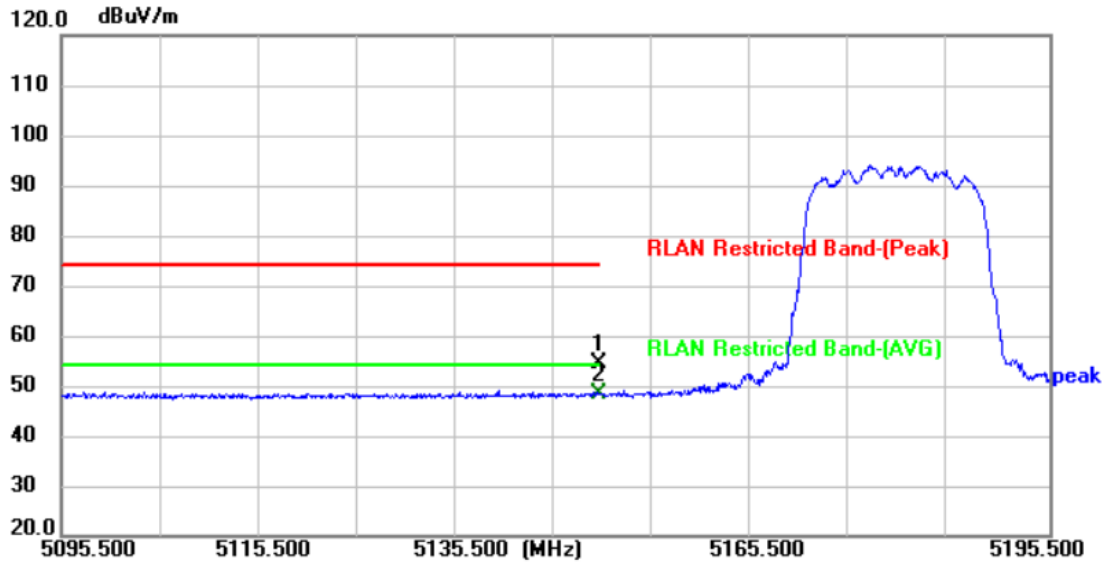


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	40.85	13.62	54.47	74.00	-19.53	peak	P
2 *	5150.000	34.80	13.62	48.42	54.00	-5.58	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

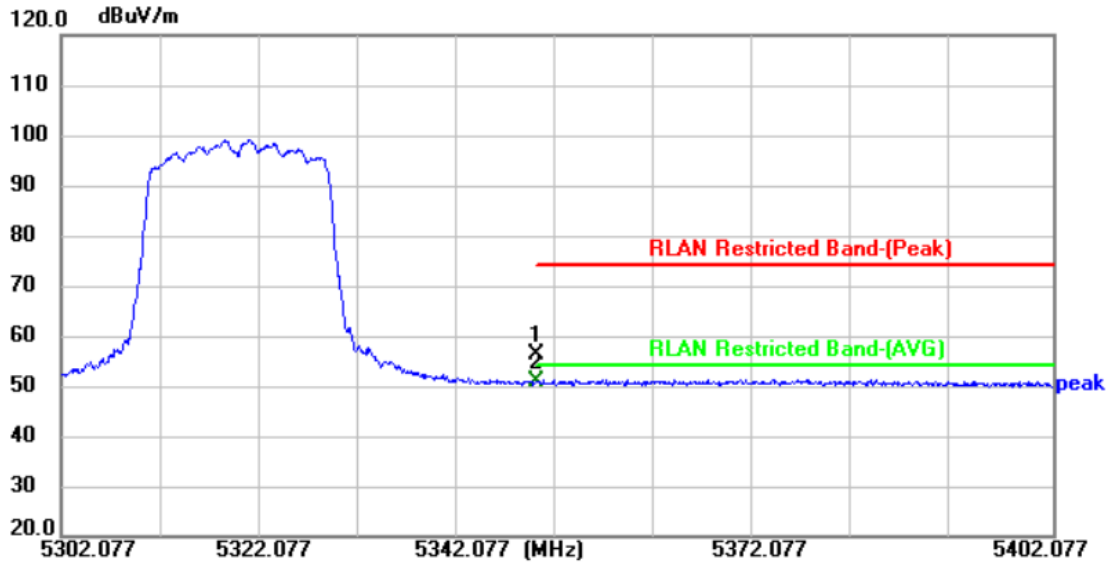

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	42.11	14.31	56.42	74.00	-17.58	peak	P
2 *	5350.000	36.48	14.31	50.79	54.00	-3.21	AVG	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)





Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

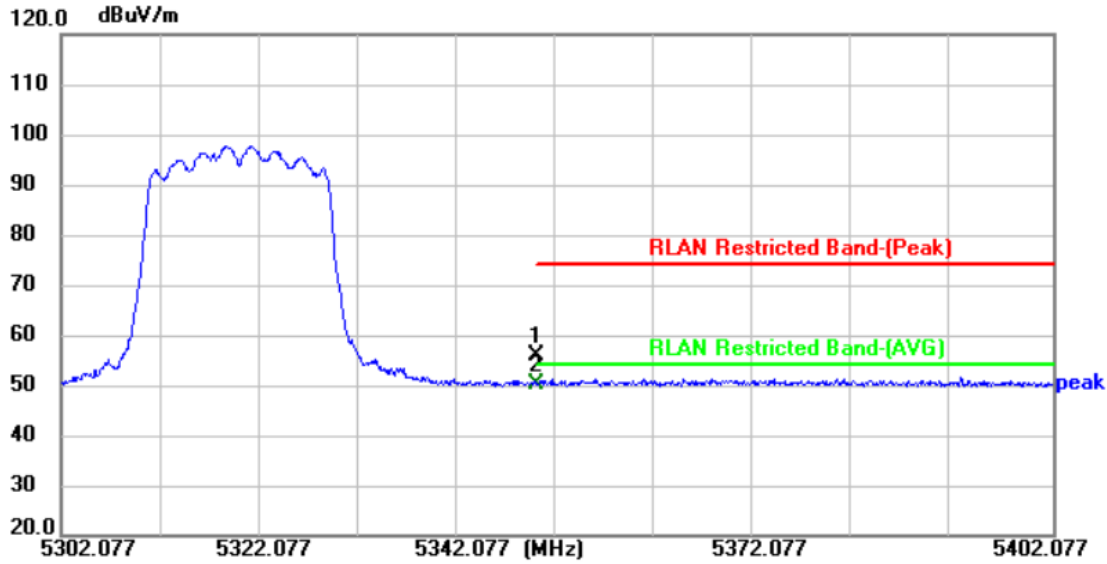


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	41.57	14.31	55.88	74.00	-18.12	peak	P
2 *	5350.000	35.80	14.31	50.11	54.00	-3.89	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

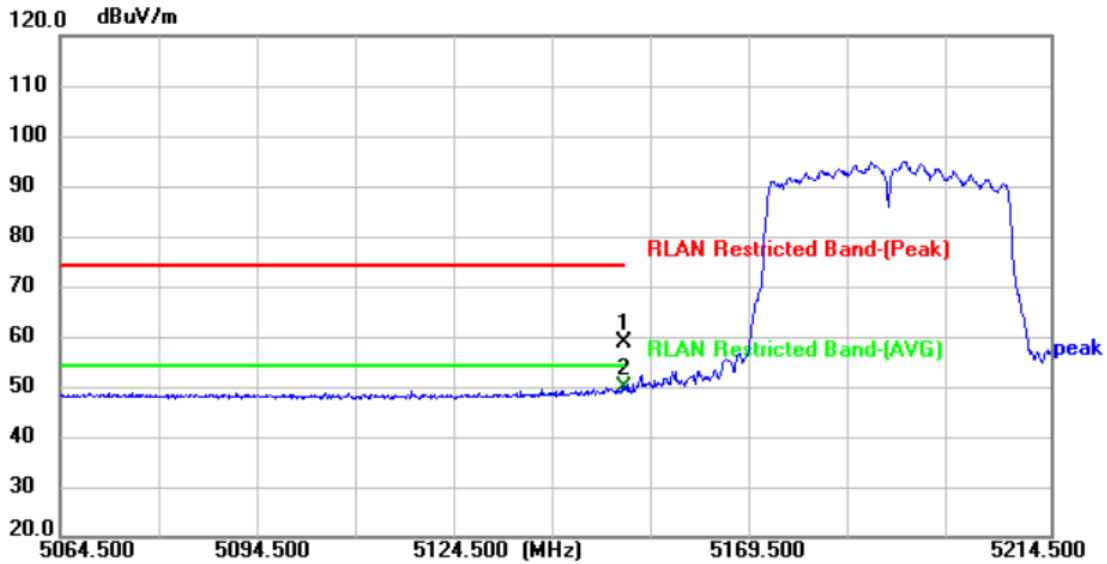


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	45.02	13.62	58.64	74.00	-15.36	peak	P
2 *	5150.000	36.08	13.62	49.70	54.00	-4.30	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

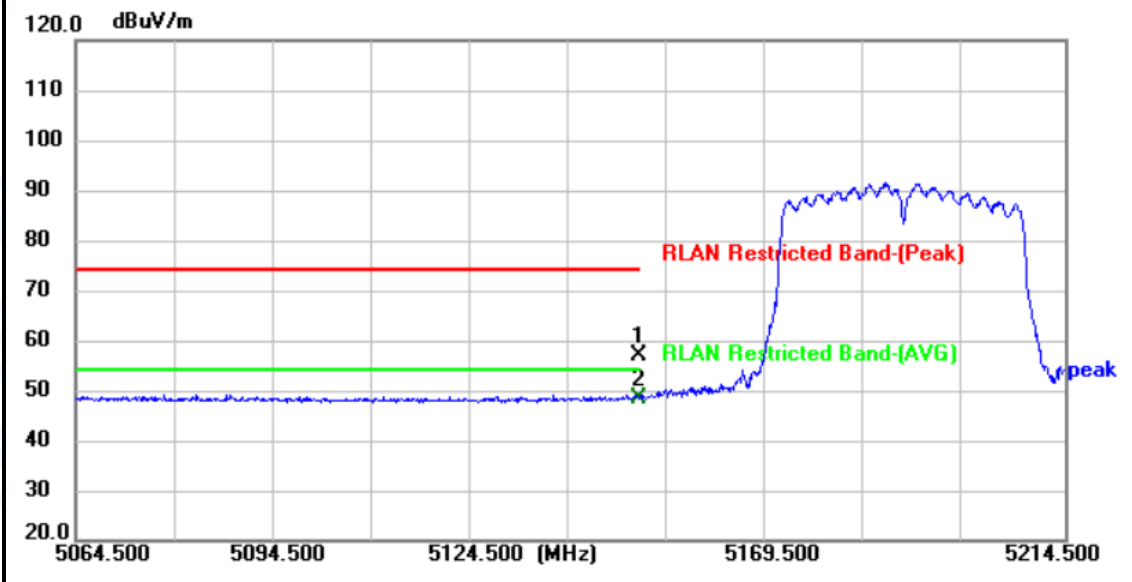


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	43.17	13.62	56.79	74.00	-17.21	peak	P
2 *	5150.000	34.79	13.62	48.41	54.00	-5.59	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) with Antenna(XINGHE)		
Remark:			

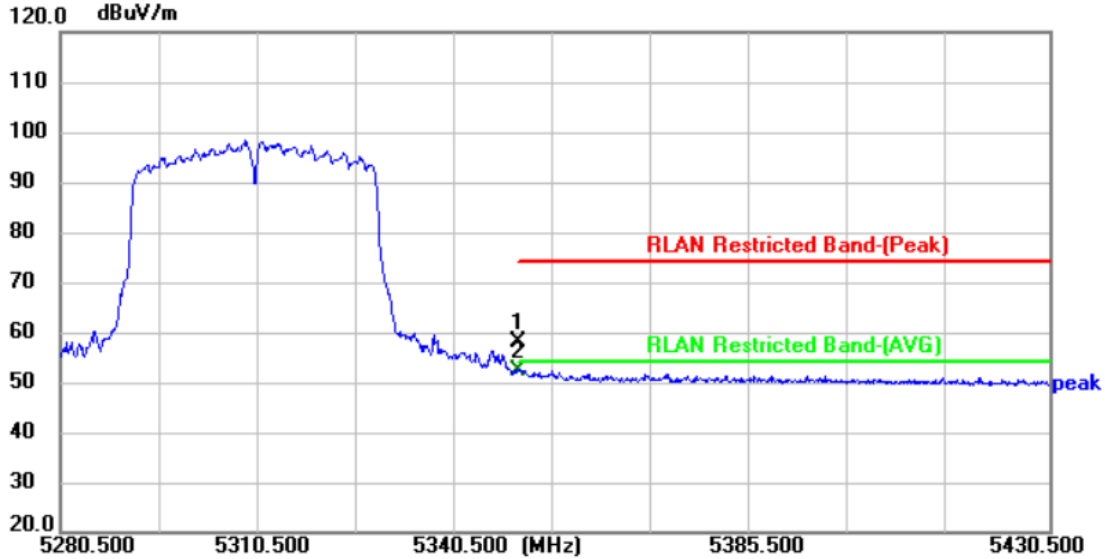


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.76	14.31	58.07	74.00	-15.93	peak	P
2 *	5350.000	37.99	14.31	52.30	54.00	-1.70	AVG	P

- Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
  2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
  3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) with Antenna(XINGHE)		
Remark:			

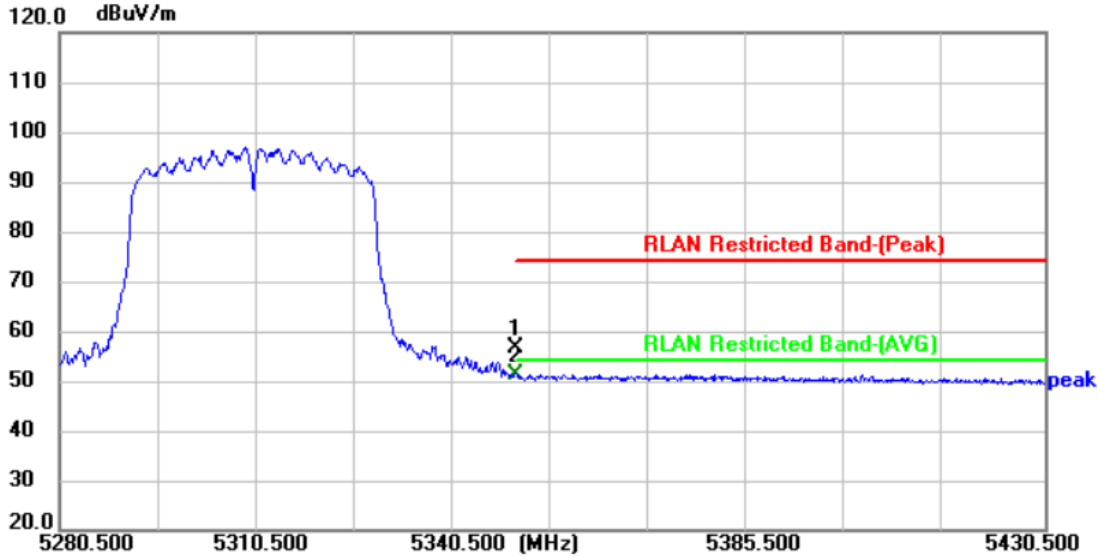


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	42.46	14.31	56.77	74.00	-17.23	peak	P
2 *	5350.000	36.78	14.31	51.09	54.00	-2.91	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) with Antenna(XINGHE)		
Remark:			

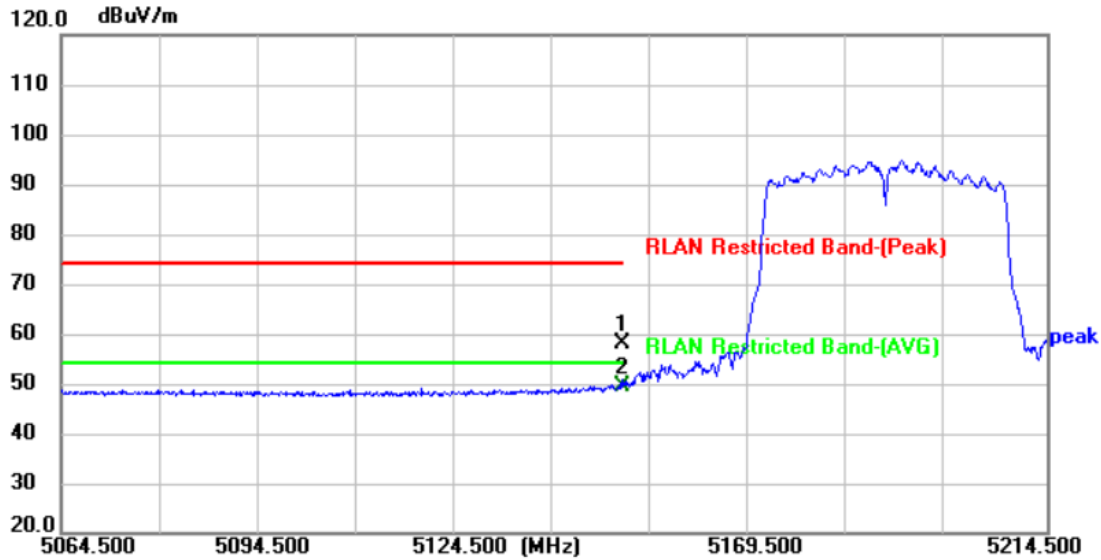


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.42	13.62	58.04	74.00	-15.96	peak	P
2 *	5150.000	35.95	13.62	49.57	54.00	-4.43	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)		
Remark:	with Antenna(XINGHE)		

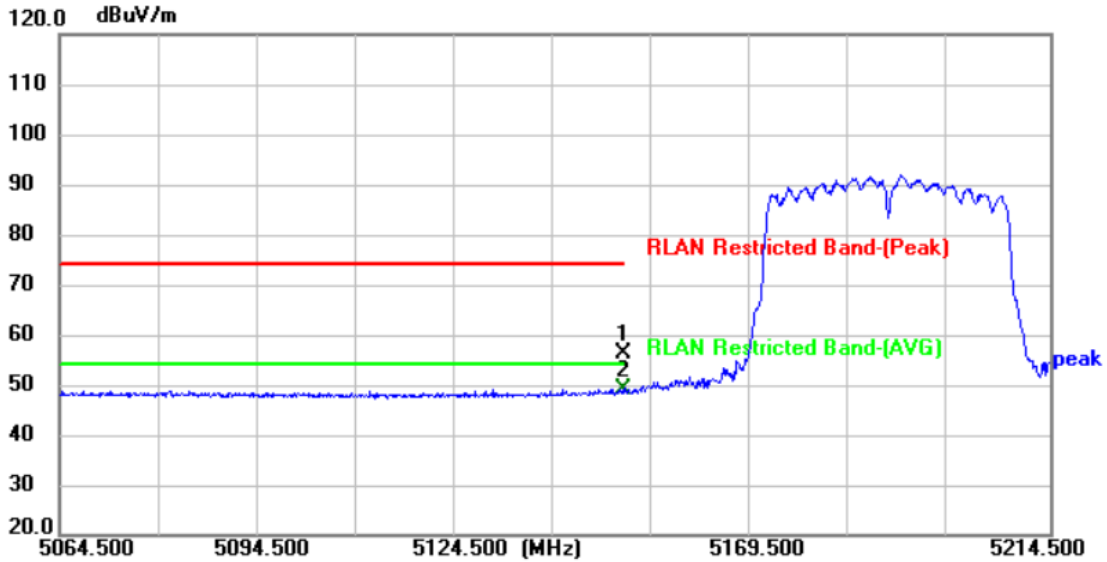


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	42.50	13.62	56.12	74.00	-17.88	peak	P
2 *	5150.000	35.62	13.62	49.24	54.00	-4.76	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)		
Remark:	with Antenna(XINGHE)		

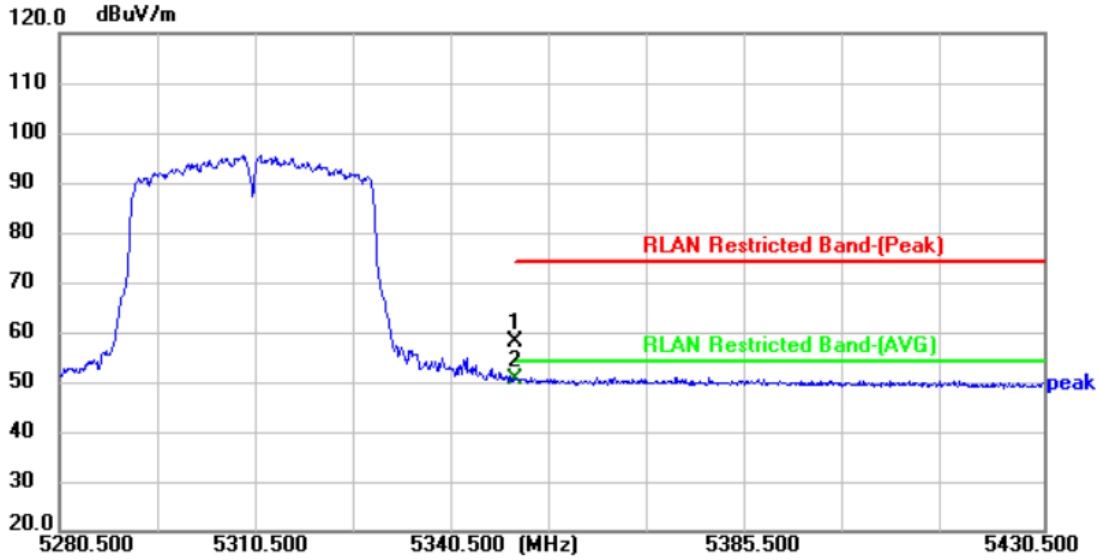

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.85	14.31	58.16	74.00	-15.84	peak	P
2 *	5350.000	36.29	14.31	50.60	54.00	-3.40	AVG	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)





Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)		
Remark:	with Antenna(XINGHE)		

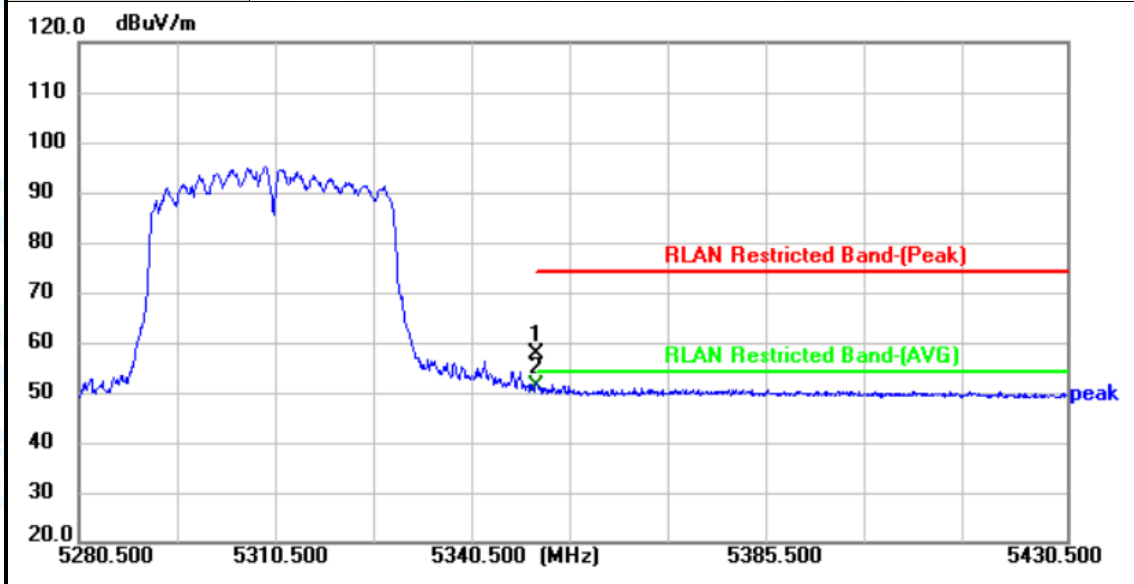


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.26	14.31	57.57	74.00	-16.43	peak	P
2 *	5350.000	36.78	14.31	51.09	54.00	-2.91	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)		
Remark:	with Antenna(XINGHE)		

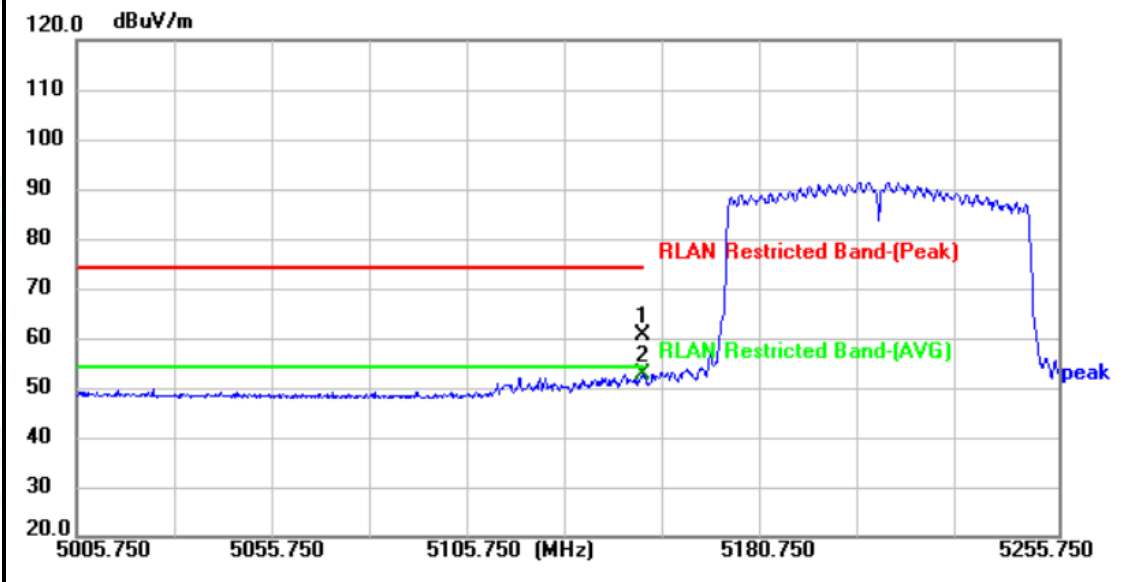


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	46.80	13.62	60.42	74.00	-13.58	peak	P
2 *	5150.000	39.06	13.62	52.68	54.00	-1.32	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)		
Remark:	with Antenna(XINGHE)		

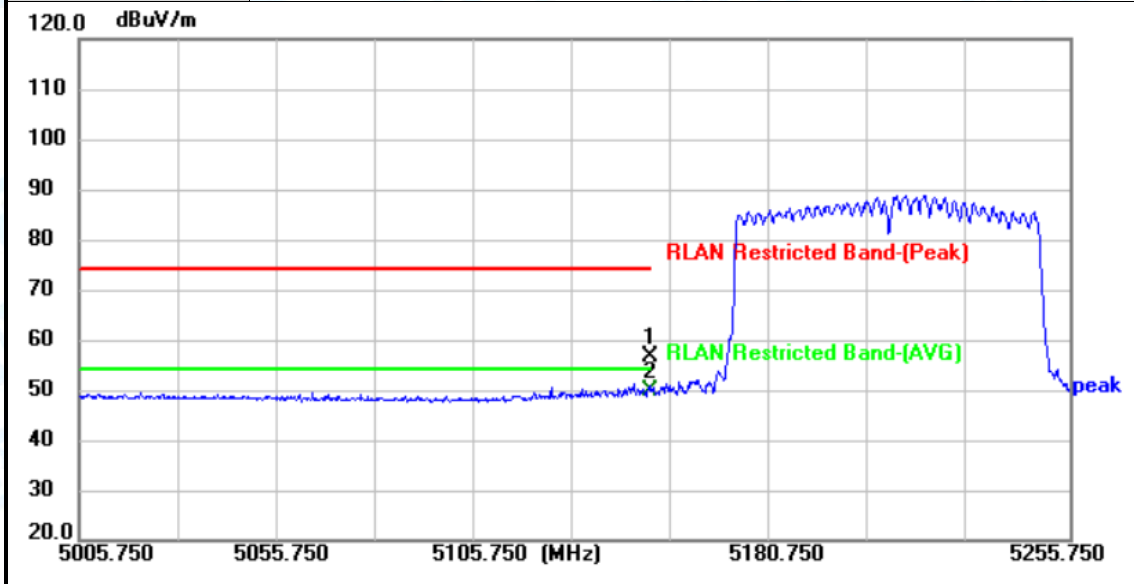


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	42.94	13.62	56.56	74.00	-17.44	peak	P
2 *	5150.000	36.21	13.62	49.83	54.00	-4.17	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A)		
Remark:	with Antenna(XINGHE)		

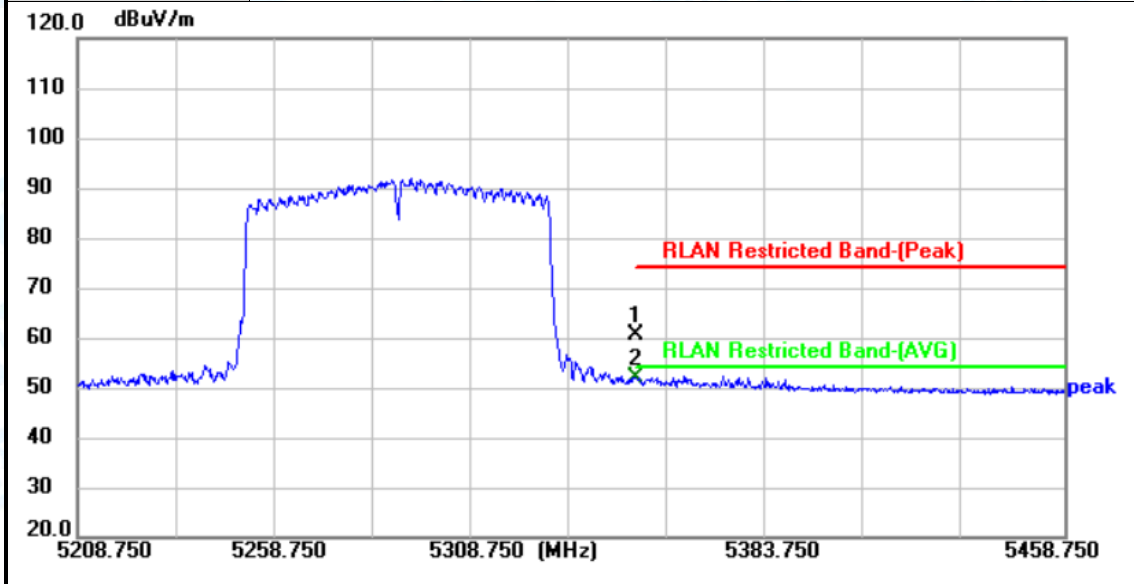


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	46.16	14.31	60.47	74.00	-13.53	peak	P
2 *	5350.000	37.55	14.31	51.86	54.00	-2.14	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A)		
Remark:	with Antenna(XINGHE)		

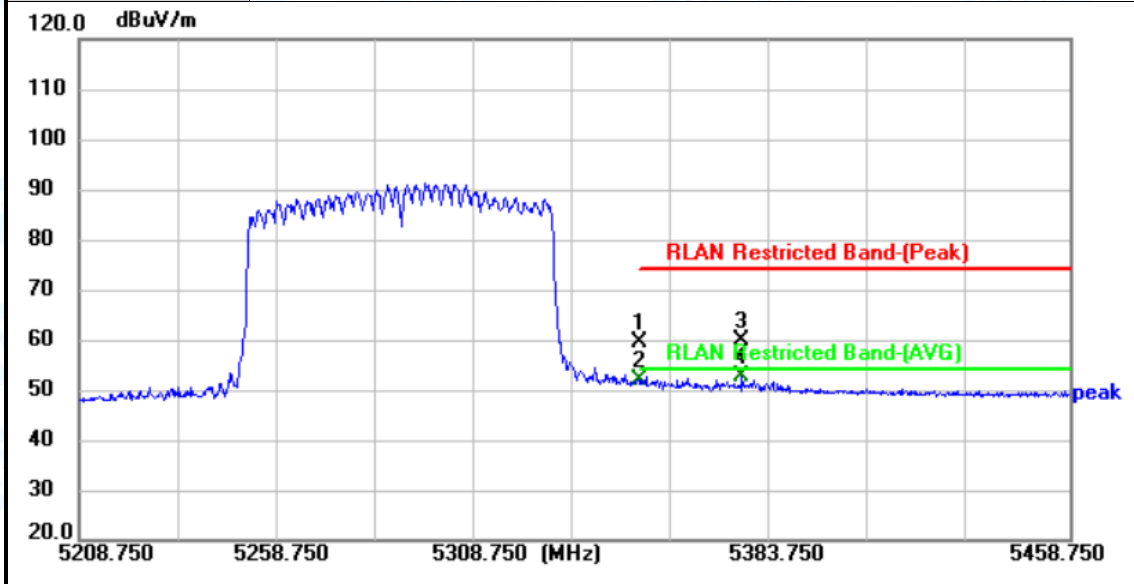


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	45.27	14.31	59.58	74.00	-14.42	peak	P
2	5350.000	37.67	14.31	51.98	54.00	-2.02	AVG	P
3	5376.000	45.43	14.40	59.83	74.00	-14.17	peak	P
4 *	5376.000	38.43	14.40	52.83	54.00	-1.17	AVG	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

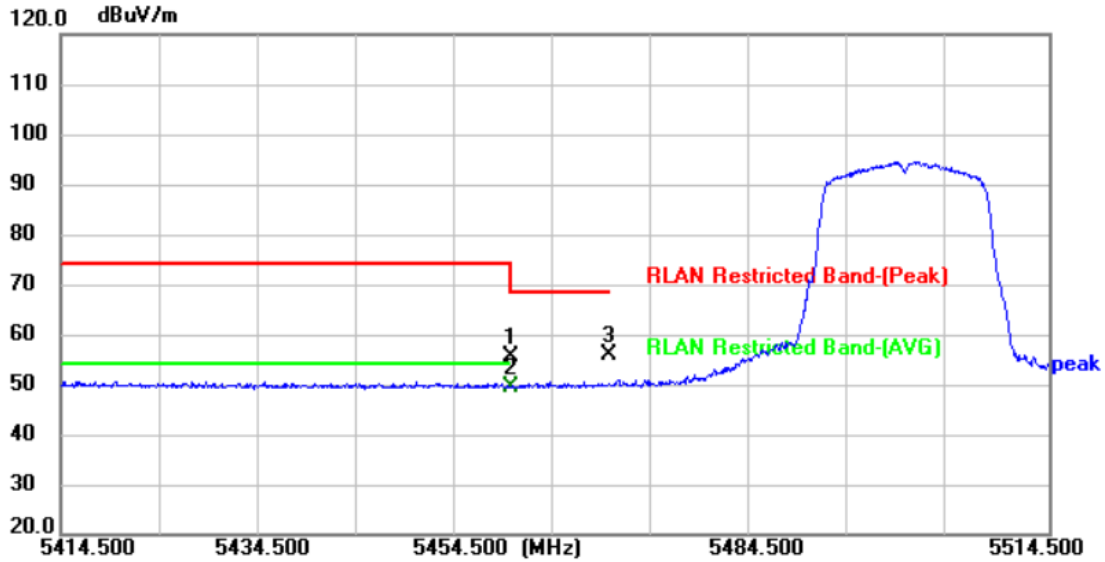


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.72	14.68	55.40	68.30	-12.90	peak	P
2 *	5460.000	34.88	14.68	49.56	54.00	-4.44	AVG	P
3	5470.000	41.02	14.72	55.74	68.30	-12.56	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

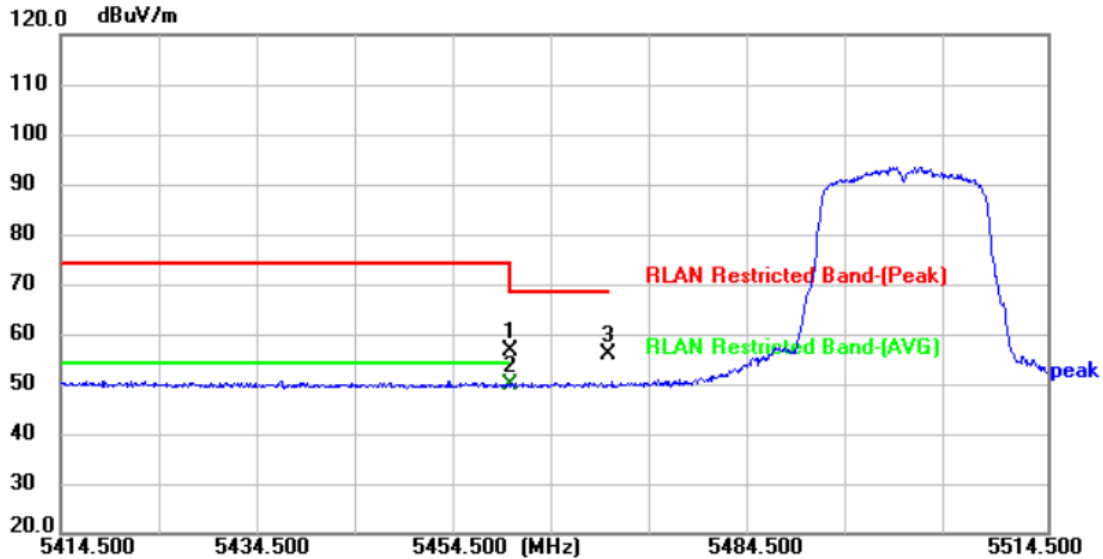


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	41.90	14.68	56.58	68.30	-11.72	peak	P
2 *	5460.000	34.99	14.68	49.67	54.00	-4.33	AVG	P
3	5470.000	41.08	14.72	55.80	68.30	-12.50	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

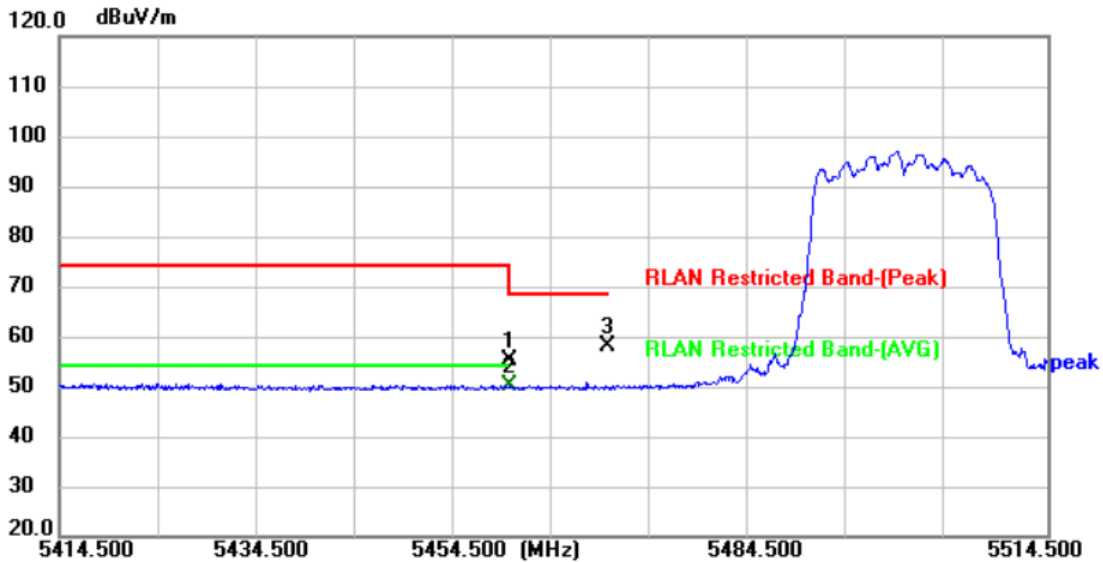

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.53	14.68	55.21	68.30	-13.09	peak	P
2 *	5460.000	35.51	14.68	50.19	54.00	-3.81	AVG	P
3	5470.000	43.24	14.72	57.96	68.30	-10.34	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)





Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

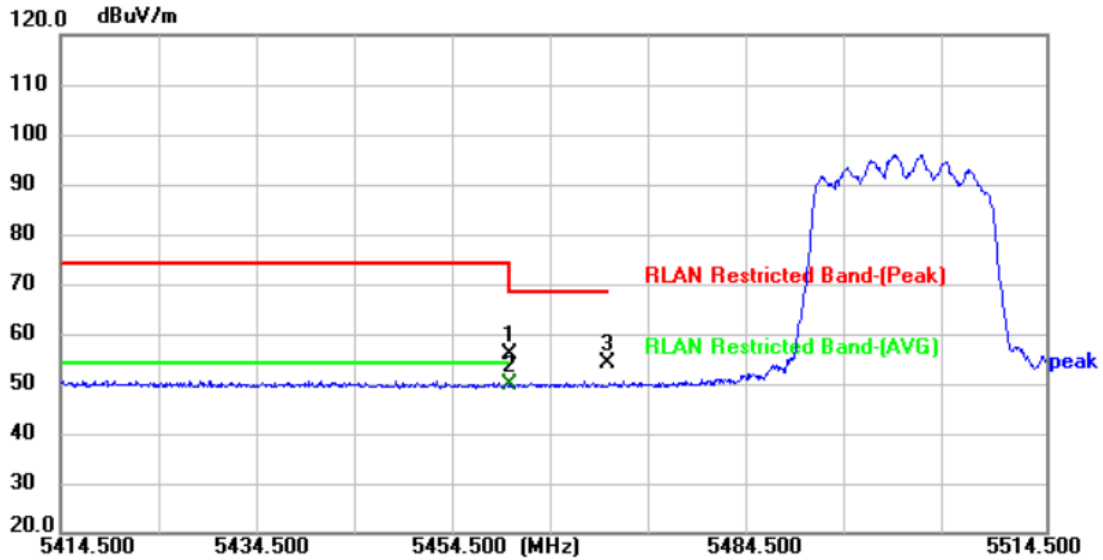


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	41.21	14.68	55.89	68.30	-12.41	peak	P
2 *	5460.000	34.98	14.68	49.66	54.00	-4.34	AVG	P
3	5470.000	39.50	14.72	54.22	68.30	-14.08	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

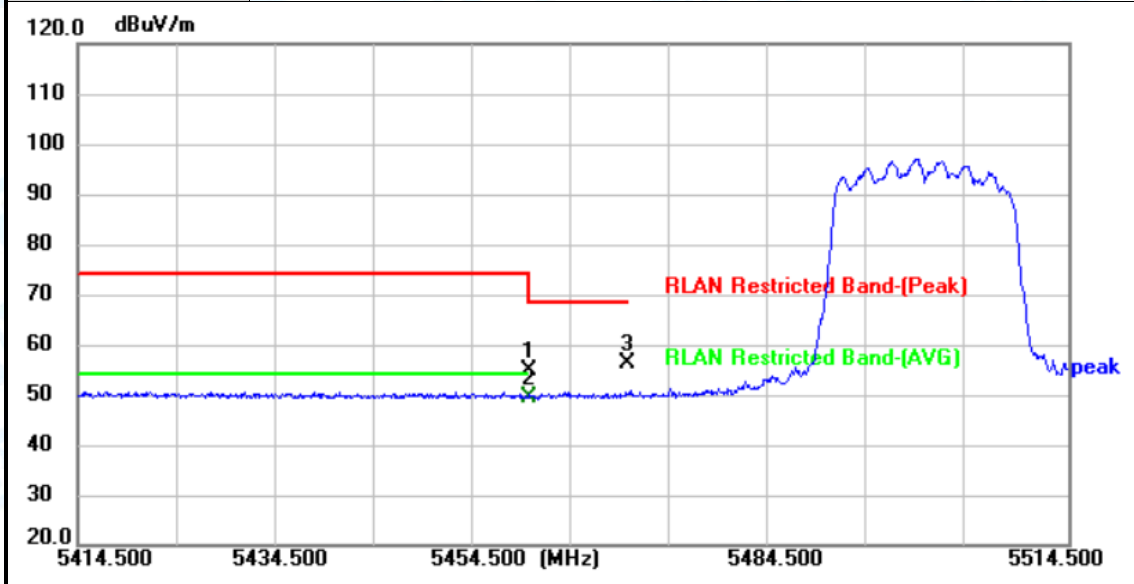


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.08	14.68	54.76	68.30	-13.54	peak	P
2 *	5460.000	34.92	14.68	49.60	54.00	-4.40	AVG	P
3	5470.000	41.50	14.72	56.22	68.30	-12.08	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

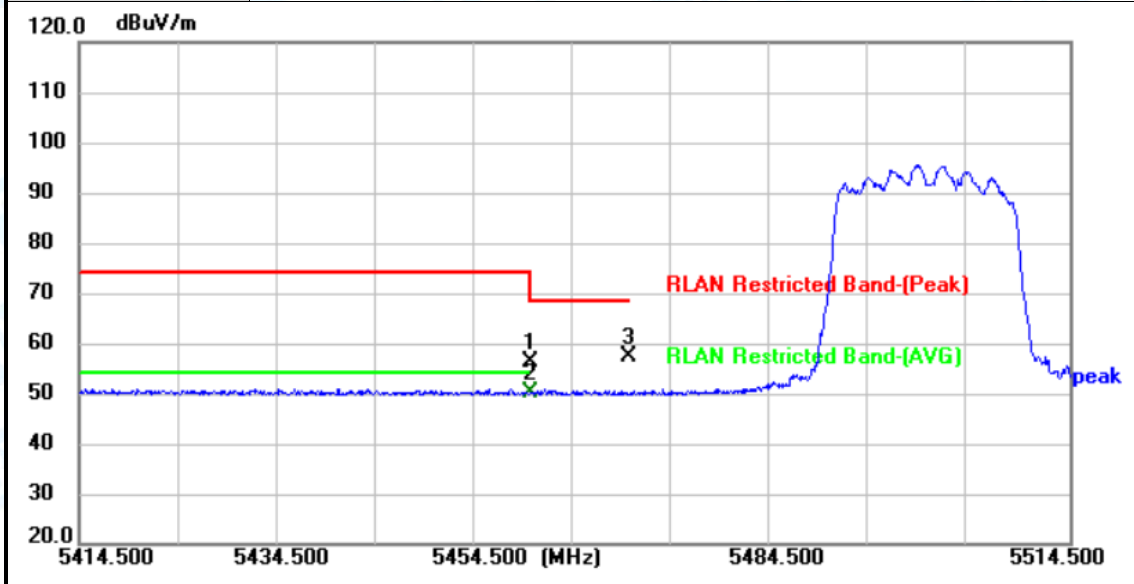


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	41.48	14.68	56.16	68.30	-12.14	peak	P
2 *	5460.000	35.36	14.68	50.04	54.00	-3.96	AVG	P
3	5470.000	42.51	14.72	57.23	68.30	-11.07	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

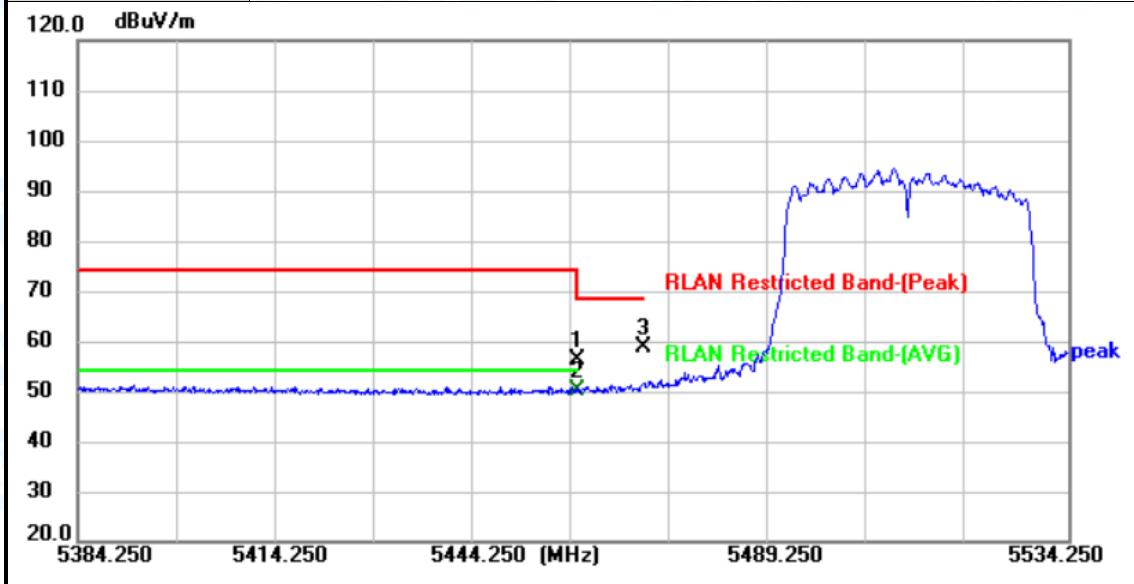


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	41.64	14.68	56.32	68.30	-11.98	peak	P
2 *	5460.000	35.50	14.68	50.18	54.00	-3.82	AVG	P
3	5470.000	43.94	14.72	58.66	68.30	-9.64	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

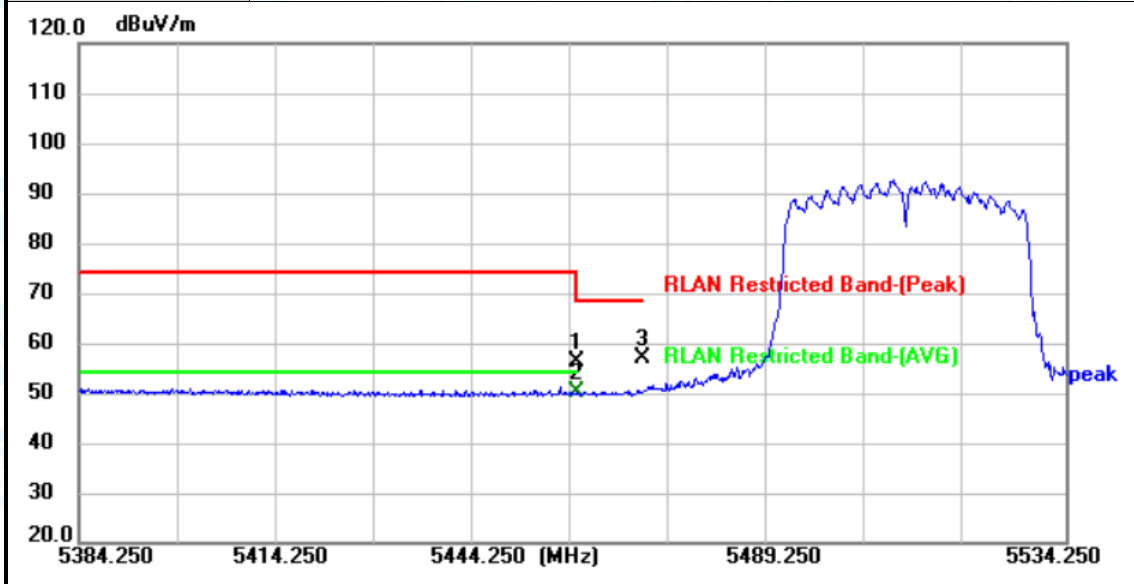


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	41.40	14.68	56.08	68.30	-12.22	peak	P
2 *	5460.000	35.37	14.68	50.05	54.00	-3.95	AVG	P
3	5470.000	42.40	14.72	57.12	68.30	-11.18	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

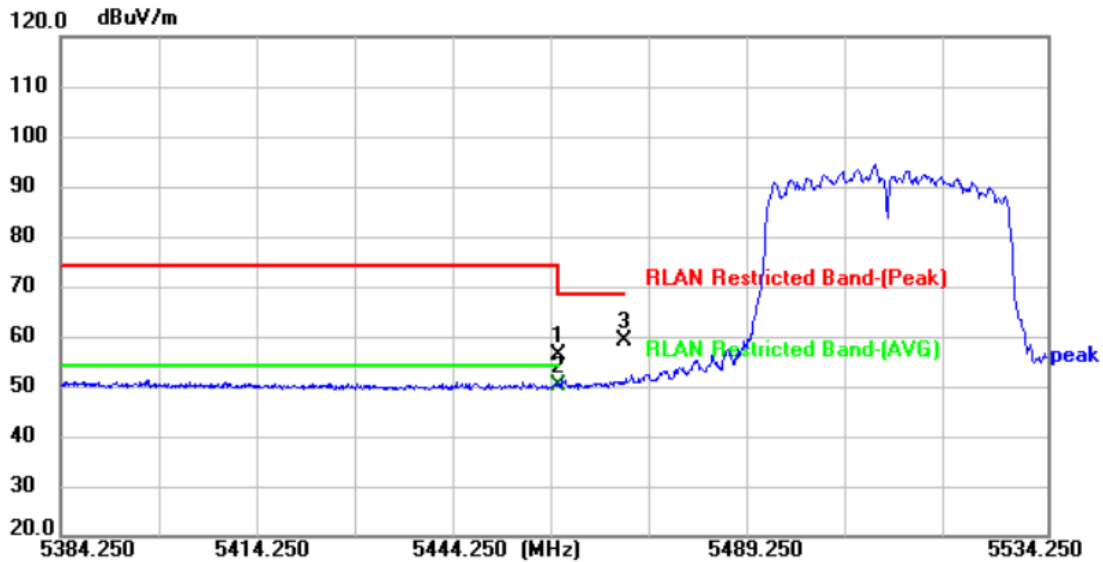


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	41.56	14.68	56.24	68.30	-12.06	peak	P
2 *	5460.000	35.33	14.68	50.01	54.00	-3.99	AVG	P
3	5470.000	44.27	14.72	58.99	68.30	-9.31	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

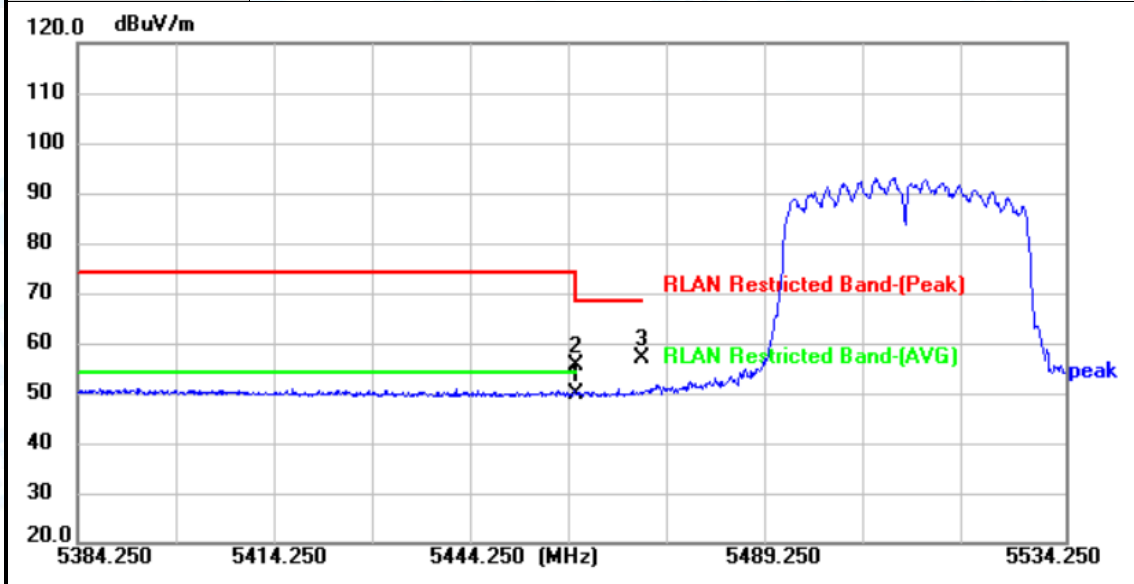


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	35.24	14.68	49.92	68.30	-18.38	peak	P
2	5460.000	40.74	14.68	55.42	68.30	-12.88	peak	P
3 *	5470.000	42.13	14.72	56.85	68.30	-11.45	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

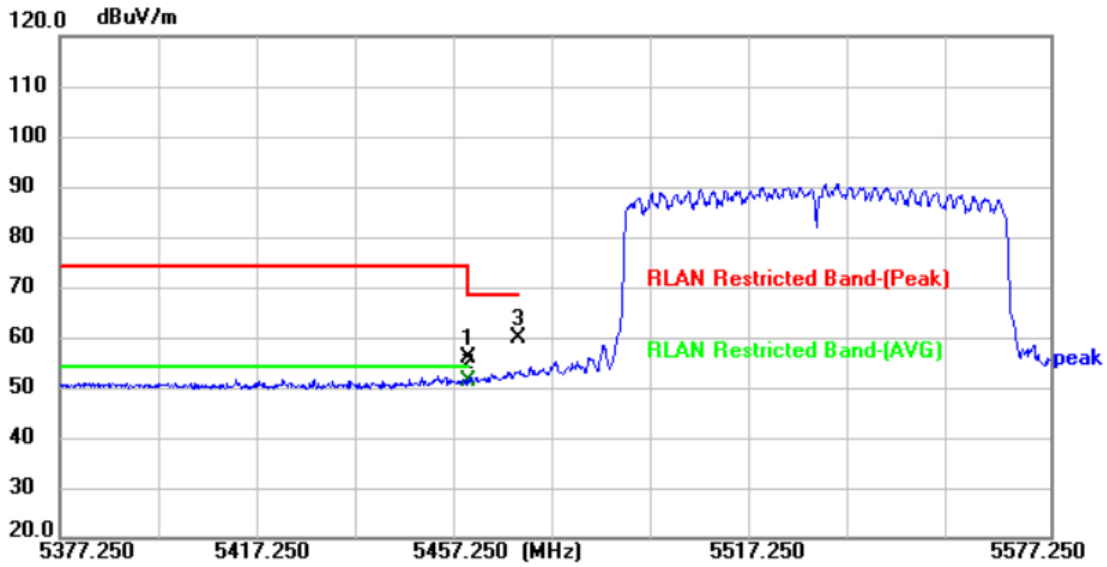

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	41.08	14.68	55.76	68.30	-12.54	peak	P
2 *	5460.000	36.65	14.68	51.33	54.00	-2.67	AVG	P
3	5470.000	45.14	14.72	59.86	68.30	-8.44	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)





Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

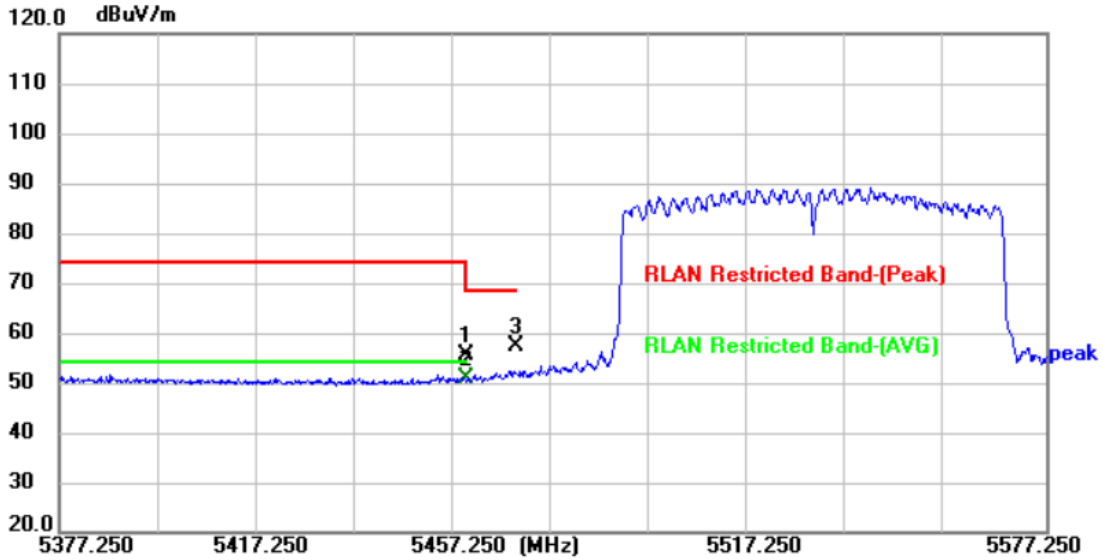


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	40.96	14.68	55.64	68.30	-12.66	peak	P
2 *	5460.000	36.12	14.68	50.80	54.00	-3.20	AVG	P
3	5470.000	42.63	14.72	57.35	68.30	-10.95	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

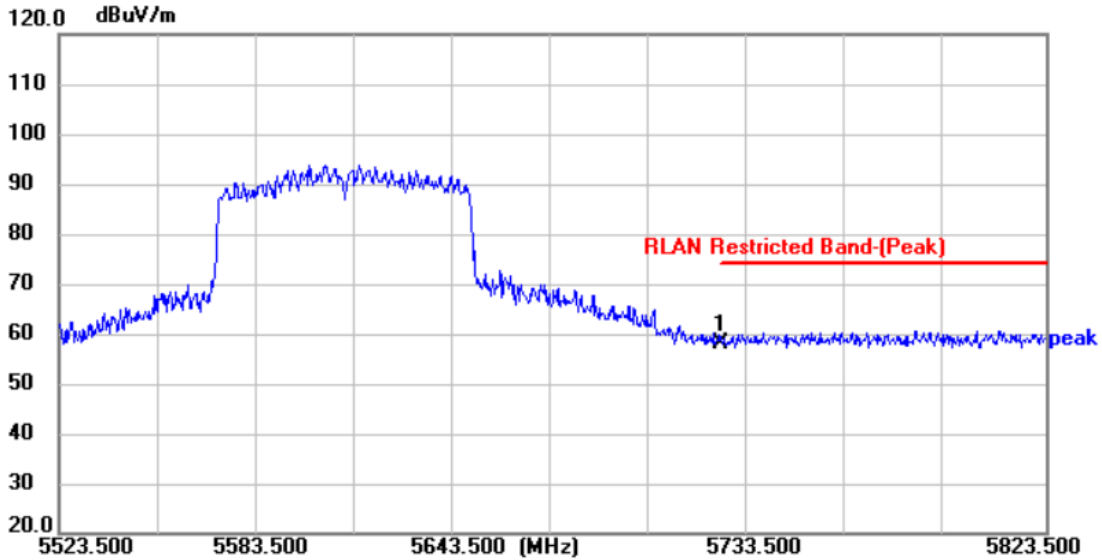


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	42.83	15.10	57.93	74.00	-16.07	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.3°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:	with Antenna(XINGHE)		

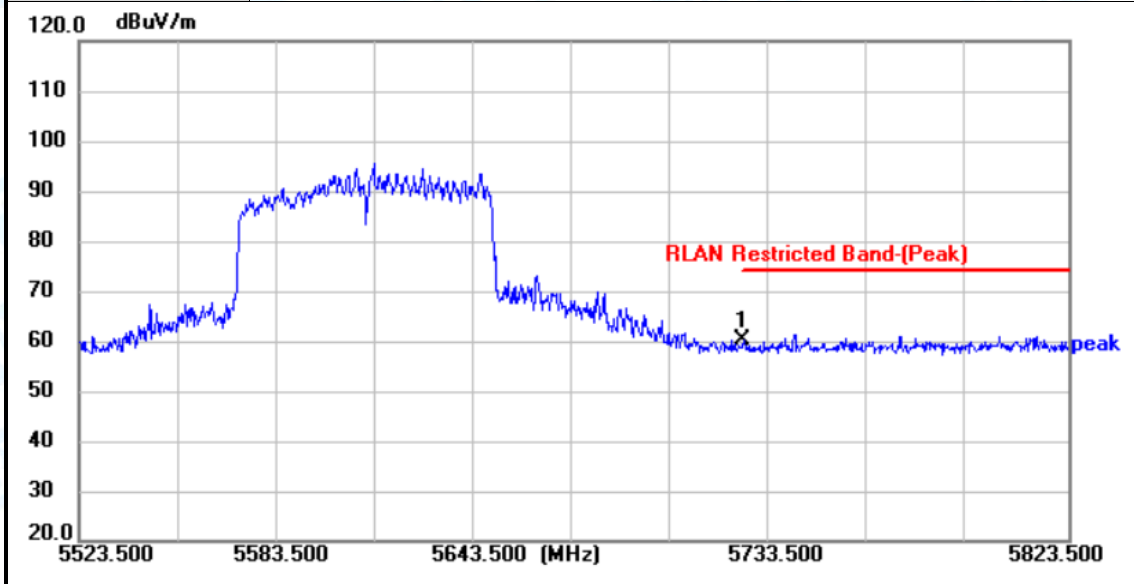


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	45.00	15.10	60.10	74.00	-13.90	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

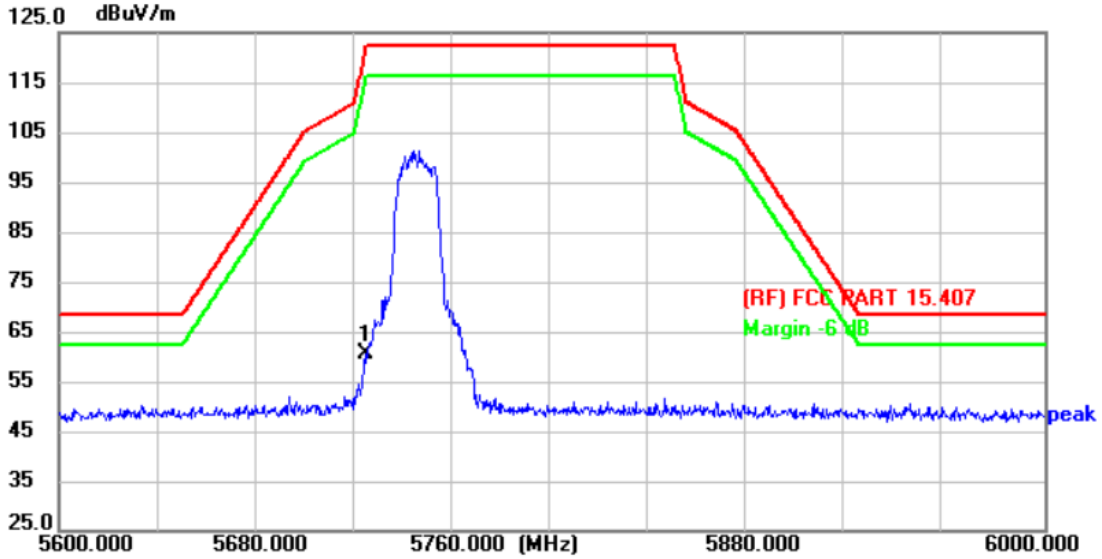


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	45.47	15.10	60.57	122.30	-61.73	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

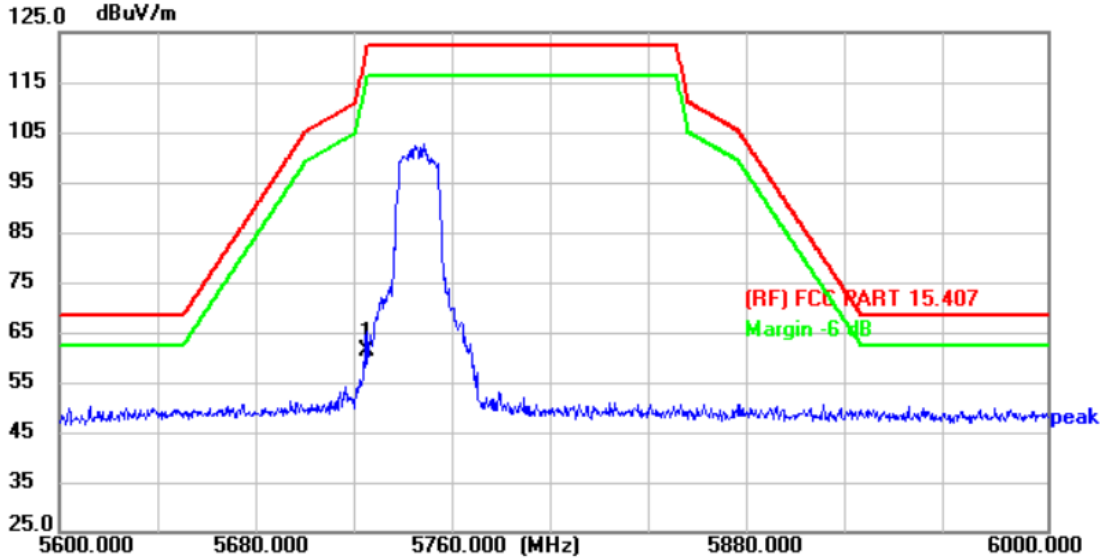


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	46.11	15.10	61.21	122.30	-61.09	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

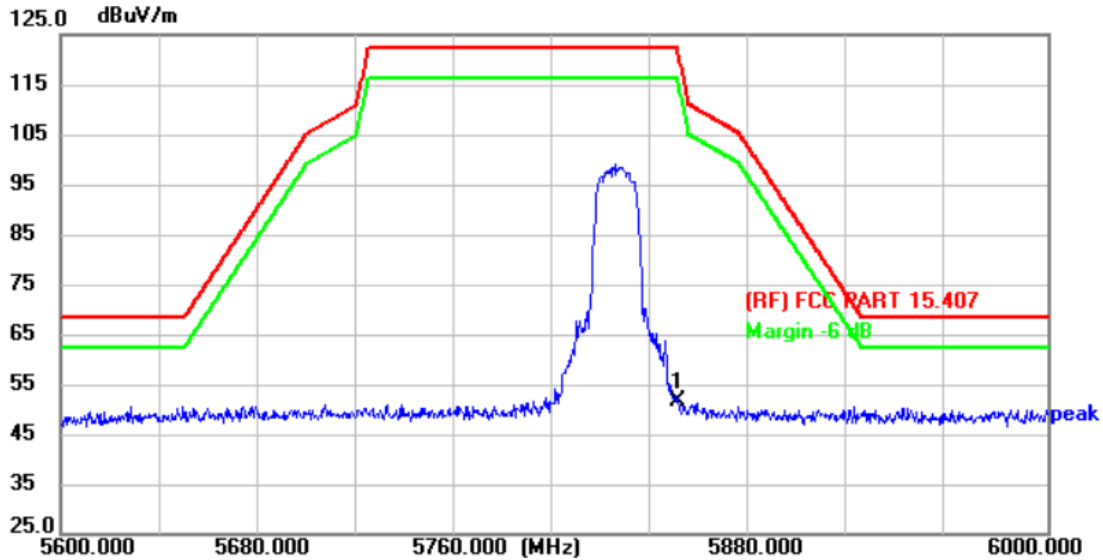


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	36.37	15.26	51.63	122.30	-70.67	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

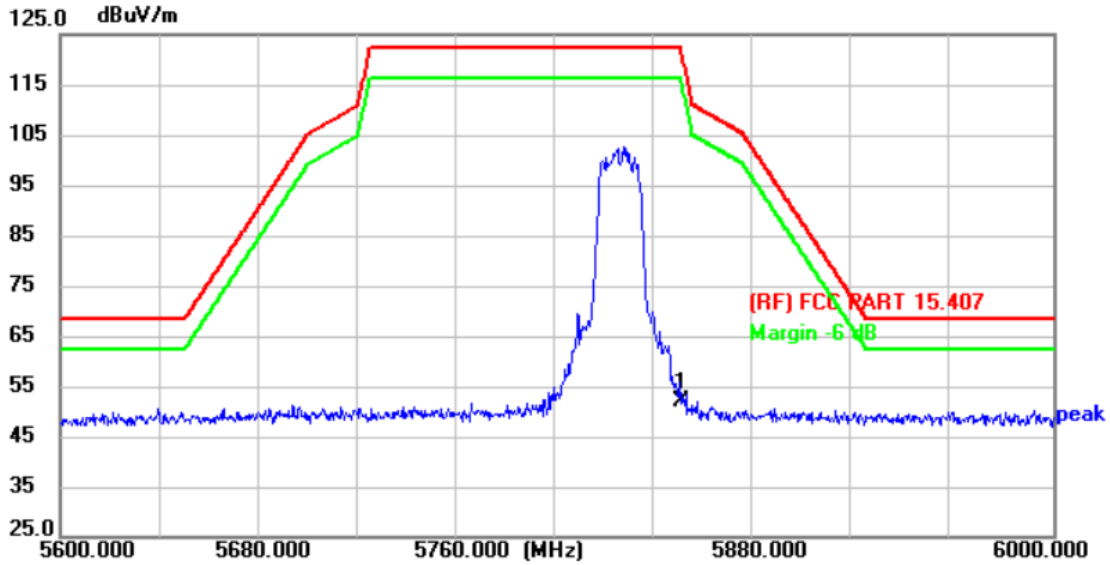


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	36.71	15.26	51.97	122.30	-70.33	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

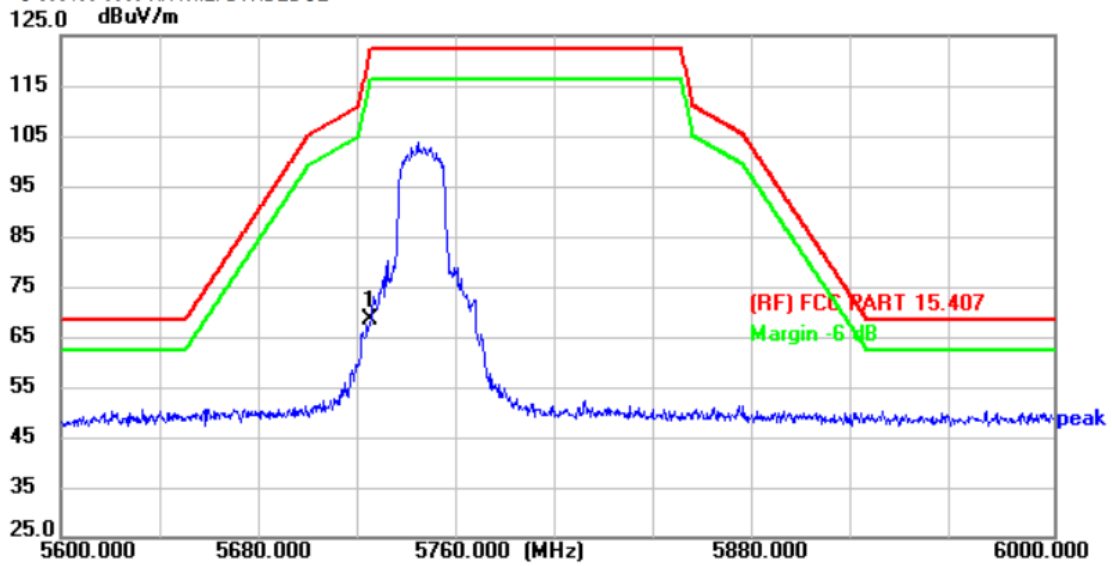

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	53.31	15.10	68.41	122.30	-53.89	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

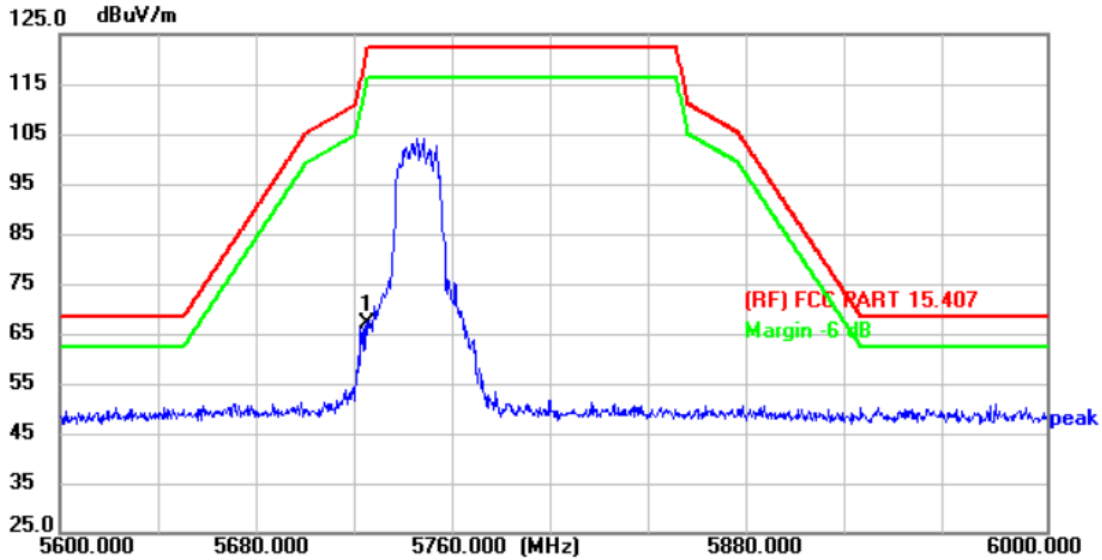


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	51.98	15.10	67.08	122.30	-55.22	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

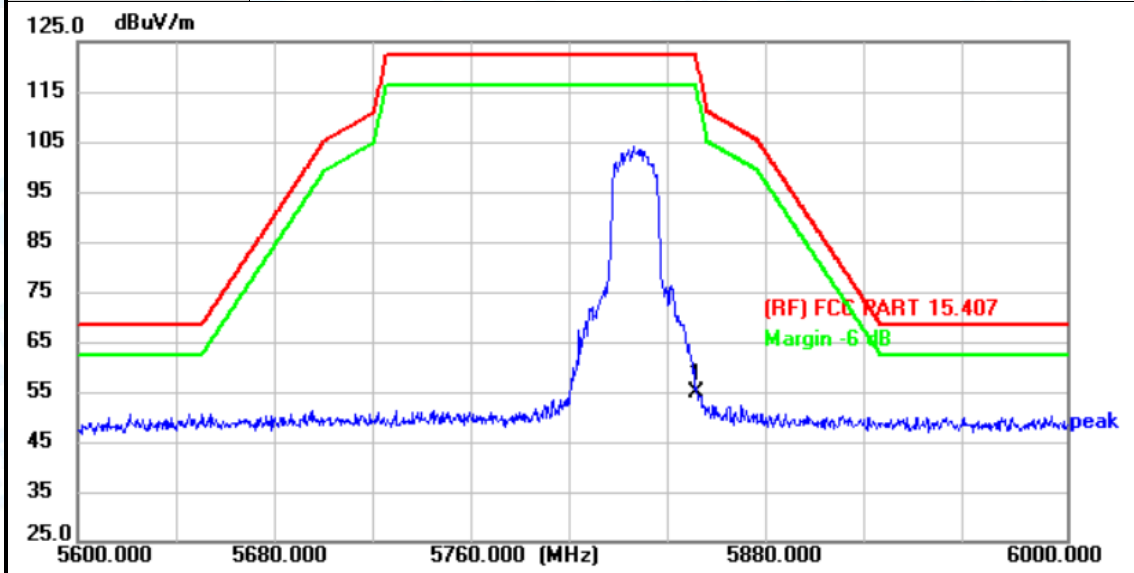


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	39.62	15.26	54.88	122.30	-67.42	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

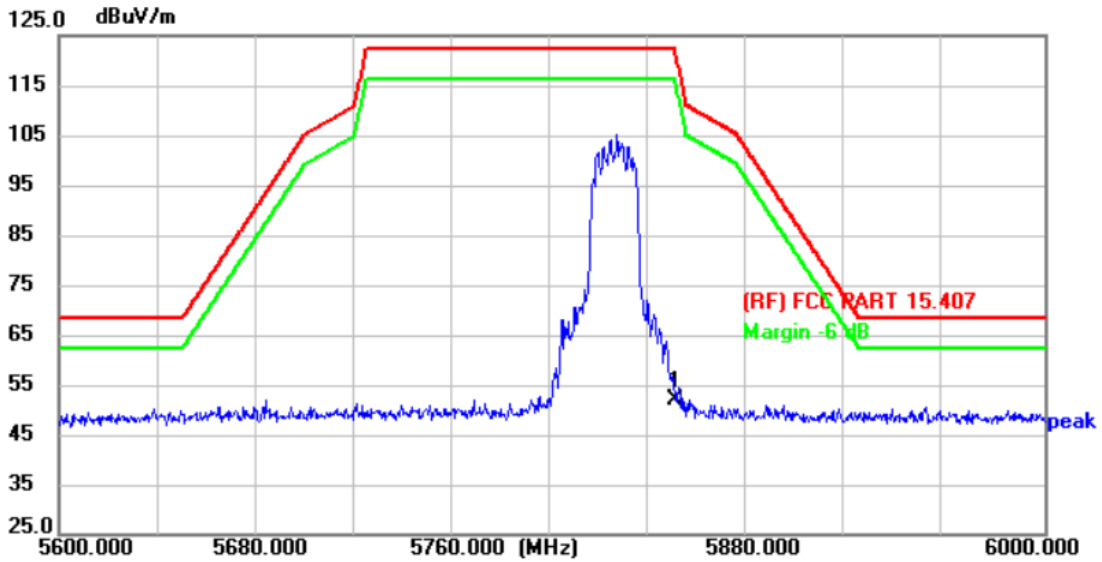


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	36.87	15.26	52.13	122.30	-70.17	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

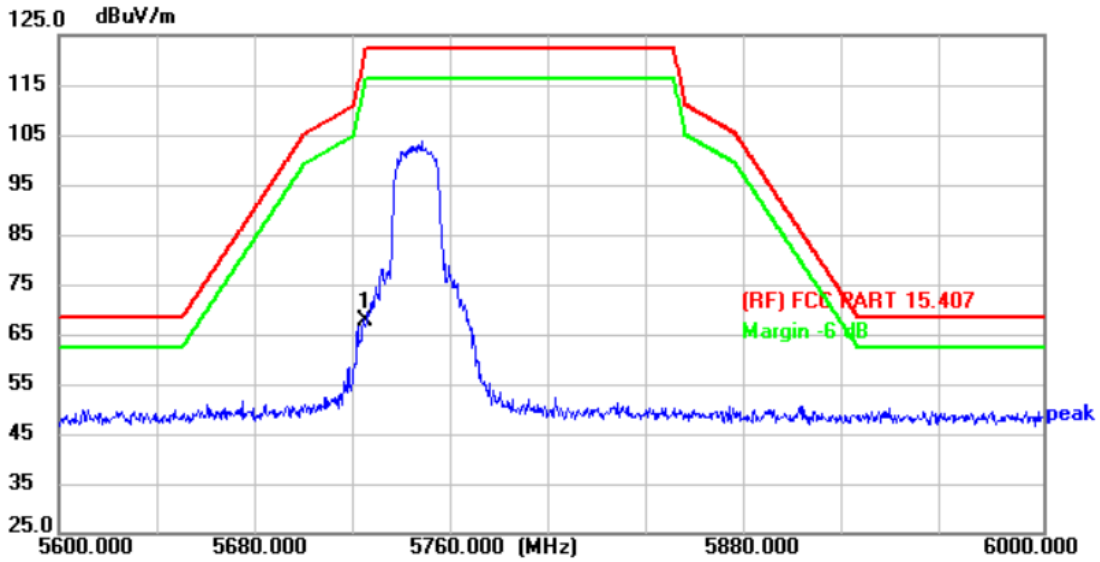


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	52.54	15.10	67.64	122.30	-54.66	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

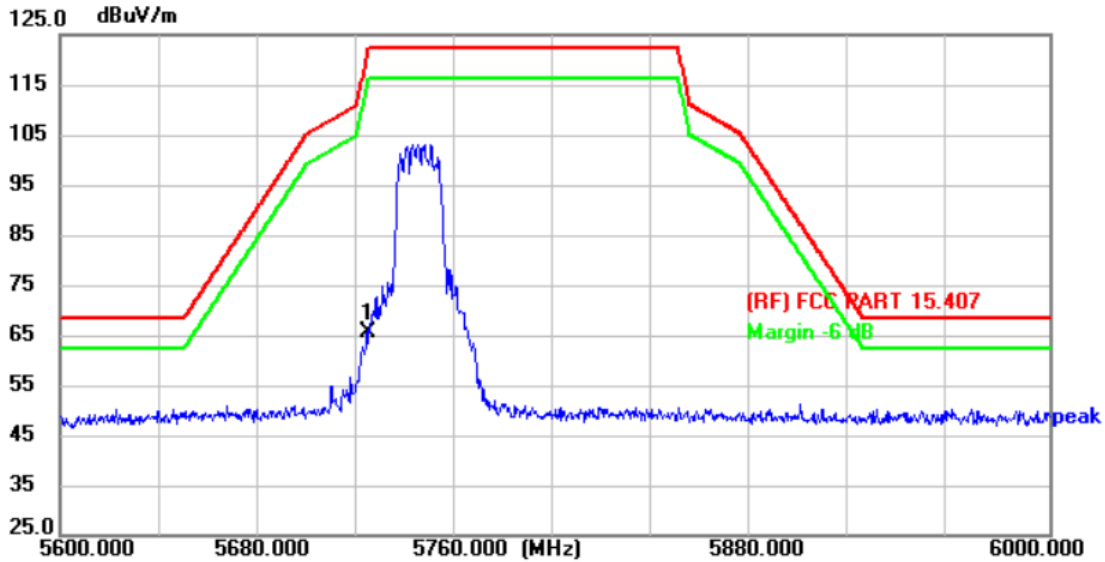


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	50.37	15.10	65.47	122.30	-56.83	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.6°C	Relative Humidity:	49%
Test Voltage:	DC 3.3V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:	with Antenna(XINGHE)		

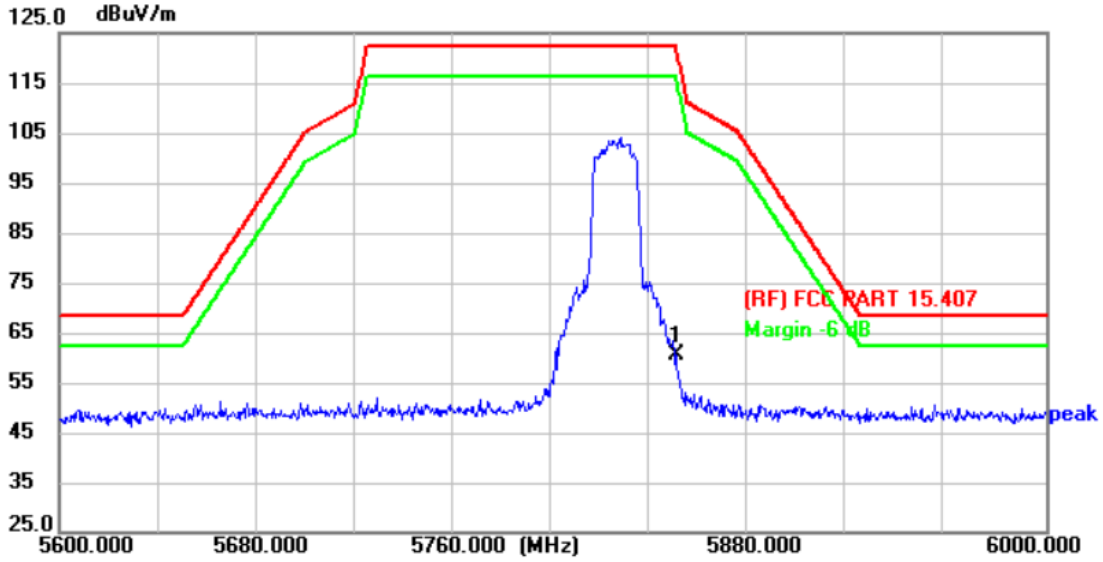

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	45.21	15.26	60.47	122.30	-61.83	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

