
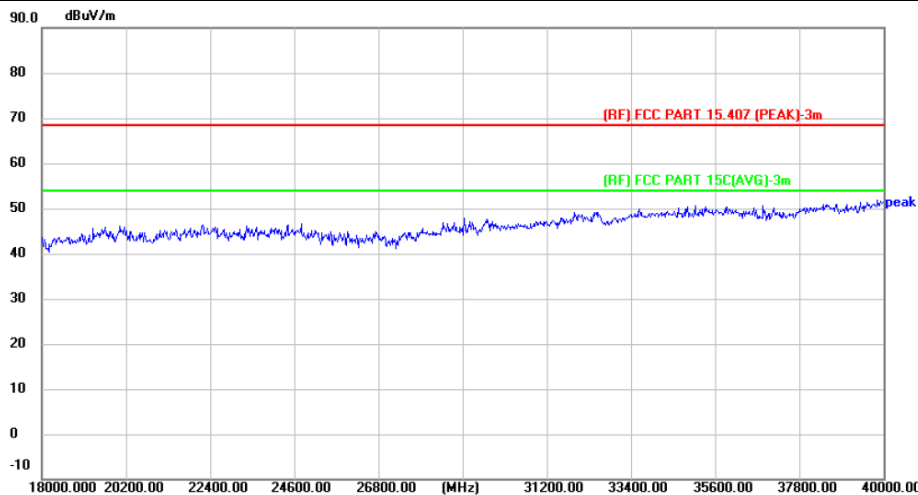


| | | | |
|---------------|---------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5290MHz | | |

Horizontal

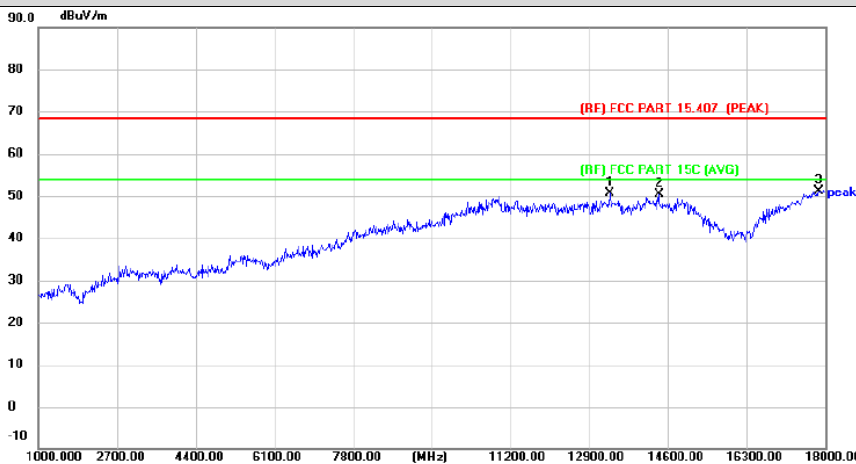

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 13342.000 | 40.63 | 9.96 | 50.59 | 68.30 | -17.71 | peak | P |
| 2 | 14396.000 | 39.31 | 10.96 | 50.27 | 68.30 | -18.03 | peak | P |
| 3 * | 17847.000 | 34.12 | 17.08 | 51.20 | 68.30 | -17.10 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|---------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5290MHz | | |

Vertical

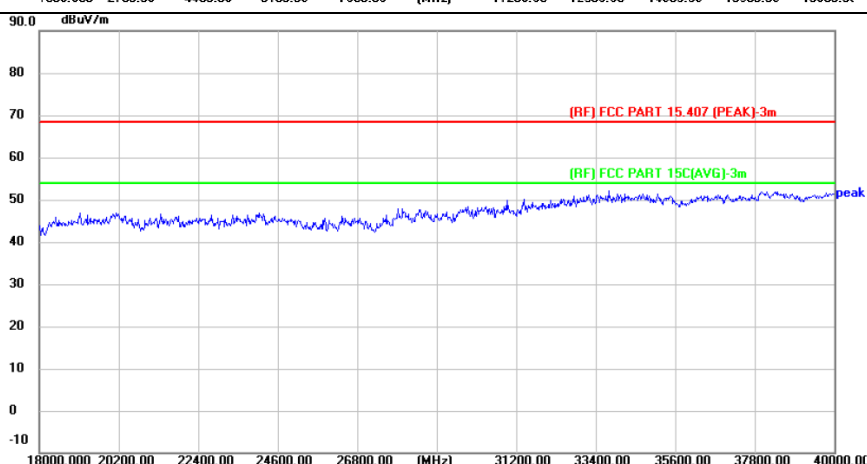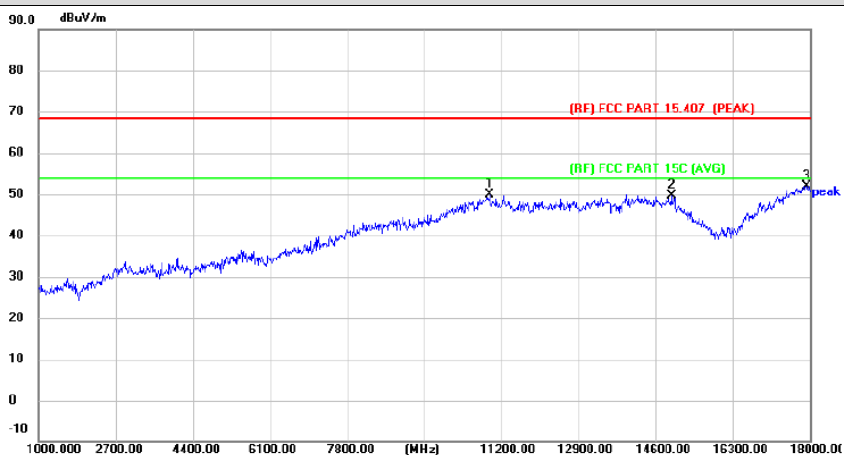

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10945.000 | 41.56 | 8.20 | 49.76 | 68.30 | -18.54 | peak | P |
| 2 | 14940.000 | 38.30 | 11.37 | 49.67 | 68.30 | -18.63 | peak | P |
| 3 * | 17915.000 | 34.41 | 17.56 | 51.97 | 68.30 | -16.33 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|--------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5290MHz | | |

Horizontal

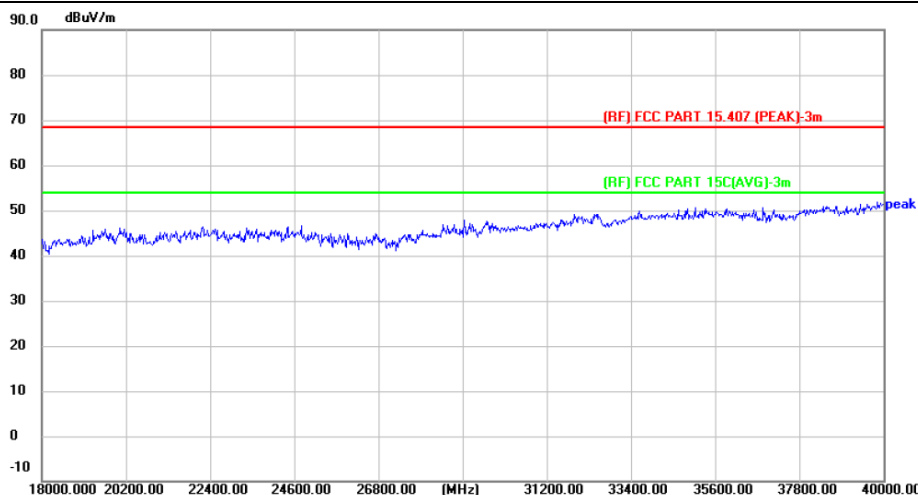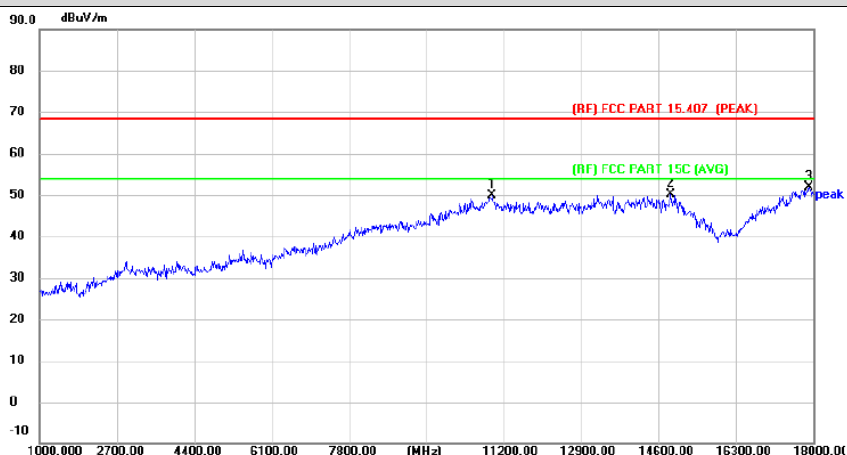

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10945.000 | 41.64 | 8.20 | 49.84 | 68.30 | -18.46 | peak | P |
| 2 | 14855.000 | 39.24 | 11.01 | 50.25 | 68.30 | -18.05 | peak | P |
| 3 * | 17898.000 | 34.38 | 17.50 | 51.88 | 68.30 | -16.42 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|--------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5290MHz | | |

Vertical

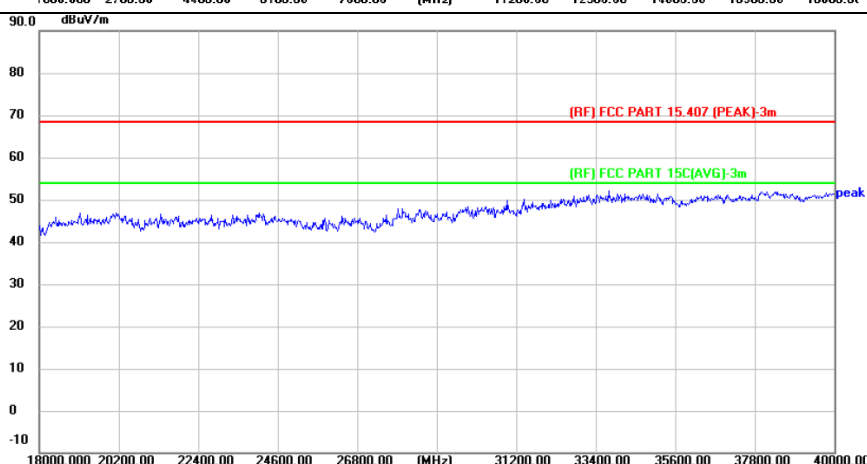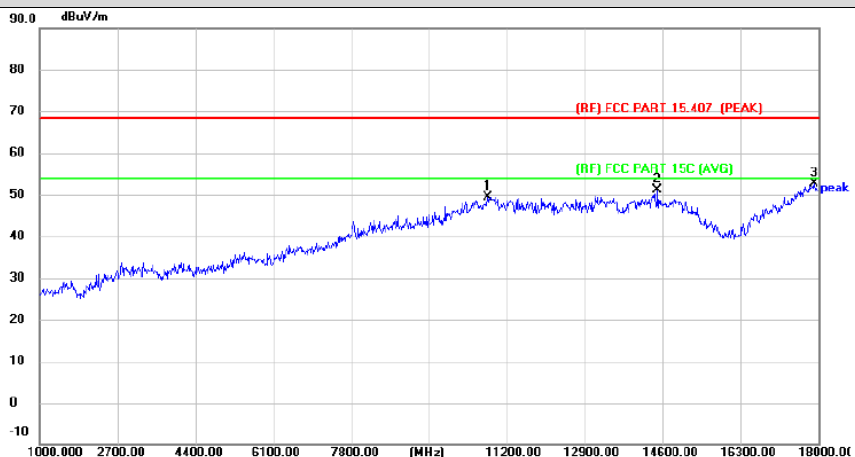

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10775.000 | 41.79 | 7.57 | 49.36 | 68.30 | -18.94 | peak | P |
| 2 | 14481.000 | 40.44 | 10.73 | 51.17 | 68.30 | -17.13 | peak | P |
| 3 * | 17898.000 | 35.01 | 17.50 | 52.51 | 68.30 | -15.79 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|---------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5530MHz | | |

Horizontal

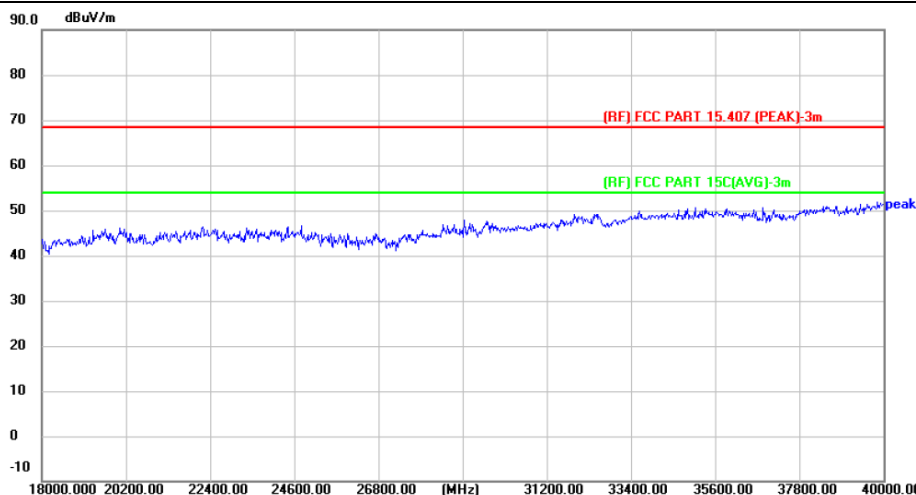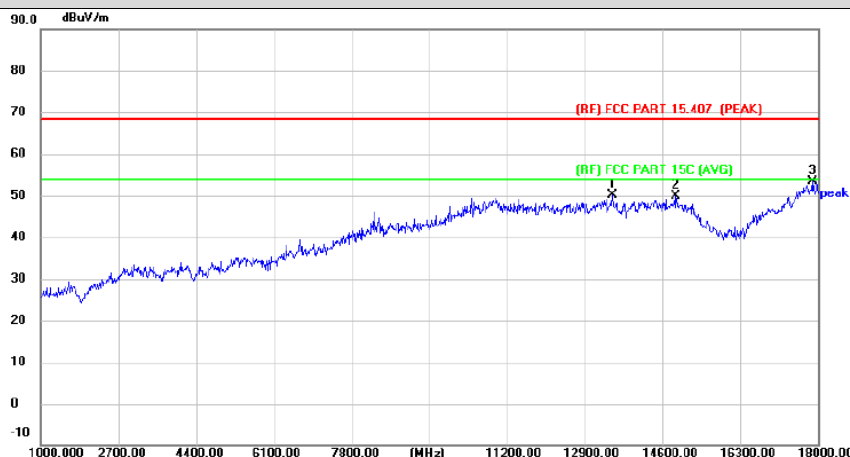

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 13495.000 | 40.14 | 10.11 | 50.25 | 68.30 | -18.05 | peak | P |
| 2 | 14872.000 | 38.84 | 11.14 | 49.98 | 68.30 | -18.32 | peak | P |
| 3 * | 17864.000 | 36.21 | 17.22 | 53.43 | 68.30 | -14.87 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|---------------------------------|---------------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5530MHz | | |

Vertical

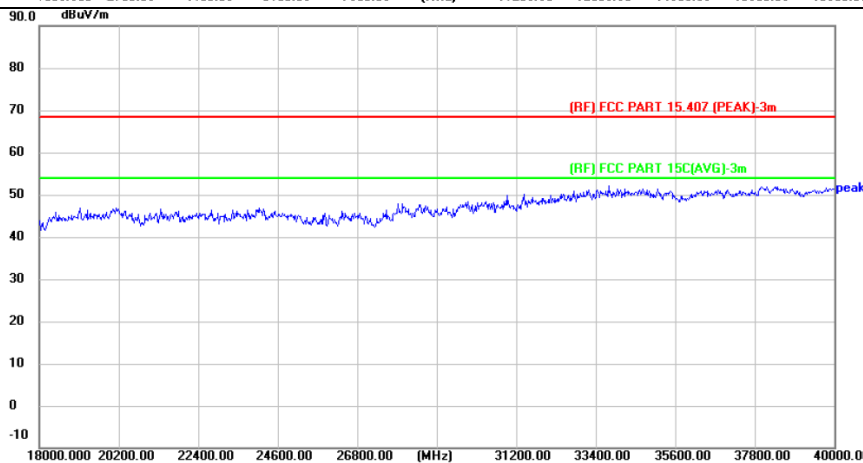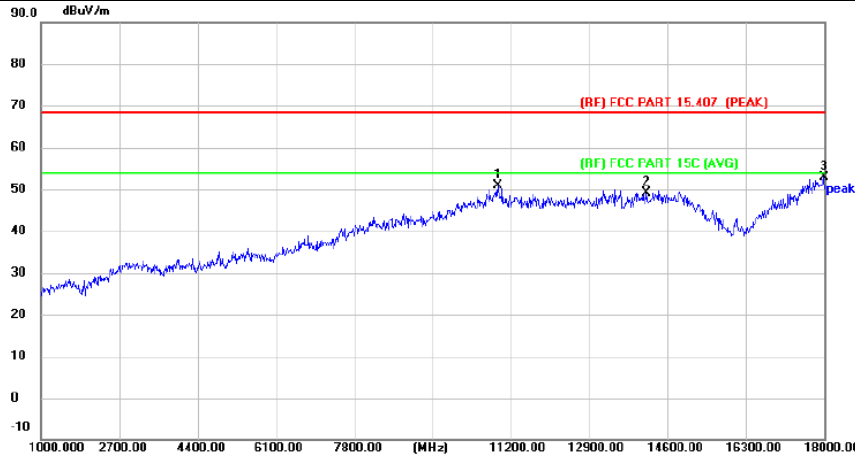

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10911.000 | 42.78 | 8.22 | 51.00 | 68.30 | -17.30 | peak | P |
| 2 | 14141.000 | 39.00 | 10.20 | 49.20 | 68.30 | -19.10 | peak | P |
| 3 * | 17983.000 | 35.14 | 17.76 | 52.90 | 68.30 | -15.40 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|---------------------------------|---------------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5690MHz | | |

Horizontal

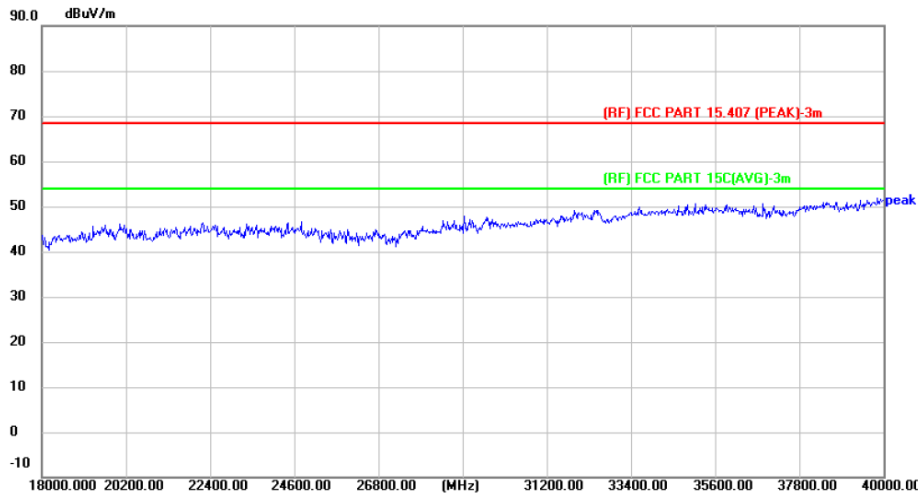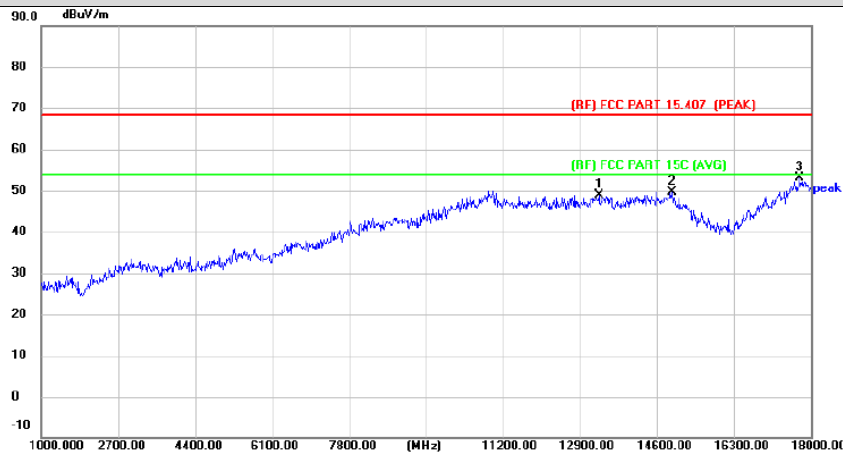

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 13308.000 | 39.00 | 9.81 | 48.81 | 68.30 | -19.49 | peak | P |
| 2 | 14923.000 | 38.23 | 11.36 | 49.59 | 68.30 | -18.71 | peak | P |
| 3 * | 17745.000 | 36.86 | 16.28 | 53.14 | 68.30 | -15.16 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|---------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5690MHz | | |

Vertical

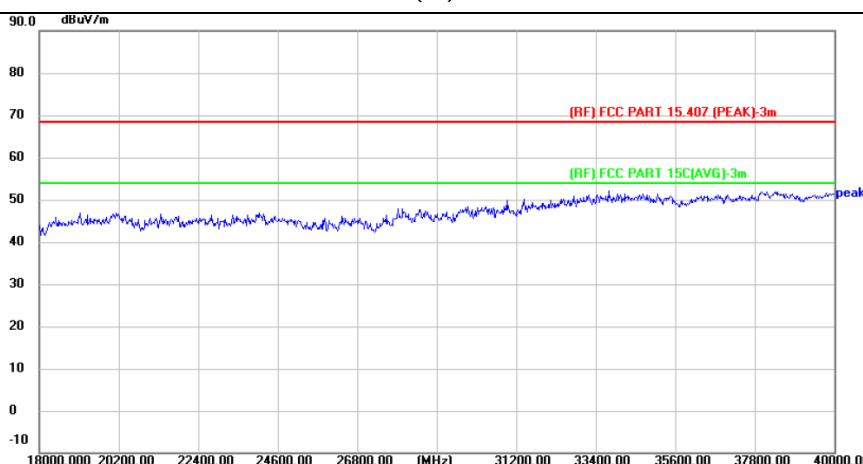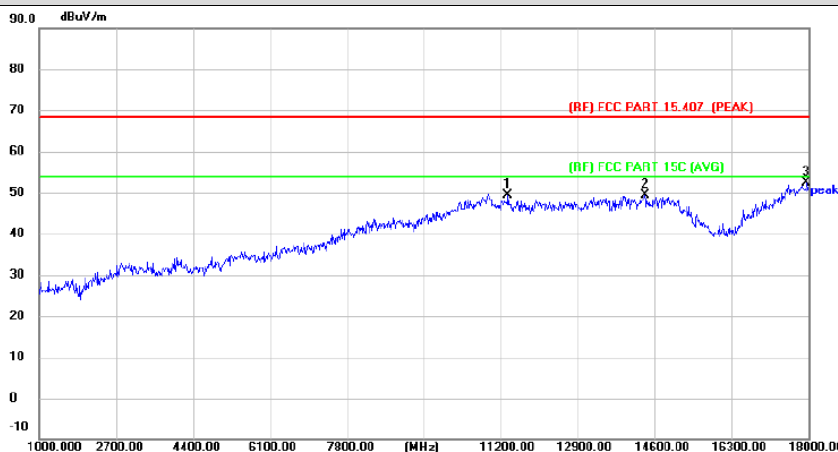

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11353.000 | 40.40 | 8.92 | 49.32 | 68.30 | -18.98 | peak | P |
| 2 | 14379.000 | 38.41 | 10.85 | 49.26 | 68.30 | -19.04 | peak | P |
| 3 * | 17949.000 | 34.83 | 17.66 | 52.49 | 68.30 | -15.81 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|--------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5530MHz | | |

Horizontal

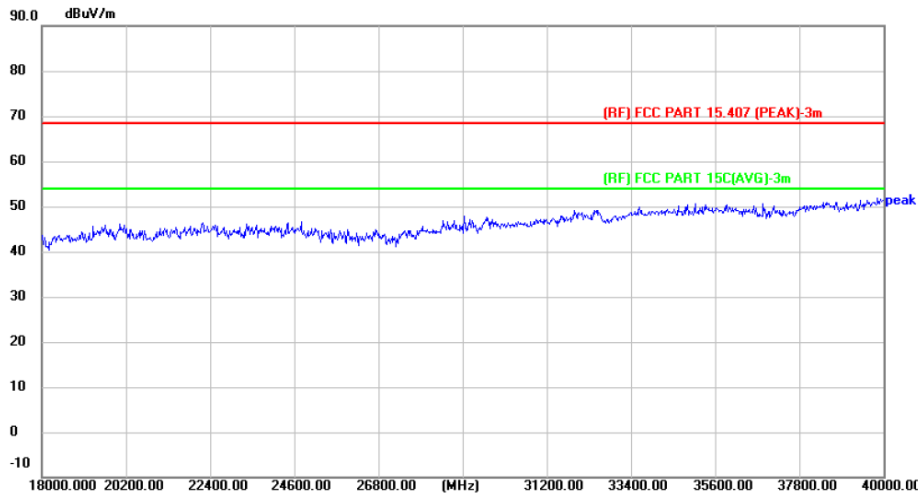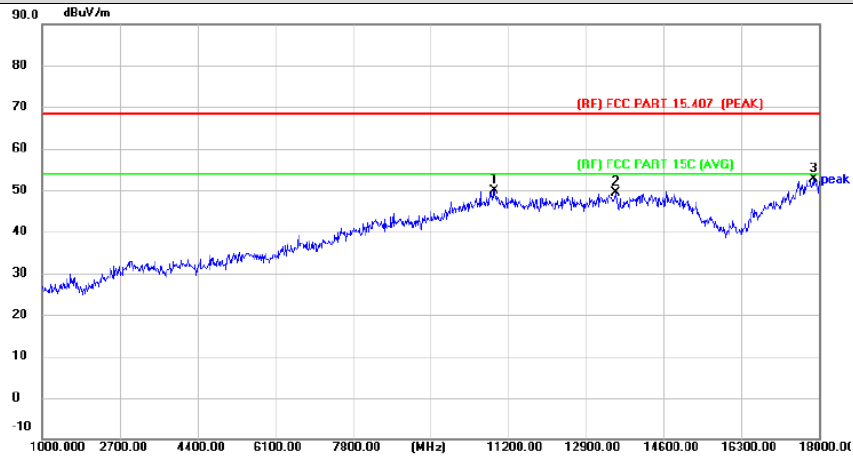

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10894.000 | 41.64 | 8.20 | 49.84 | 68.30 | -18.46 | peak | P |
| 2 | 13546.000 | 39.31 | 10.02 | 49.33 | 68.30 | -18.97 | peak | P |
| 3 * | 17864.000 | 35.53 | 17.22 | 52.75 | 68.30 | -15.55 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|--------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5530MHz | | |

Vertical

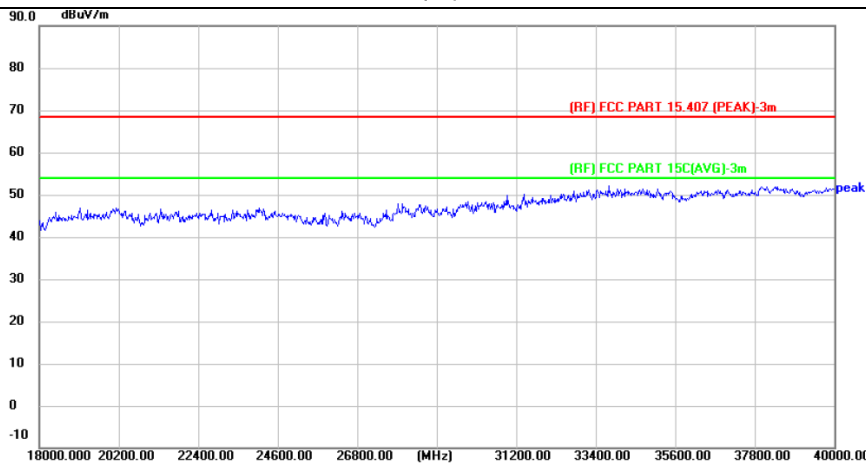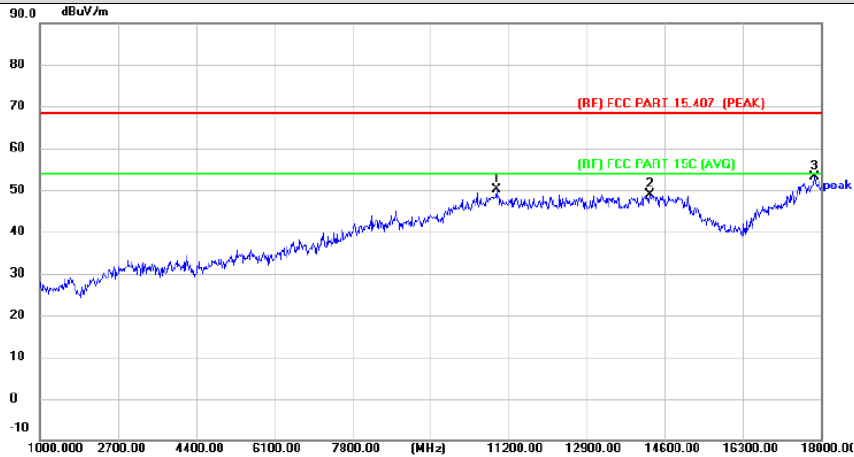

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10928.000 | 41.81 | 8.21 | 50.02 | 68.30 | -18.28 | peak | P |
| 2 | 14260.000 | 38.53 | 10.29 | 48.82 | 68.30 | -19.48 | peak | P |
| 3 * | 17847.000 | 35.93 | 17.08 | 53.01 | 68.30 | -15.29 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|--------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5690MHz | | |

Horizontal

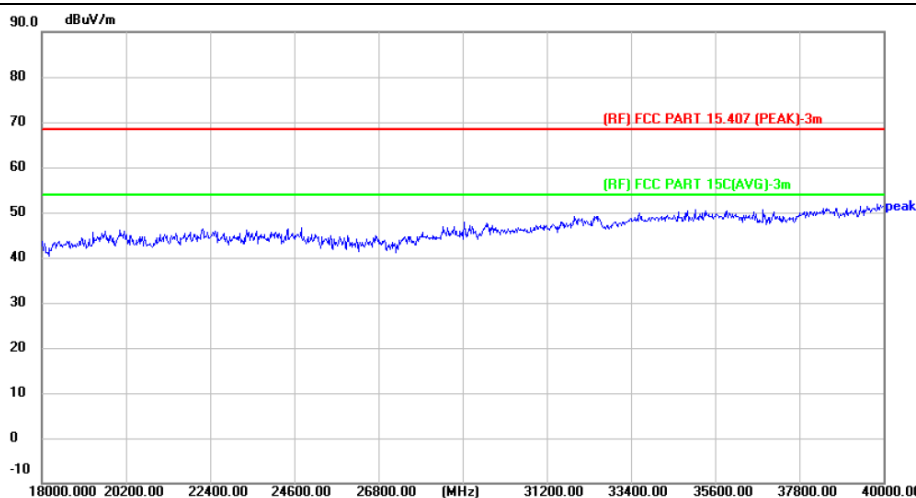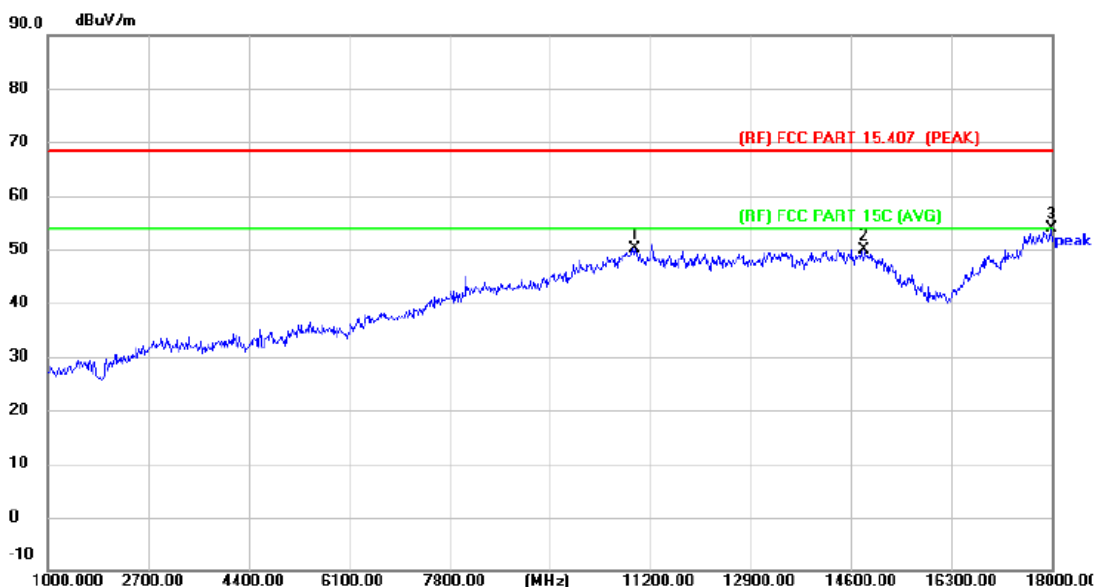

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10928.000 | 41.97 | 8.21 | 50.18 | 68.30 | -18.12 | peak | P |
| 2 | 14821.000 | 39.26 | 10.72 | 49.98 | 68.30 | -18.32 | peak | P |
| 3 * | 17983.000 | 36.13 | 17.76 | 53.89 | 68.30 | -14.41 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|--------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5690MHz | | |

Vertical

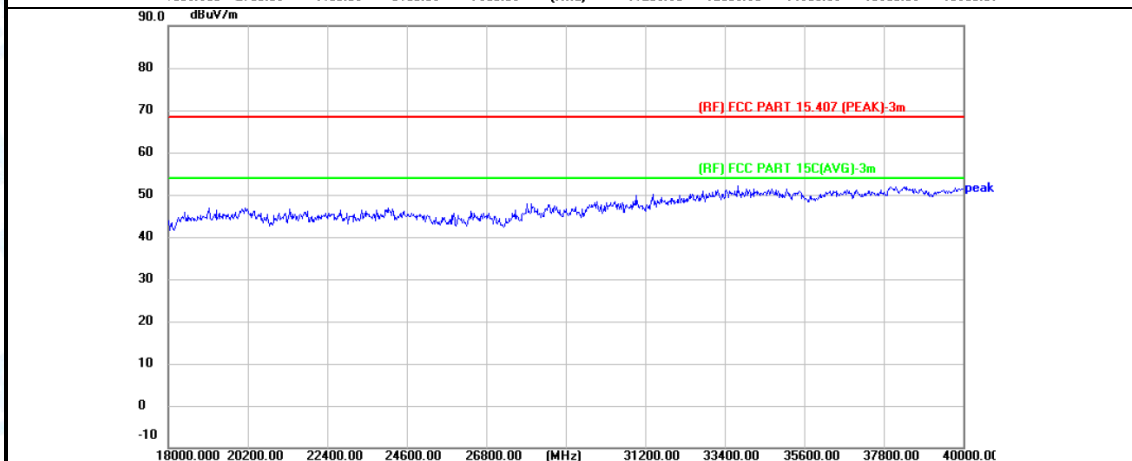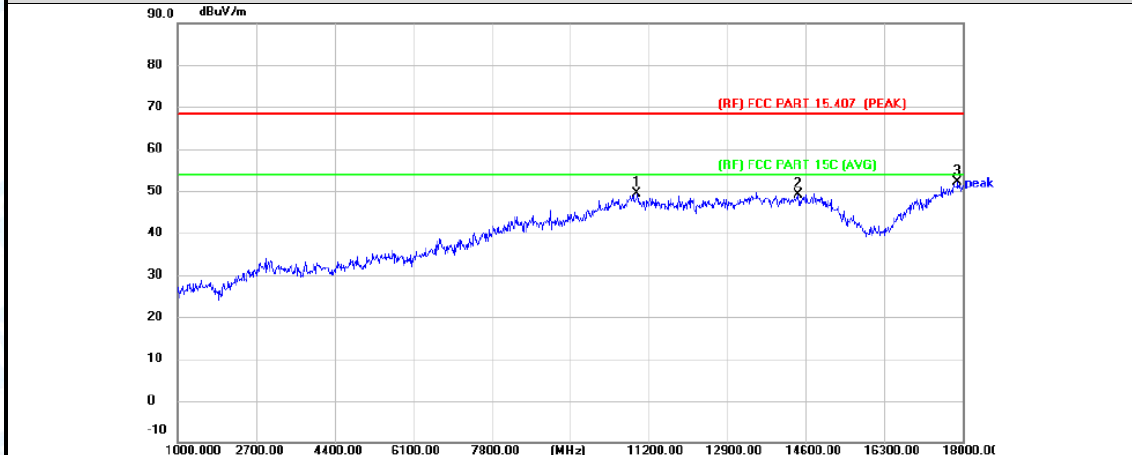

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10945.000 | 41.26 | 8.20 | 49.46 | 68.30 | -18.84 | peak | P |
| 2 | 14430.000 | 38.19 | 10.89 | 49.08 | 68.30 | -19.22 | peak | P |
| 3 * | 17881.000 | 34.68 | 17.36 | 52.04 | 68.30 | -16.26 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|---------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5775MHz | | |

Horizontal

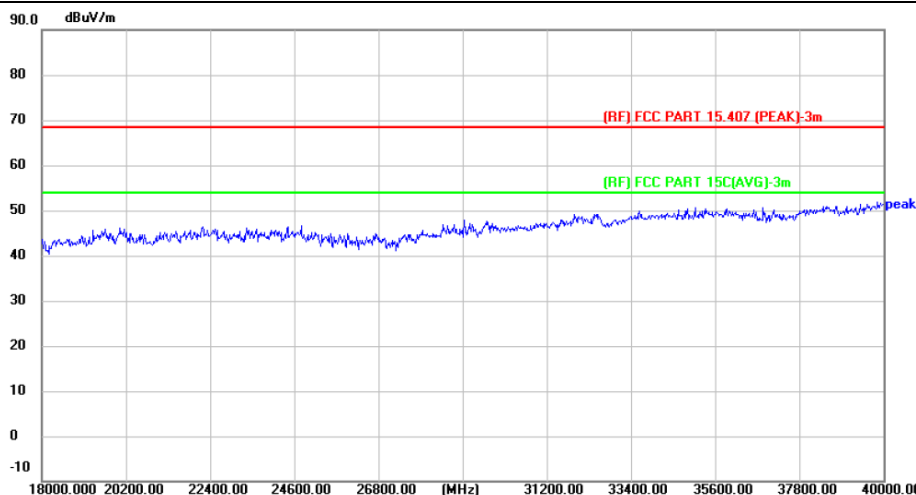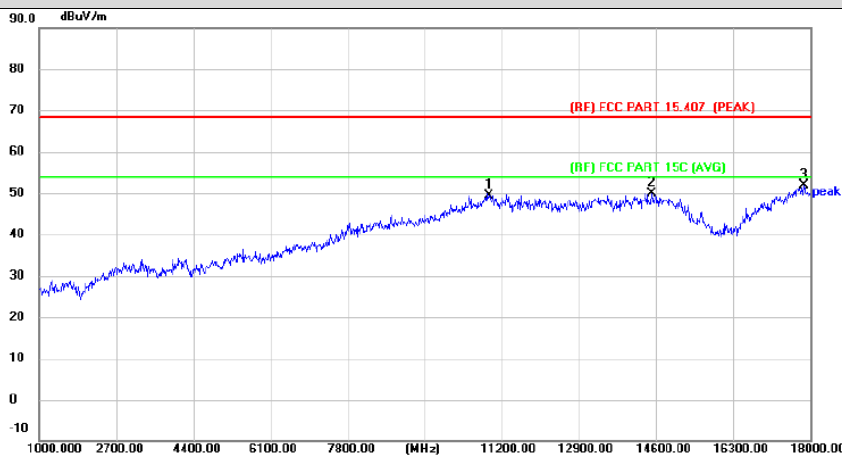

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10911.000 | 41.26 | 8.22 | 49.48 | 68.30 | -18.82 | peak | P |
| 2 | 14498.000 | 39.33 | 10.67 | 50.00 | 68.30 | -18.30 | peak | P |
| 3 * | 17847.000 | 34.88 | 17.08 | 51.96 | 68.30 | -16.34 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|---------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5775MHz | | |

Vertical

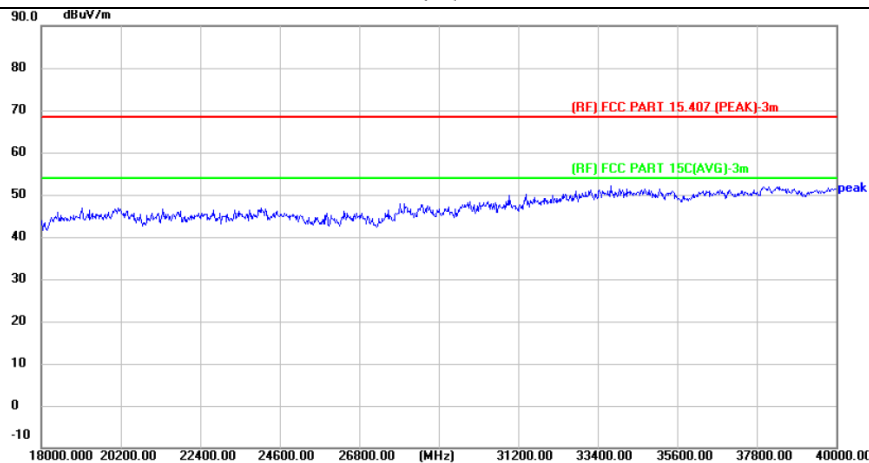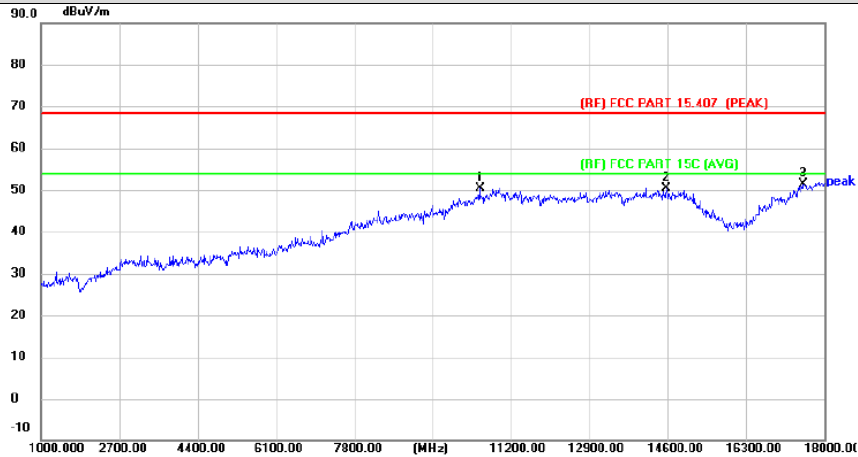

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10520.000 | 43.93 | 6.44 | 50.37 | 68.30 | -17.93 | peak | P |
| 2 | 14566.000 | 39.61 | 10.79 | 50.40 | 68.30 | -17.90 | peak | P |
| 3 * | 17541.000 | 36.06 | 15.30 | 51.36 | 68.30 | -16.94 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|--------------------------------|---------------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5775MHz | | |

Horizontal

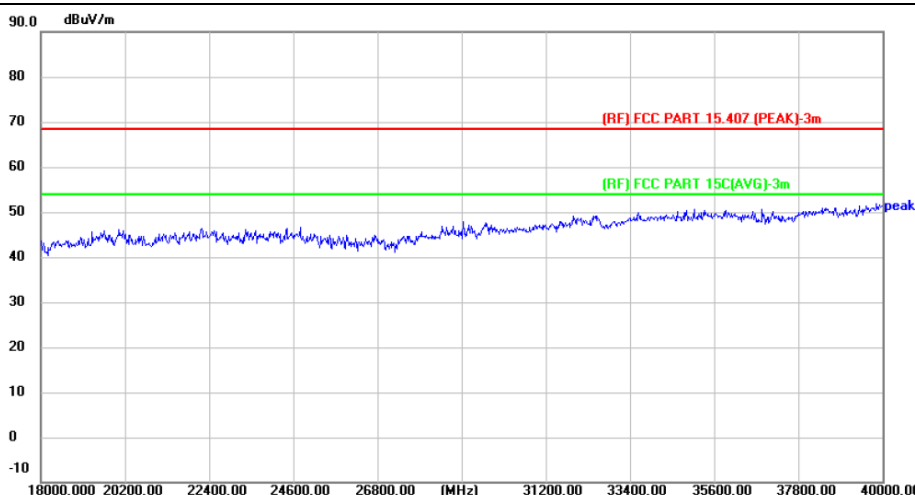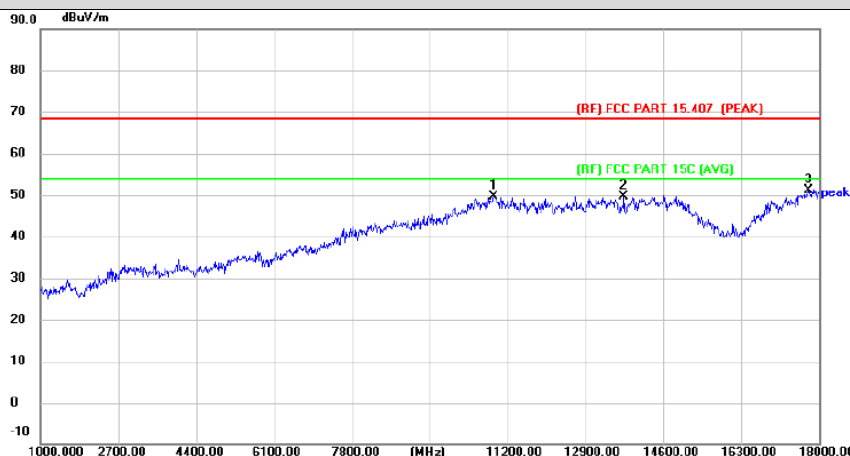

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10894.000 | 41.33 | 8.20 | 49.53 | 68.30 | -18.77 | peak | P |
| 2 | 13733.000 | 39.48 | 10.24 | 49.72 | 68.30 | -18.58 | peak | P |
| 3 * | 17762.000 | 34.74 | 16.41 | 51.15 | 68.30 | -17.15 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|--------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5775MHz | | |

Vertical

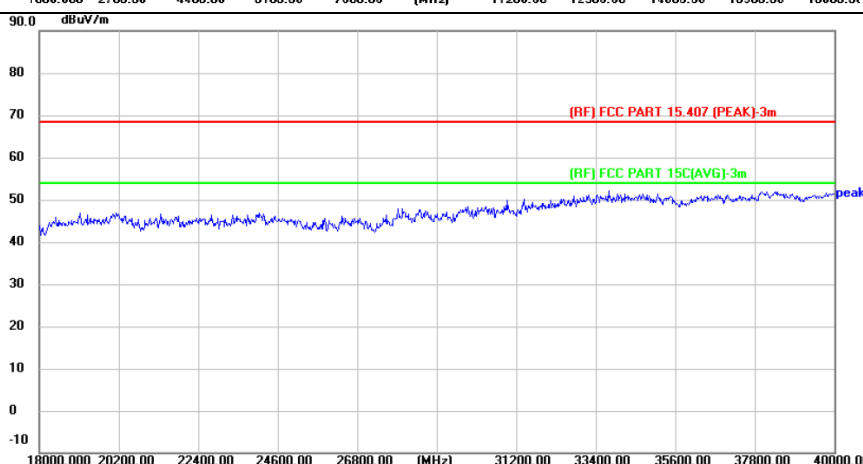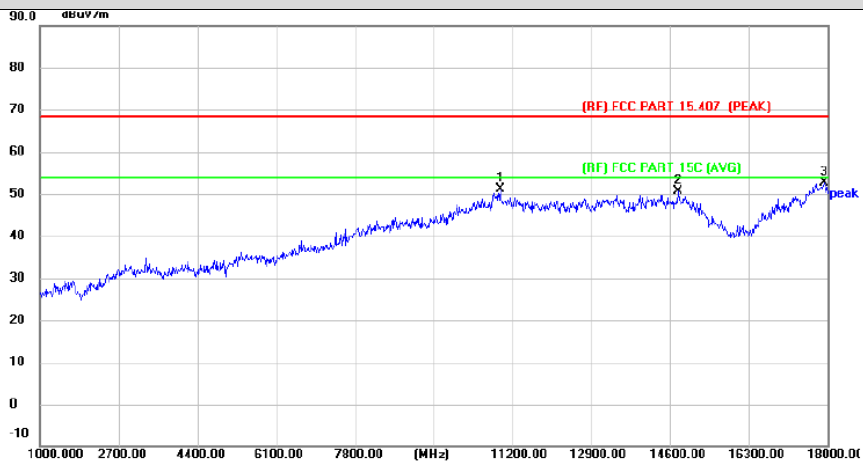

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10928.000 | 42.86 | 8.21 | 51.07 | 68.30 | -17.23 | peak | P |
| 2 | 14770.000 | 39.91 | 10.66 | 50.57 | 68.30 | -17.73 | peak | P |
| 3 * | 17915.000 | 35.02 | 17.56 | 52.58 | 68.30 | -15.72 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|----------------------------------|---------------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5250MHz | | |

Horizontal

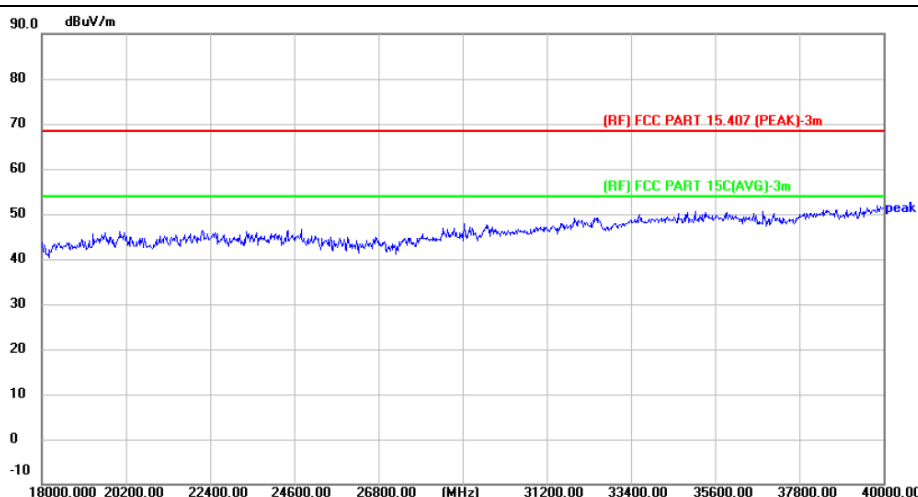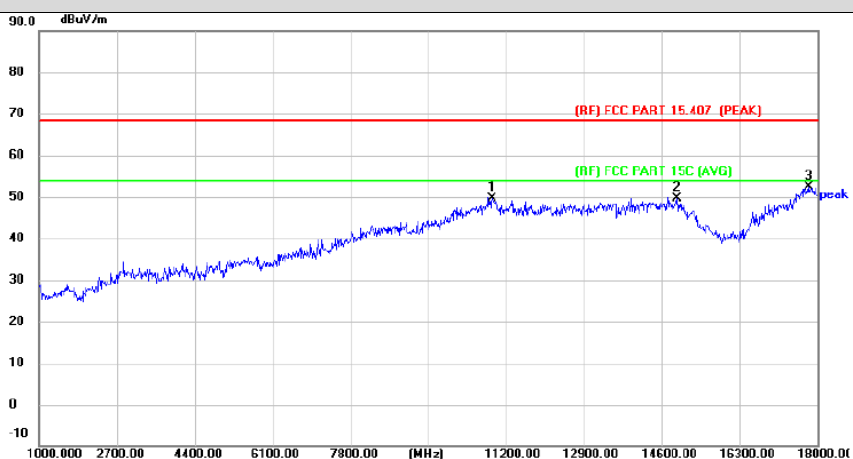

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10894.000 | 41.31 | 8.20 | 49.51 | 68.30 | -18.79 | peak | P |
| 2 | 14923.000 | 38.35 | 11.36 | 49.71 | 68.30 | -18.59 | peak | P |
| 3 * | 17796.000 | 35.59 | 16.67 | 52.26 | 68.30 | -16.04 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|----------------------------------|---------------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5250MHz | | |

Vertical

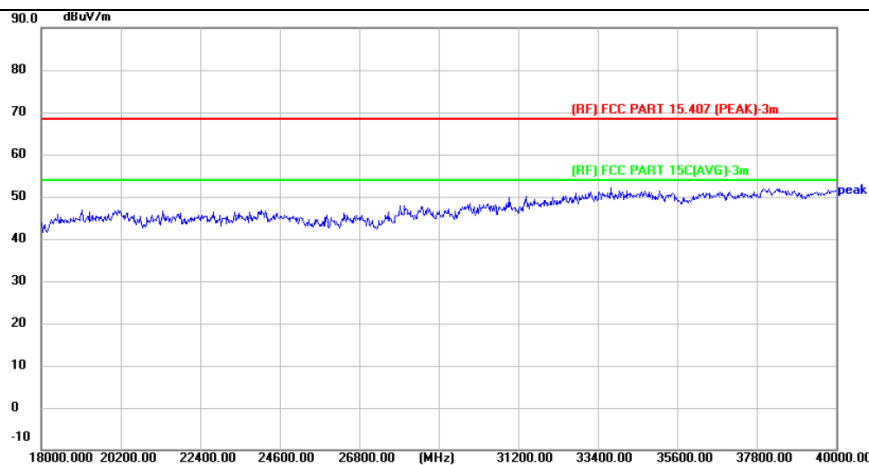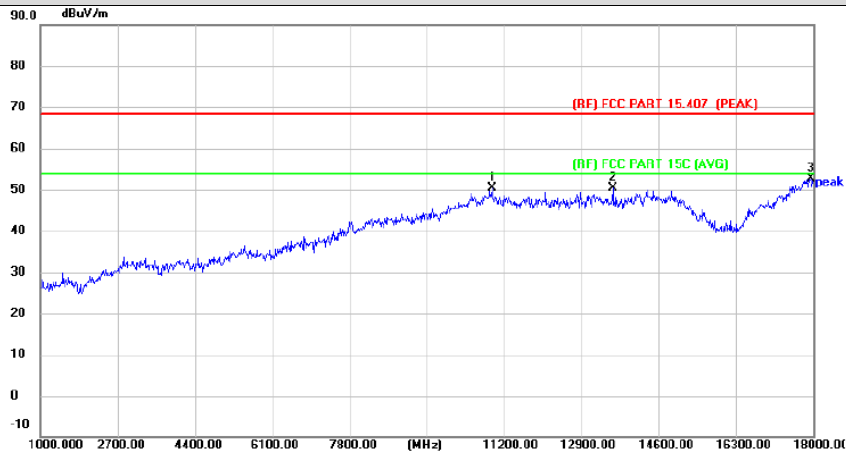

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10928.000 | 42.27 | 8.21 | 50.48 | 68.30 | -17.82 | peak | P |
| 2 | 13580.000 | 40.51 | 9.97 | 50.48 | 68.30 | -17.82 | peak | P |
| 3 * | 17932.000 | 34.96 | 17.61 | 52.57 | 68.30 | -15.73 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|----------------------------------|---------------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5570MHz | | |

Horizontal

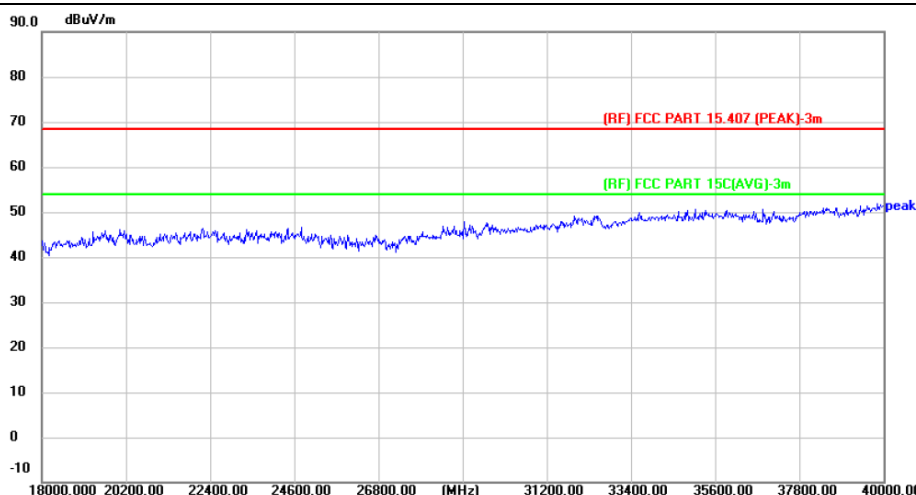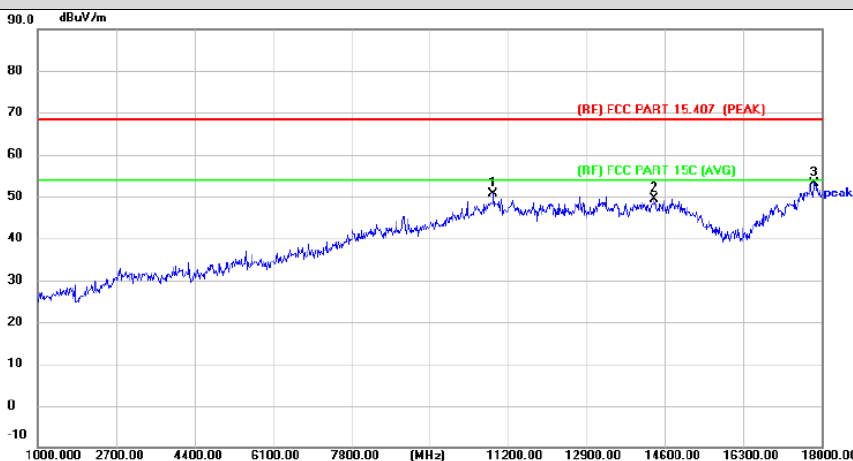

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10877.000 | 42.48 | 8.12 | 50.60 | 68.30 | -17.70 | peak | P |
| 2 | 14362.000 | 38.54 | 10.73 | 49.27 | 68.30 | -19.03 | peak | P |
| 3 * | 17830.000 | 36.25 | 16.95 | 53.20 | 68.30 | -15.10 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|----------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5570MHz | | |

Vertical

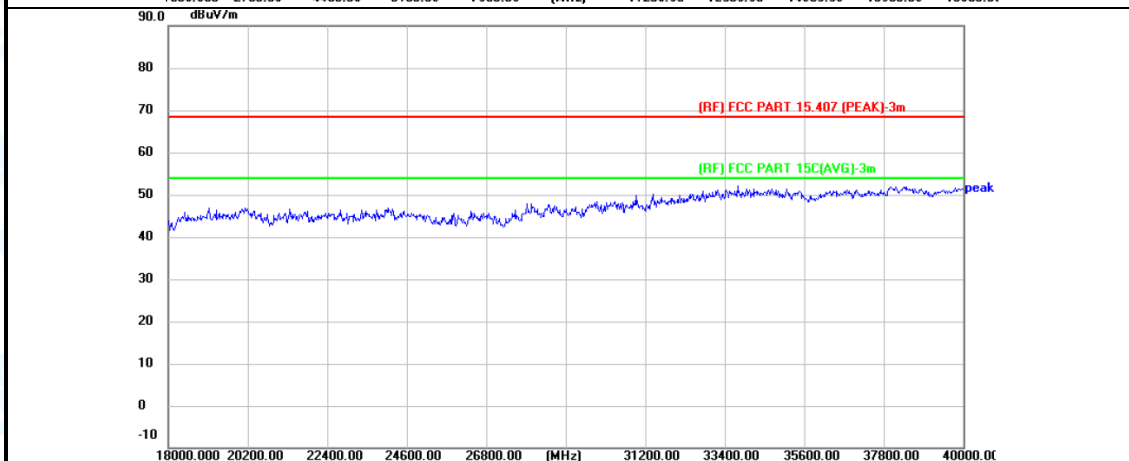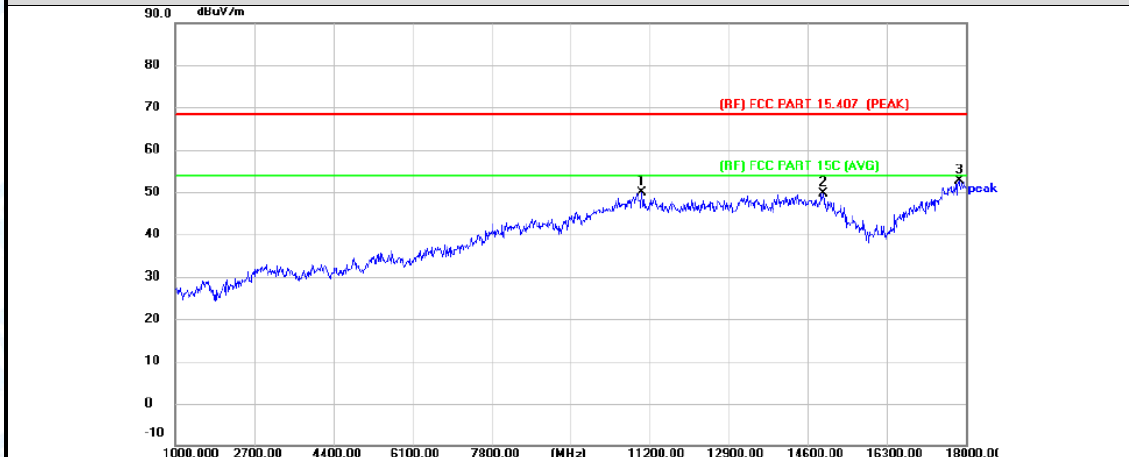

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11030.000 | 41.88 | 8.05 | 49.93 | 68.30 | -18.37 | peak | P |
| 2 | 14923.000 | 38.19 | 11.36 | 49.55 | 68.30 | -18.75 | peak | P |
| 3 * | 17847.000 | 35.57 | 17.08 | 52.65 | 68.30 | -15.65 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|---------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5250MHz | | |

Horizontal

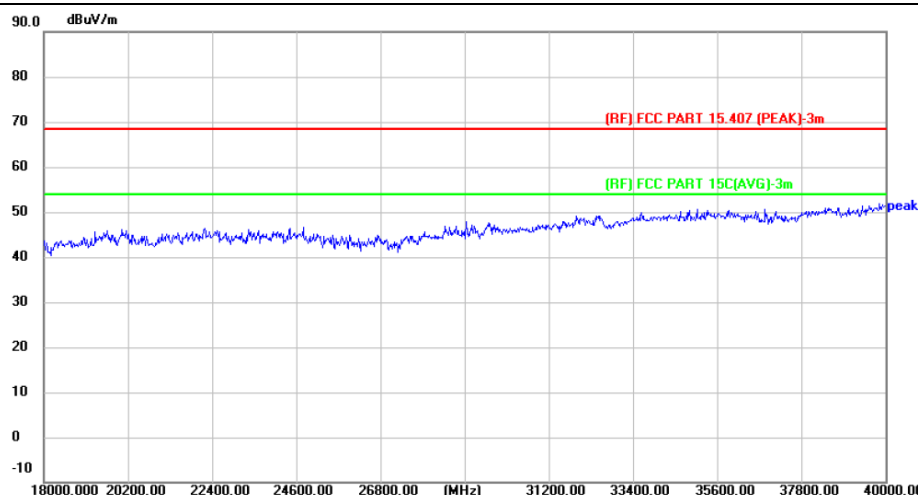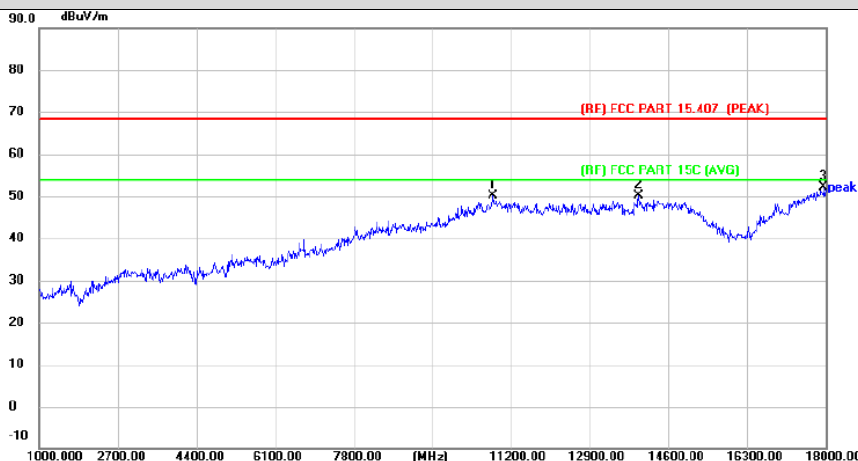

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10809.000 | 42.39 | 7.79 | 50.18 | 68.30 | -18.12 | peak | P |
| 2 | 13954.000 | 39.37 | 10.70 | 50.07 | 68.30 | -18.23 | peak | P |
| 3 * | 17949.000 | 34.57 | 17.66 | 52.23 | 68.30 | -16.07 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|---------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5250MHz | | |

Vertical

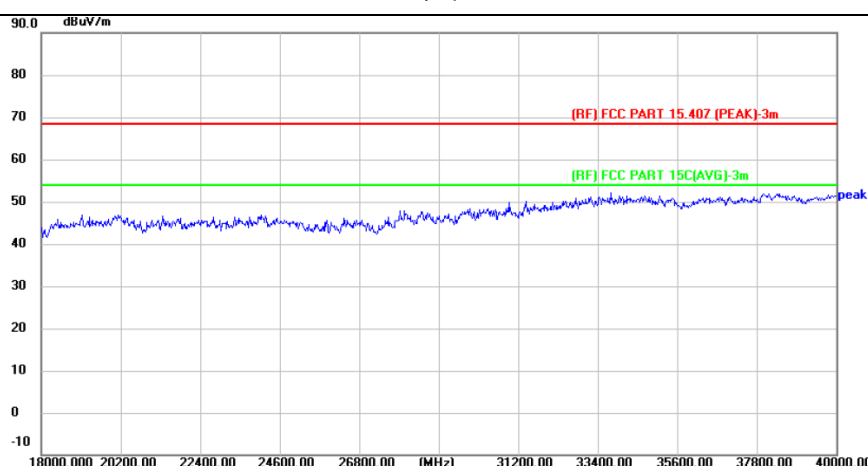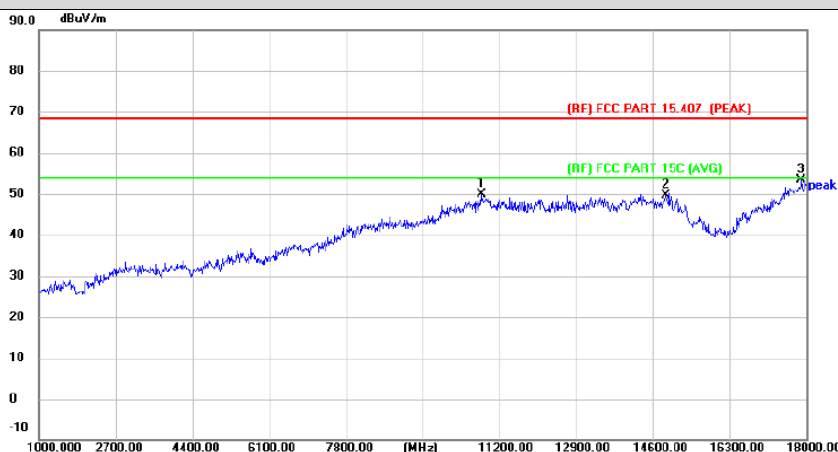

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10792.000 | 42.27 | 7.69 | 49.96 | 68.30 | -18.34 | peak | P |
| 2 | 14872.000 | 38.53 | 11.14 | 49.67 | 68.30 | -18.63 | peak | P |
| 3 * | 17881.000 | 35.95 | 17.36 | 53.31 | 68.30 | -14.99 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|---------------------------------|---------------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5570MHz | | |

Horizontal

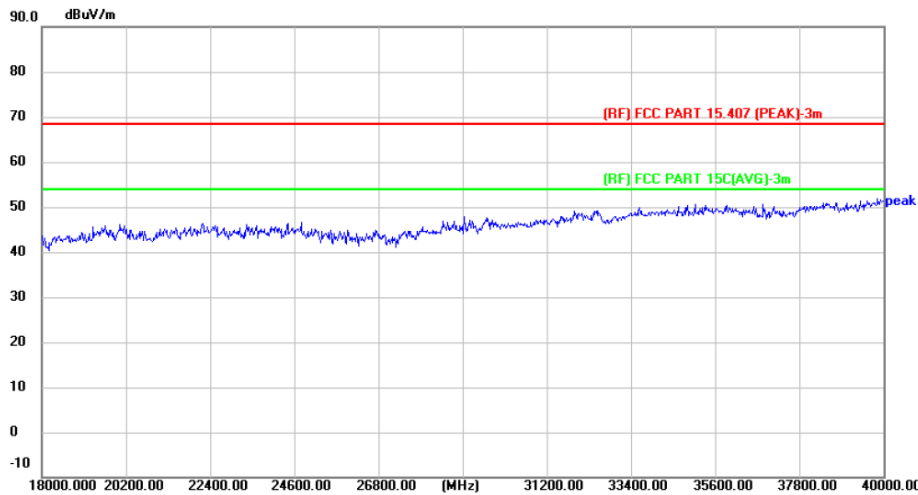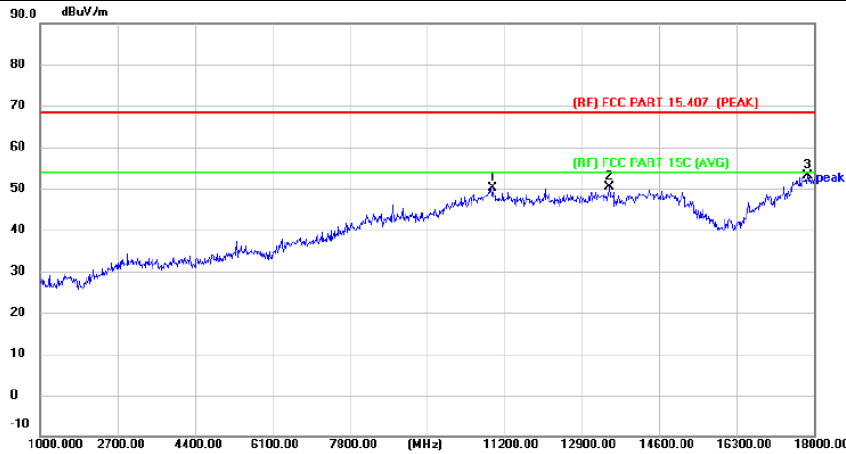

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10945.000 | 42.01 | 8.20 | 50.21 | 68.30 | -18.09 | peak | P |
| 2 | 13495.000 | 40.25 | 10.11 | 50.36 | 68.30 | -17.94 | peak | P |
| 3 * | 17847.000 | 35.94 | 17.08 | 53.02 | 68.30 | -15.28 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|---------------------------------|--------------------|-----|
| Temperature: | 24.3°C | Relative Humidity: | 45% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5570MHz | | |

Vertical

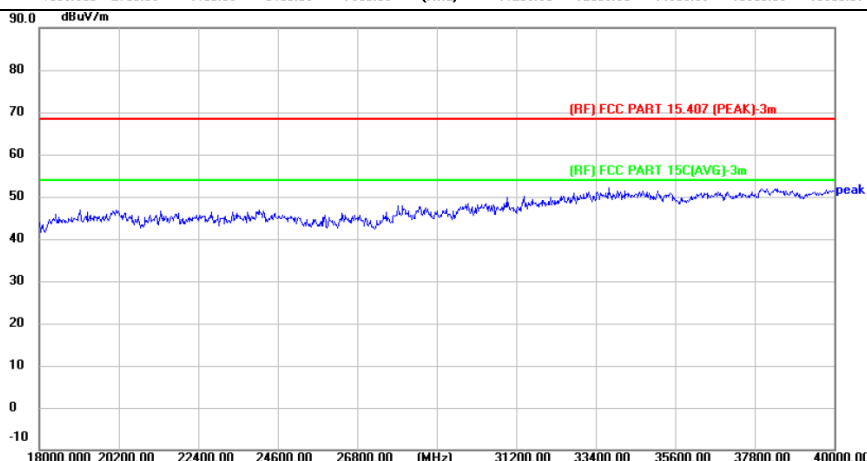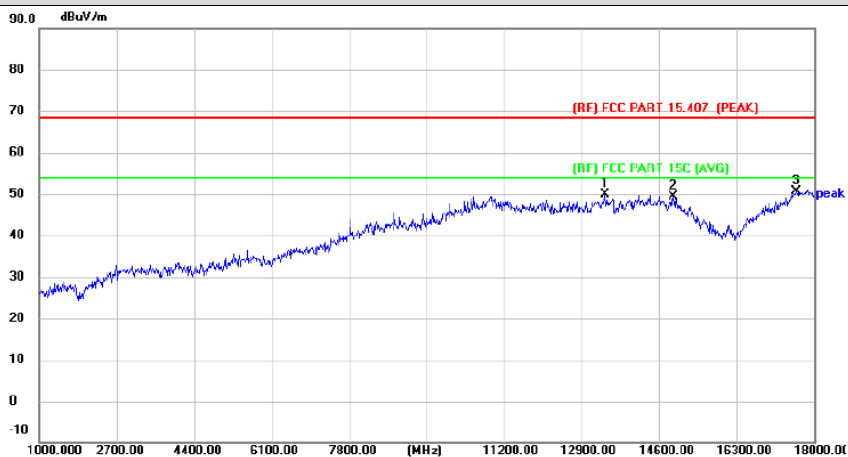

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 13410.000 | 39.80 | 10.17 | 49.97 | 68.30 | -18.33 | peak | P |
| 2 | 14906.000 | 38.13 | 11.37 | 49.50 | 68.30 | -18.80 | peak | P |
| 3 * | 17609.000 | 34.99 | 15.65 | 50.64 | 68.30 | -17.66 | peak | P |

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Attachment C-- Restricted Bands Requirement Test Data

-----Radiation Test

| | | | |
|---------------|------------------------------------|--------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5180 MHz (U-NII-1) | | |
| Remark: | | | |

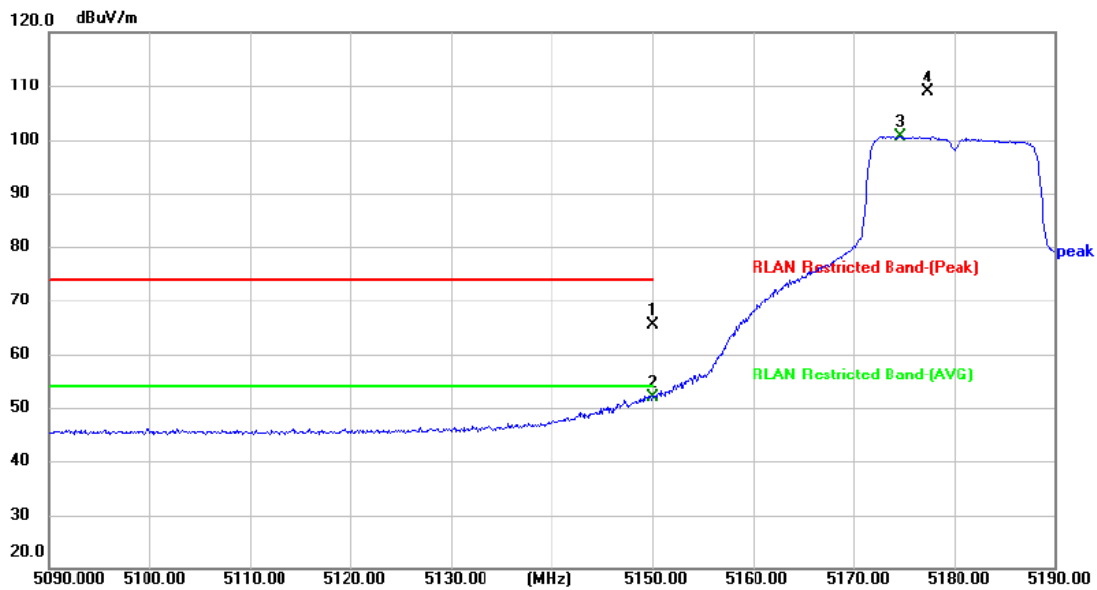


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 53.26 | 12.08 | 65.34 | 74.00 | -8.66 | peak | P |
| 2 * | 5150.000 | 39.83 | 12.08 | 51.91 | 54.00 | -2.09 | AVG | P |
| 3 | 5174.700 | 88.51 | 12.17 | 100.68 | | | AVG | |
| 4 | 5177.400 | 96.69 | 12.18 | 108.87 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|------------------------------------|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5180 MHz (U-NII-1) | | |
| Remark: | | | |

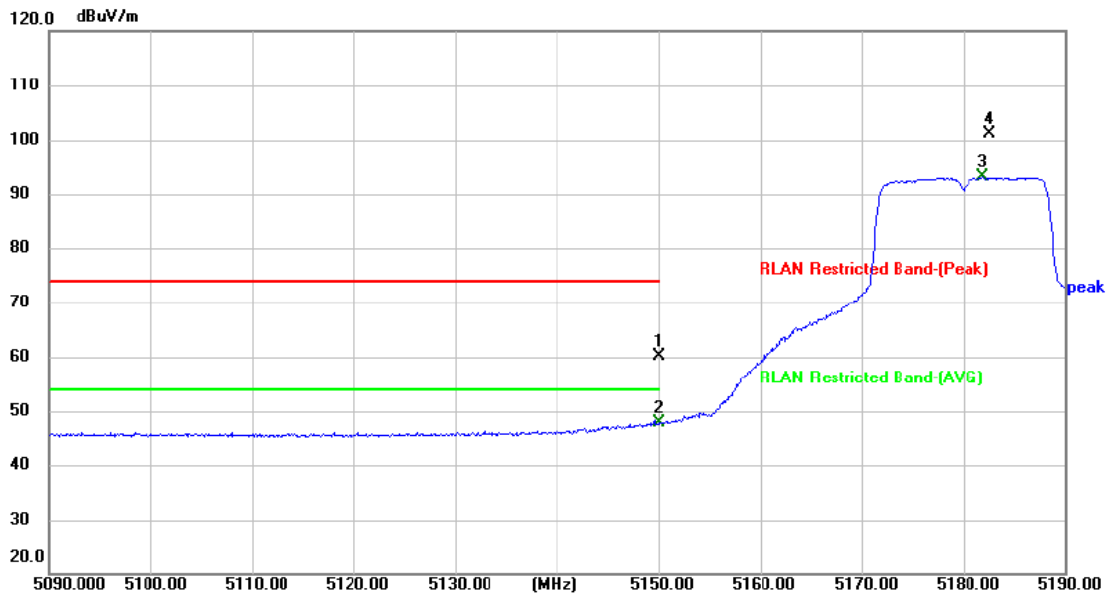


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 48.07 | 12.08 | 60.15 | 74.00 | -13.85 | peak | P |
| 2 * | 5150.000 | 35.71 | 12.08 | 47.79 | 54.00 | -6.21 | AVG | P |
| 3 | 5181.900 | 80.83 | 12.19 | 93.02 | | | AVG | |
| 4 | 5182.600 | 88.94 | 12.19 | 101.13 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|-------------------------------------|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5320 MHz (U-NII-2A) | | |
| Remark: | | | |

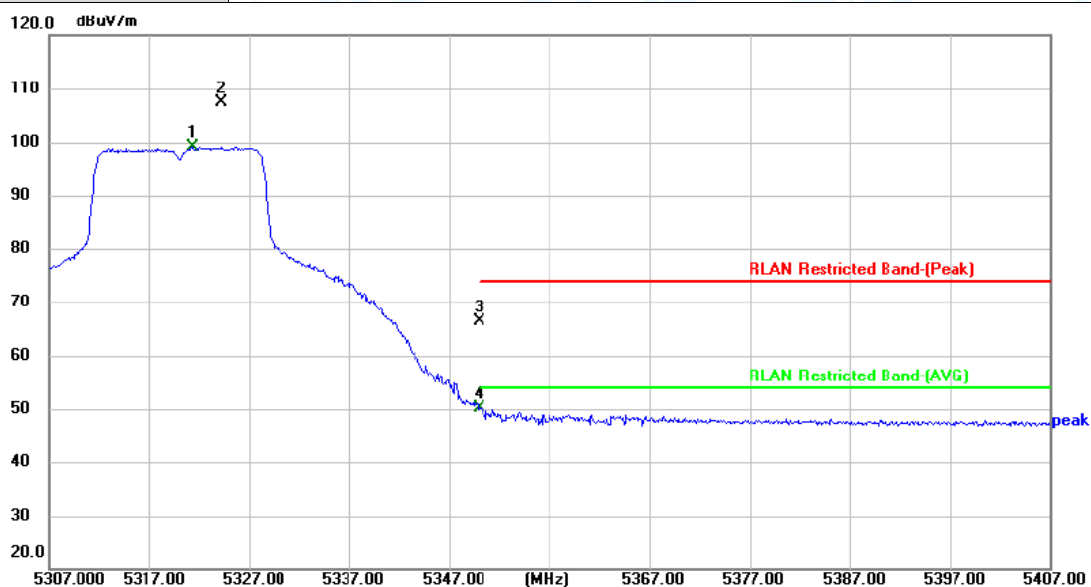


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5321.300 | 86.54 | 12.52 | 99.06 | | | AVG | |
| 2 | 5324.200 | 94.83 | 12.54 | 107.37 | | | peak | |
| 3 | 5350.000 | 53.71 | 12.68 | 66.39 | 74.00 | -7.61 | peak | P |
| 4 * | 5350.000 | 37.39 | 12.68 | 50.07 | 54.00 | -3.93 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|---------------|-------------------------------------|--------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5320 MHz (U-NII-2A) | | |
| Remark: | | | |

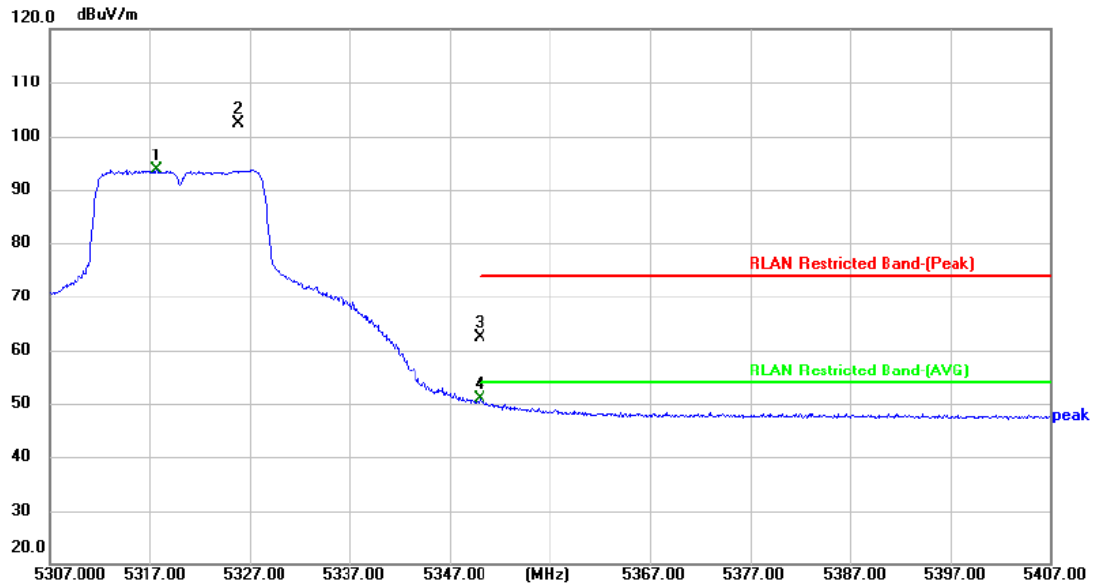


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5317.700 | 81.16 | 12.50 | 93.66 | | | AVG | |
| 2 | 5325.800 | 89.74 | 12.54 | 102.28 | | | peak | |
| 3 | 5350.000 | 49.67 | 12.68 | 62.35 | 74.00 | -11.65 | peak | P |
| 4 * | 5350.000 | 38.08 | 12.68 | 50.76 | 54.00 | -3.24 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) | | |
| Remark: | | | |

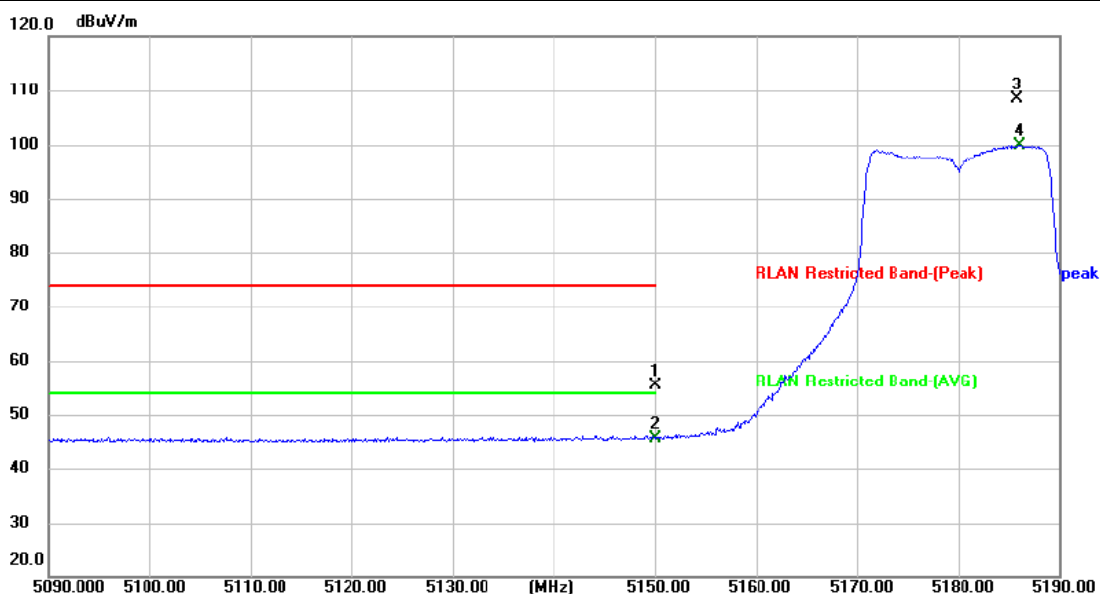


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 43.18 | 12.08 | 55.26 | 74.00 | -18.74 | peak | P |
| 2 * | 5150.000 | 33.52 | 12.08 | 45.60 | 54.00 | -8.40 | AVG | P |
| 3 | 5185.800 | 96.29 | 12.20 | 108.49 | | | peak | |
| 4 | 5186.000 | 87.79 | 12.20 | 99.99 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) | | |
| Remark: | | | |

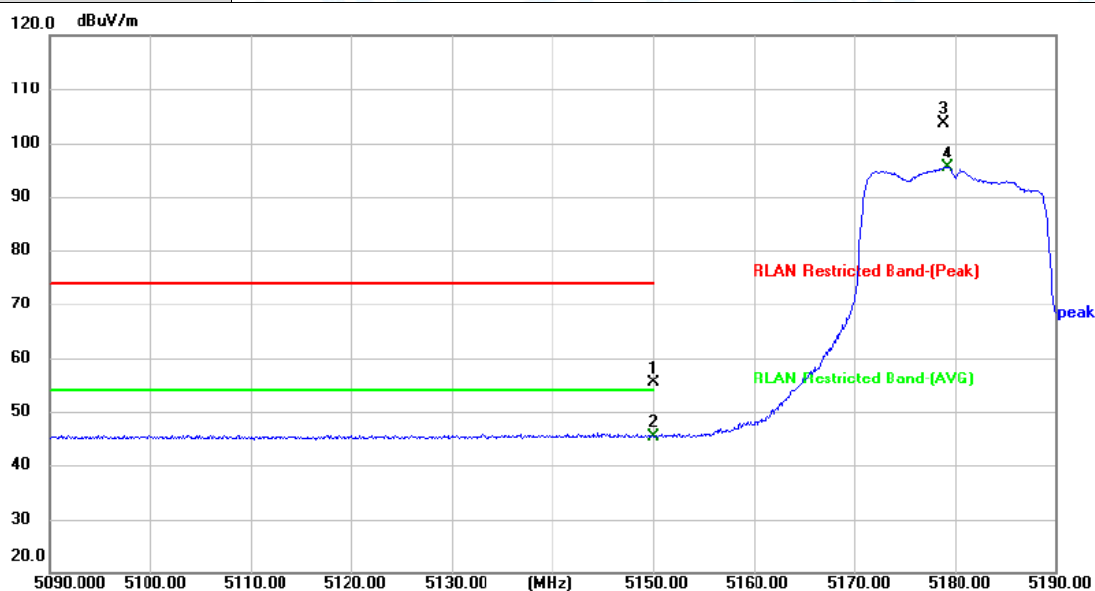


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 43.33 | 12.08 | 55.41 | 74.00 | -18.59 | peak | P |
| 2 * | 5150.000 | 33.39 | 12.08 | 45.47 | 54.00 | -8.53 | AVG | P |
| 3 | 5178.800 | 91.41 | 12.18 | 103.59 | | | peak | |
| 4 | 5179.200 | 83.30 | 12.18 | 95.48 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5320MHz (U-NII-2A) | | |
| Remark: | | | |

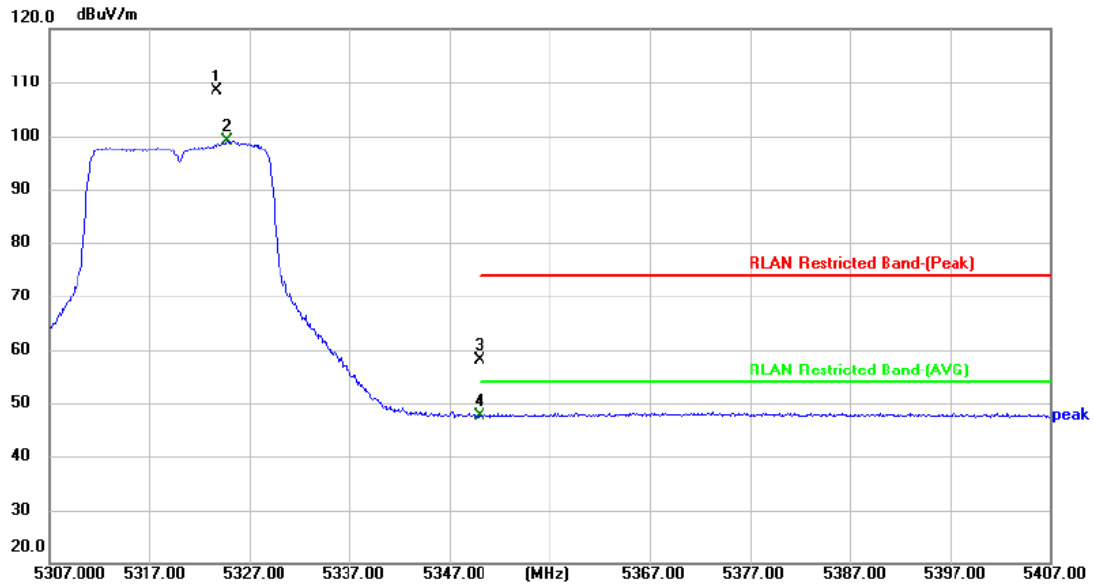


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5323.700 | 95.83 | 12.54 | 108.37 | | | peak | |
| 2 | 5324.800 | 86.68 | 12.54 | 99.22 | | | AVG | |
| 3 | 5350.000 | 45.39 | 12.68 | 58.07 | 74.00 | -15.93 | peak | P |
| 4 * | 5350.000 | 35.03 | 12.68 | 47.71 | 54.00 | -6.29 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A) | | |
| Remark: | | | |

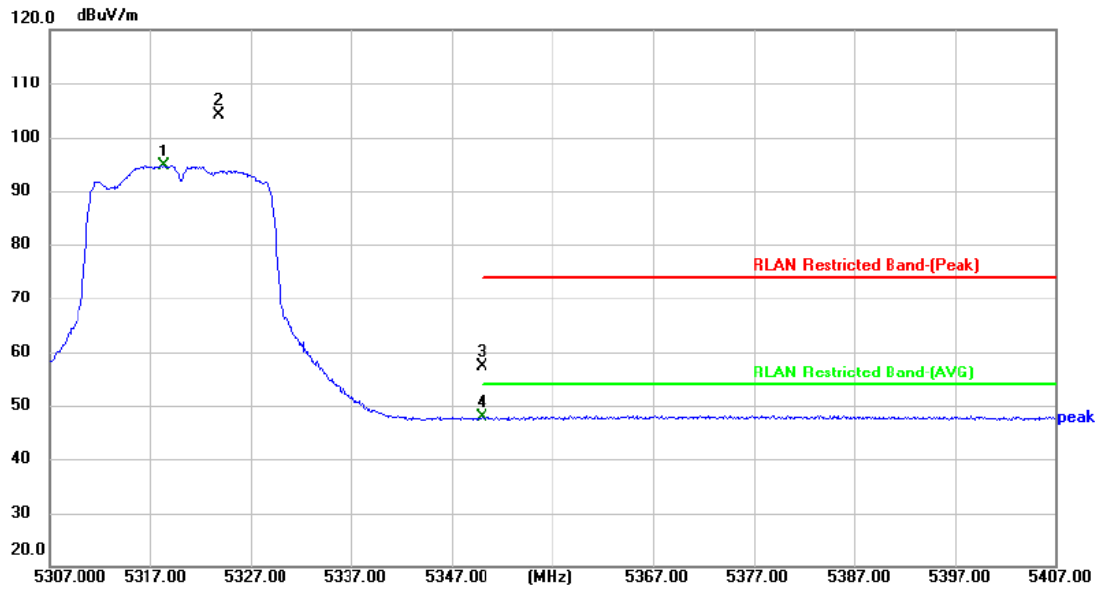


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5318.400 | 82.13 | 12.50 | 94.63 | | | AVG | |
| 2 | 5323.800 | 91.67 | 12.54 | 104.21 | | | peak | |
| 3 | 5350.000 | 44.63 | 12.68 | 57.31 | 74.00 | -16.69 | peak | P |
| 4 * | 5350.000 | 35.11 | 12.68 | 47.79 | 54.00 | -6.21 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) | | |
| Remark: | | | |

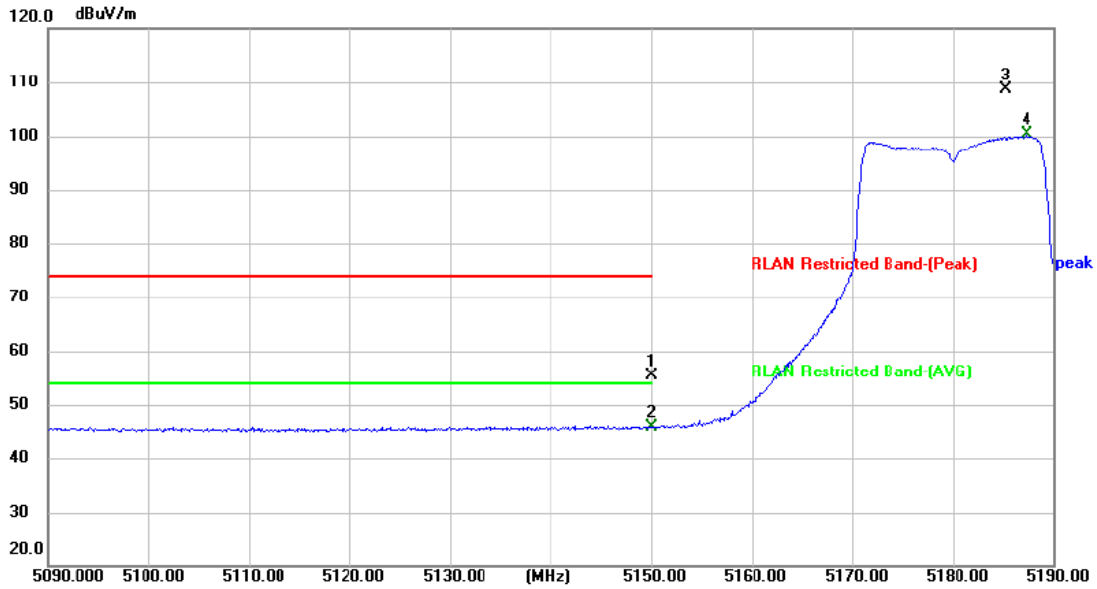


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 43.31 | 12.08 | 55.39 | 74.00 | -18.61 | peak | P |
| 2 * | 5150.000 | 33.80 | 12.08 | 45.88 | 54.00 | -8.12 | AVG | P |
| 3 | 5185.200 | 96.36 | 12.19 | 108.55 | | | peak | |
| 4 | 5187.400 | 88.06 | 12.20 | 100.26 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) | | |
| Remark: | | | |

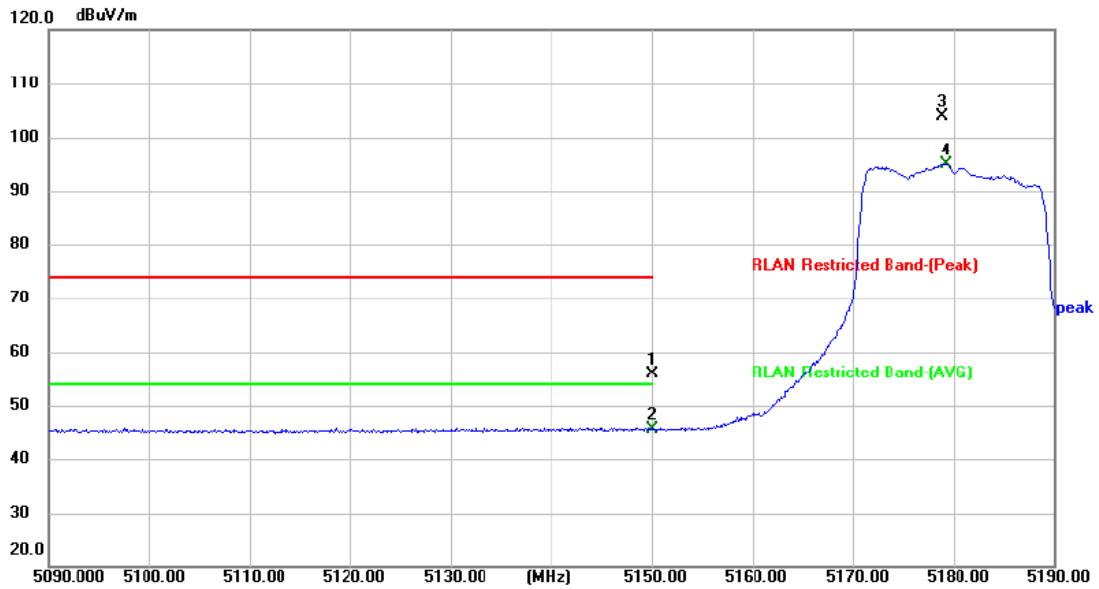


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 43.92 | 12.08 | 56.00 | 74.00 | -18.00 | peak | P |
| 2 * | 5150.000 | 33.47 | 12.08 | 45.55 | 54.00 | -8.45 | AVG | P |
| 3 | 5178.900 | 91.74 | 12.18 | 103.92 | | | peak | |
| 4 | 5179.200 | 82.73 | 12.18 | 94.91 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) | | |
| Remark: | | | |

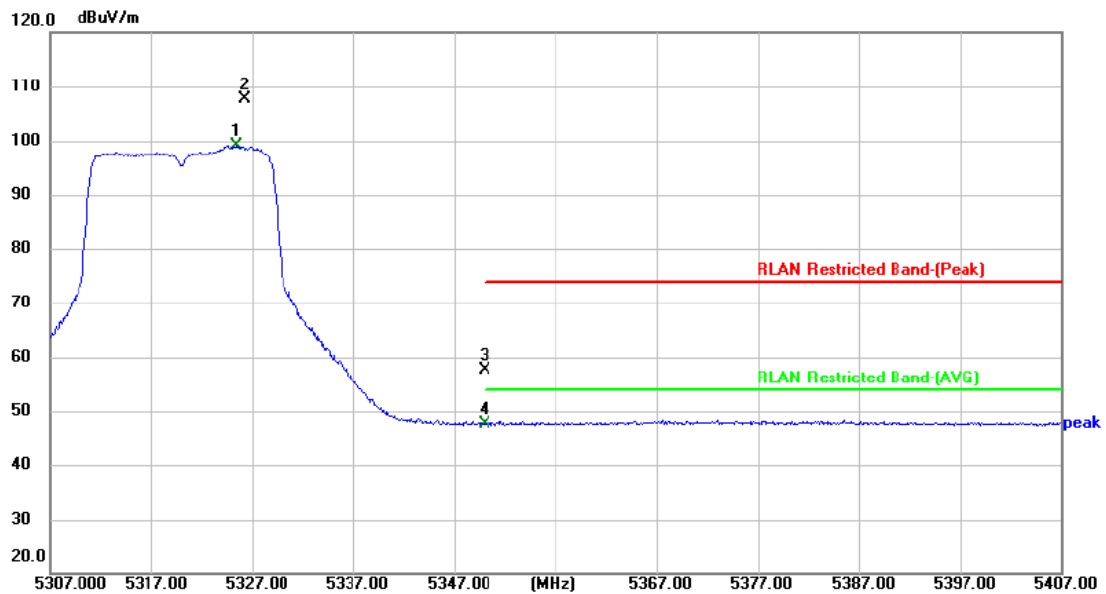


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5325.500 | 86.65 | 12.54 | 99.19 | | | AVG | |
| 2 | 5326.200 | 94.97 | 12.55 | 107.52 | | | peak | |
| 3 | 5350.000 | 44.88 | 12.68 | 57.56 | 74.00 | -16.44 | peak | P |
| 4 * | 5350.000 | 34.98 | 12.68 | 47.66 | 54.00 | -6.34 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) | | |
| Remark: | | | |

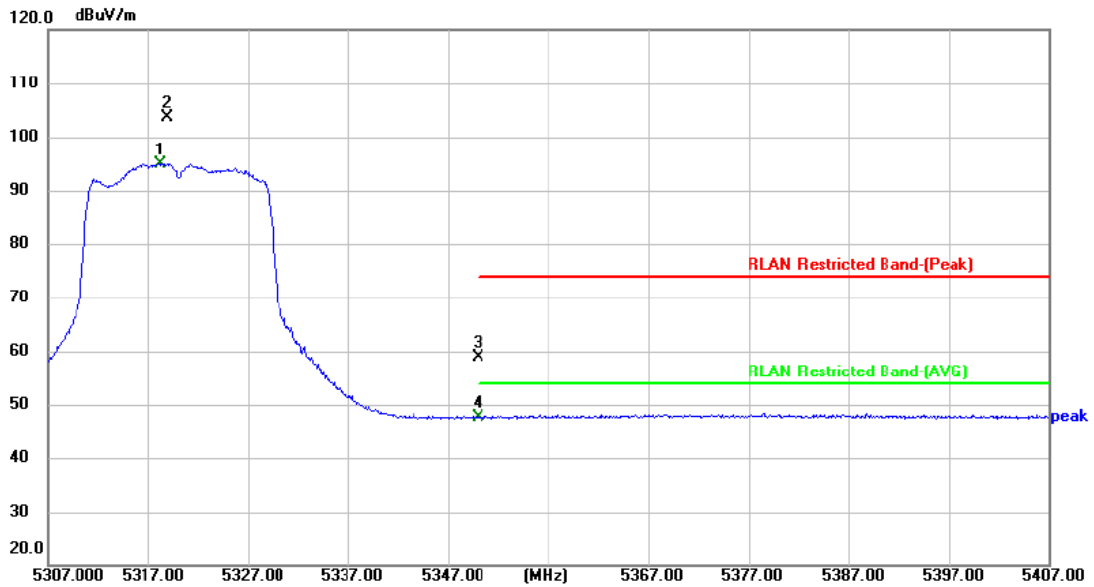


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5318.300 | 82.47 | 12.50 | 94.97 | | | AVG | |
| 2 | 5318.900 | 91.21 | 12.51 | 103.72 | | | peak | |
| 3 | 5350.000 | 46.09 | 12.68 | 58.77 | 74.00 | -15.23 | peak | P |
| 4 * | 5350.000 | 35.05 | 12.68 | 47.73 | 54.00 | -6.27 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1) | | |
| Remark: | | | |

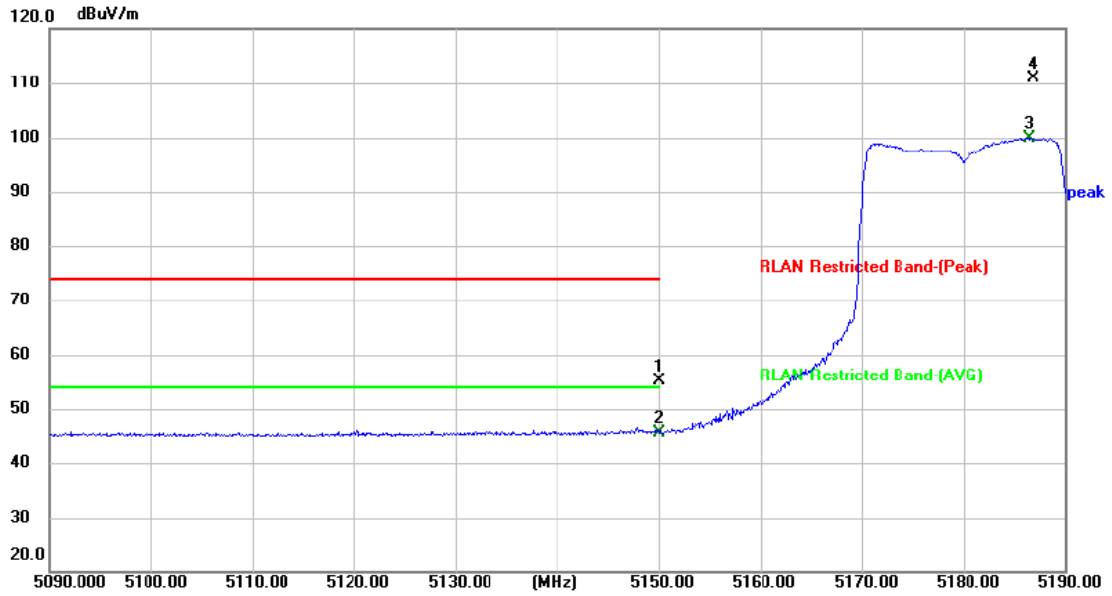


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 43.16 | 12.08 | 55.24 | 74.00 | -18.76 | peak | P |
| 2 * | 5150.000 | 33.63 | 12.08 | 45.71 | 54.00 | -8.29 | AVG | P |
| 3 | 5186.500 | 87.66 | 12.20 | 99.86 | | | AVG | |
| 4 | 5186.900 | 98.61 | 12.20 | 110.81 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1) | | |
| Remark: | | | |

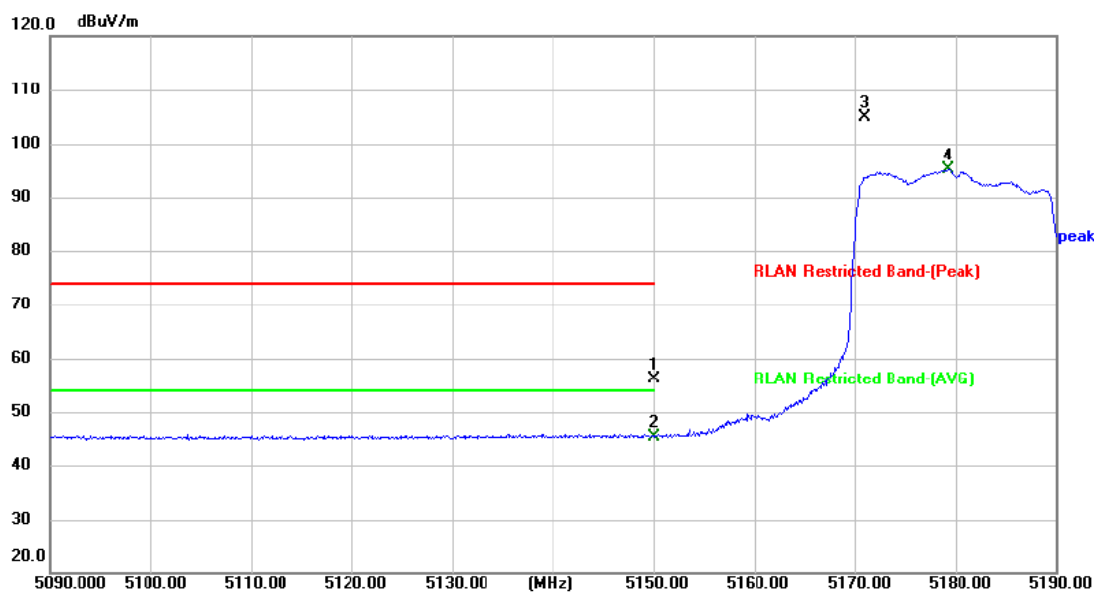


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 44.16 | 12.08 | 56.24 | 74.00 | -17.76 | peak | P |
| 2 * | 5150.000 | 33.32 | 12.08 | 45.40 | 54.00 | -8.60 | AVG | P |
| 3 | 5171.000 | 92.65 | 12.16 | 104.81 | | | peak | |
| 4 | 5179.300 | 82.98 | 12.18 | 95.16 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5320 MHz (U-NII-2A) | | |
| Remark: | | | |

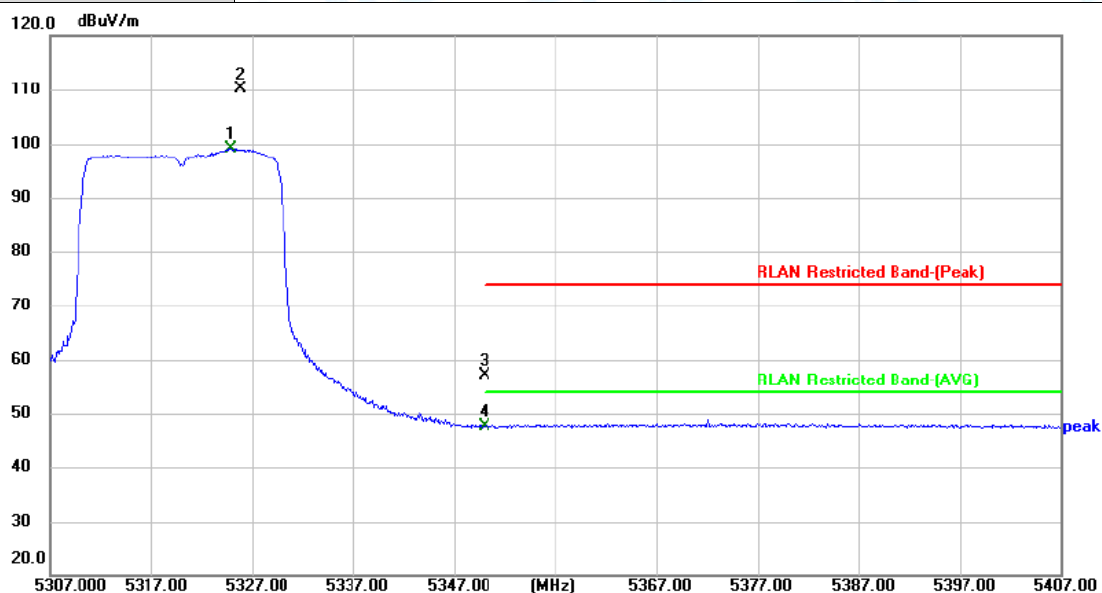


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5324.900 | 86.56 | 12.54 | 99.10 | | | AVG | |
| 2 | 5325.800 | 97.51 | 12.54 | 110.05 | | | peak | |
| 3 | 5350.000 | 44.46 | 12.68 | 57.14 | 74.00 | -16.86 | peak | P |
| 4 * | 5350.000 | 34.92 | 12.68 | 47.60 | 54.00 | -6.40 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5320 MHz (U-NII-2A) | | |
| Remark: | | | |

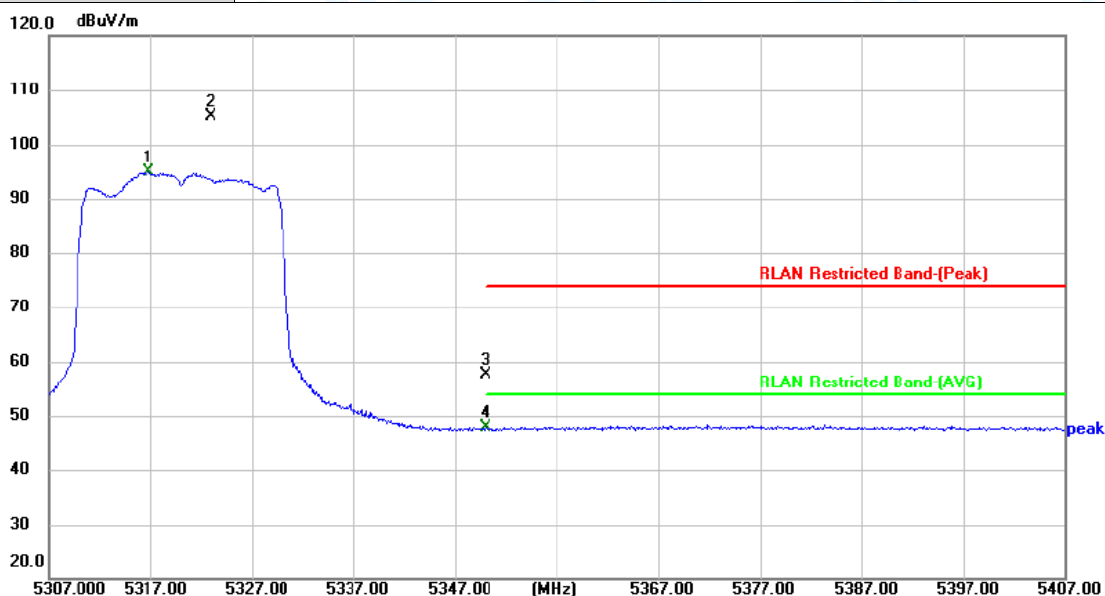


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5316.800 | 82.26 | 12.50 | 94.76 | | | AVG | |
| 2 | 5322.900 | 92.66 | 12.53 | 105.19 | | | peak | |
| 3 | 5350.000 | 44.95 | 12.68 | 57.63 | 74.00 | -16.37 | peak | P |
| 4 * | 5350.000 | 35.14 | 12.68 | 47.82 | 54.00 | -6.18 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) | | |
| Remark: | | | |

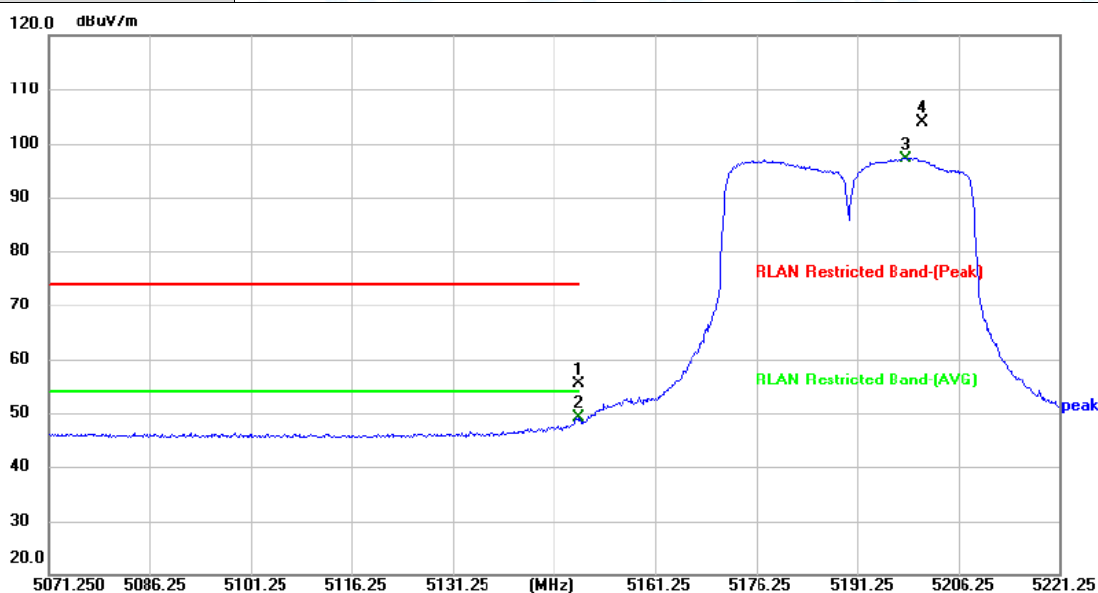


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 43.31 | 12.08 | 55.39 | 74.00 | -18.61 | peak | P |
| 2 * | 5150.000 | 36.96 | 12.08 | 49.04 | 54.00 | -4.96 | AVG | P |
| 3 | 5198.450 | 84.97 | 12.25 | 97.22 | | | AVG | |
| 4 | 5200.850 | 91.72 | 12.25 | 103.97 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) | | |
| Remark: | | | |

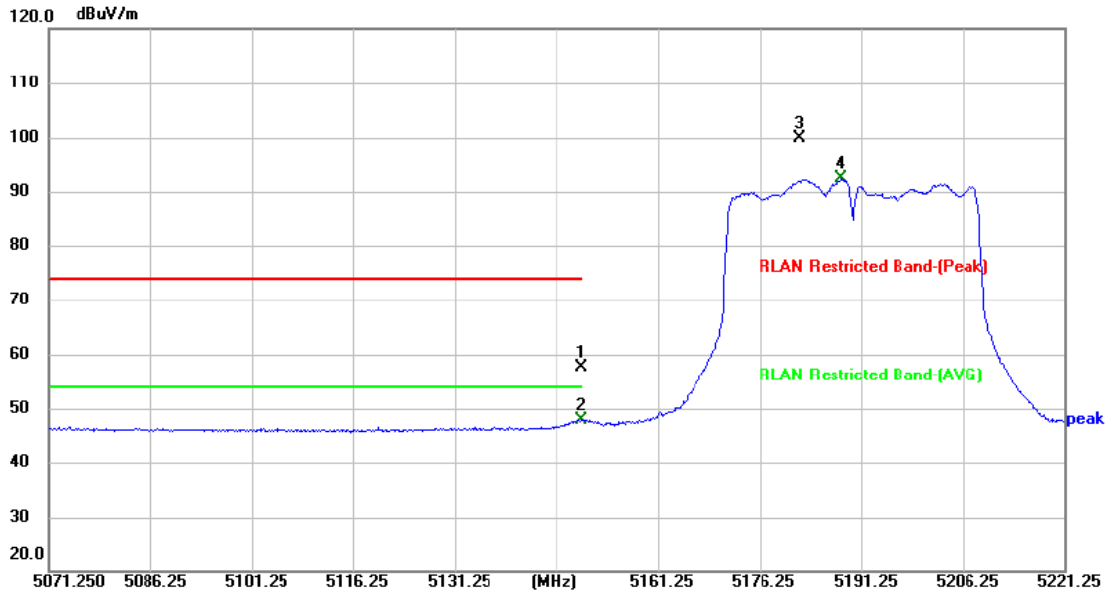


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 45.65 | 12.08 | 57.73 | 74.00 | -16.27 | peak | P |
| 2 * | 5150.000 | 35.78 | 12.08 | 47.86 | 54.00 | -6.14 | AVG | P |
| 3 | 5182.100 | 87.60 | 12.19 | 99.79 | | | peak | |
| 4 | 5188.400 | 80.06 | 12.21 | 92.27 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) | | |
| Remark: | | | |

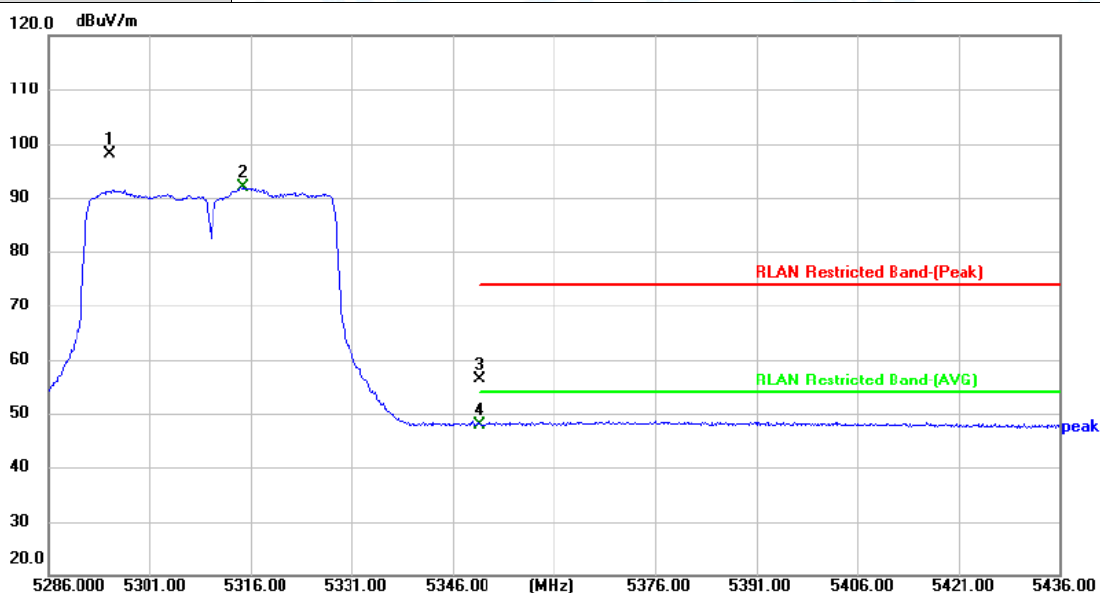


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5295.000 | 85.85 | 12.40 | 98.25 | | | peak | |
| 2 | 5314.950 | 79.39 | 12.49 | 91.88 | | | AVG | |
| 3 | 5350.000 | 43.61 | 12.68 | 56.29 | 74.00 | -17.71 | peak | P |
| 4 * | 5350.000 | 35.27 | 12.68 | 47.95 | 54.00 | -6.05 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) | | |
| Remark: | | | |

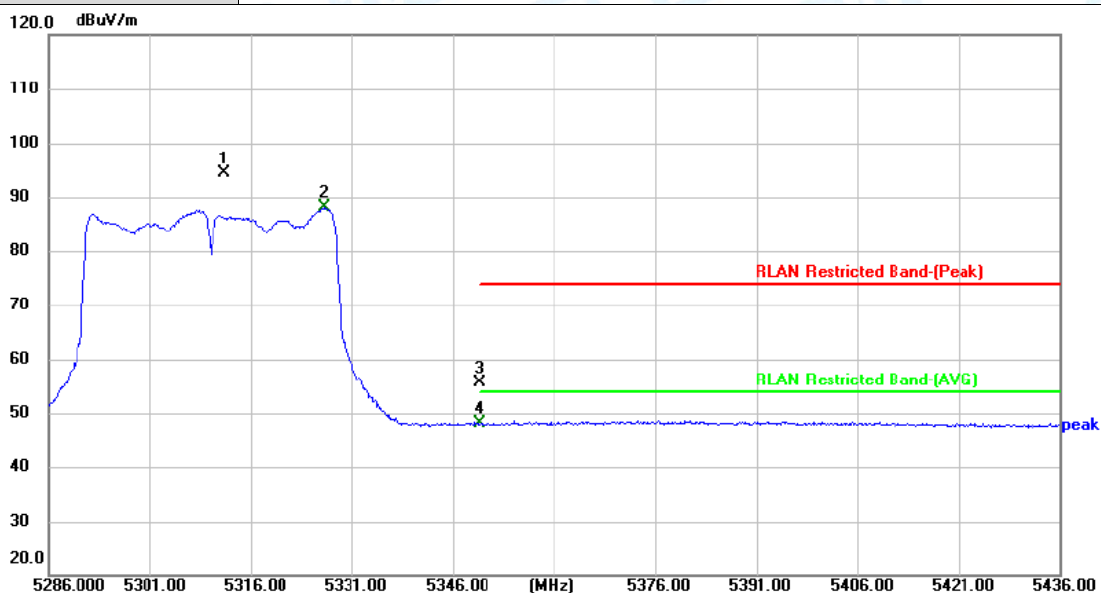


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5312.100 | 81.99 | 12.47 | 94.46 | | | peak | |
| 2 | 5326.950 | 75.60 | 12.55 | 88.15 | | | AVG | |
| 3 | 5350.000 | 43.03 | 12.68 | 55.71 | 74.00 | -18.29 | peak | P |
| 4 * | 5350.000 | 35.44 | 12.68 | 48.12 | 54.00 | -5.88 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) | | |
| Remark: | | | |

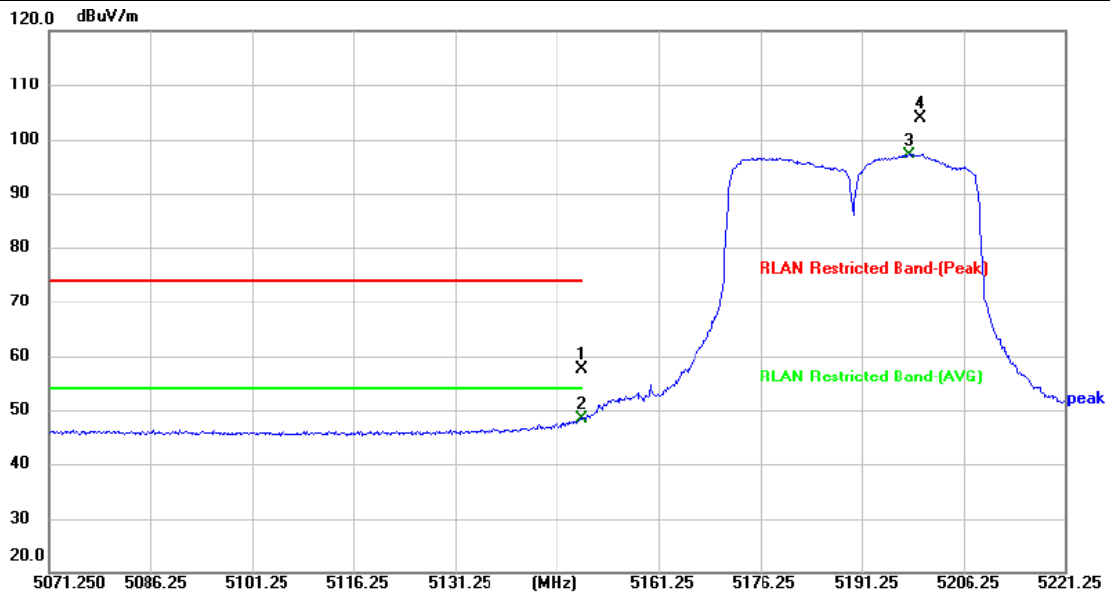


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 45.47 | 12.08 | 57.55 | 74.00 | -16.45 | peak | P |
| 2 * | 5150.000 | 36.26 | 12.08 | 48.34 | 54.00 | -5.66 | AVG | P |
| 3 | 5198.300 | 84.95 | 12.25 | 97.20 | | | AVG | |
| 4 | 5199.950 | 91.66 | 12.25 | 103.91 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) | | |
| Remark: | | | |

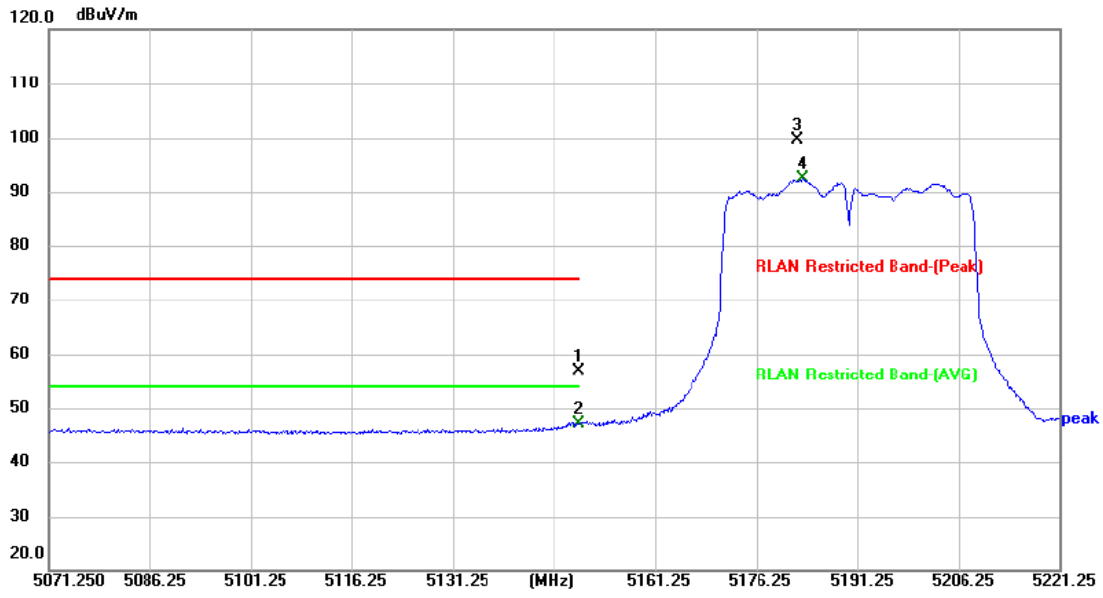


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 44.86 | 12.08 | 56.94 | 74.00 | -17.06 | peak | P |
| 2 * | 5150.000 | 35.10 | 12.08 | 47.18 | 54.00 | -6.82 | AVG | P |
| 3 | 5182.400 | 87.37 | 12.19 | 99.56 | | | peak | |
| 4 | 5183.150 | 80.07 | 12.19 | 92.26 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) | | |
| Remark: | | | |

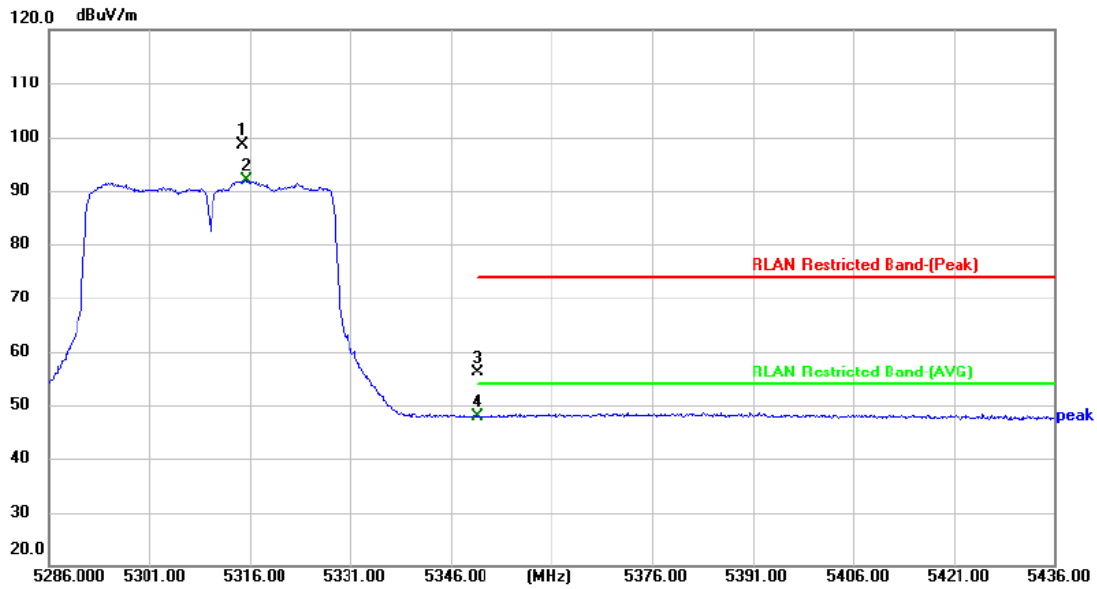


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5314.950 | 86.14 | 12.49 | 98.63 | | | peak | |
| 2 | 5315.550 | 79.39 | 12.50 | 91.89 | | | AVG | |
| 3 | 5350.000 | 43.55 | 12.68 | 56.23 | 74.00 | -17.77 | peak | P |
| 4 * | 5350.000 | 35.22 | 12.68 | 47.90 | 54.00 | -6.10 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) | | |
| Remark: | | | |

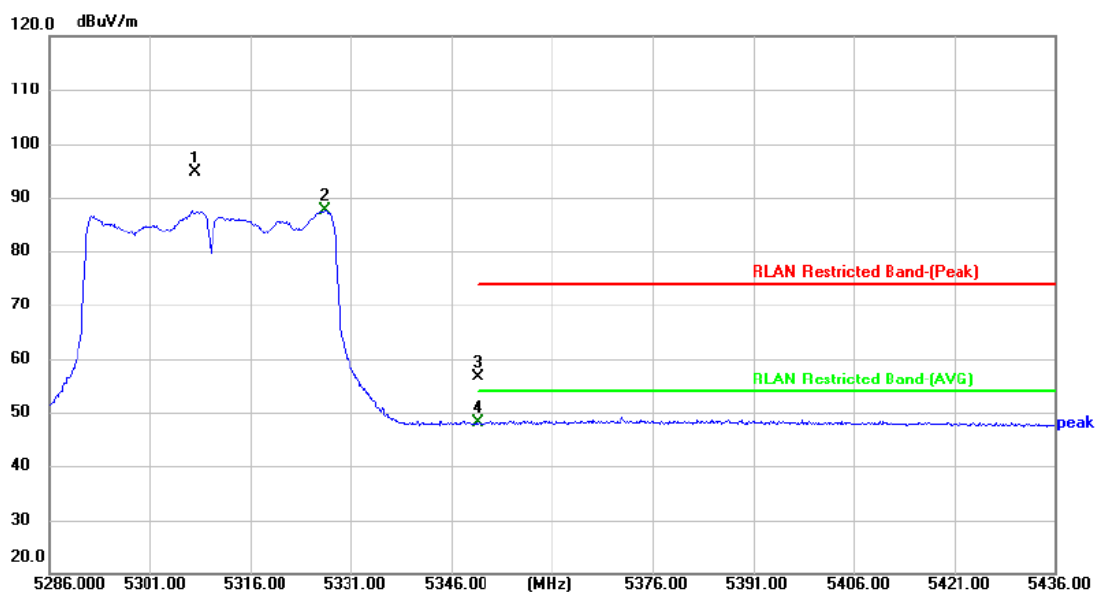


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5307.600 | 82.26 | 12.44 | 94.70 | | | peak | |
| 2 | 5327.100 | 75.06 | 12.56 | 87.62 | | | AVG | |
| 3 | 5350.000 | 43.83 | 12.68 | 56.51 | 74.00 | -17.49 | peak | P |
| 4 * | 5350.000 | 35.41 | 12.68 | 48.09 | 54.00 | -5.91 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) | | |
| Remark: | | | |

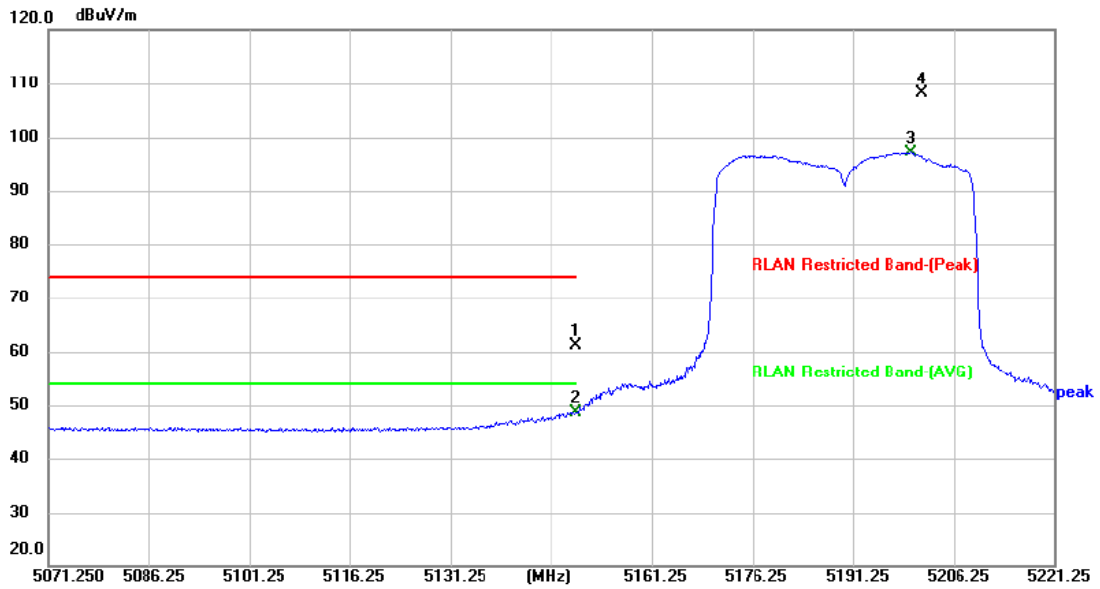


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 48.97 | 12.08 | 61.05 | 74.00 | -12.95 | peak | P |
| 2 * | 5150.000 | 36.51 | 12.08 | 48.59 | 54.00 | -5.41 | AVG | P |
| 3 | 5199.950 | 84.76 | 12.25 | 97.01 | | | AVG | |
| 4 | 5201.450 | 95.96 | 12.25 | 108.21 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) | | |
| Remark: | | | |

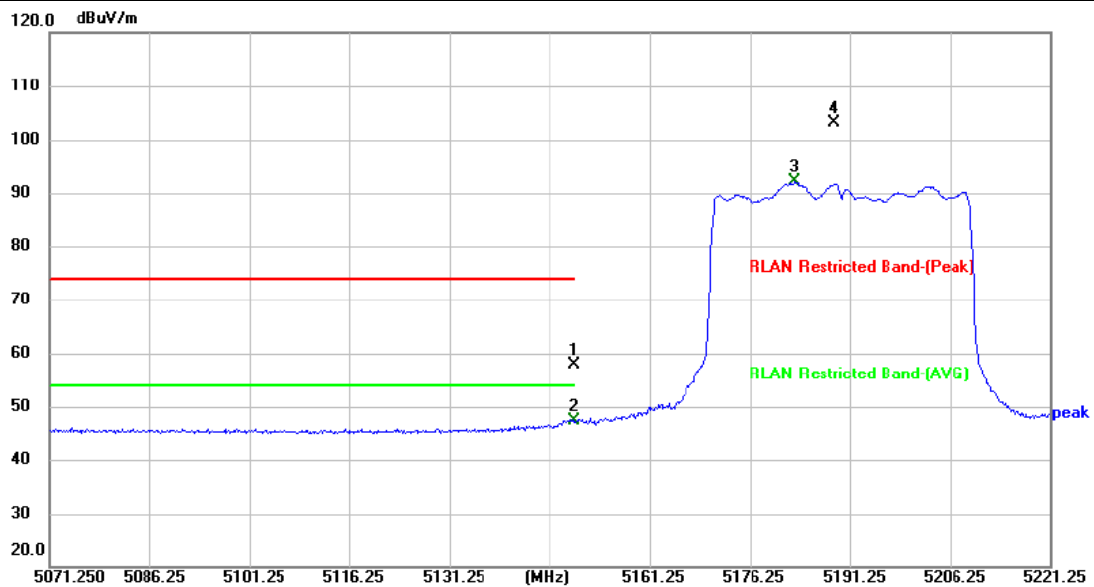


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 45.76 | 12.08 | 57.84 | 74.00 | -16.16 | peak | P |
| 2 * | 5150.000 | 35.18 | 12.08 | 47.26 | 54.00 | -6.74 | AVG | P |
| 3 | 5183.000 | 79.87 | 12.19 | 92.06 | | | AVG | |
| 4 | 5189.000 | 90.97 | 12.21 | 103.18 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5310 MHz (U-NII-2A) | | |
| Remark: | | | |

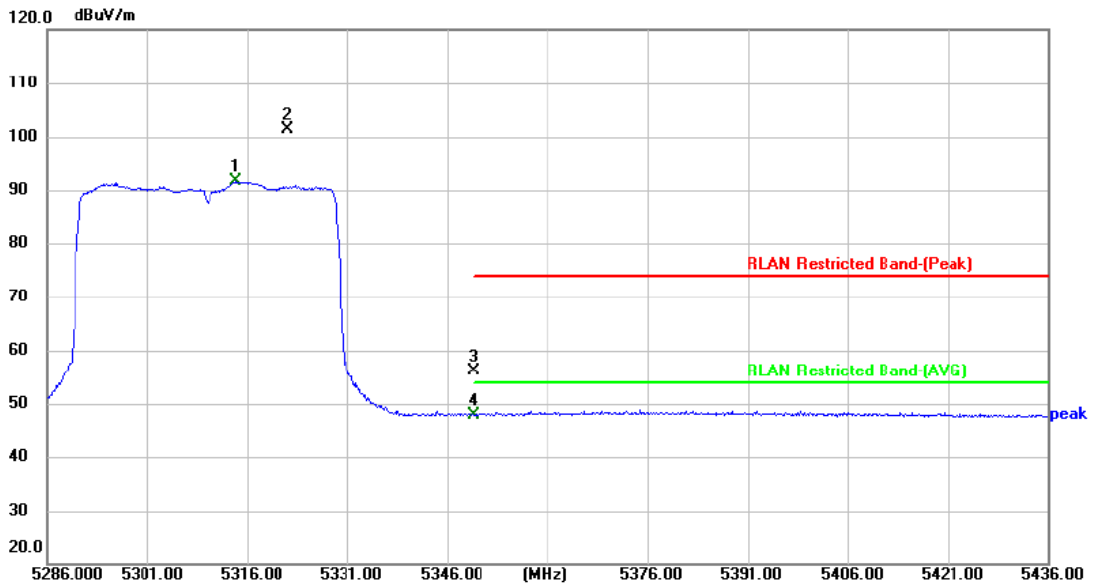


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5314.200 | 79.15 | 12.48 | 91.63 | | | AVG | |
| 2 | 5322.150 | 88.94 | 12.52 | 101.46 | | | peak | |
| 3 | 5350.000 | 43.44 | 12.68 | 56.12 | 74.00 | -17.88 | peak | P |
| 4 * | 5350.000 | 35.30 | 12.68 | 47.98 | 54.00 | -6.02 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5310 MHz (U-NII-2A) | | |
| Remark: | | | |

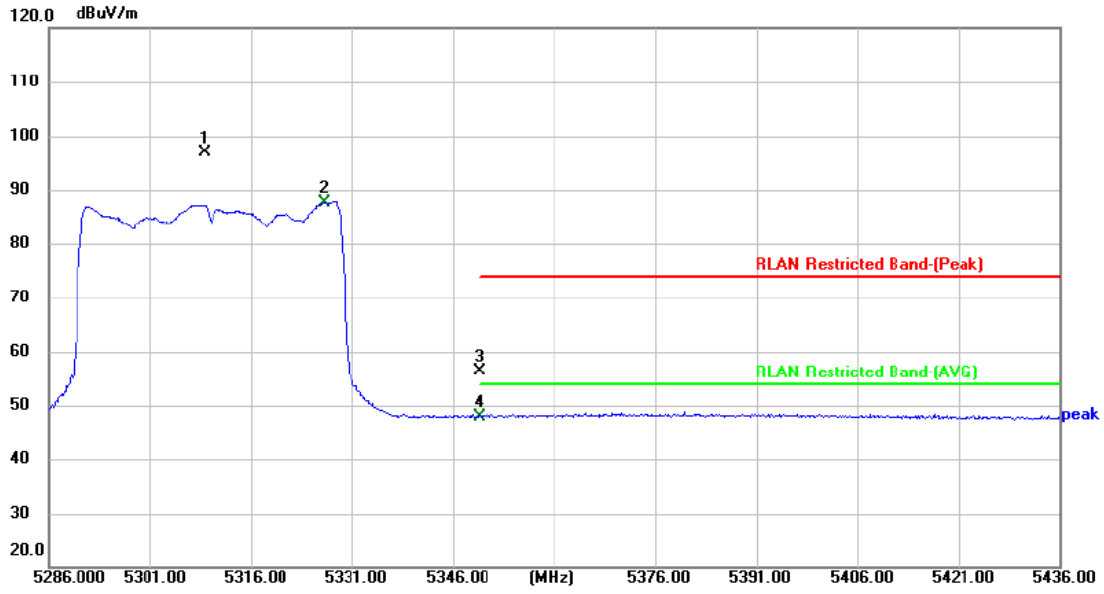


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5309.100 | 84.34 | 12.45 | 96.79 | | | peak | |
| 2 | 5326.950 | 75.19 | 12.55 | 87.74 | | | AVG | |
| 3 | 5350.000 | 43.63 | 12.68 | 56.31 | 74.00 | -17.69 | peak | P |
| 4 * | 5350.000 | 35.18 | 12.68 | 47.86 | 54.00 | -6.14 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) | | |
| Remark: | | | |

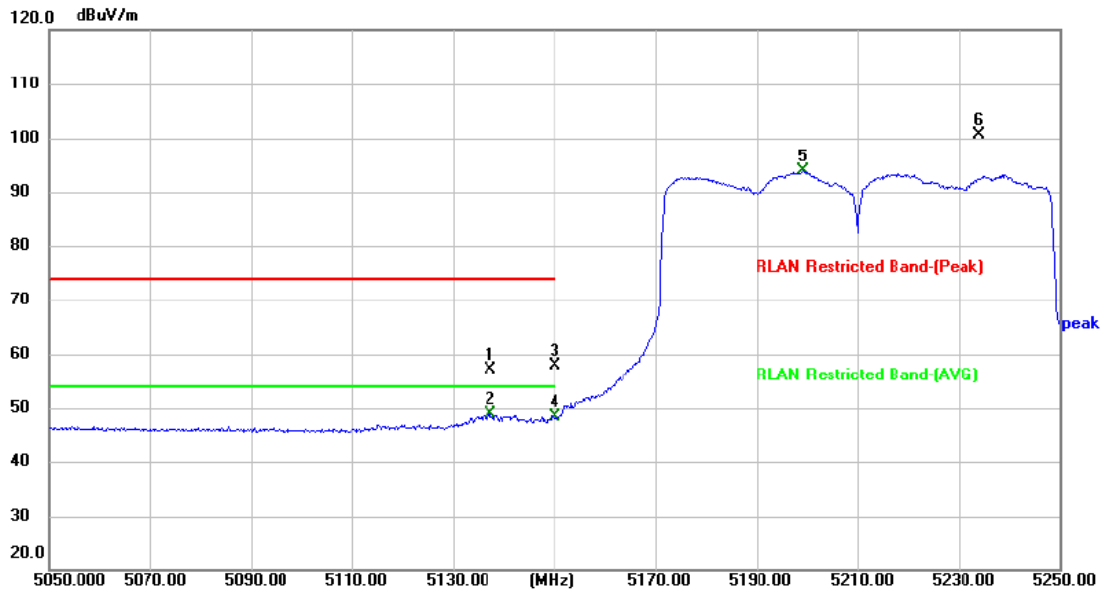


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5137.200 | 45.20 | 12.04 | 57.24 | 74.00 | -16.76 | peak | P |
| 2 * | 5137.200 | 36.84 | 12.04 | 48.88 | 54.00 | -5.12 | AVG | P |
| 3 | 5150.000 | 45.76 | 12.08 | 57.84 | 74.00 | -16.16 | peak | P |
| 4 | 5150.000 | 36.29 | 12.08 | 48.37 | 54.00 | -5.63 | AVG | P |
| 5 | 5199.200 | 81.62 | 12.25 | 93.87 | | | AVG | |
| 6 | 5234.200 | 88.22 | 12.30 | 100.52 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) | | |
| Remark: | | | |

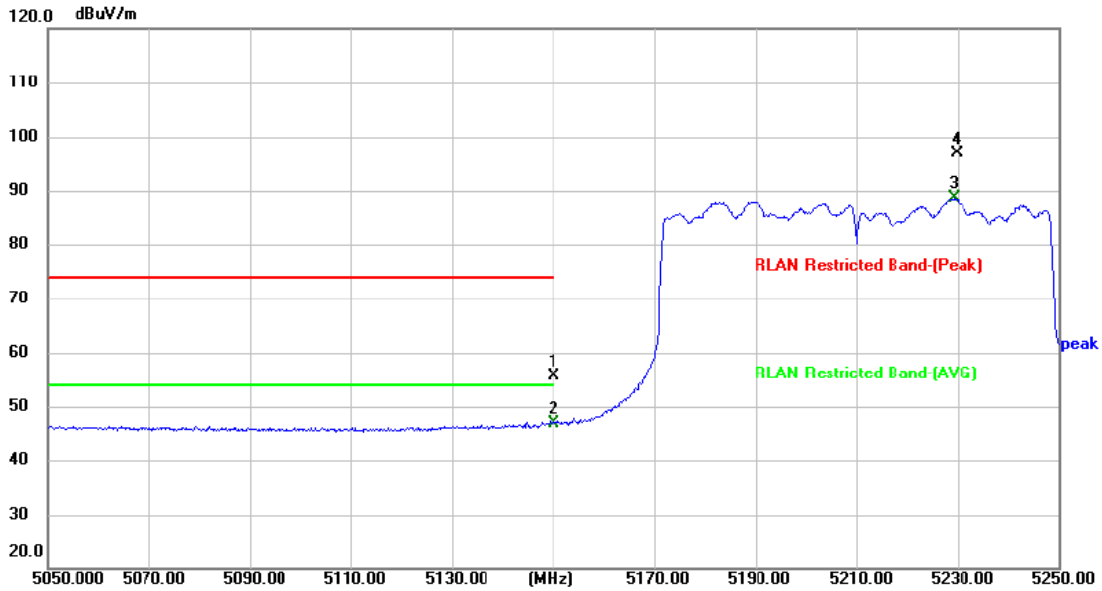


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 43.52 | 12.08 | 55.60 | 74.00 | -18.40 | peak | P |
| 2 * | 5150.000 | 34.81 | 12.08 | 46.89 | 54.00 | -7.11 | AVG | P |
| 3 | 5229.200 | 76.23 | 12.29 | 88.52 | | | AVG | |
| 4 | 5229.800 | 84.57 | 12.29 | 96.86 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) | | |
| Remark: | | | |

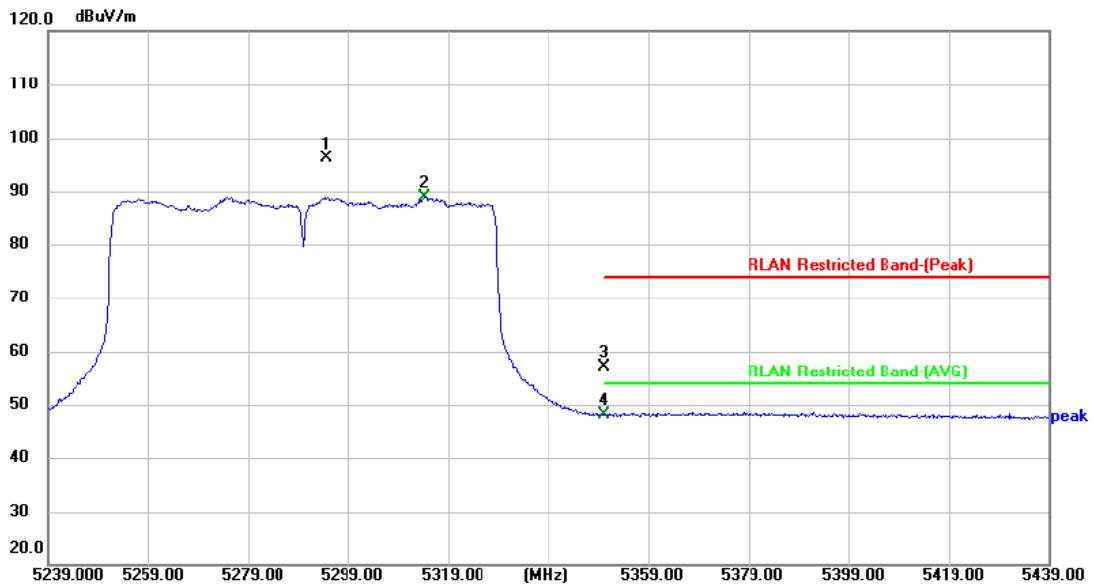


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5294.600 | 83.82 | 12.40 | 96.22 | | | peak | |
| 2 | 5314.400 | 76.45 | 12.48 | 88.93 | | | AVG | |
| 3 | 5350.000 | 44.49 | 12.68 | 57.17 | 74.00 | -16.83 | peak | P |
| 4 * | 5350.000 | 35.44 | 12.68 | 48.12 | 54.00 | -5.88 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) | | |
| Remark: | | | |

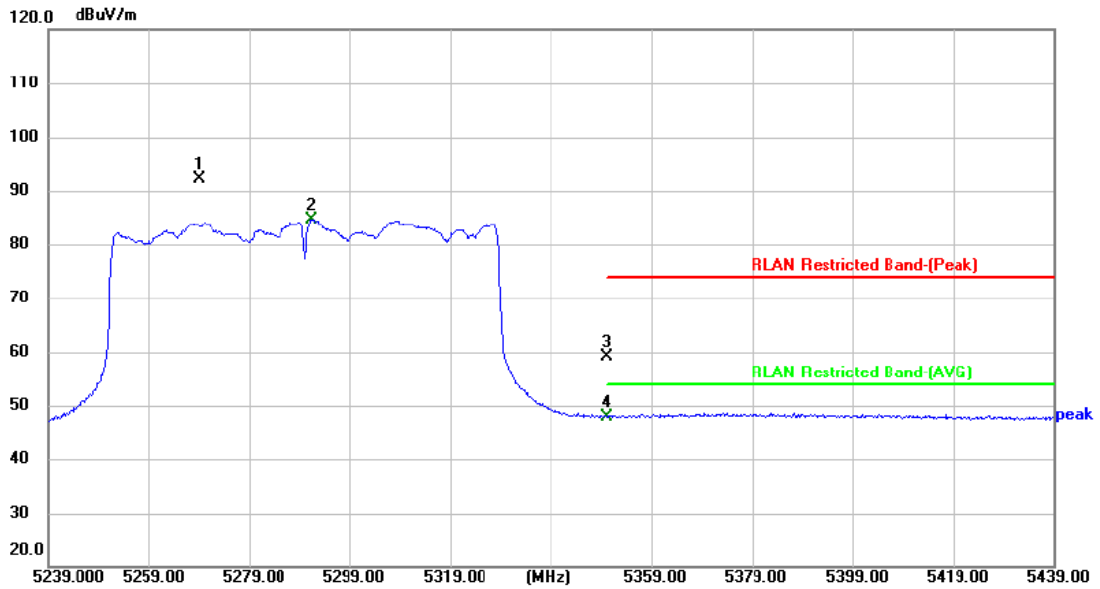


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5269.000 | 79.76 | 12.36 | 92.12 | | | peak | |
| 2 | 5291.400 | 72.30 | 12.39 | 84.69 | | | AVG | |
| 3 | 5350.000 | 46.39 | 12.68 | 59.07 | 74.00 | -14.93 | peak | P |
| 4 * | 5350.000 | 35.30 | 12.68 | 47.98 | 54.00 | -6.02 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1) | | |
| Remark: | | | |

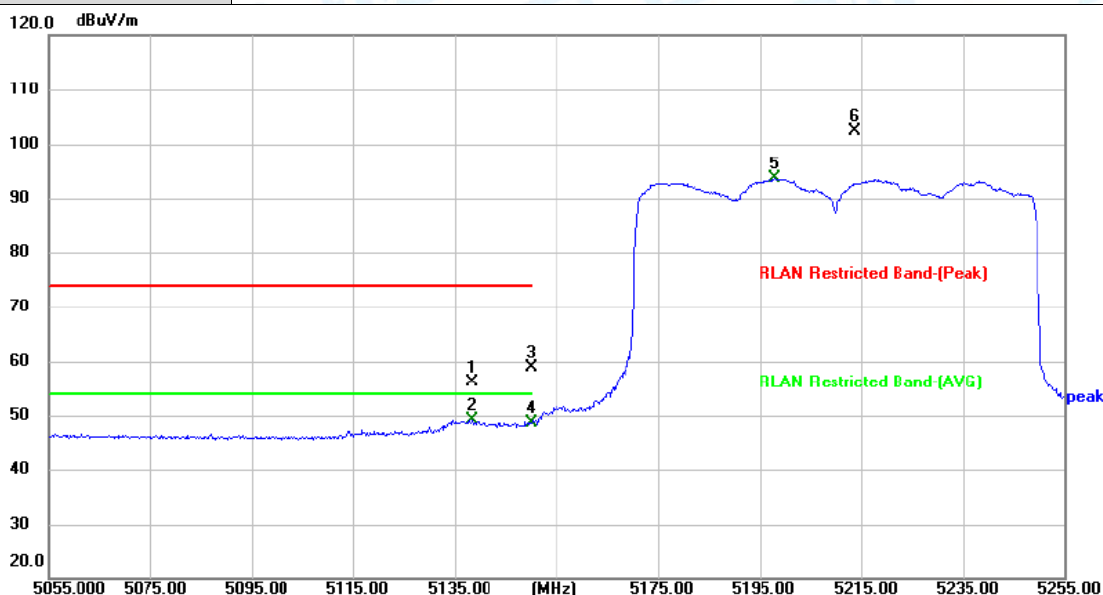


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5138.400 | 44.20 | 12.05 | 56.25 | 74.00 | -17.75 | peak | P |
| 2 * | 5138.400 | 37.12 | 12.05 | 49.17 | 54.00 | -4.83 | AVG | P |
| 3 | 5150.000 | 46.68 | 12.08 | 58.76 | 74.00 | -15.24 | peak | P |
| 4 | 5150.000 | 36.58 | 12.08 | 48.66 | 54.00 | -5.34 | AVG | P |
| 5 | 5198.000 | 81.37 | 12.25 | 93.62 | | | AVG | |
| 6 | 5213.800 | 90.15 | 12.27 | 102.42 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1) | | |
| Remark: | | | |

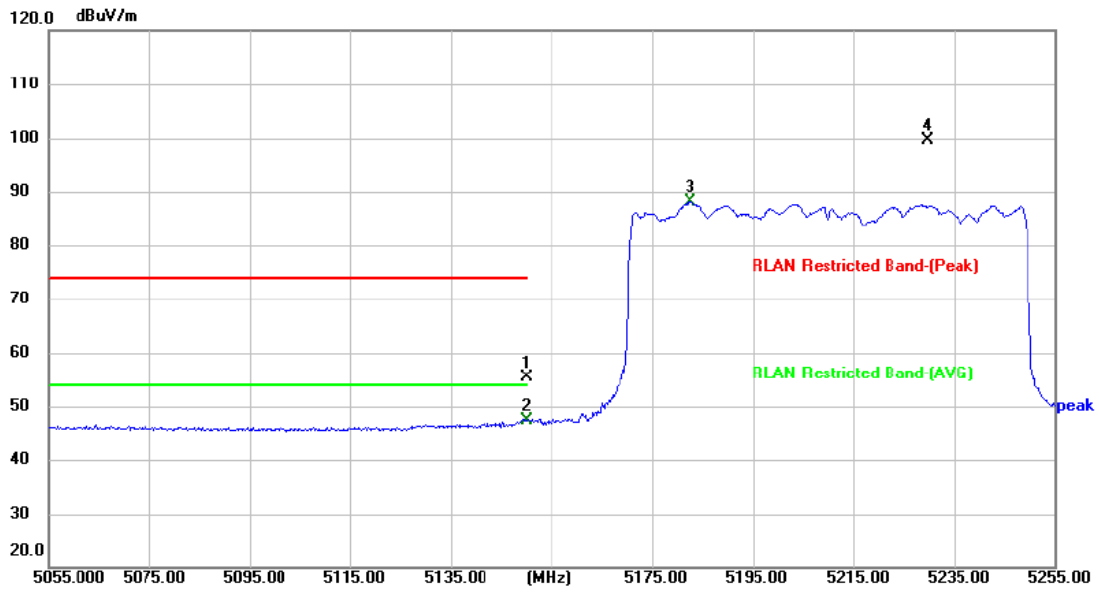


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 43.34 | 12.08 | 55.42 | 74.00 | -18.58 | peak | P |
| 2 * | 5150.000 | 35.36 | 12.08 | 47.44 | 54.00 | -6.56 | AVG | P |
| 3 | 5182.600 | 76.00 | 12.19 | 88.19 | | | AVG | |
| 4 | 5229.800 | 87.28 | 12.29 | 99.57 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5290 MHz (U-NII-2A) | | |
| Remark: | | | |

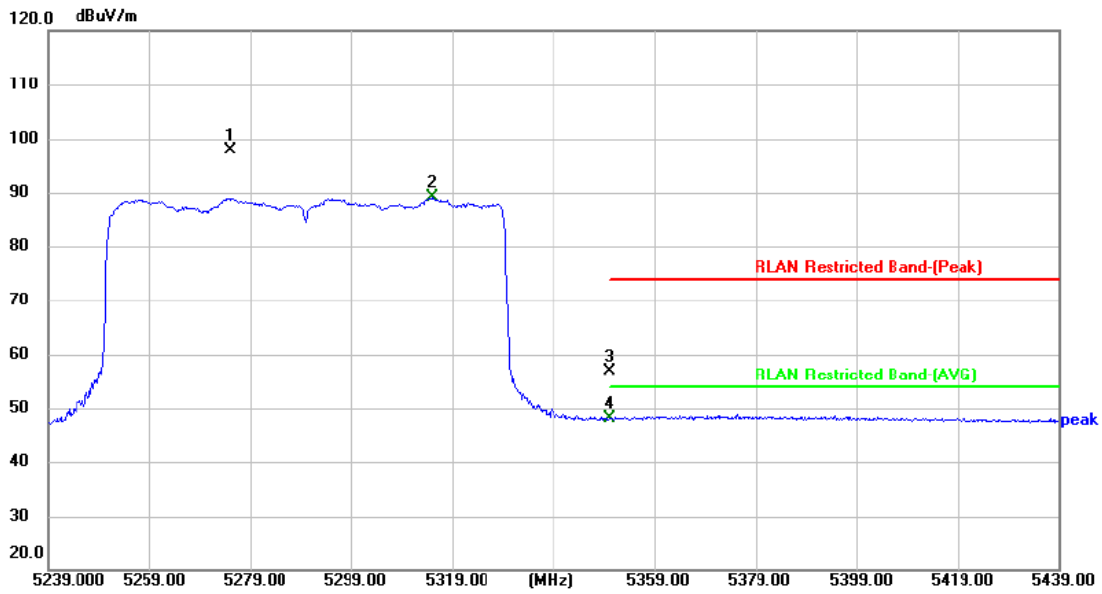


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5275.000 | 85.53 | 12.36 | 97.89 | | | peak | |
| 2 | 5315.000 | 76.58 | 12.49 | 89.07 | | | AVG | |
| 3 | 5350.000 | 44.26 | 12.68 | 56.94 | 74.00 | -17.06 | peak | P |
| 4 * | 5350.000 | 35.36 | 12.68 | 48.04 | 54.00 | -5.96 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5290 MHz (U-NII-2A) | | |
| Remark: | | | |

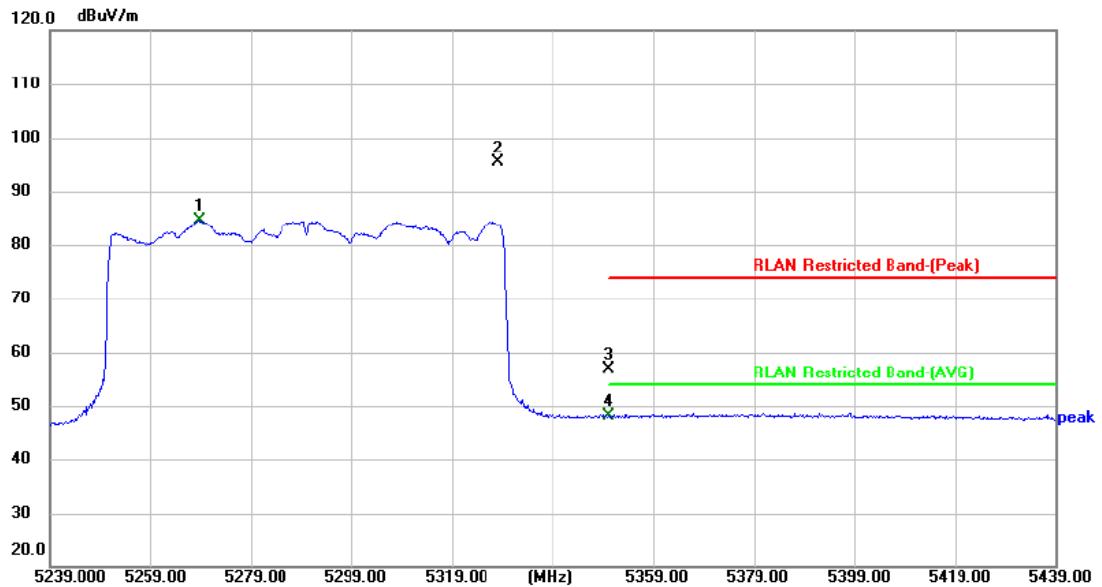


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5268.800 | 72.18 | 12.36 | 84.54 | | | AVG | |
| 2 | 5328.200 | 82.88 | 12.56 | 95.44 | | | peak | |
| 3 | 5350.000 | 44.29 | 12.68 | 56.97 | 74.00 | -17.03 | peak | P |
| 4 * | 5350.000 | 35.33 | 12.68 | 48.01 | 54.00 | -5.99 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5250 MHz (U-NII-2A) | | |
| Remark: | | | |

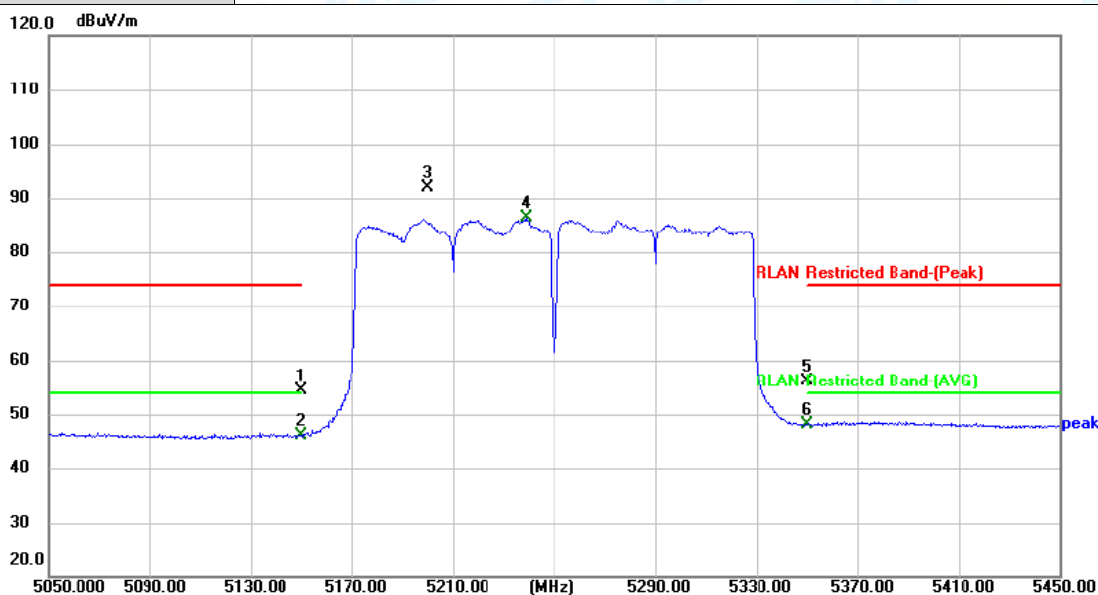


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 42.36 | 12.08 | 54.44 | 74.00 | -19.56 | peak | P |
| 2 | 5150.000 | 34.09 | 12.08 | 46.17 | 54.00 | -7.83 | AVG | P |
| 3 | 5200.000 | 79.59 | 12.25 | 91.84 | | | peak | |
| 4 | 5238.800 | 73.95 | 12.31 | 86.26 | | | AVG | |
| 5 | 5350.000 | 43.41 | 12.68 | 56.09 | 74.00 | -17.91 | peak | P |
| 6 * | 5350.000 | 35.49 | 12.68 | 48.17 | 54.00 | -5.83 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5250 MHz (U-NII-2A) | | |
| Remark: | | | |

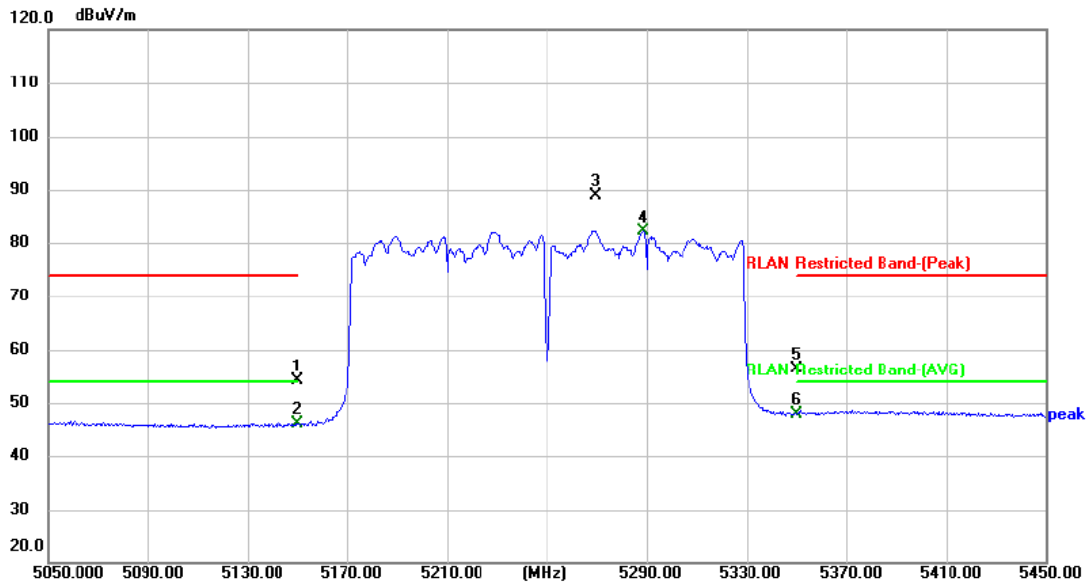


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 42.16 | 12.08 | 54.24 | 74.00 | -19.76 | peak | P |
| 2 | 5150.000 | 33.95 | 12.08 | 46.03 | 54.00 | -7.97 | AVG | P |
| 3 | 5269.600 | 76.50 | 12.36 | 88.86 | | | peak | |
| 4 | 5288.400 | 69.83 | 12.38 | 82.21 | | | AVG | |
| 5 | 5350.000 | 43.59 | 12.68 | 56.27 | 74.00 | -17.73 | peak | P |
| 6 * | 5350.000 | 35.31 | 12.68 | 47.99 | 54.00 | -6.01 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5250 MHz (U-NII-2A) | | |
| Remark: | | | |

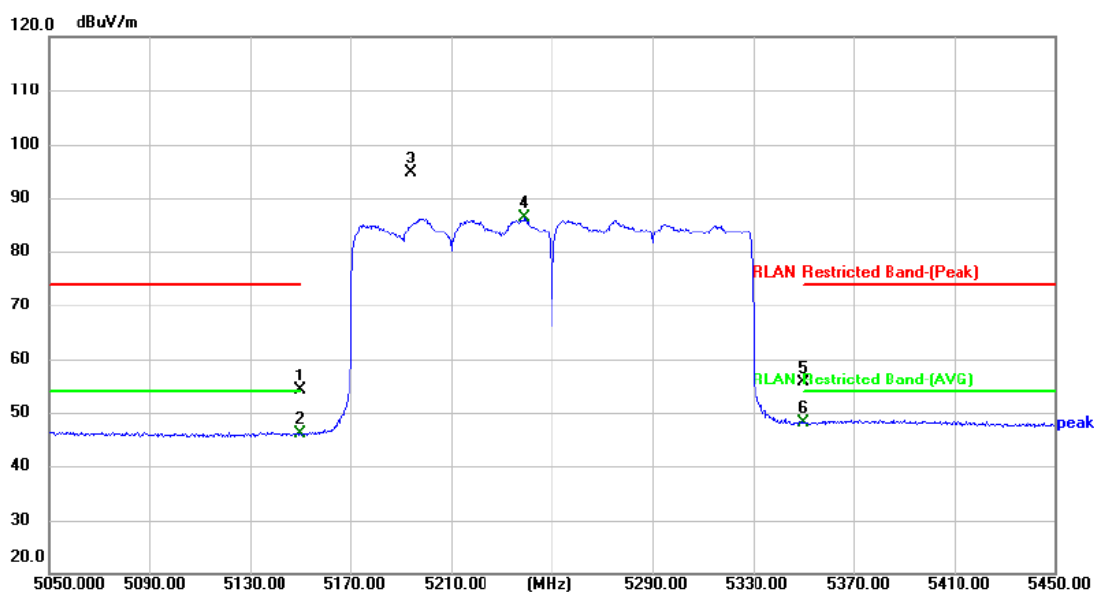


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 42.10 | 12.08 | 54.18 | 74.00 | -19.82 | peak | P |
| 2 | 5150.000 | 34.01 | 12.08 | 46.09 | 54.00 | -7.91 | AVG | P |
| 3 | 5193.600 | 82.31 | 12.23 | 94.54 | | | peak | |
| 4 | 5239.200 | 74.05 | 12.31 | 86.36 | | | AVG | |
| 5 | 5350.000 | 42.83 | 12.68 | 55.51 | 74.00 | -18.49 | peak | P |
| 6 * | 5350.000 | 35.40 | 12.68 | 48.08 | 54.00 | -5.92 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5250 MHz (U-NII-2A) | | |
| Remark: | | | |

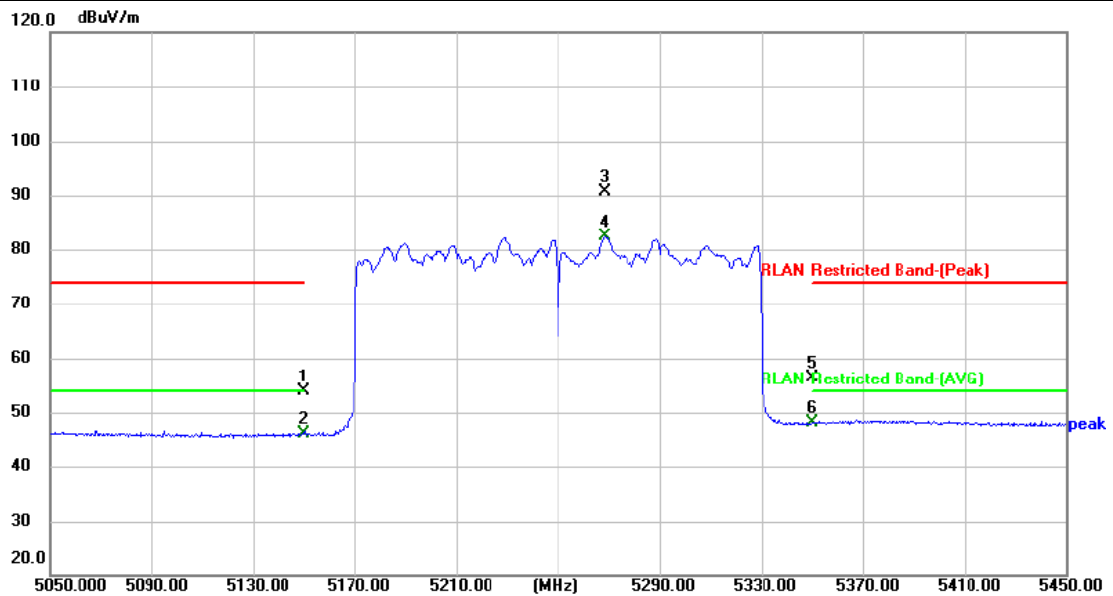


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 41.86 | 12.08 | 53.94 | 74.00 | -20.06 | peak | P |
| 2 | 5150.000 | 33.95 | 12.08 | 46.03 | 54.00 | -7.97 | AVG | P |
| 3 | 5268.400 | 78.20 | 12.35 | 90.55 | | | peak | |
| 4 | 5268.400 | 69.97 | 12.35 | 82.32 | | | AVG | |
| 5 | 5350.000 | 43.82 | 12.68 | 56.50 | 74.00 | -17.50 | peak | P |
| 6 * | 5350.000 | 35.45 | 12.68 | 48.13 | 54.00 | -5.87 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|-------------------------------------|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5500 MHz (U-NII-2C) | | |
| Remark: | | | |

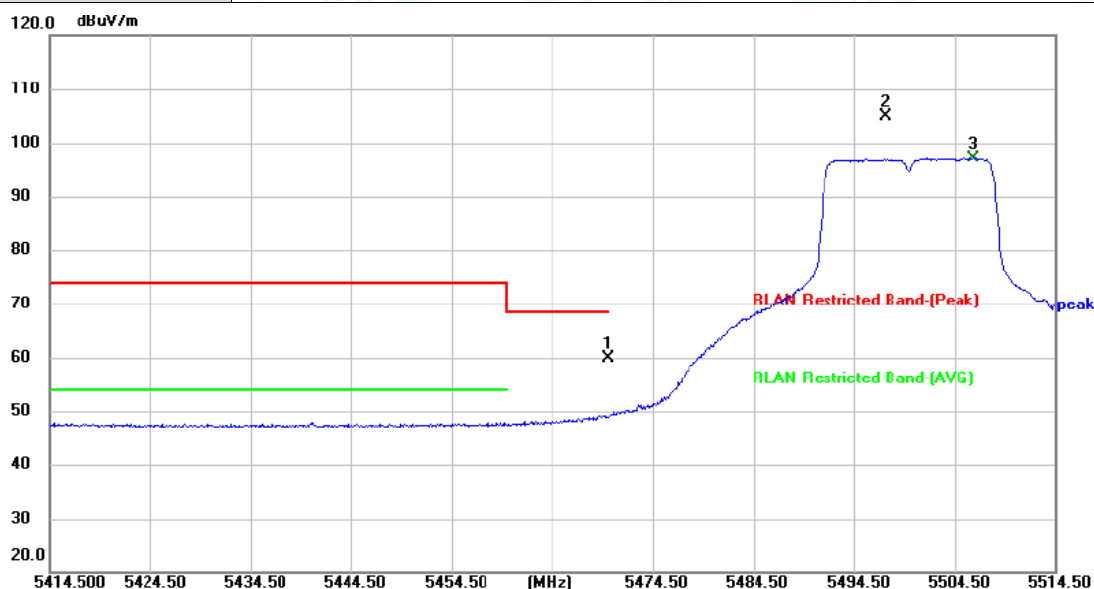


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 46.51 | 13.30 | 59.81 | 68.30 | -8.49 | peak | P |
| 2 | 5497.600 | 91.48 | 13.42 | 104.90 | | | peak | |
| 3 | 5506.400 | 83.73 | 13.43 | 97.16 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|-------------------------------------|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5500 MHz (U-NII-2C) | | |
| Remark: | | | |

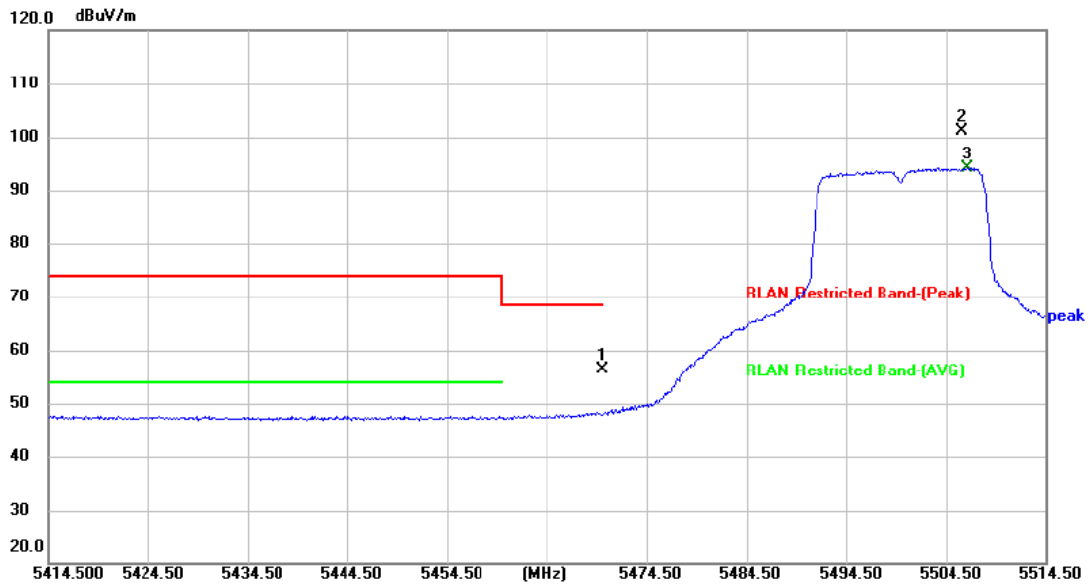


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.20 | 13.30 | 56.50 | 68.30 | -11.80 | peak | P |
| 2 | 5506.100 | 87.60 | 13.43 | 101.03 | | | peak | |
| 3 | 5506.700 | 80.69 | 13.43 | 94.12 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|-------------------------------------|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5700 MHz (U-NII-2C) | | |
| Remark: | | | |

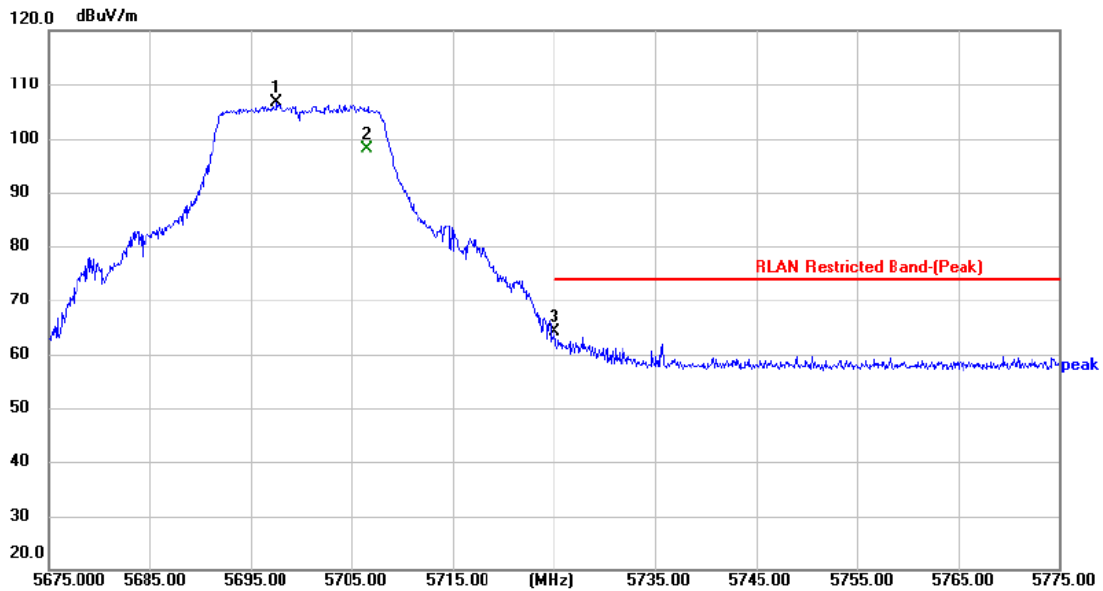


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5697.500 | 92.92 | 13.59 | 106.51 | | | peak | |
| 2 | 5706.500 | 84.48 | 13.59 | 98.07 | | | AVG | |
| 3 * | 5725.000 | 50.65 | 13.58 | 64.23 | 74.00 | -9.77 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|-------------------------------------|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5700 MHz (U-NII-2C) | | |
| Remark: | | | |

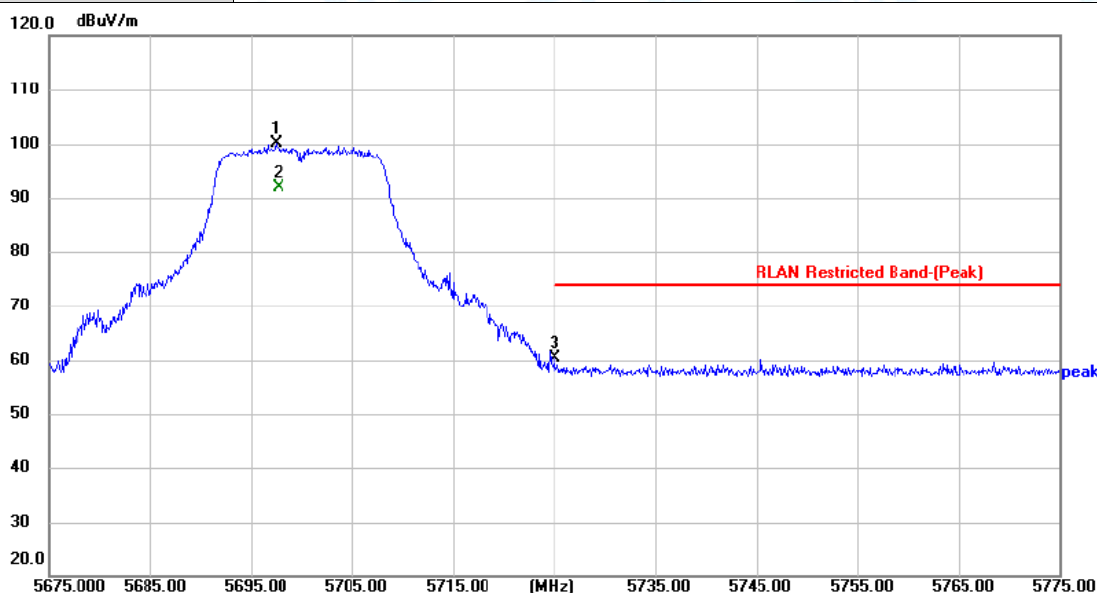


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5697.400 | 86.57 | 13.59 | 100.16 | | | peak | |
| 2 | 5697.700 | 78.33 | 13.60 | 91.93 | | | AVG | |
| 3 * | 5725.000 | 46.75 | 13.58 | 60.33 | 74.00 | -13.67 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) | | |
| Remark: | | | |

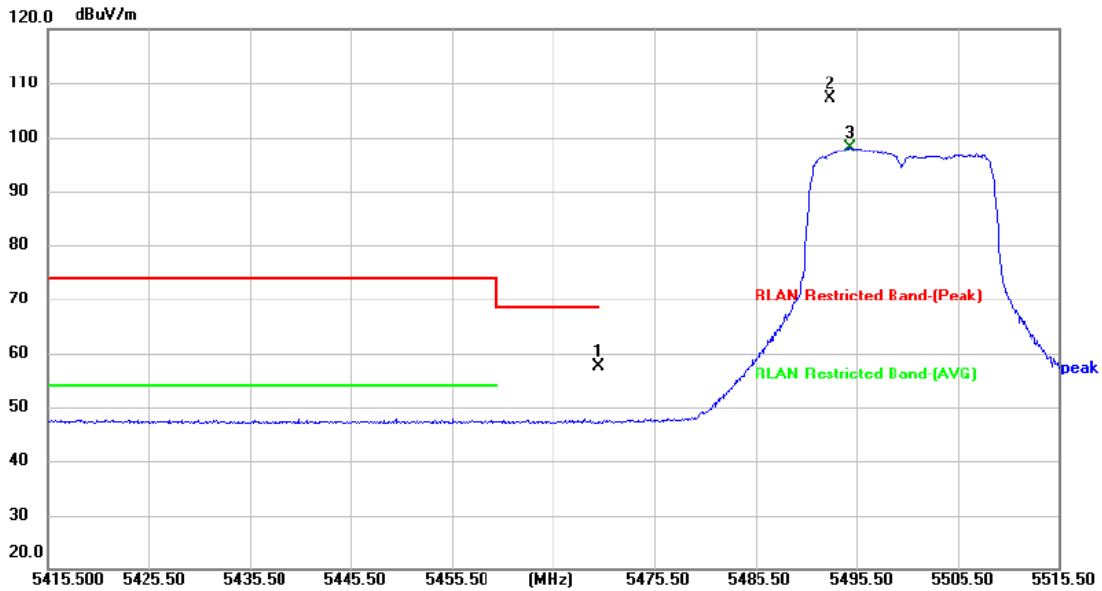


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.22 | 13.30 | 57.52 | 68.30 | -10.78 | peak | P |
| 2 | 5492.900 | 93.71 | 13.40 | 107.11 | | | peak | |
| 3 | 5494.900 | 84.66 | 13.41 | 98.07 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) | | |
| Remark: | | | |

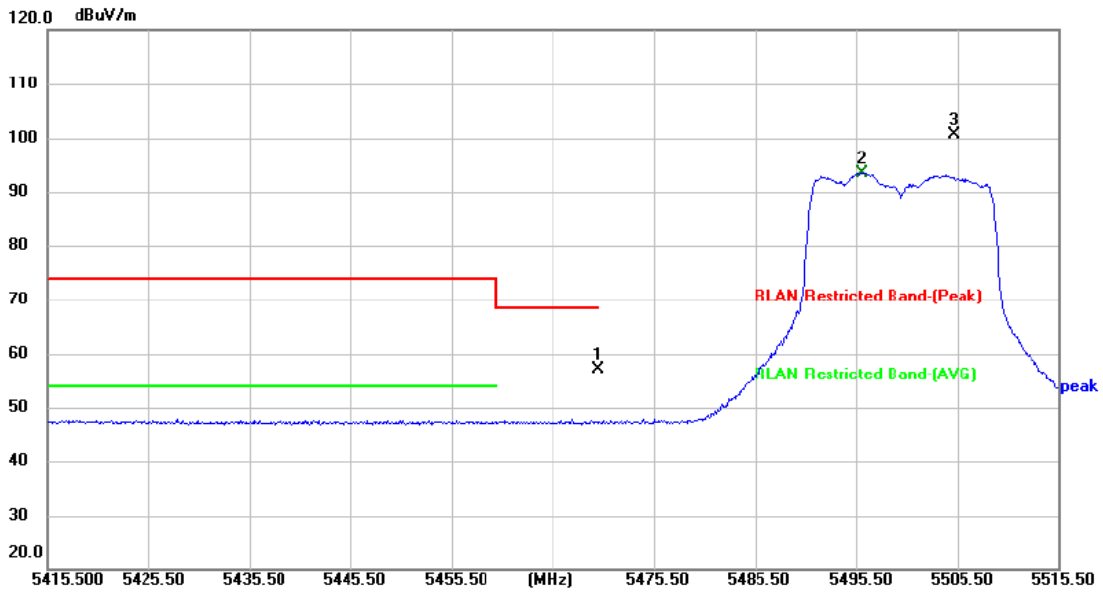


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.94 | 13.30 | 57.24 | 68.30 | -11.06 | peak | P |
| 2 | 5496.100 | 80.05 | 13.41 | 93.46 | | | AVG | |
| 3 | 5505.100 | 87.26 | 13.43 | 100.69 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C) | | |
| Remark: | | | |

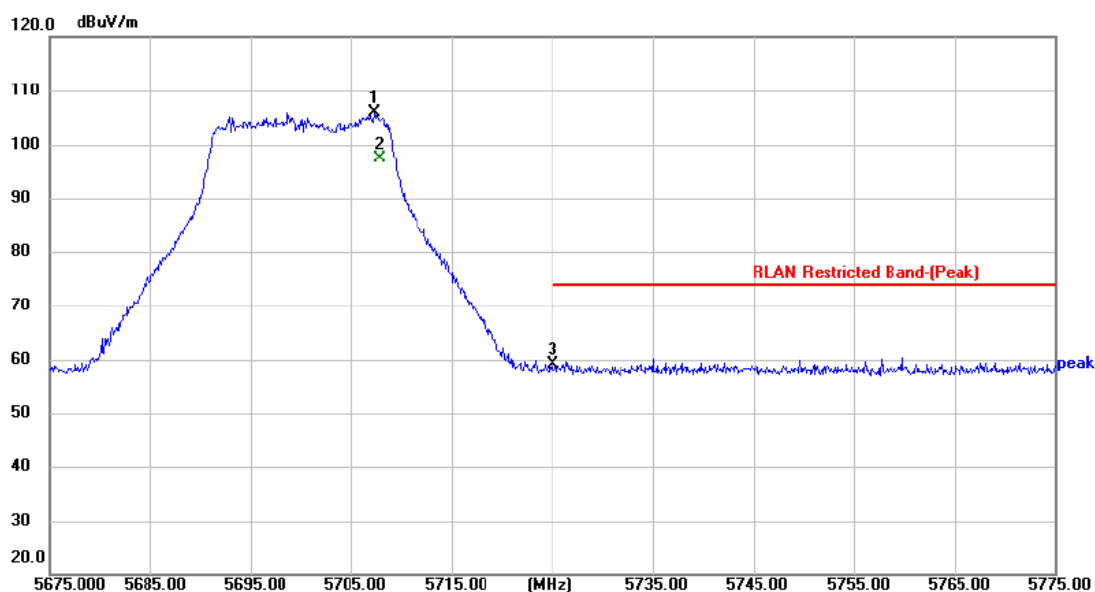


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5707.300 | 92.28 | 13.59 | 105.87 | | | peak | |
| 2 | 5707.800 | 83.73 | 13.59 | 97.32 | | | AVG | |
| 3 * | 5725.000 | 45.56 | 13.58 | 59.14 | 74.00 | -14.86 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C) | | |
| Remark: | | | |

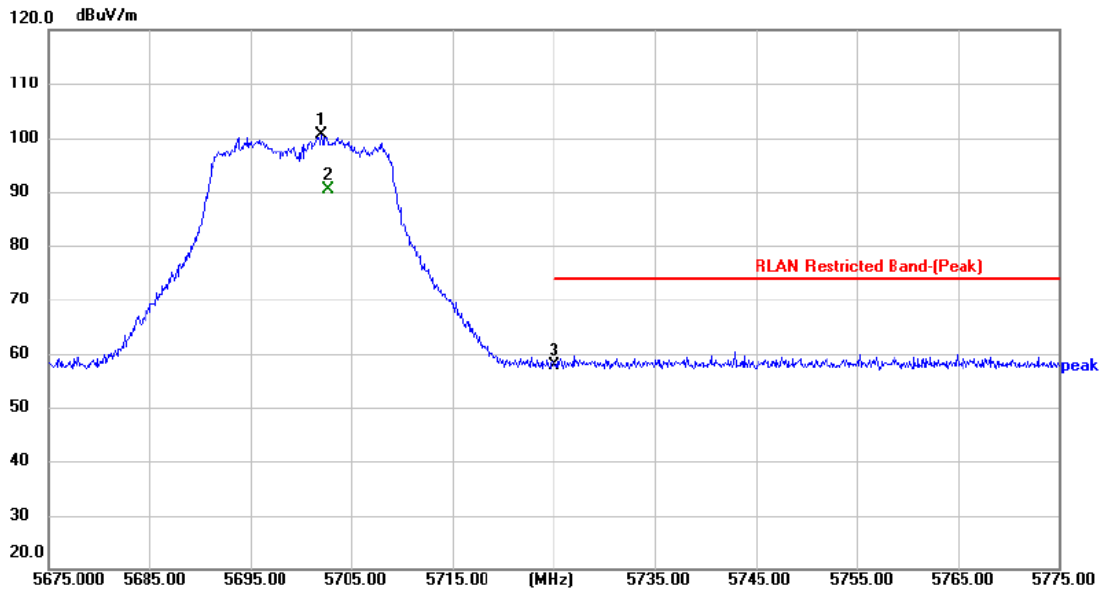


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5702.000 | 87.04 | 13.60 | 100.64 | | | peak | |
| 2 | 5702.700 | 76.89 | 13.60 | 90.49 | | | AVG | |
| 3 * | 5725.000 | 44.40 | 13.58 | 57.98 | 74.00 | -16.02 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) | | |
| Remark: | | | |

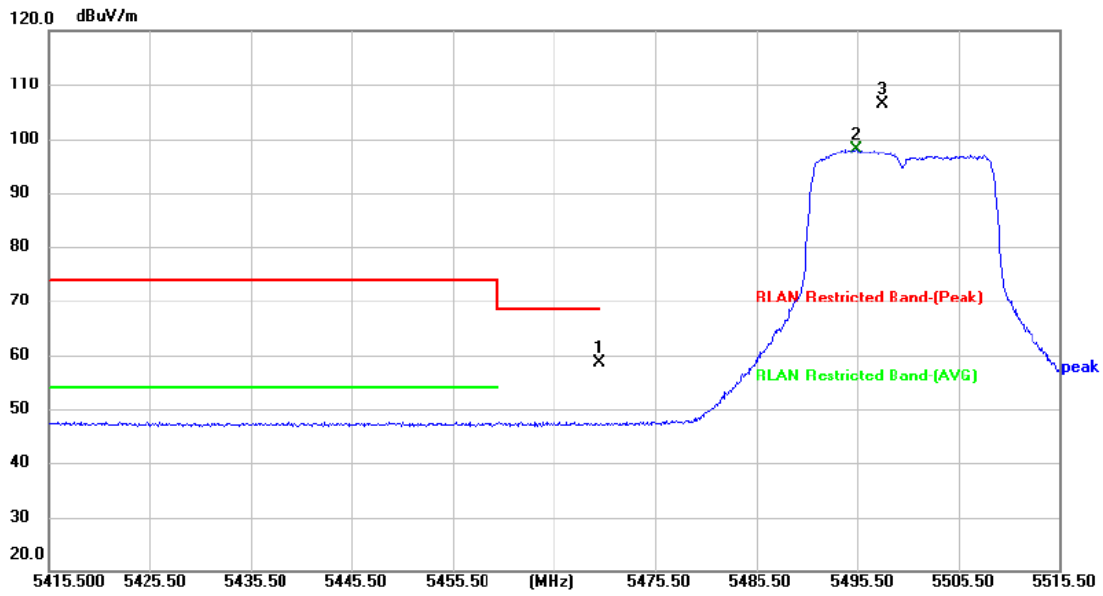


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 45.36 | 13.30 | 58.66 | 68.30 | -9.64 | peak | P |
| 2 | 5495.400 | 84.68 | 13.41 | 98.09 | | | AVG | |
| 3 | 5497.900 | 92.97 | 13.42 | 106.39 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) | | |
| Remark: | | | |

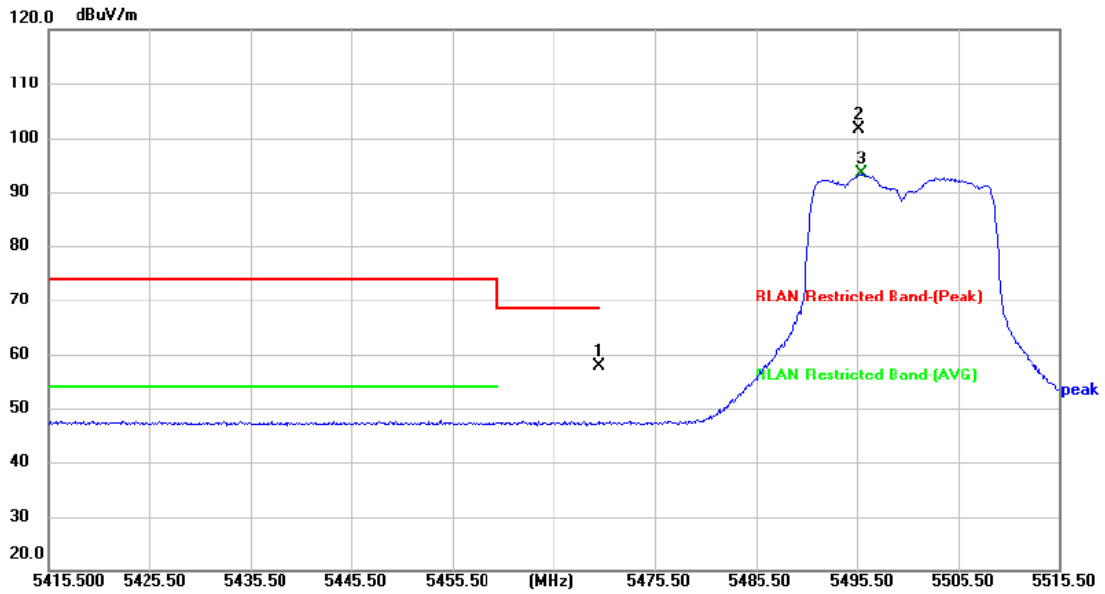


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.58 | 13.30 | 57.88 | 68.30 | -10.42 | peak | P |
| 2 | 5495.700 | 88.30 | 13.41 | 101.71 | | | peak | |
| 3 | 5496.000 | 79.89 | 13.41 | 93.30 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C) | | |
| Remark: | | | |

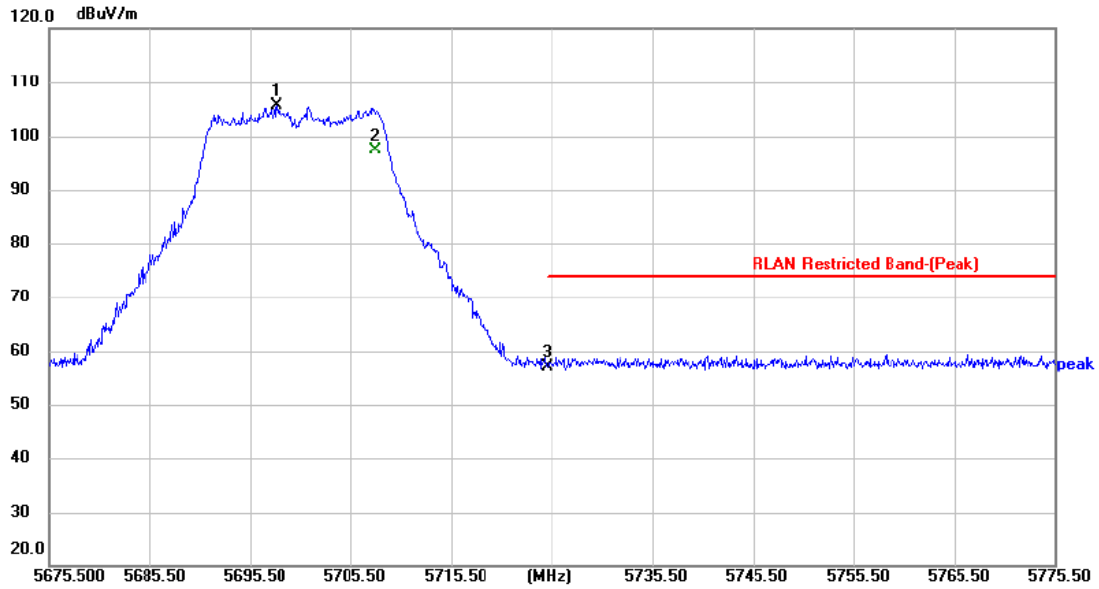


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5698.100 | 92.05 | 13.60 | 105.65 | | | peak | |
| 2 | 5708.000 | 83.79 | 13.59 | 97.38 | | | AVG | |
| 3 * | 5725.000 | 43.54 | 13.58 | 57.12 | 74.00 | -16.88 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C) | | |
| Remark: | | | |

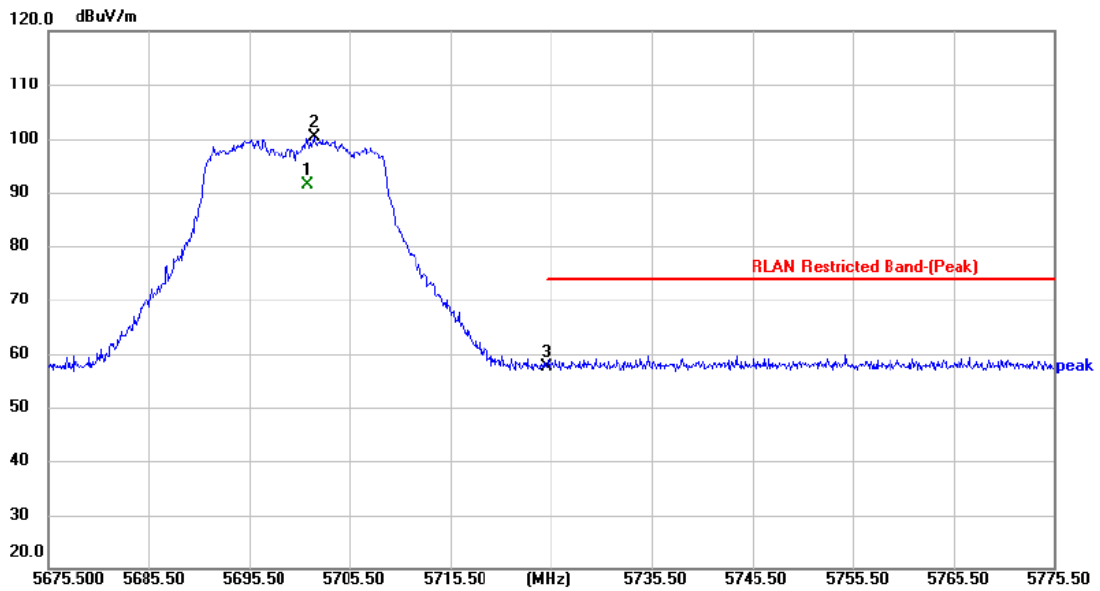


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5701.300 | 77.71 | 13.60 | 91.31 | | | AVG | |
| 2 | 5701.900 | 86.72 | 13.60 | 100.32 | | | peak | |
| 3 * | 5725.000 | 43.97 | 13.58 | 57.55 | 74.00 | -16.45 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) | | |
| Remark: | | | |

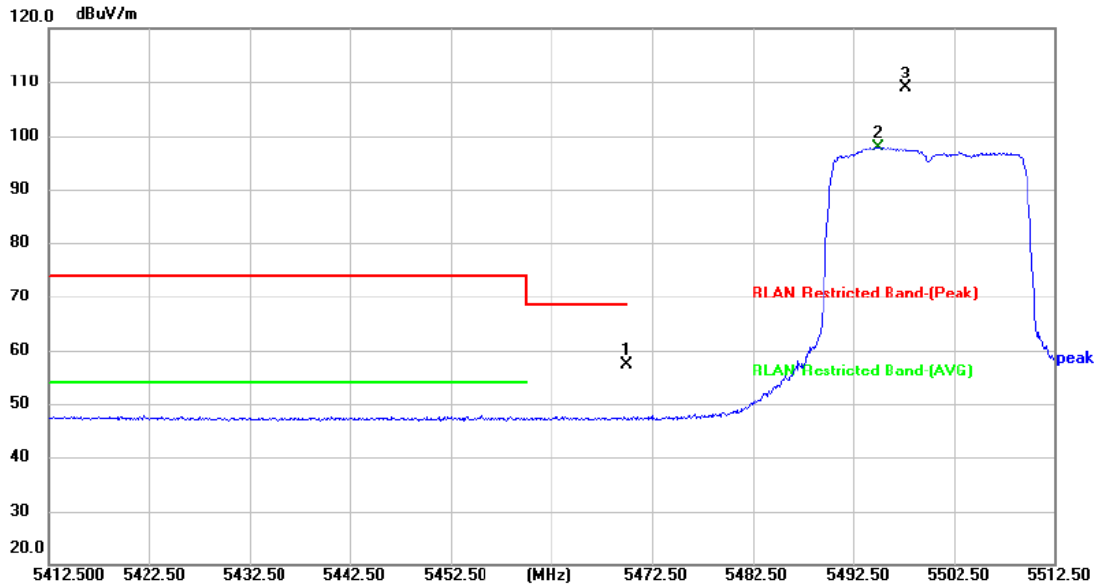


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.17 | 13.30 | 57.47 | 68.30 | -10.83 | peak | P |
| 2 | 5499.900 | 84.58 | 13.41 | 97.99 | | | AVG | |
| 3 | 5497.800 | 95.56 | 13.42 | 108.98 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) | | |
| Remark: | | | |

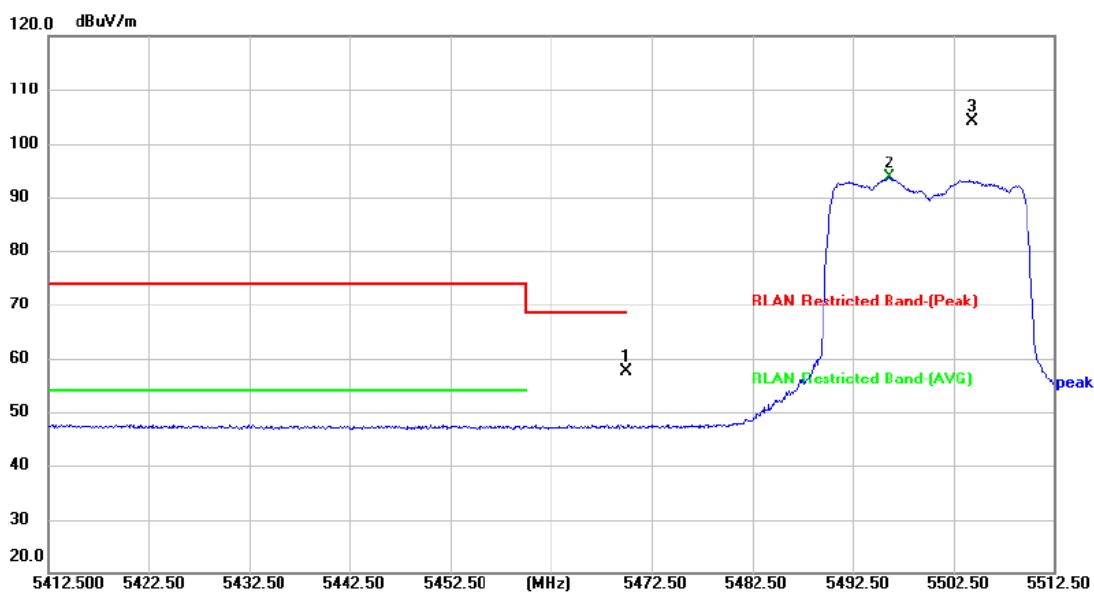


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.30 | 13.30 | 57.60 | 68.30 | -10.70 | peak | P |
| 2 | 5496.100 | 80.20 | 13.41 | 93.61 | | | AVG | |
| 3 | 5504.400 | 90.61 | 13.43 | 104.04 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5700 MHz (U-NII-2C) | | |
| Remark: | | | |

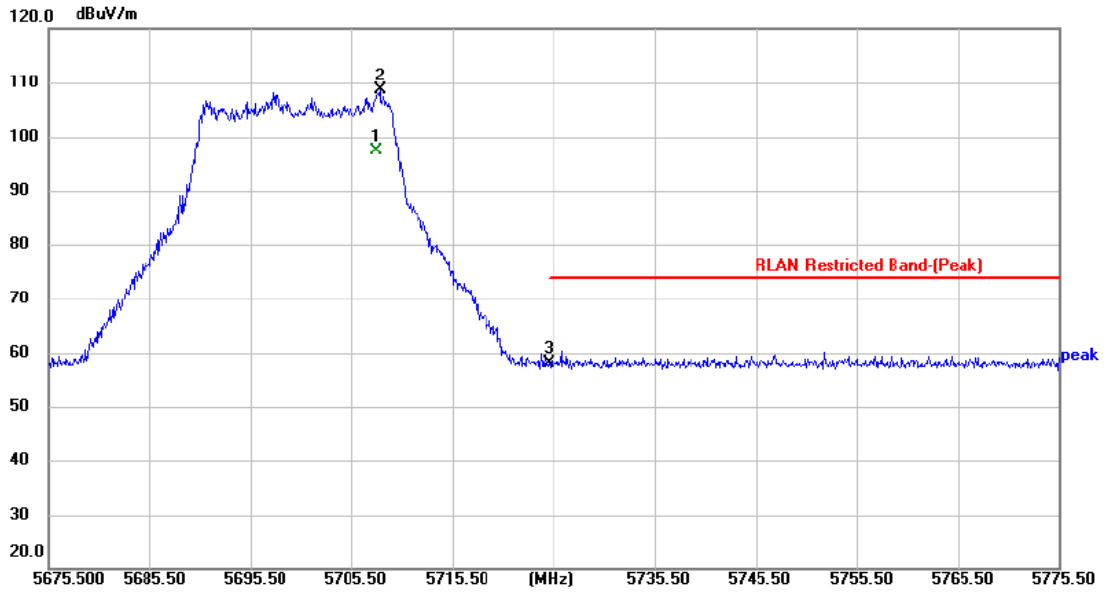


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5707.900 | 83.67 | 13.59 | 97.26 | | | AVG | |
| 2 | 5708.300 | 95.08 | 13.59 | 108.67 | | | peak | |
| 3 * | 5725.000 | 44.46 | 13.58 | 58.04 | 74.00 | -15.96 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE20) Mode 5700 MHz (U-NII-2C) | | |
| Remark: | | | |

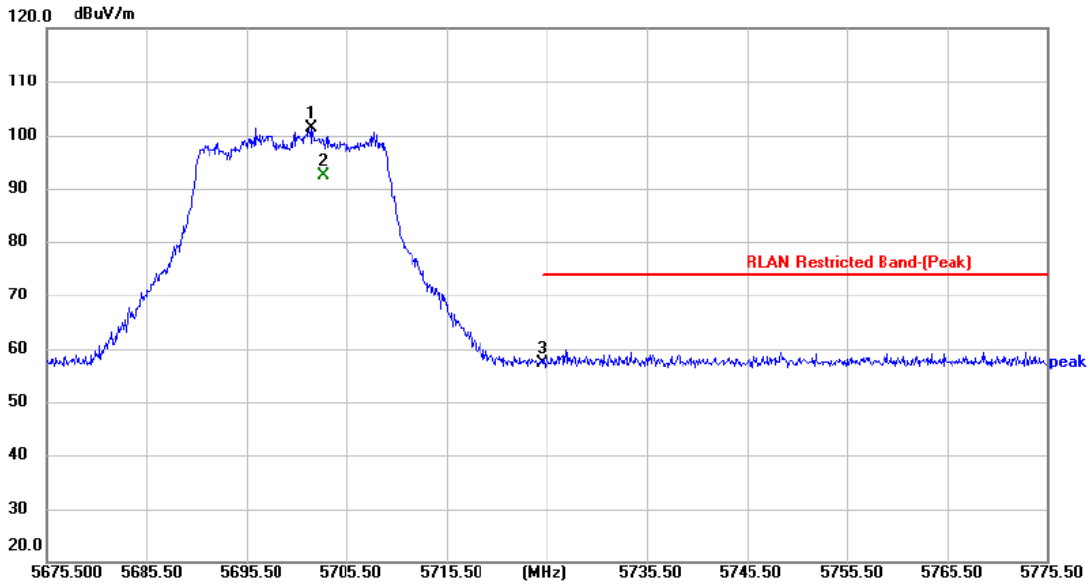


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5701.900 | 87.81 | 13.60 | 101.41 | | | peak | |
| 2 | 5703.200 | 78.77 | 13.60 | 92.37 | | | AVG | |
| 3 * | 5725.000 | 43.68 | 13.58 | 57.26 | 74.00 | -16.74 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) | | |
| Remark: | | | |

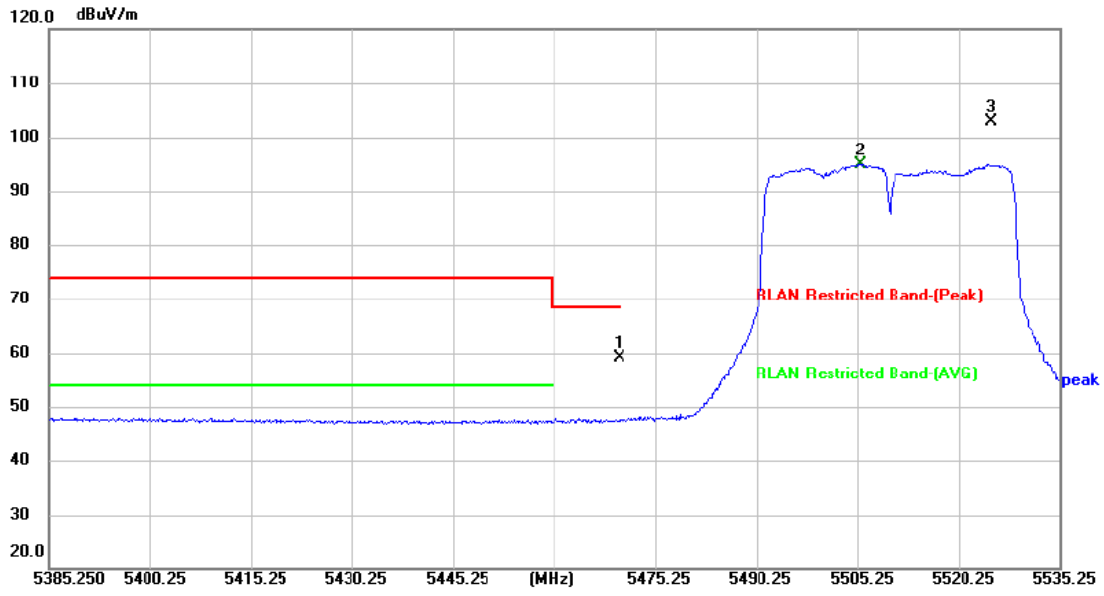


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 45.92 | 13.30 | 59.22 | 68.30 | -9.08 | peak | P |
| 2 | 5505.700 | 81.45 | 13.43 | 94.88 | | | AVG | |
| 3 | 5525.050 | 89.57 | 13.43 | 103.00 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) | | |
| Remark: | | | |

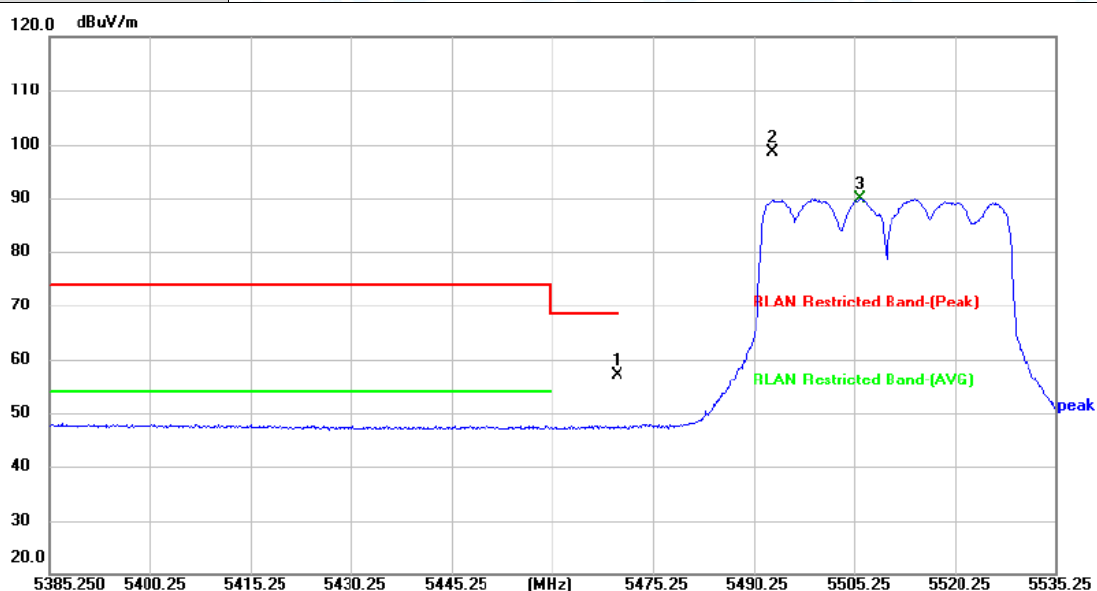


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.79 | 13.30 | 57.09 | 68.30 | -11.21 | peak | P |
| 2 | 5493.100 | 85.17 | 13.40 | 98.57 | | | peak | |
| 3 | 5506.150 | 76.46 | 13.43 | 89.89 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C) | | |
| Remark: | | | |

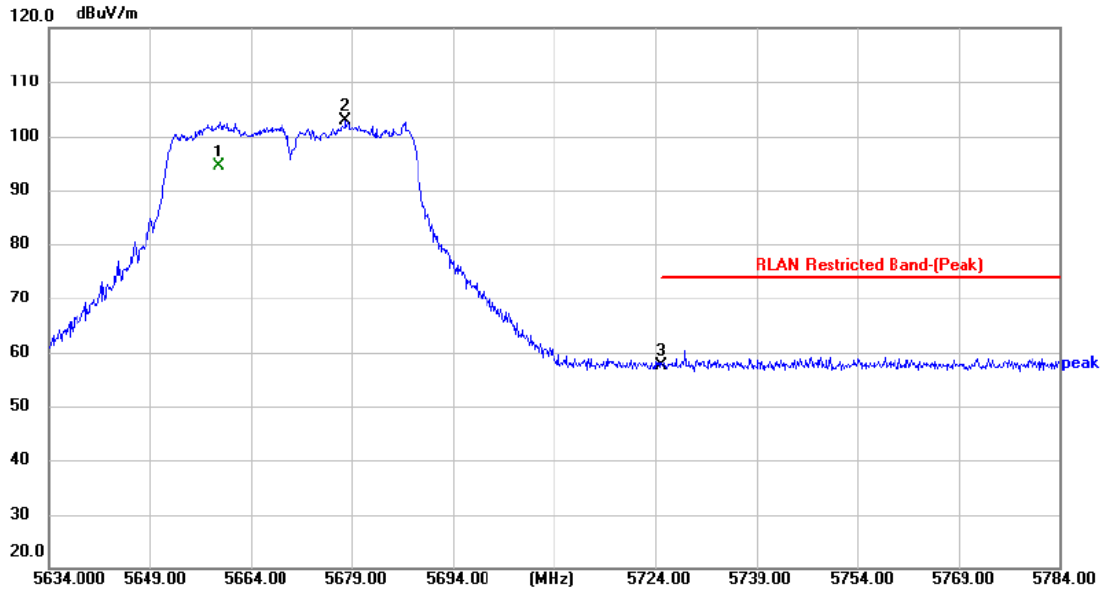


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5659.200 | 80.97 | 13.53 | 94.50 | | | AVG | |
| 2 | 5677.950 | 89.23 | 13.57 | 102.80 | | | peak | |
| 3 * | 5725.000 | 44.03 | 13.58 | 57.61 | 74.00 | -16.39 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C) | | |
| Remark: | | | |

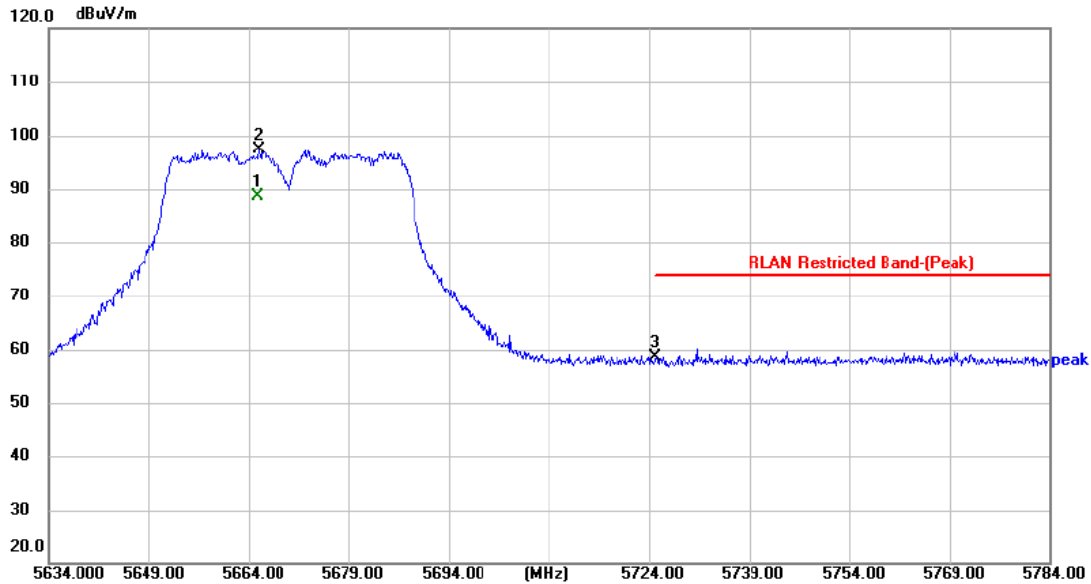


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5665.200 | 75.21 | 13.53 | 88.74 | | | AVG | |
| 2 | 5665.500 | 83.90 | 13.53 | 97.43 | | | peak | |
| 3 * | 5725.000 | 44.94 | 13.58 | 58.52 | 74.00 | -15.48 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) | | |
| Remark: | | | |

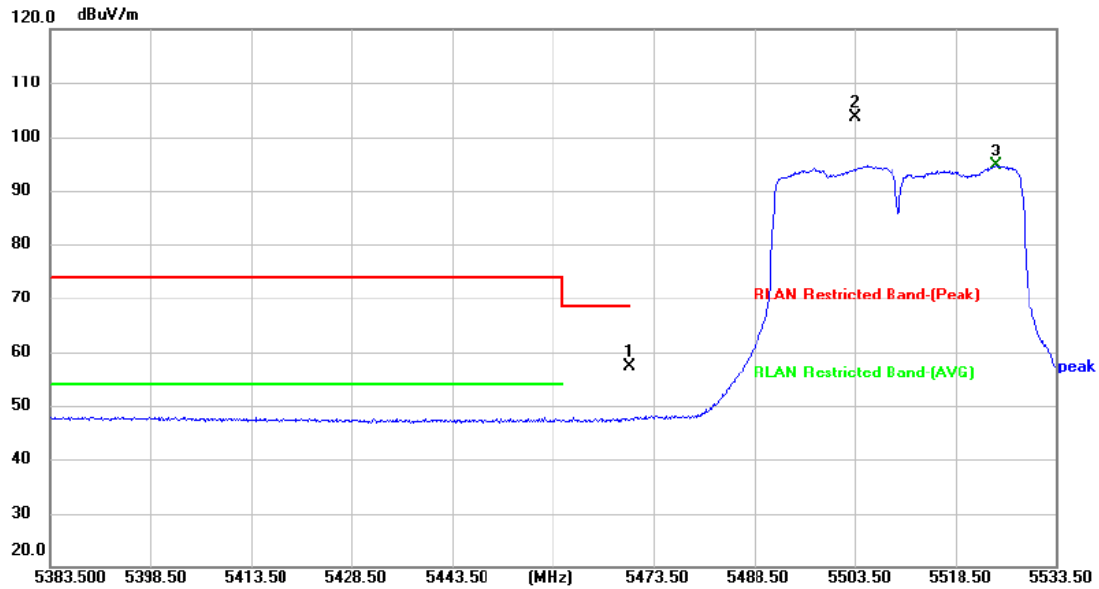


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.02 | 13.30 | 57.32 | 68.30 | -10.98 | peak | P |
| 2 | 5503.500 | 90.19 | 13.43 | 103.62 | | | peak | |
| 3 | 5524.500 | 81.25 | 13.42 | 94.67 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) | | |
| Remark: | | | |

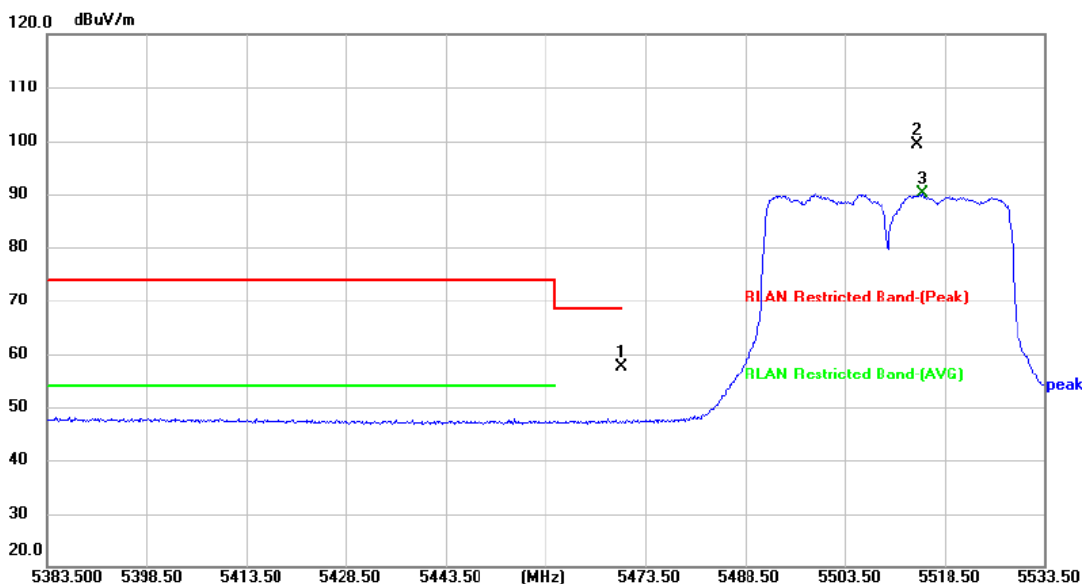


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.31 | 13.30 | 57.61 | 68.30 | -10.69 | peak | P |
| 2 | 5514.450 | 85.91 | 13.42 | 99.33 | | | peak | |
| 3 | 5515.200 | 76.61 | 13.42 | 90.03 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C) | | |
| Remark: | | | |

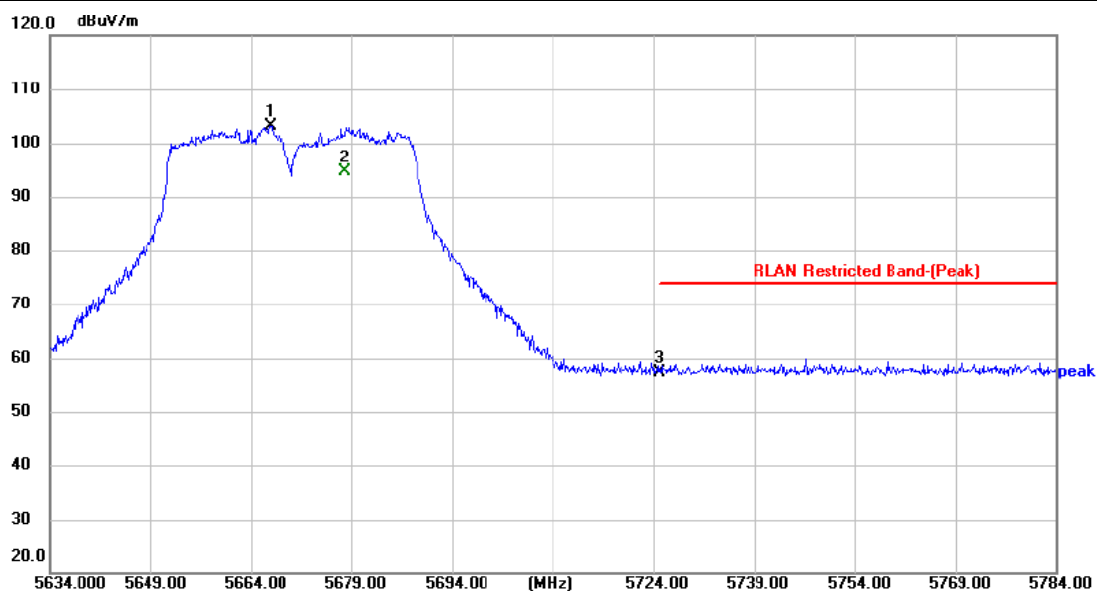


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5666.850 | 89.69 | 13.53 | 103.22 | | | peak | |
| 2 | 5677.950 | 81.05 | 13.57 | 94.62 | | | AVG | |
| 3 * | 5725.000 | 43.77 | 13.58 | 57.35 | 74.00 | -16.65 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C) | | |
| Remark: | | | |

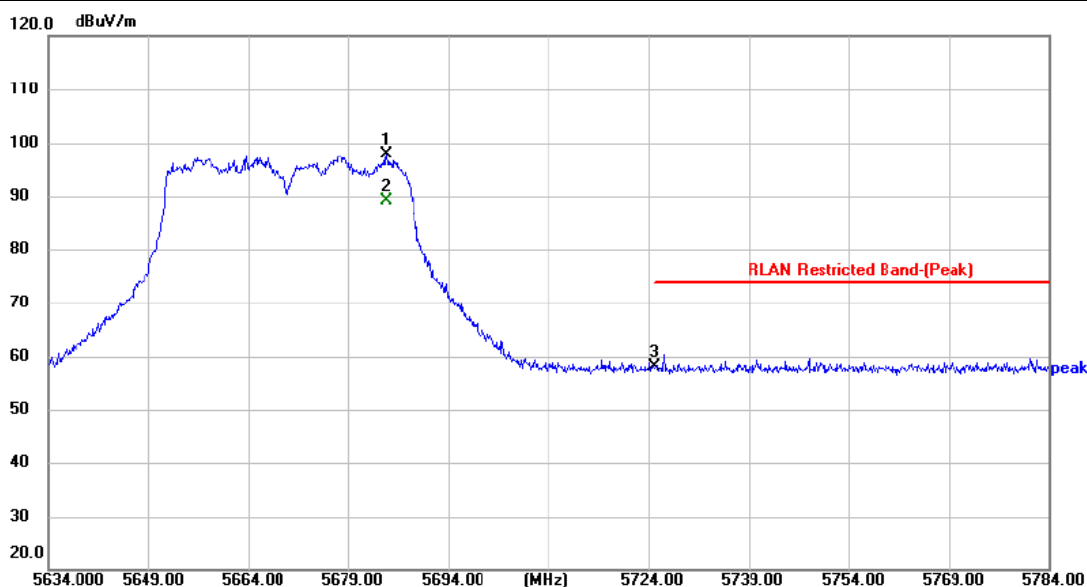


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5684.700 | 84.31 | 13.58 | 97.89 | | | peak | |
| 2 | 5684.700 | 75.46 | 13.58 | 89.04 | | | AVG | |
| 3 * | 5725.000 | 44.48 | 13.58 | 58.06 | 74.00 | -15.94 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C) | | |
| Remark: | | | |

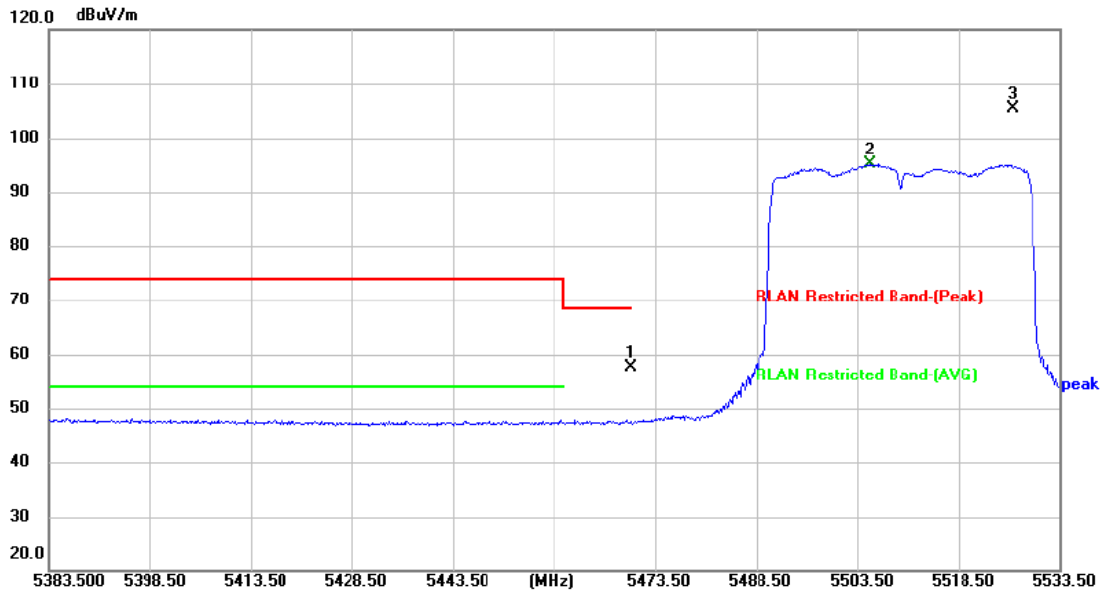


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.26 | 13.30 | 57.56 | 68.30 | -10.74 | peak | P |
| 2 | 5505.450 | 81.67 | 13.43 | 95.10 | | | AVG | |
| 3 | 5526.600 | 91.96 | 13.43 | 105.39 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C) | | |
| Remark: | | | |

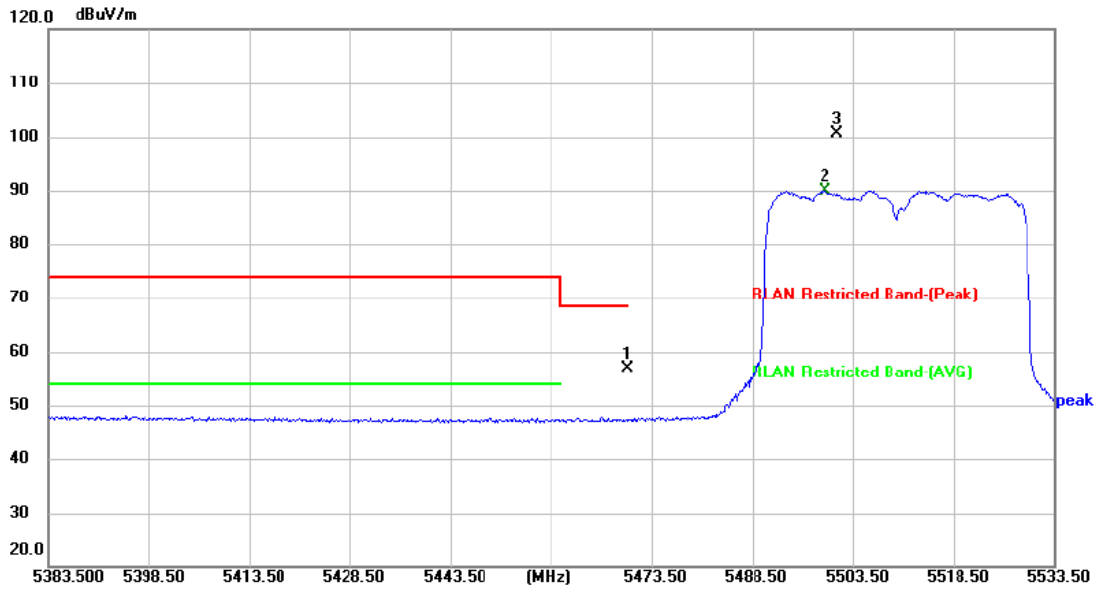


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.64 | 13.30 | 56.94 | 68.30 | -11.36 | peak | P |
| 2 | 5499.450 | 76.52 | 13.43 | 89.95 | | | AVG | |
| 3 | 5501.250 | 87.15 | 13.43 | 100.58 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5670 MHz (U-NII-2C) | | |
| Remark: | | | |

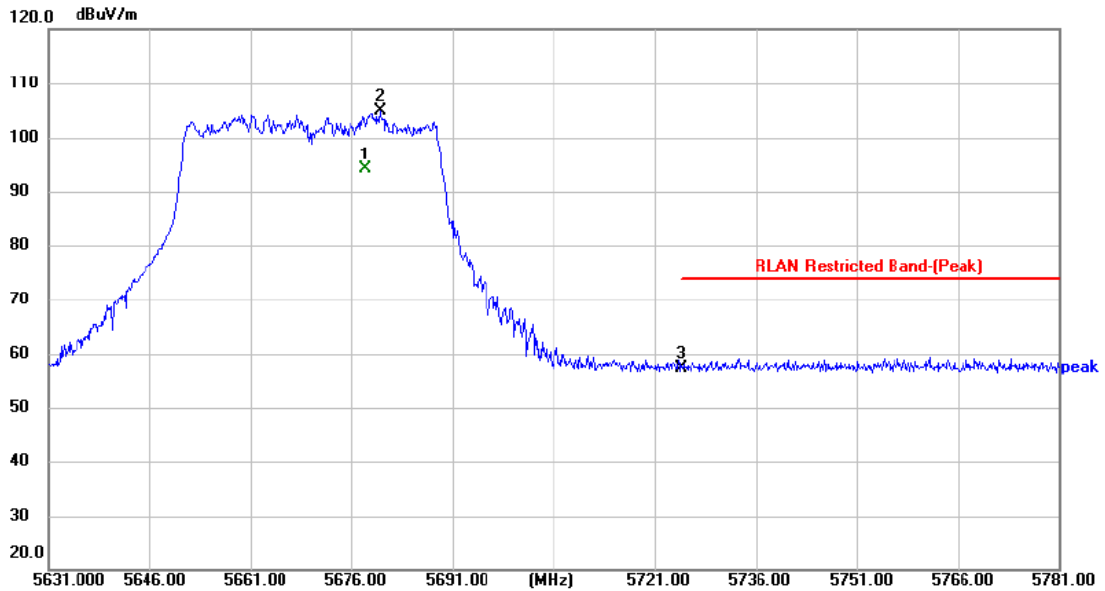


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5678.100 | 80.51 | 13.57 | 94.08 | | | AVG | |
| 2 | 5680.200 | 91.35 | 13.57 | 104.92 | | | peak | |
| 3 * | 5725.000 | 43.78 | 13.58 | 57.36 | 74.00 | -16.64 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE40) Mode 5670 MHz (U-NII-2C) | | |
| Remark: | | | |

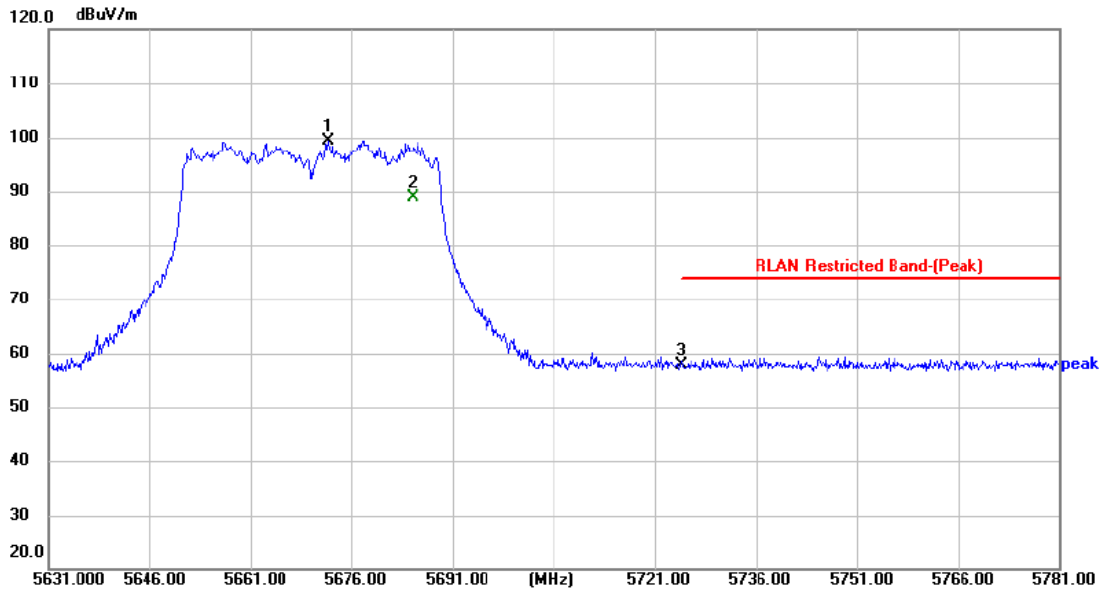


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5672.400 | 85.91 | 13.54 | 99.45 | | | peak | |
| 2 | 5685.150 | 75.34 | 13.58 | 88.92 | | | AVG | |
| 3 * | 5725.000 | 44.40 | 13.58 | 57.98 | 74.00 | -16.02 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) | | |
| Remark: | | | |

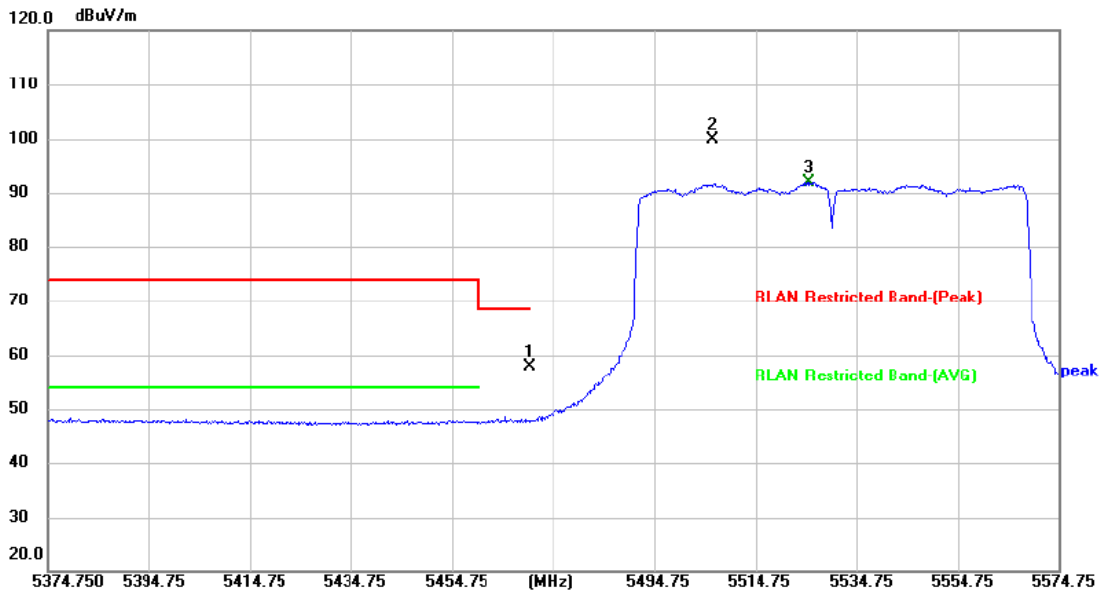


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.61 | 13.30 | 57.91 | 68.30 | -10.39 | peak | P |
| 2 | 5506.350 | 86.44 | 13.43 | 99.87 | | | peak | |
| 3 | 5525.350 | 78.43 | 13.43 | 91.86 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) | | |
| Remark: | | | |

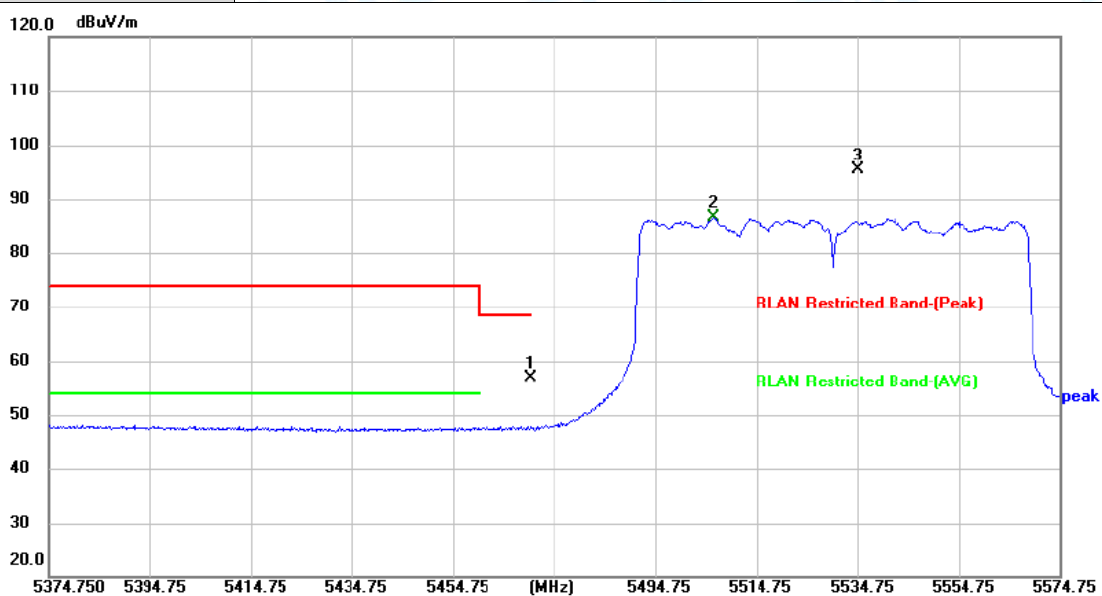


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.65 | 13.30 | 56.95 | 68.30 | -11.35 | peak | P |
| 2 | 5506.350 | 73.13 | 13.43 | 86.56 | | | AVG | |
| 3 | 5534.750 | 81.92 | 13.43 | 95.35 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5530 MHz (U-NII-2C) | | |
| Remark: | | | |

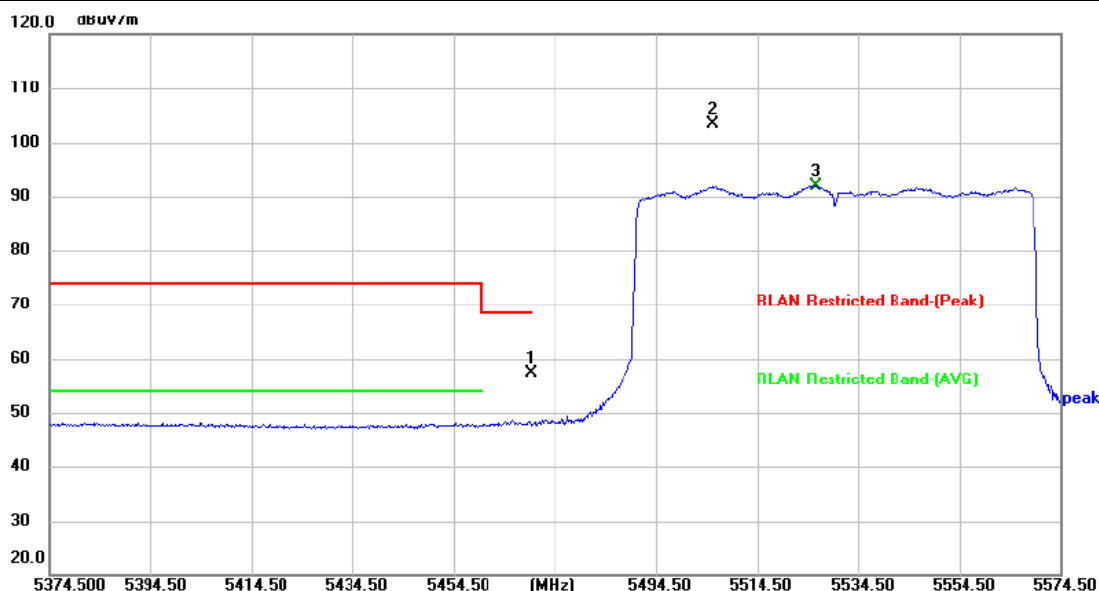


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.07 | 13.30 | 57.37 | 68.30 | -10.93 | peak | P |
| 2 | 5505.900 | 89.87 | 13.43 | 103.30 | | | peak | |
| 3 | 5526.100 | 78.50 | 13.43 | 91.93 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE80) Mode 5530 MHz (U-NII-2C) | | |
| Remark: | | | |

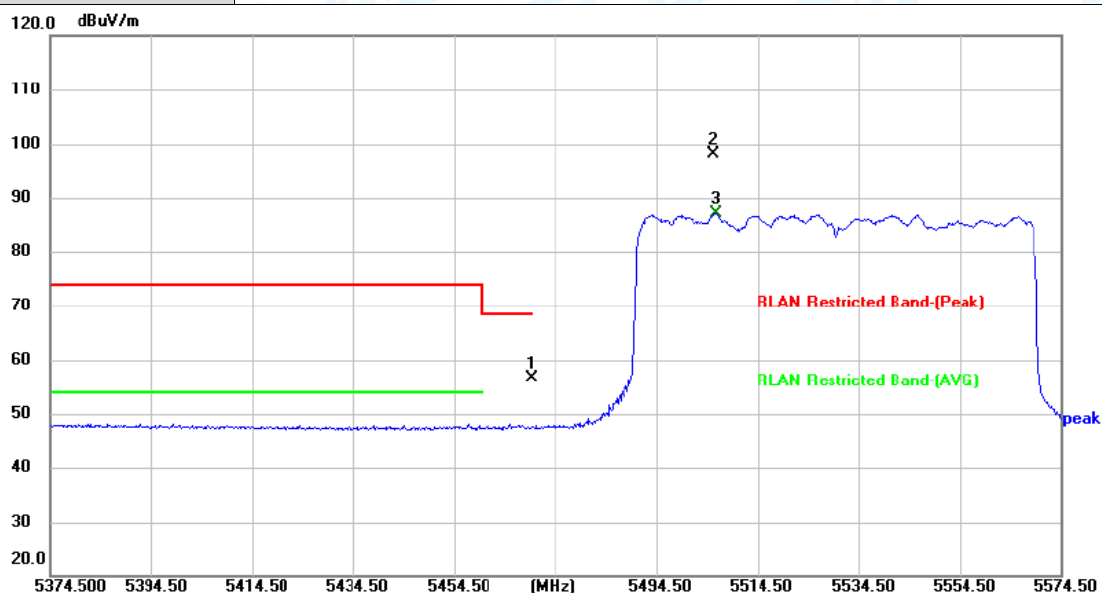


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 43.43 | 13.30 | 56.73 | 68.30 | -11.57 | peak | P |
| 2 | 5505.700 | 84.81 | 13.43 | 98.24 | | | peak | |
| 3 | 5506.300 | 73.75 | 13.43 | 87.18 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5570 MHz (U-NII-2C) | | |
| Remark: | | | |

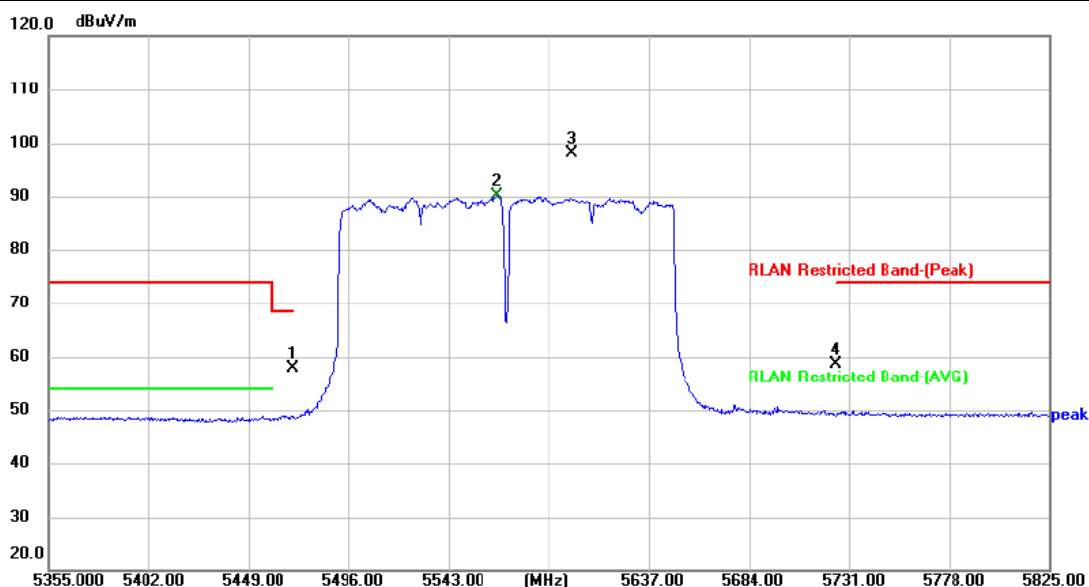


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.49 | 13.30 | 57.79 | 68.30 | -10.51 | peak | P |
| 2 | 5565.560 | 76.69 | 13.42 | 90.11 | | | AVG | |
| 3 | 5600.810 | 84.69 | 13.42 | 98.11 | | | peak | |
| 4 | 5725.000 | 44.93 | 13.58 | 58.51 | 74.00 | -15.49 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT160) Mode 5570 MHz (U-NII-2C) | | |
| Remark: | | | |

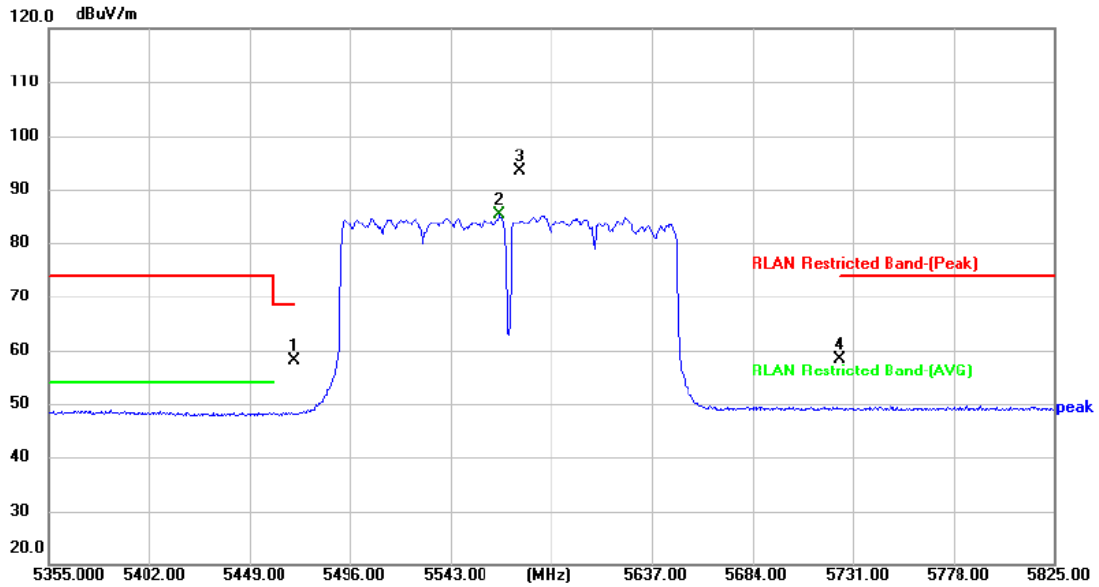


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.86 | 13.30 | 58.16 | 68.30 | -10.14 | peak | P |
| 2 | 5566.030 | 71.84 | 13.42 | 85.26 | | | AVG | |
| 3 | 5574.960 | 79.90 | 13.43 | 93.33 | | | peak | |
| 4 | 5725.000 | 44.84 | 13.58 | 58.42 | 74.00 | -15.58 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5570 MHz (U-NII-2C) | | |
| Remark: | | | |

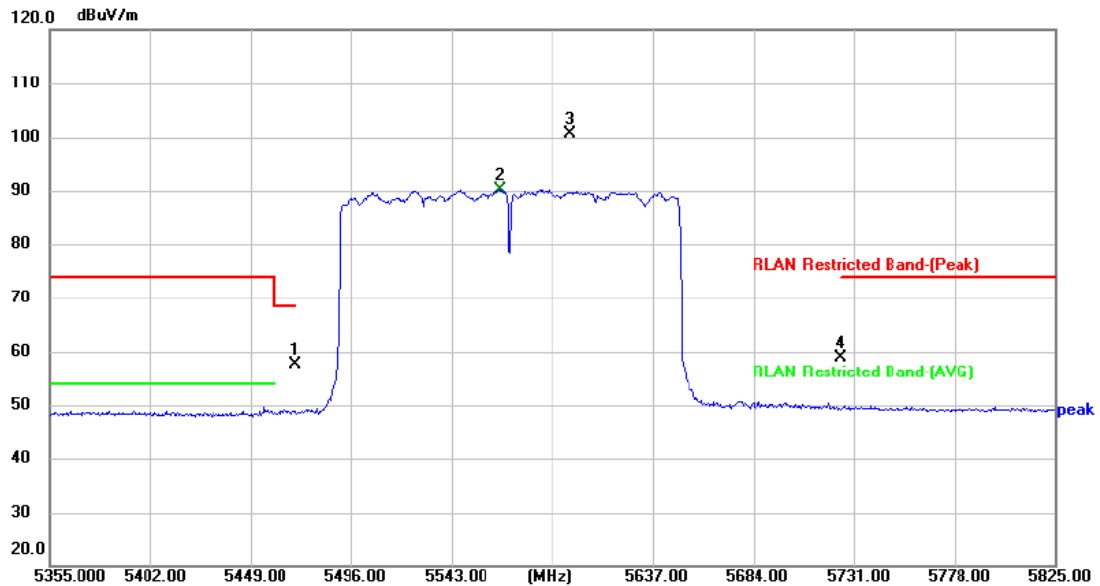


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.35 | 13.30 | 57.65 | 68.30 | -10.65 | peak | P |
| 2 | 5565.560 | 76.71 | 13.42 | 90.13 | | | AVG | |
| 3 | 5598.460 | 87.32 | 13.42 | 100.74 | | | peak | |
| 4 | 5725.000 | 45.21 | 13.58 | 58.79 | 74.00 | -15.21 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ax(HE160) Mode 5570 MHz (U-NII-2C) | | |
| Remark: | | | |

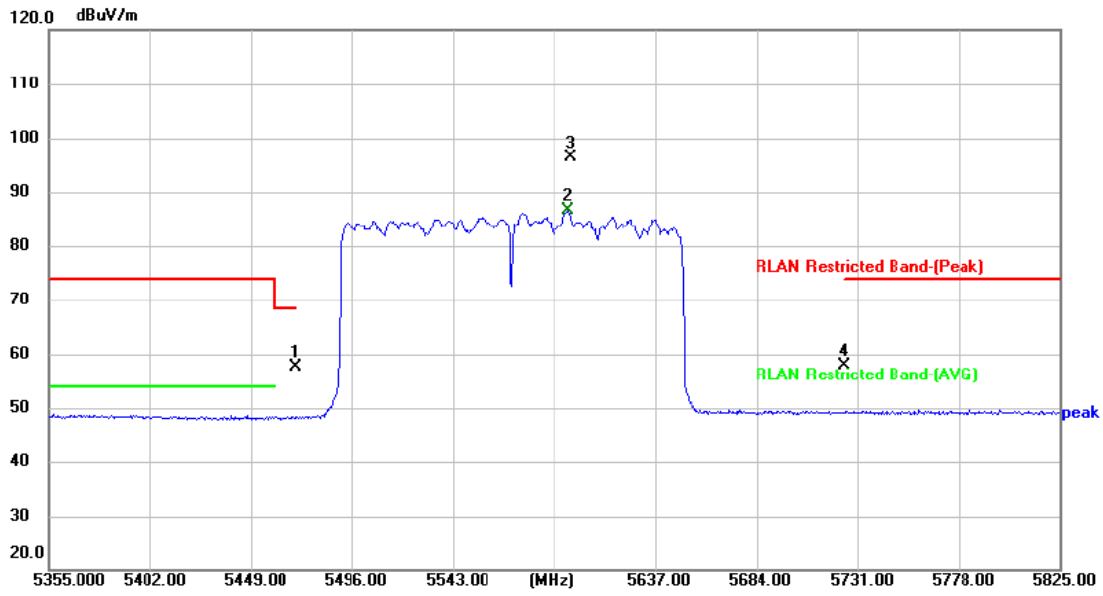


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 44.33 | 13.30 | 57.63 | 68.30 | -10.67 | peak | P |
| 2 | 5596.580 | 73.20 | 13.42 | 86.62 | | | AVG | |
| 3 | 5597.520 | 83.05 | 13.42 | 96.47 | | | peak | |
| 4 | 5725.000 | 44.34 | 13.58 | 57.92 | 74.00 | -16.08 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|------------------------------------|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5745 MHz (U-NII-3) | | |
| Remark: | | | |

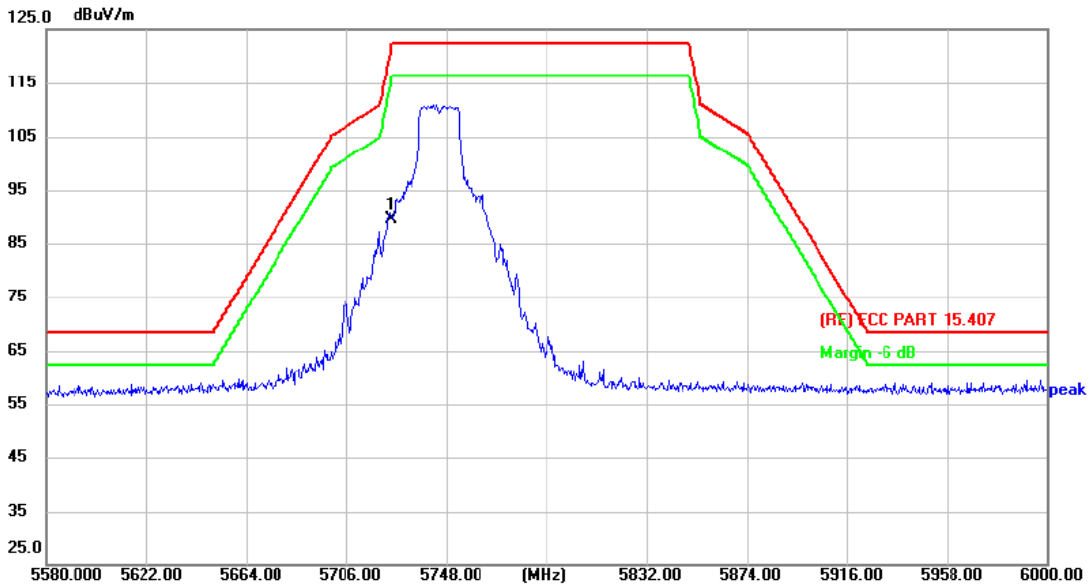


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 76.14 | 13.58 | 89.72 | 122.30 | -32.58 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|------------------------------------|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5745 MHz (U-NII-3) | | |
| Remark: | | | |

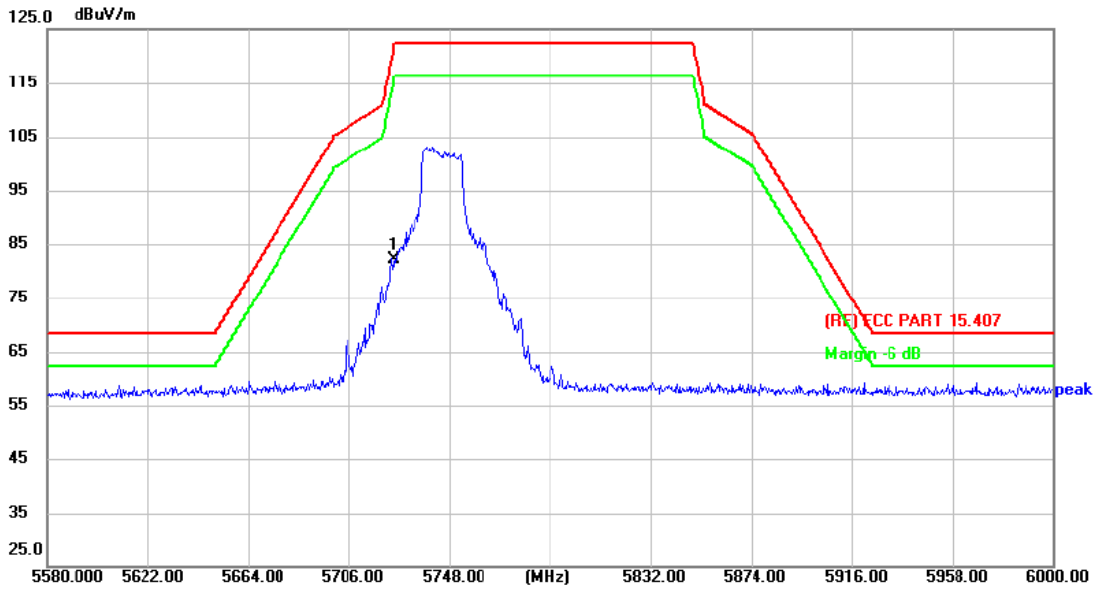


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 68.61 | 13.58 | 82.19 | 122.30 | -40.11 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|------------------------------------|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5825 MHz (U-NII-3) | | |
| Remark: | | | |

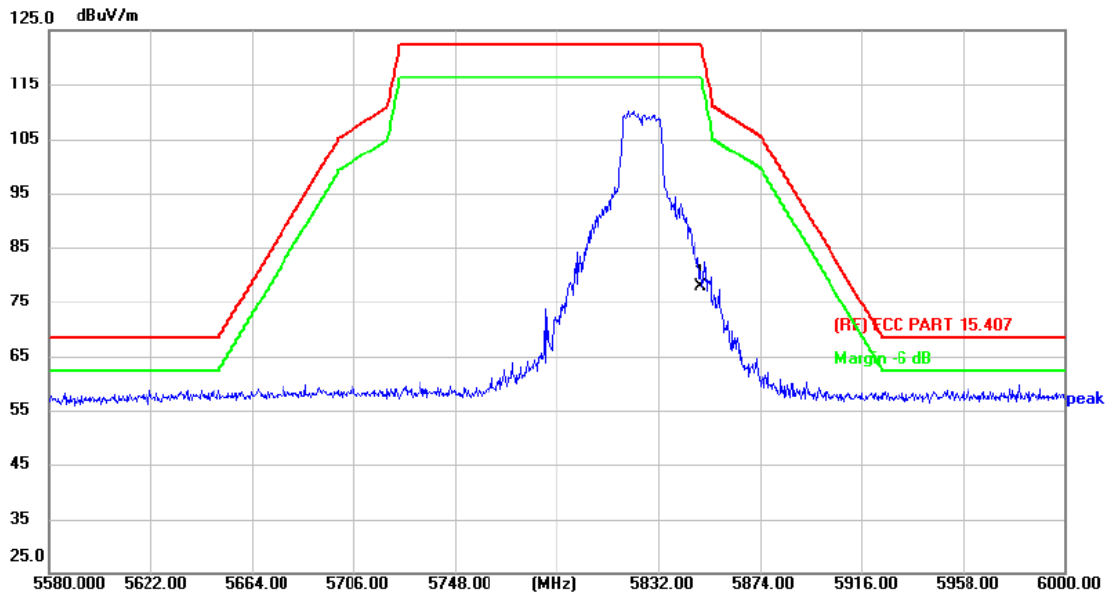


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 64.25 | 13.54 | 77.79 | 122.30 | -44.51 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|------------------------------------|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5825 MHz (U-NII-3) | | |
| Remark: | | | |

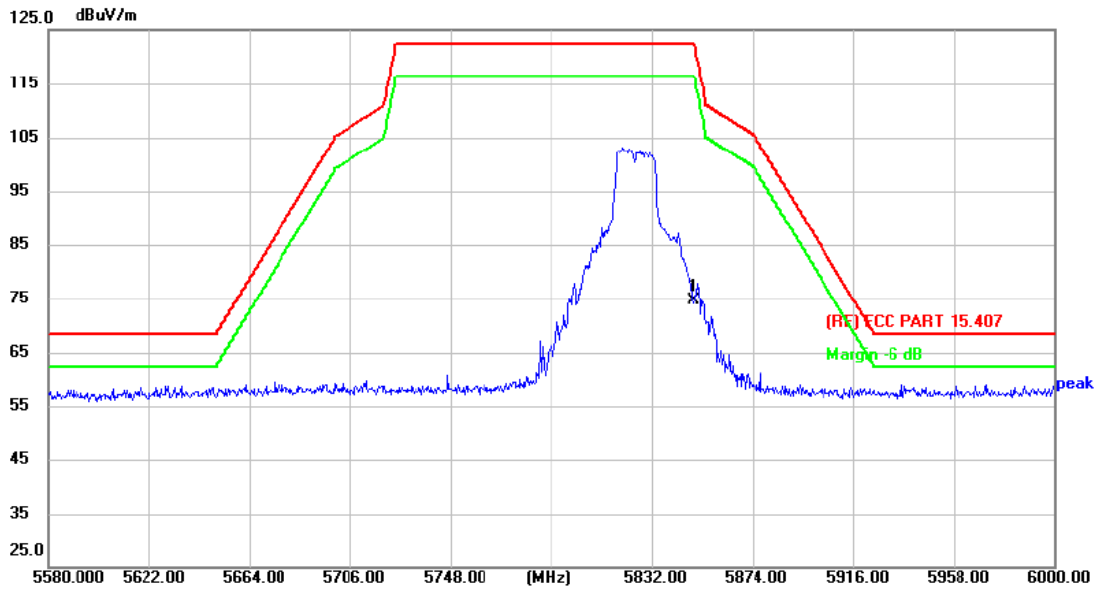


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000 | 61.03 | 13.54 | 74.57 | 122.30 | -47.73 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) | | |
| Remark: | | | |

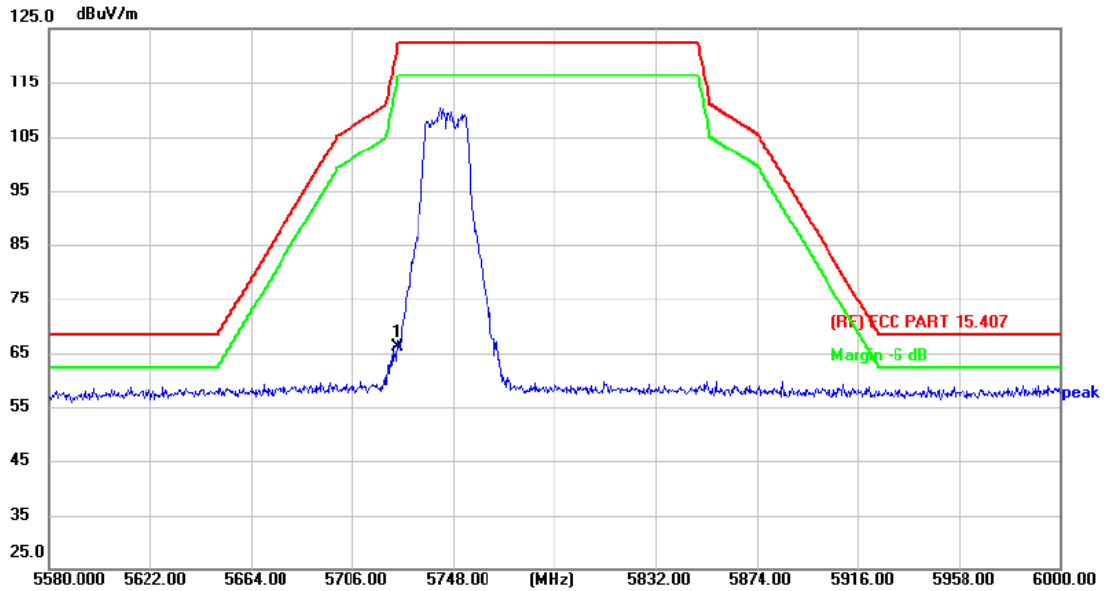


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 52.63 | 13.58 | 66.21 | 122.30 | -56.09 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 23.9°C | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) | | |
| Remark: | | | |

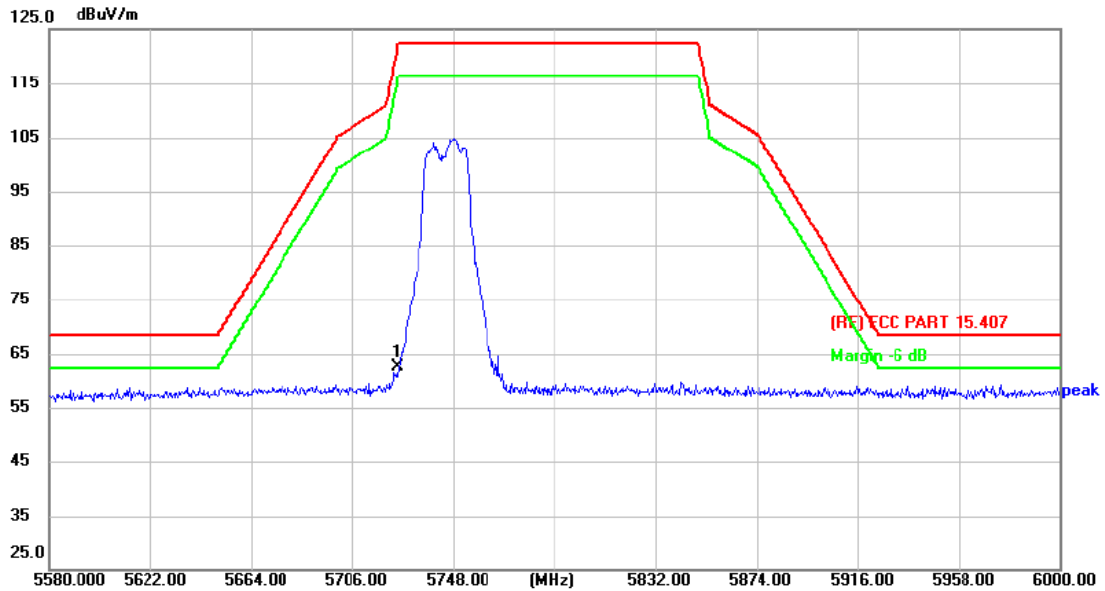

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000 | 49.16 | 13.58 | 62.74 | 122.30 | -59.56 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

