


802.11ax HE20 SDM/5500MHz

Detector mode: Average

Polarity:


Horizontal

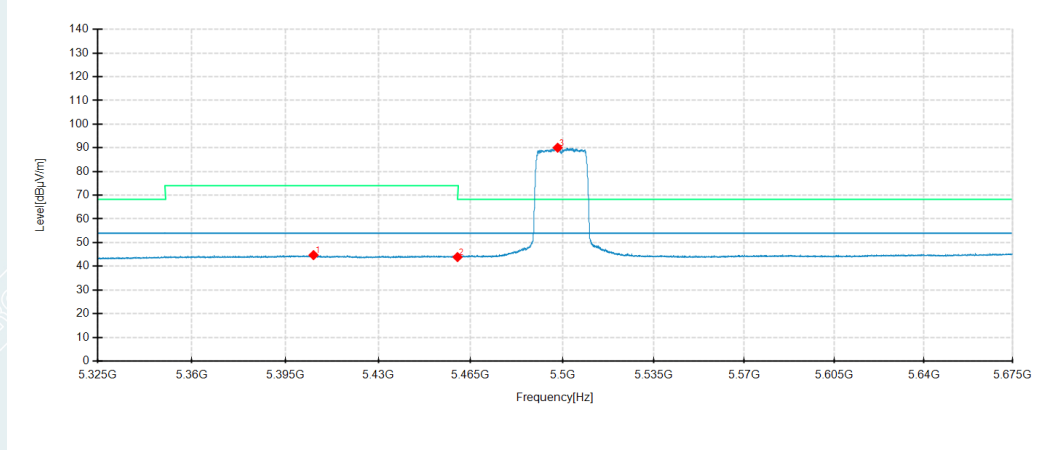

Detector mode: Average

Polarity:

Vertical

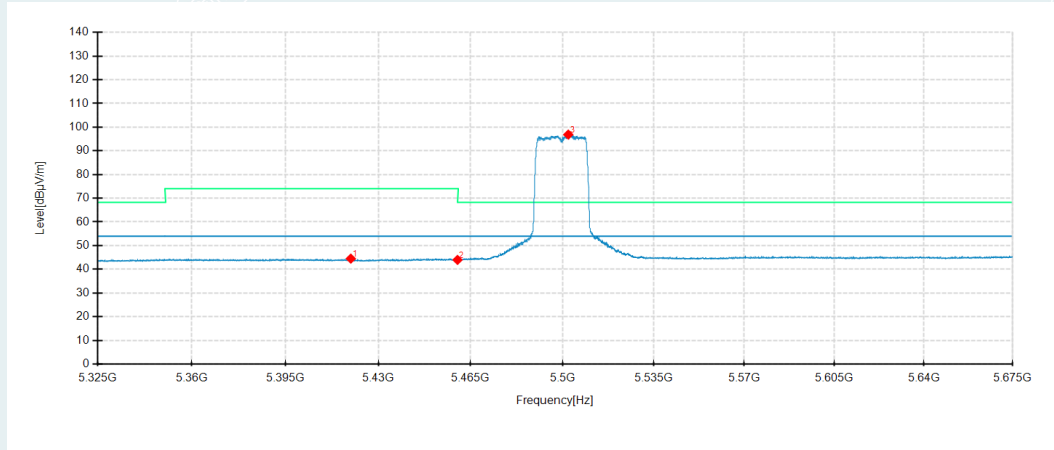


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5405.605	28.59	44.71	16.12	54.00	9.29	100	198	Horizontal	/
2	5460	27.80	43.89	16.09	54.00	10.11	200	58	Horizontal	/
3	5498.18	73.54	90.05	16.51	-	-	200	6	Horizontal	No limit
1	5419.64	28.77	44.49	15.72	54.00	9.51	200	16	Vertical	/
2	5460	28.13	43.96	15.83	54.00	10.04	100	72	Vertical	/
3	5502.24	80.44	96.86	16.42	-	-	100	38	Vertical	No limit

802.11ax HE20 SDM/5700MHz

Detector mode: Peak

Polarity:


Horizontal

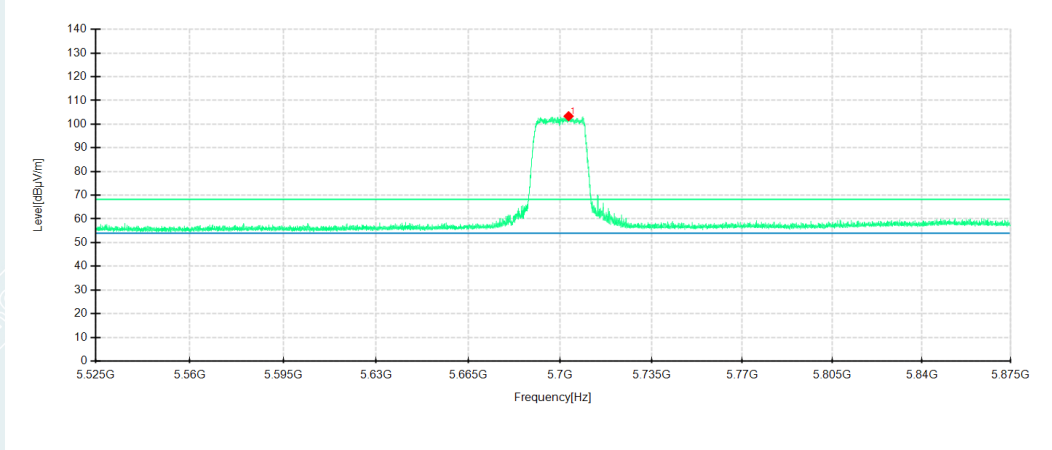

Detector mode: Peak

Polarity:

Vertical

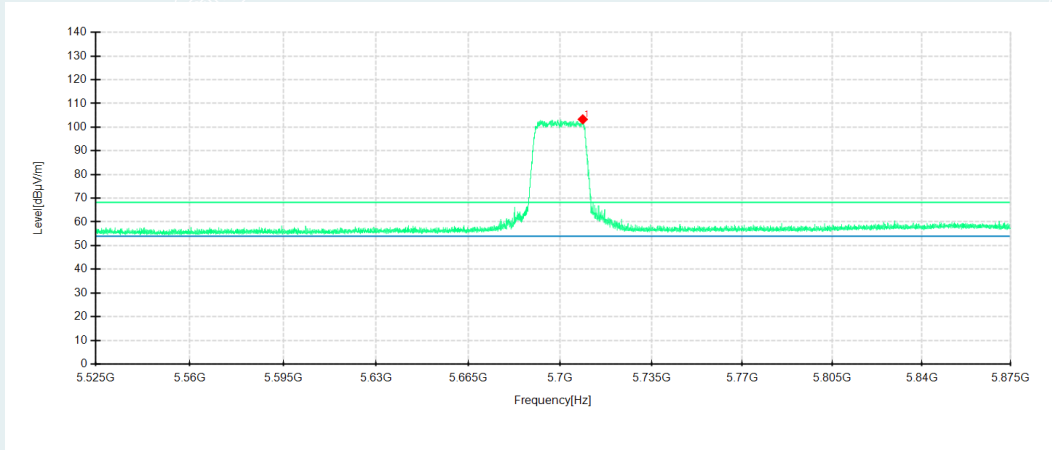


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5703.22	86.36	103.36	17.00	-	-	200	10	Horizontal	No limit
1	5708.645	86.30	103.31	17.01	-	-	200	15	Vertical	No limit

802.11ax HE20 SDM/5700MHz

Detector mode: Average

Polarity:


Horizontal

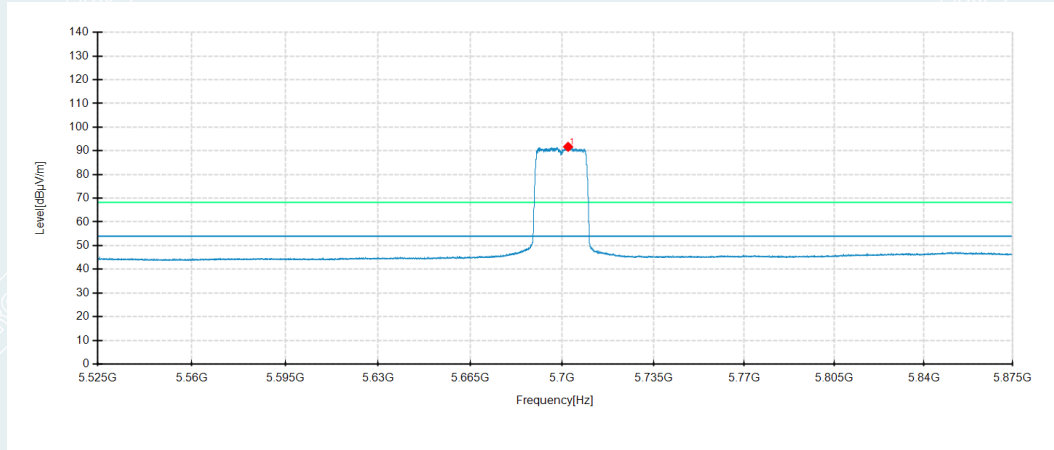

Detector mode: Average

Polarity:

Vertical

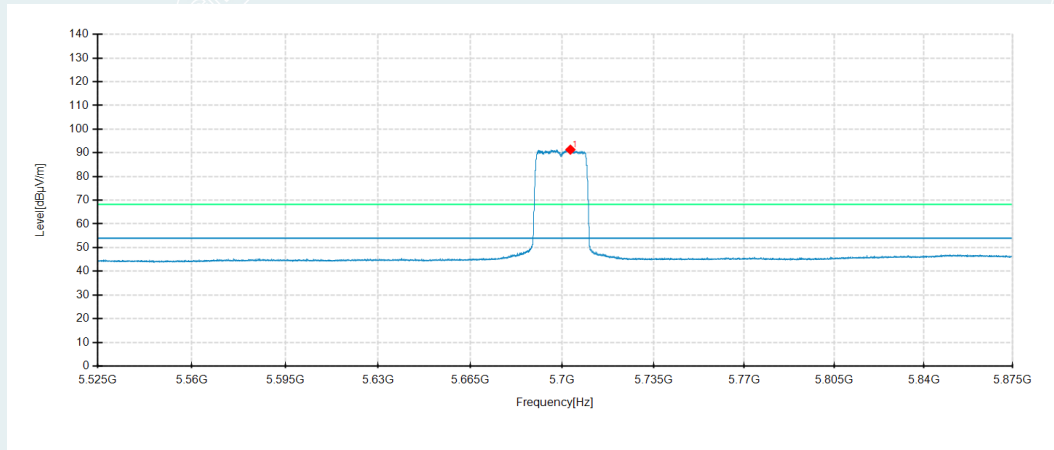


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5702.275	74.70	91.70	17.00	-	-	200	15	Horizontal	No limit
1	5703.15	74.53	91.34	16.81	-	-	200	16	Vertical	No limit

802.11ax HE20 SDM/5720MHz

Detector mode: Peak

Polarity:


Horizontal

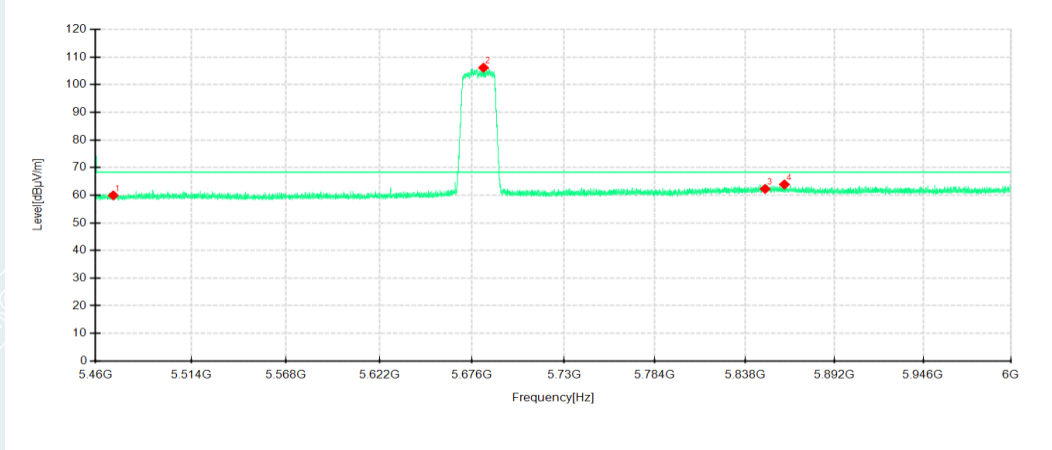

Detector mode: Peak

Polarity:

Vertical

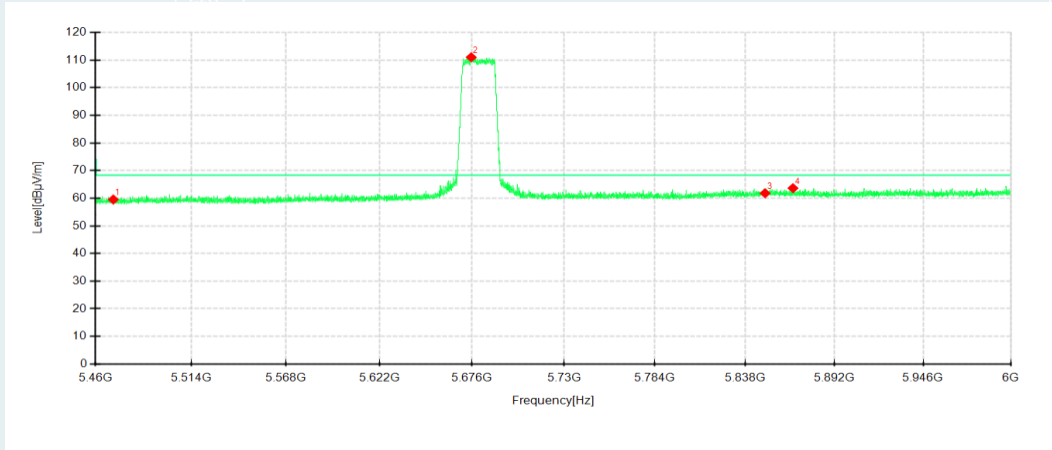


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5470	39.87	59.93	20.06	68.30	8.37	200	290	Horizontal	
2	5682.696	85.29	106.12	20.83	-	-	200	14	Horizontal	No limit
3	5850	39.50	62.28	22.78	68.30	6.02	200	148	Horizontal	
4	5861.706	41.28	63.88	22.60	68.30	4.42	200	300	Horizontal	
1	5470	39.91	59.53	19.62	68.30	8.77	200	174	Vertical	
2	5675.514	90.28	110.99	20.71	-	-	100	319	Vertical	No limit
3	5850	39.31	61.79	22.48	68.30	6.51	200	71	Vertical	
4	5866.836	41.33	63.62	22.29	68.30	4.68	100	36	Vertical	

802.11 ax HE20 SDM/5745MHz

Detector mode: Peak


Polarity:

Horizontal

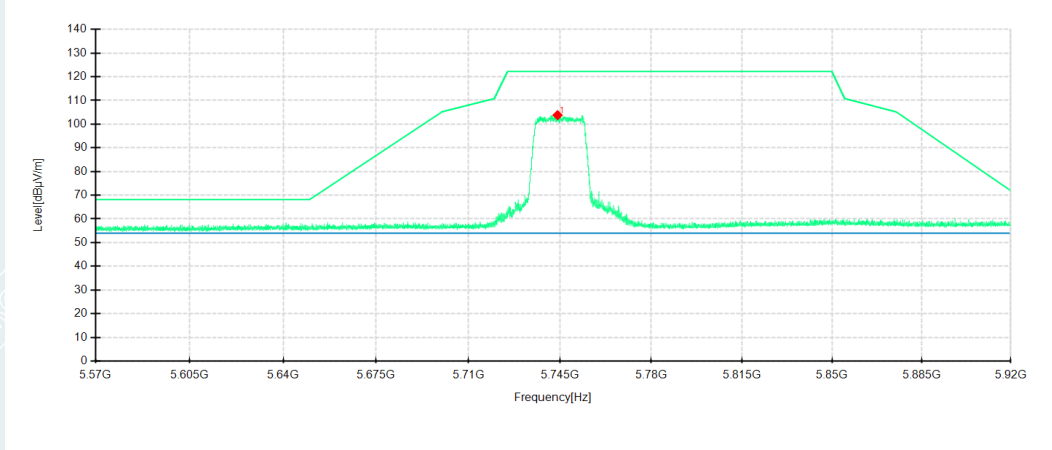

Detector mode: Peak

Polarity: Vertical

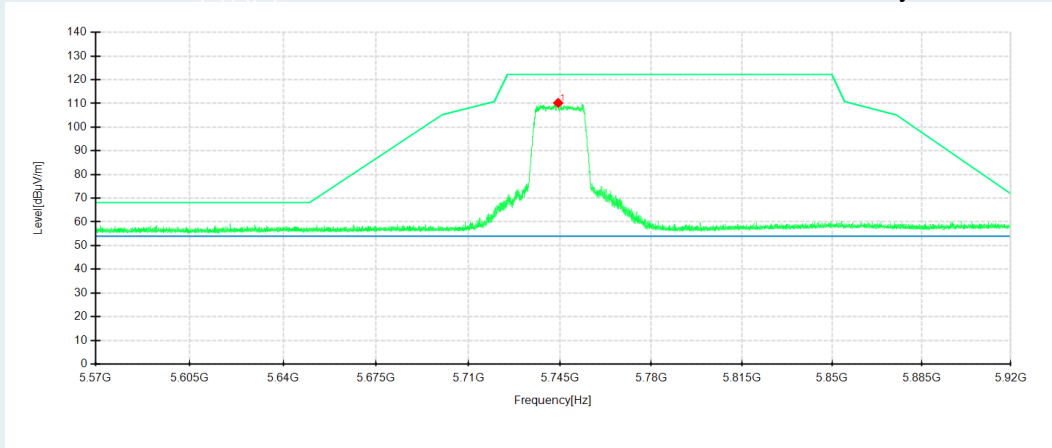


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5744.02	86.68	103.79	17.11	-	-	200	340	Horizontal	No limit
1	5744.265	93.23	110.23	17.00	-	-	100	49	Vertical	No limit

802.11 ax HE20 SDM/5825MHz

Detector mode: Peak


Polarity:

Horizontal

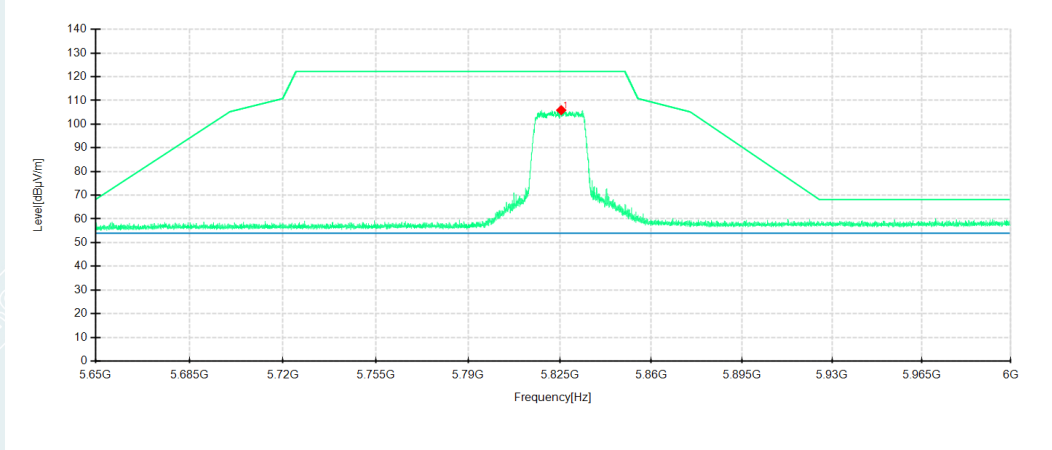

Detector mode: Peak

Polarity: Vertical

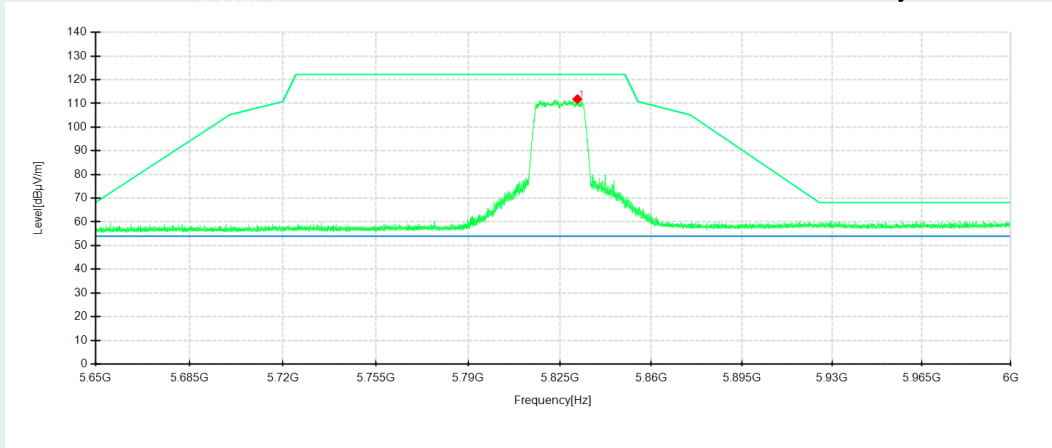


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5825.455	87.82	105.90	18.08	-	-	200	15	Horizontal	No limit
1	5831.65	93.76	111.82	18.06	-	-	200	41	Vertical	No limit

802.11ac VHT40 SDM/5190MHz

Detector mode: Peak

Polarity:


Horizontal

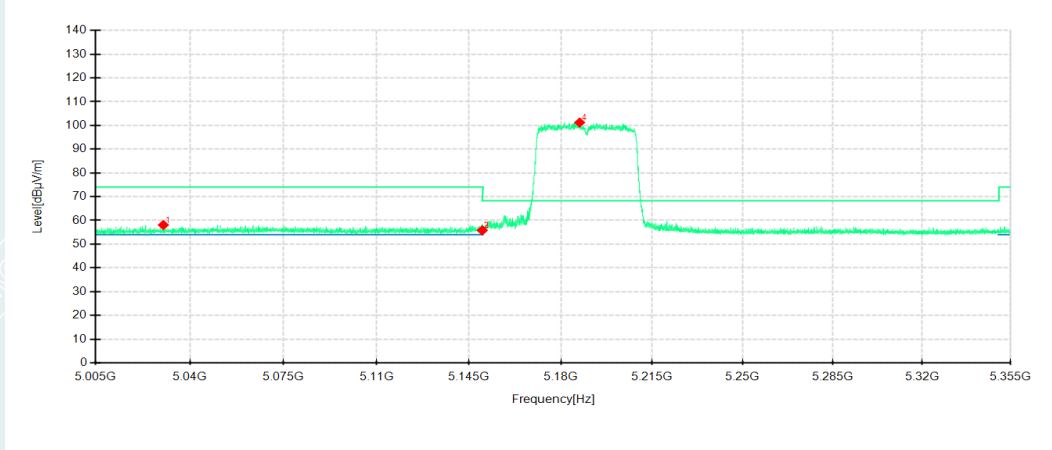

Detector mode: Peak

Polarity:

Vertical

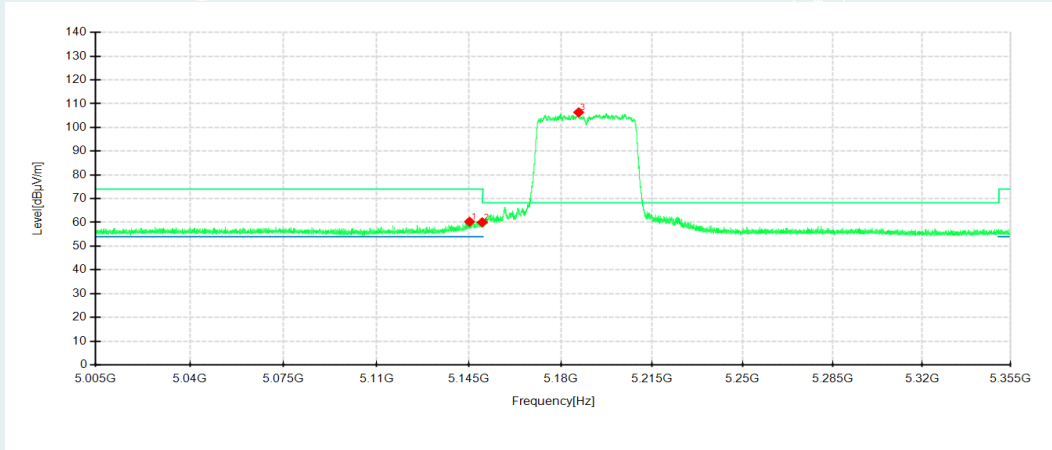


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5030.13	42.35	58.05	15.70	74.00	15.95	100	112	Horizontal	/
2	5150	40.21	55.79	15.58	68.30	12.51	100	61	Horizontal	/
3	5187.175	85.55	101.22	15.67	-	-	200	336	Horizontal	No limit
1	5145.175	44.81	60.30	15.49	74.00	13.70	100	238	Vertical	/
2	5150	44.54	60.02	15.48	68.30	8.28	100	164	Vertical	/
3	5186.825	90.62	106.34	15.72	-	-	100	48	Vertical	No limit

802.11ac VHT40 SDM/5190MHz

Detector mode: Average

Polarity:


Horizontal

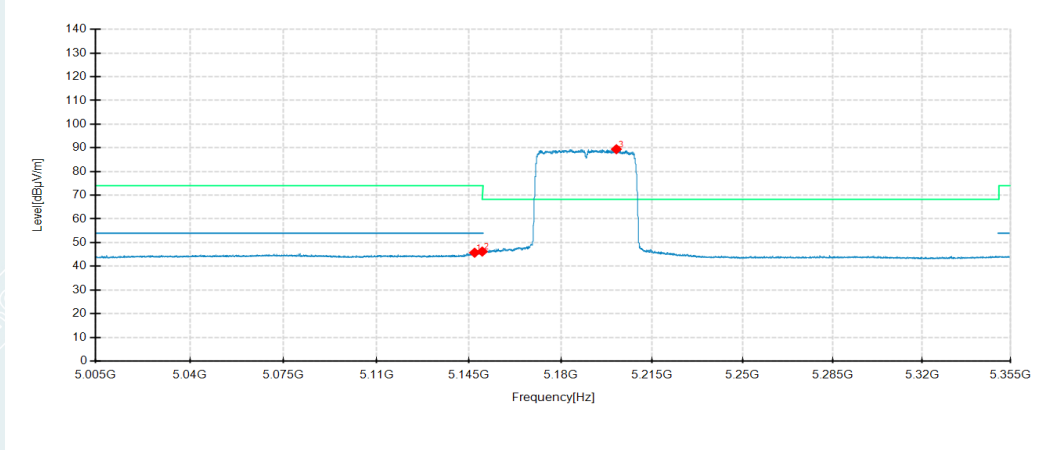

Detector mode: Average

Polarity:

Vertical

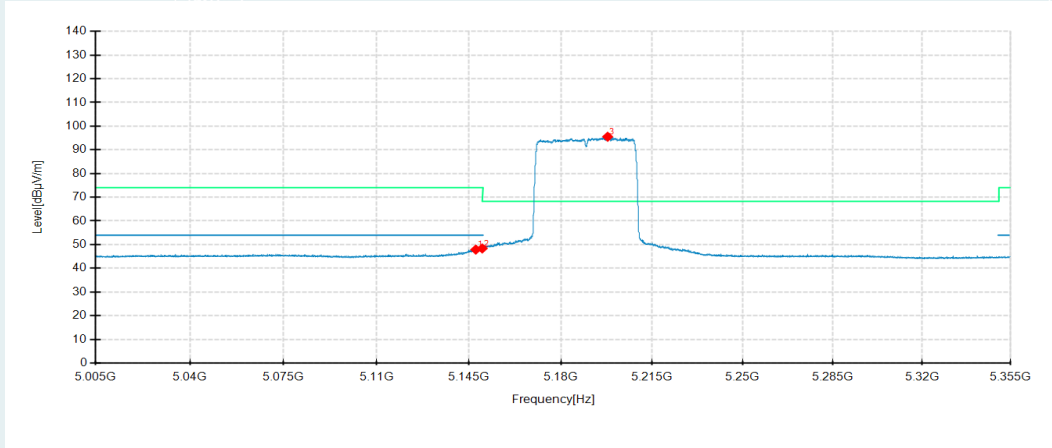


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5147.1	30.13	45.73	15.60	54.00	8.27	100	0	Horizontal	/
2	5150	30.63	46.21	15.58	54.00	7.79	100	334	Horizontal	/
3	5201.28	73.73	89.42	15.69	-	-	200	339	Horizontal	No limit
1	5147.555	32.41	47.89	15.48	54.00	6.11	100	28	Vertical	/
2	5150	32.88	48.36	15.48	54.00	5.64	100	39	Vertical	/
3	5197.92	79.73	95.52	15.79	-	-	100	39	Vertical	No limit

802.11ac VHT40 SDM/5230MHz

Detector mode: Peak

Polarity:


Horizontal

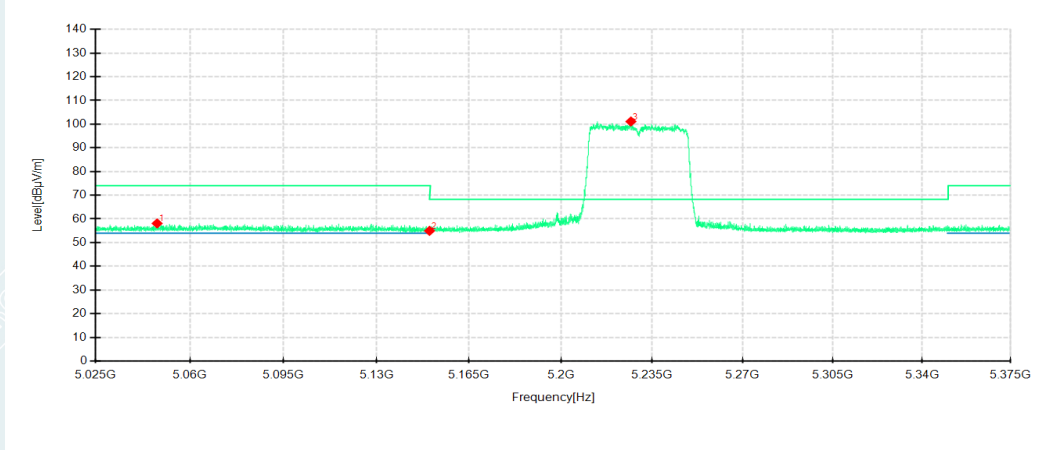

Detector mode: Peak

Polarity:

Vertical

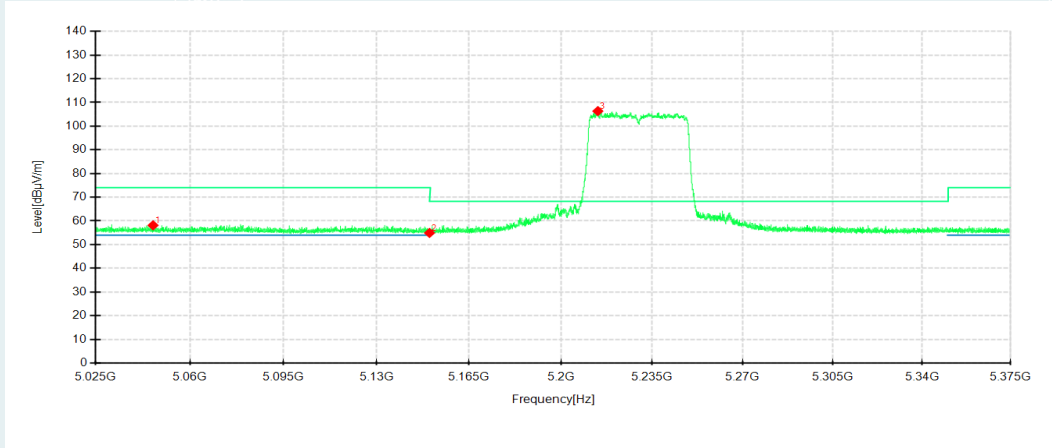


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5047.82	42.19	58.09	15.90	74.00	15.91	100	307	Horizontal	/
2	5150	39.38	54.96	15.58	68.30	13.34	200	35	Horizontal	/
3	5226.88	85.58	101.12	15.54	-	-	200	333	Horizontal	No limit
1	5046.315	42.23	58.14	15.91	74.00	15.86	200	132	Vertical	/
2	5150	39.45	54.93	15.48	68.30	13.37	100	167	Vertical	/
3	5214.175	90.58	106.35	15.77	-	-	100	39	Vertical	No limit

802.11ac VHT40 SDM/5230MHz

Detector mode: Average

Polarity:


Horizontal

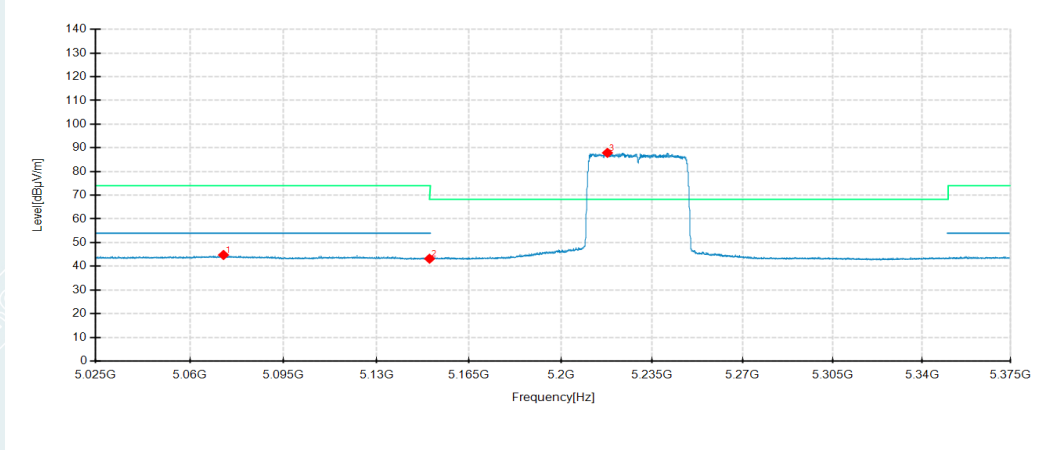

Detector mode: Average

Polarity:

Vertical

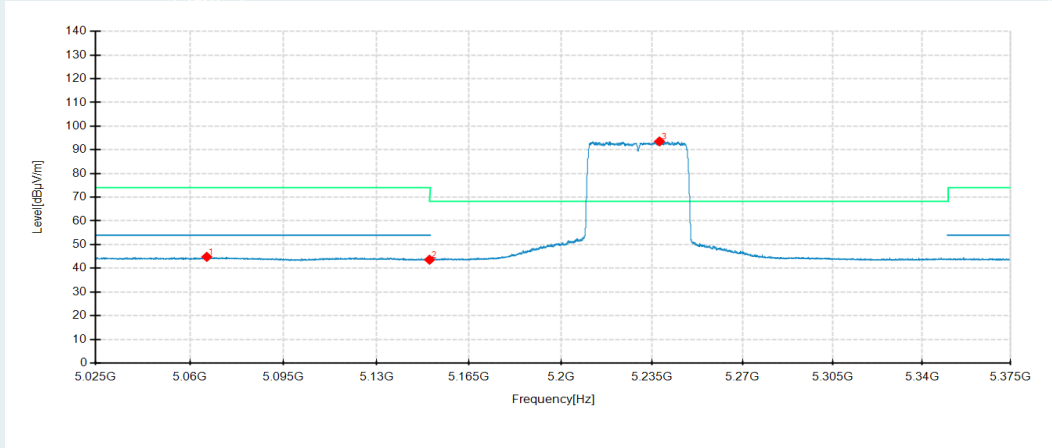


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5072.53	28.91	44.77	15.86	54.00	9.23	100	298	Horizontal	/
2	5150	27.61	43.19	15.58	54.00	10.06	100	99	Horizontal	/
3	5217.85	72.29	87.88	15.59	-	-	200	335	Horizontal	No limit
1	5066.3	29.00	44.82	15.82	54.00	9.18	200	242	Vertical	/
2	5150	28.12	43.60	15.48	54.00	9.79	200	269	Vertical	/
3	5237.87	77.82	93.54	15.72	-	-	200	264	Vertical	No limit

802.11ac VHT40 SDM/5270MHz

Detector mode: Peak

Polarity:


Horizontal

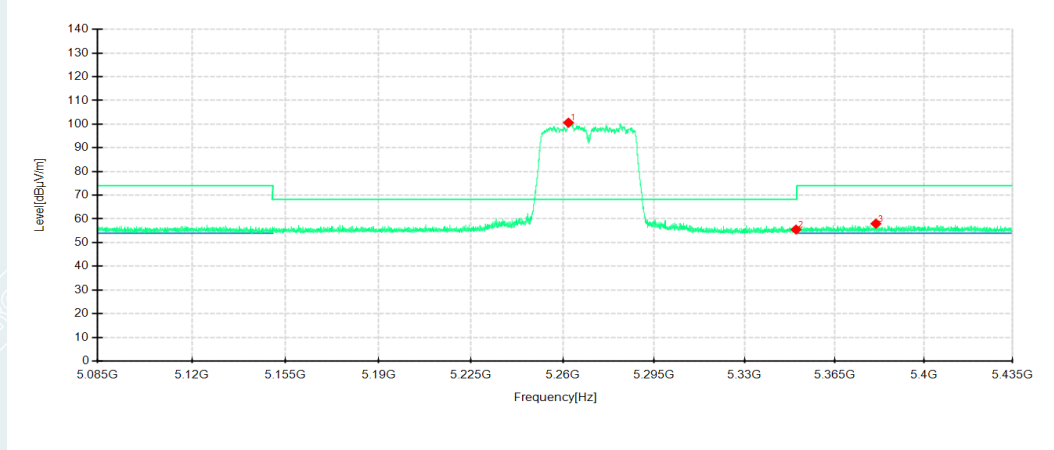

Detector mode: Peak

Polarity:

Vertical

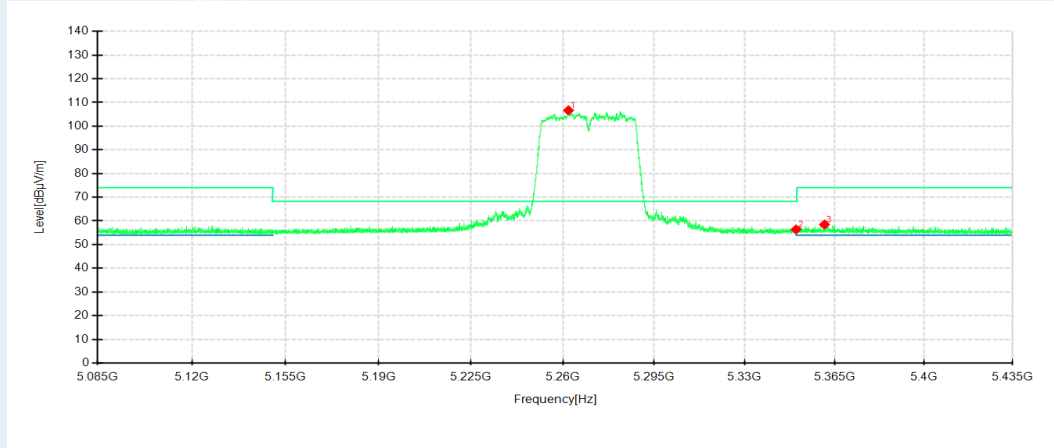


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5262.17	82.22	100.62	18.40	-	-	200	335	Horizontal	No limit
2	5350	36.98	55.52	18.54	68.30	12.78	100	111	Horizontal	/
3	5381.17	39.07	57.98	18.91	74.00	16.02	100	141	Horizontal	/
1	5262.17	87.95	106.65	18.70	-	-	100	47	Vertical	No limit
2	5350	40.83	56.37	15.54	68.30	12.68	200	118	Vertical	/
3	5361.08	39.87	58.46	18.59	74.00	15.54	200	285	Vertical	/

802.11ac VHT40 SDM/5270MHz

Detector mode: Average

Polarity:


Horizontal

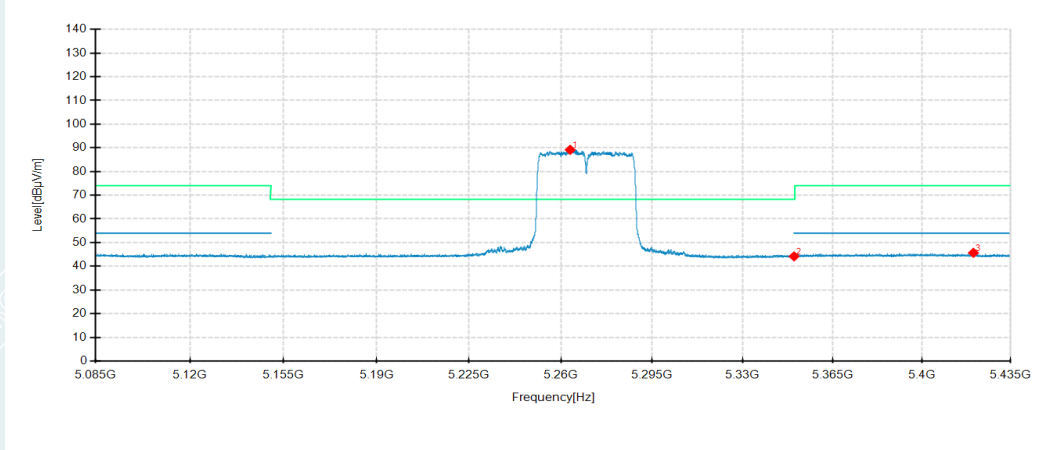

Detector mode: Average

Polarity:

Vertical

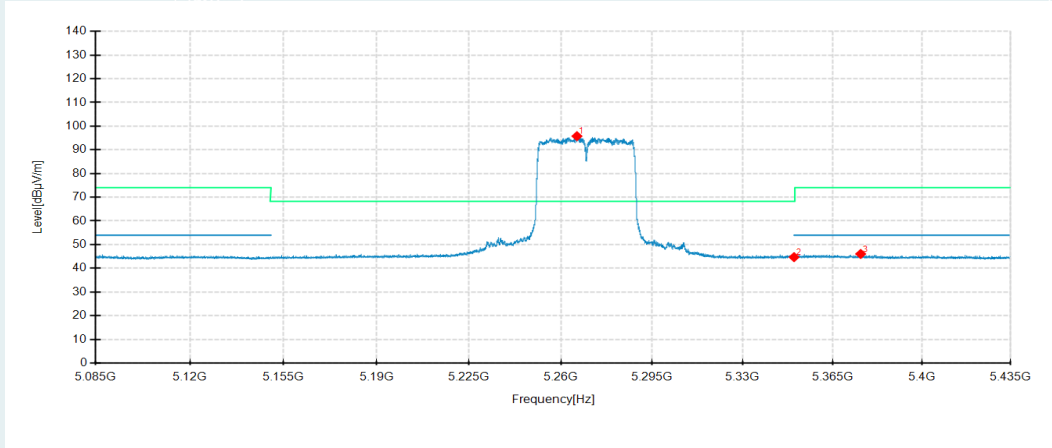


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5263.605	70.77	89.17	18.40	-	-	200	26	Horizontal	No limit
2	5350	28.63	44.17	15.54	54.00	9.50	100	0	Horizontal	/
3	5420.265	26.62	45.69	19.07	54.00	8.31	100	17	Horizontal	/
1	5266.195	77.08	95.78	18.70	-	-	100	36	Vertical	No limit
2	5350	29.17	44.71	15.54	54.00	9.74	200	187	Vertical	/
3	5375.99	27.40	46.05	18.65	54.00	7.95	100	16	Vertical	/

802.11ac VHT40 SDM/5310MHz

Detector mode: Peak

Polarity:


Horizontal

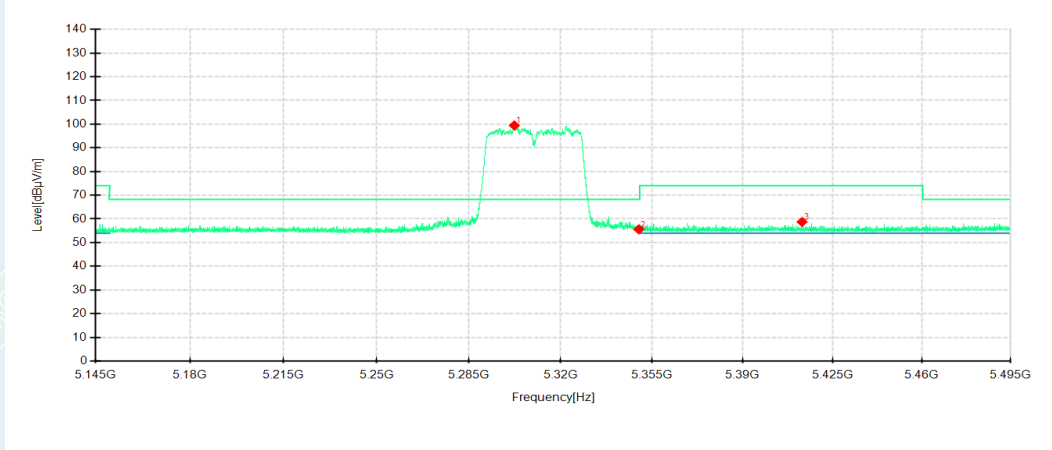

Detector mode: Peak

Polarity:

Vertical

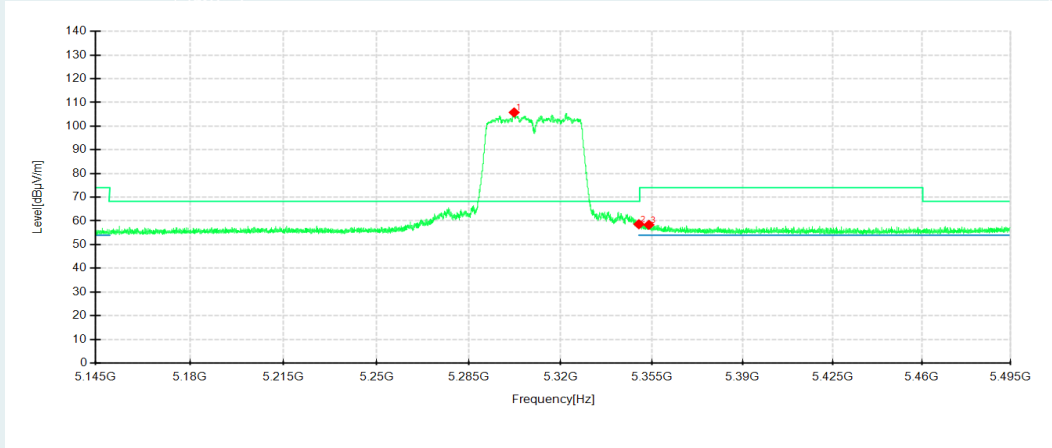


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5302.29	81.06	99.45	18.39	-	-	100	336	Horizontal	No limit
2	5350	40.03	55.57	15.54	68.30	12.35	100	262	Horizontal	/
3	5413.135	39.62	58.72	19.10	74.00	15.28	200	157	Horizontal	/
1	5302.22	87.10	105.78	18.68	-	-	100	48	Vertical	No limit
2	5350	40.06	58.60	18.54	68.30	9.70	200	202	Vertical	/
3	5353.845	39.78	58.33	18.55	74.00	15.67	200	40	Vertical	/

802.11ac VHT40 SDM/5310MHz

Detector mode: Average

Polarity:


Horizontal

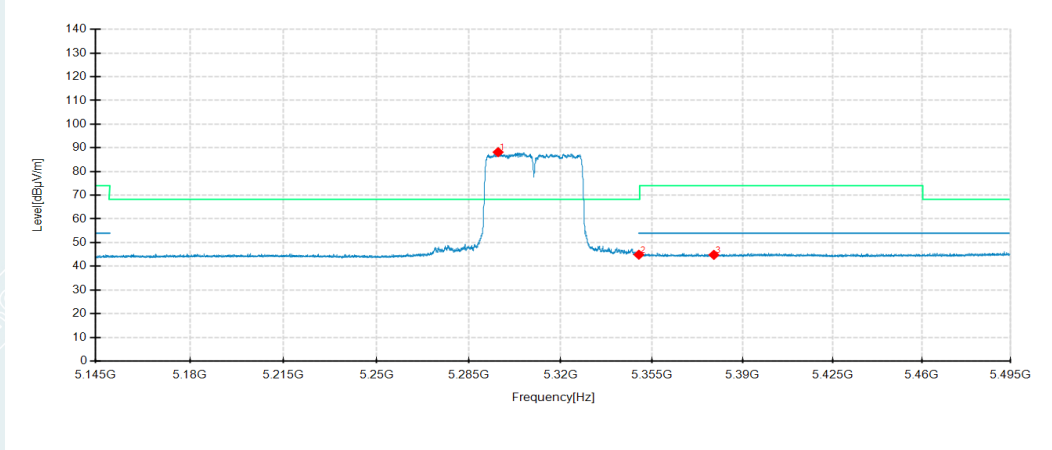

Detector mode: Average

Polarity:

Vertical

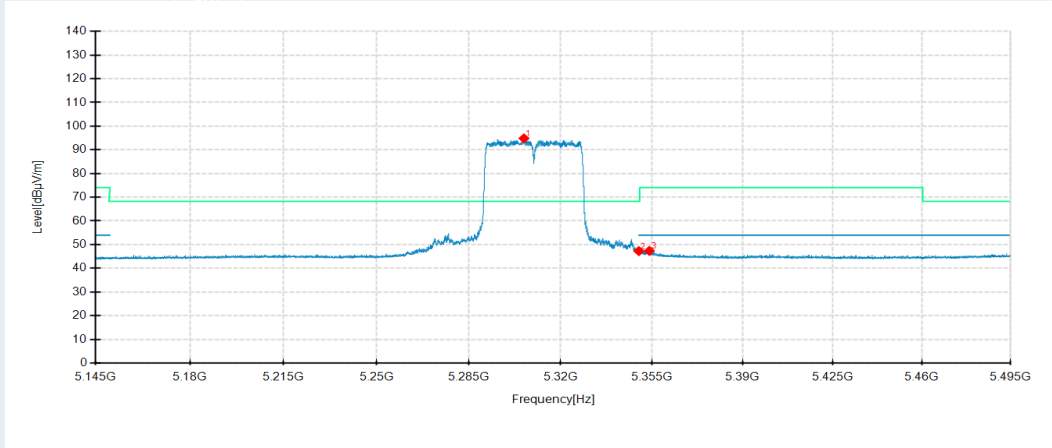


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5296.13	69.79	88.18	18.39	-	-	200	333	Horizontal	No limit
2	5350	29.35	44.89	15.54	54.00	9.51	200	129	Horizontal	/
3	5378.94	28.93	44.82	15.89	54.00	8.08	200	212	Horizontal	/
1	5305.965	76.15	94.83	18.68	-	-	100	38	Vertical	No limit
2	5350	28.72	47.26	18.54	54.00	6.74	100	38	Vertical	/
3	5354.02	28.80	47.35	18.55	54.00	6.65	100	38	Vertical	/

802.11ac VHT40 SDM/5510MHz

Detector mode: Peak

Polarity:


Horizontal

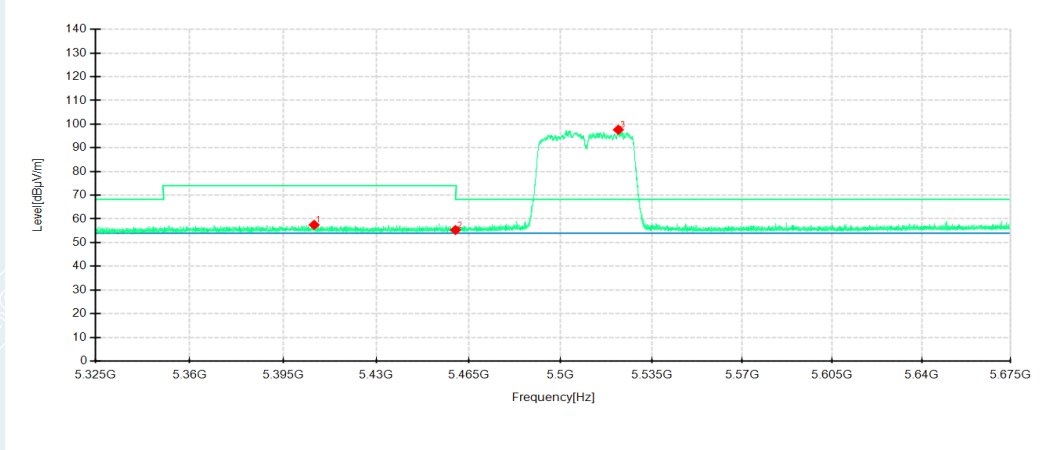

Detector mode: Peak

Polarity:

Vertical

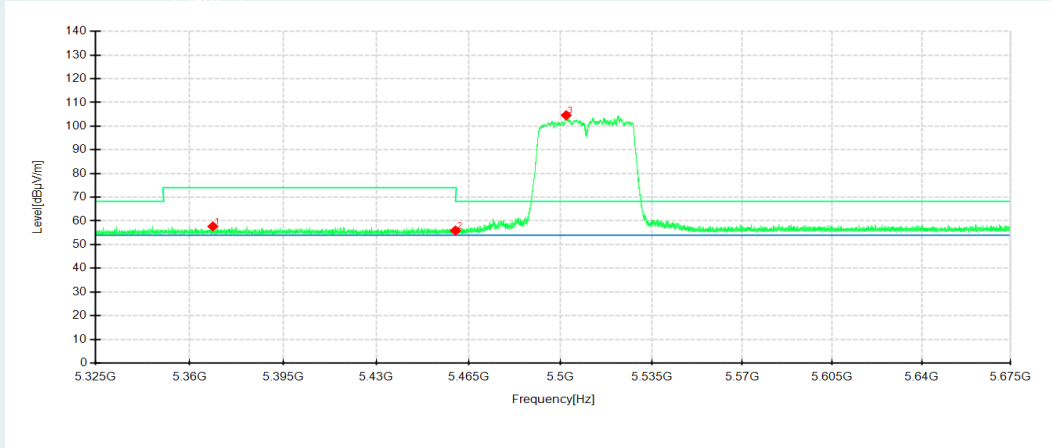


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5406.585	38.36	57.48	19.12	74.00	16.52	100	252	Horizontal	/
2	5460	39.22	55.31	16.09	68.30	11.84	100	94	Horizontal	/
3	5522.19	78.33	97.62	19.29	-	-	200	16	Horizontal	No limit
1	5368.645	39.07	57.69	18.62	74.00	16.31	200	173	Vertical	/
2	5460	40.10	55.93	15.83	68.30	12.09	100	164	Vertical	/
3	5502.205	85.18	104.60	19.42	-	-	100	48	Vertical	No limit

802.11ac VHT40 SDM/5510MHz

Detector mode: Average

Polarity:


Horizontal

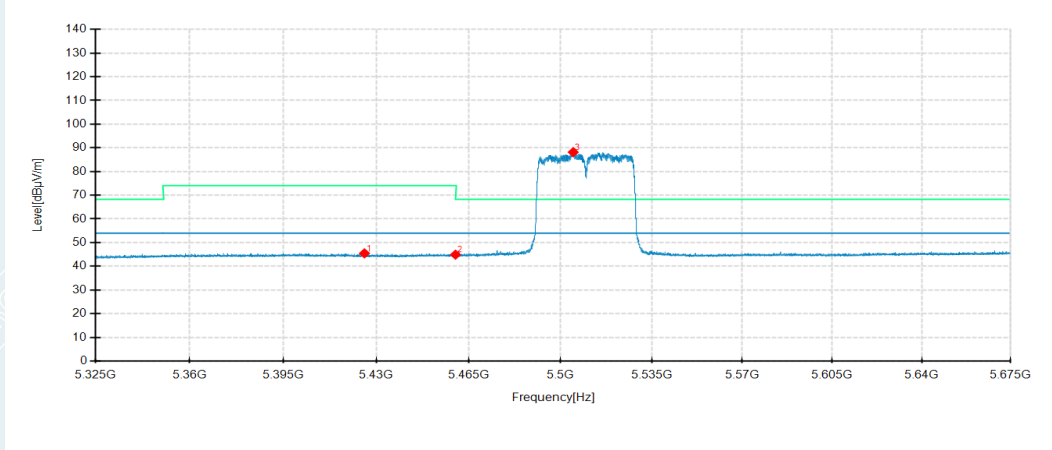

Detector mode: Average

Polarity:

Vertical

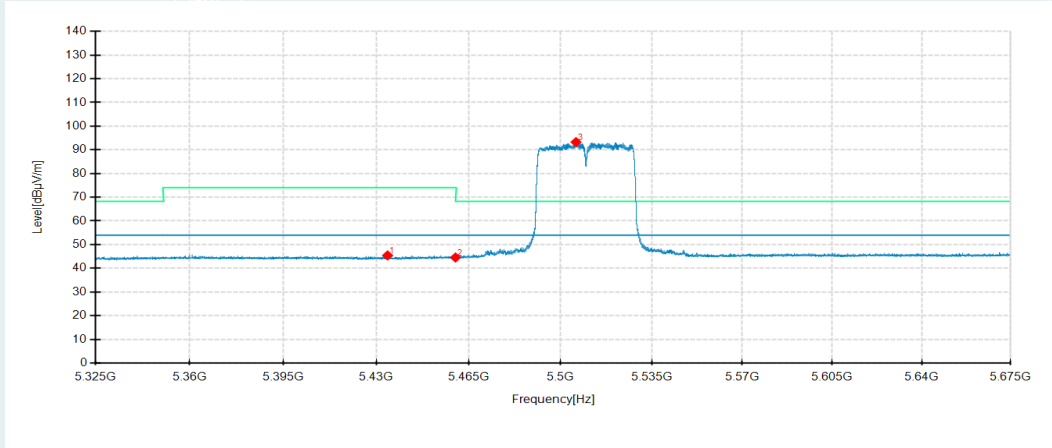


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5425.52	26.41	45.47	19.06	54.00	8.53	200	240	Horizontal	/
2	5460	25.82	44.91	19.09	54.00	9.09	200	16	Horizontal	/
3	5504.9	68.68	88.16	19.48	-	-	200	36	Horizontal	No limit
1	5434.27	26.72	45.42	18.70	54.00	8.58	100	186	Vertical	/
2	5460	28.73	44.56	15.83	54.00	9.37	200	79	Vertical	/
3	5505.95	73.86	93.27	19.41	-	-	100	47	Vertical	No limit

802.11ac VHT40 SDM/5670MHz

Detector mode: Peak

Polarity:


Horizontal

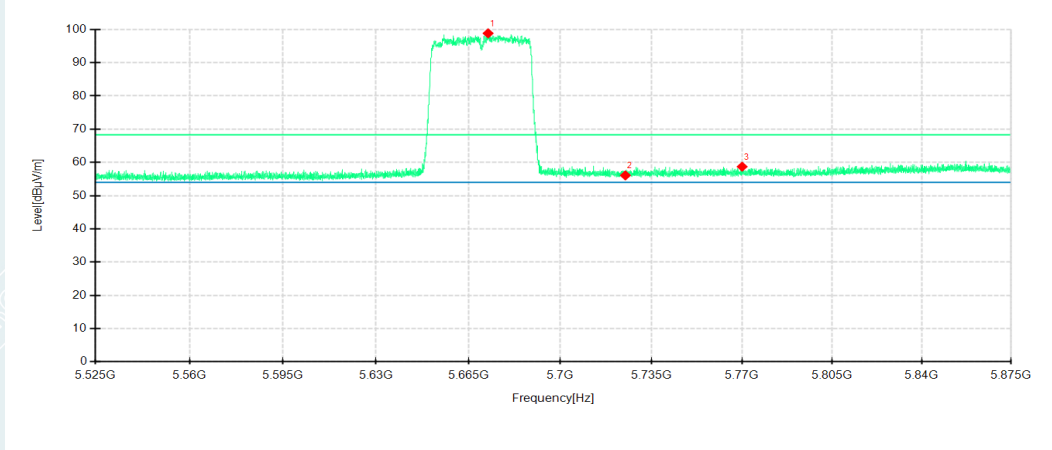

Detector mode: Peak

Polarity:

Vertical

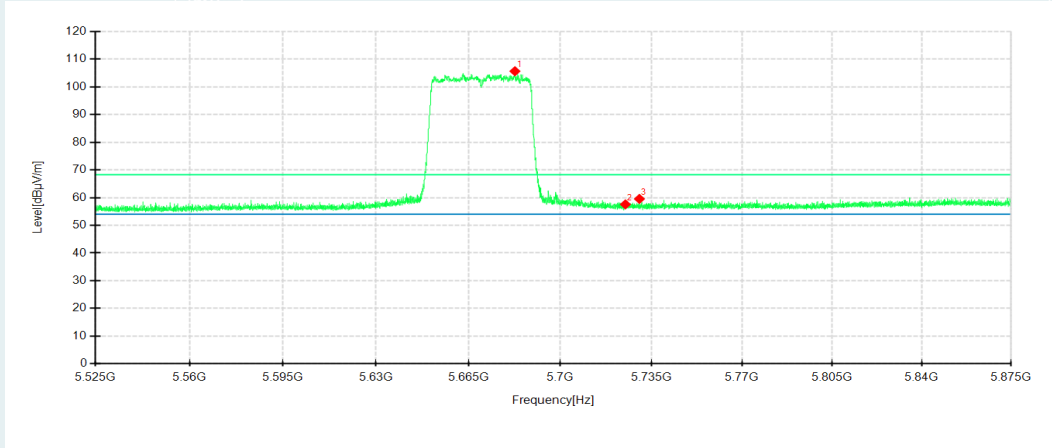


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5672.49	79.05	98.84	19.79	-	-	200	332	Horizontal	No limit
2	5725.00	36.03	56.09	20.06	68.30	12.21	200	158	Horizontal	/
3	5770.035	38.50	58.72	20.22	68.30	9.58	200	168	Horizontal	/
1	5682.71	85.91	105.64	19.73	-	-	100	316	Vertical	No limit
2	5725.00	37.67	57.58	19.91	68.30	10.72	100	316	Vertical	/
3	5730.38	39.61	59.55	19.94	68.30	8.75	200	203	Vertical	/

802.11ac VHT40 SDM/5755MHz

Detector mode: Peak

Polarity:


Horizontal

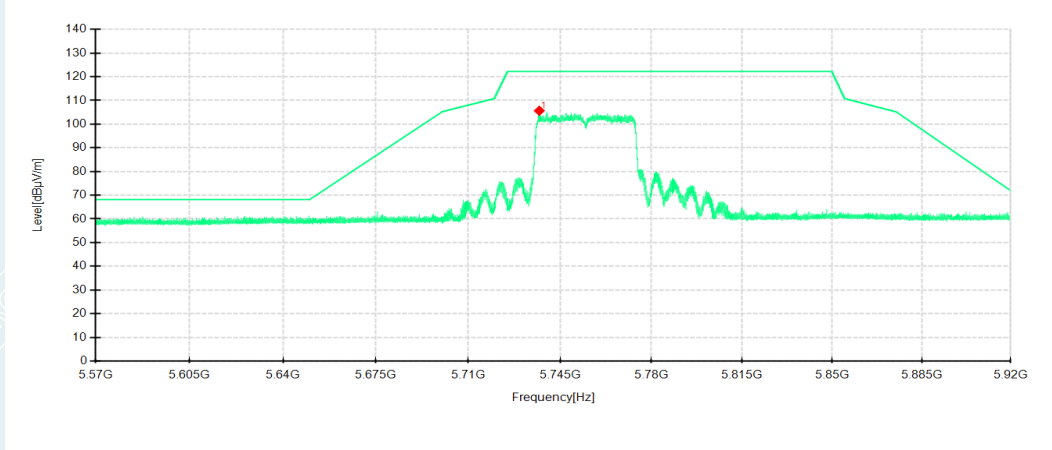

Detector mode: Peak

Polarity:

Vertical

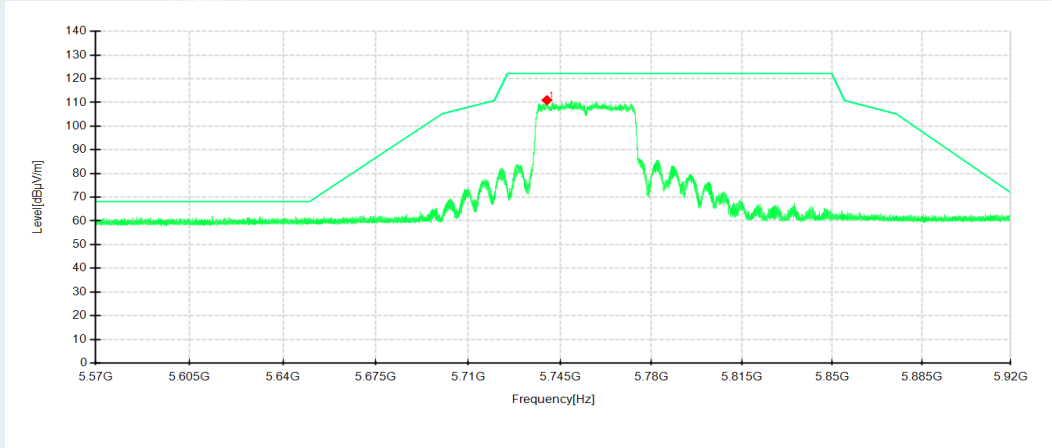


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5737.0375	85.57	105.66	20.09	-	-	200	185	Horizontal	No limit
1	5739.9775	90.99	110.97	19.98	-	-	200	199	Vertical	No limit

802.11ac VHT40 SDM/5795MHz

Detector mode: Peak

Polarity:


Horizontal

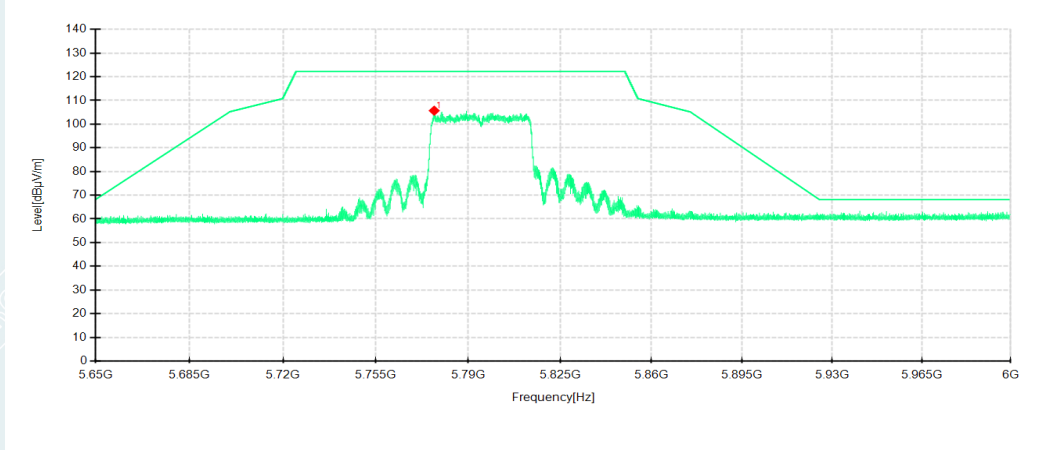

Detector mode: Peak

Polarity:

Vertical

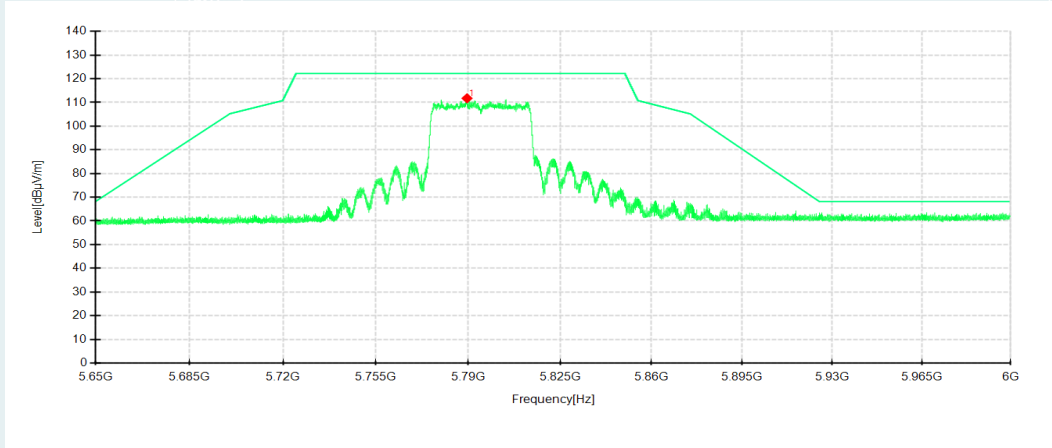


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5777.0675	85.45	105.70	20.25	-	-	200	193	Horizontal	No limit
1	5789.5275	91.63	111.76	20.13	-	-	100	231	Vertical	No limit

802.11ac VHT40 SDM/5710MHz

Detector mode: Peak

Polarity:


Horizontal

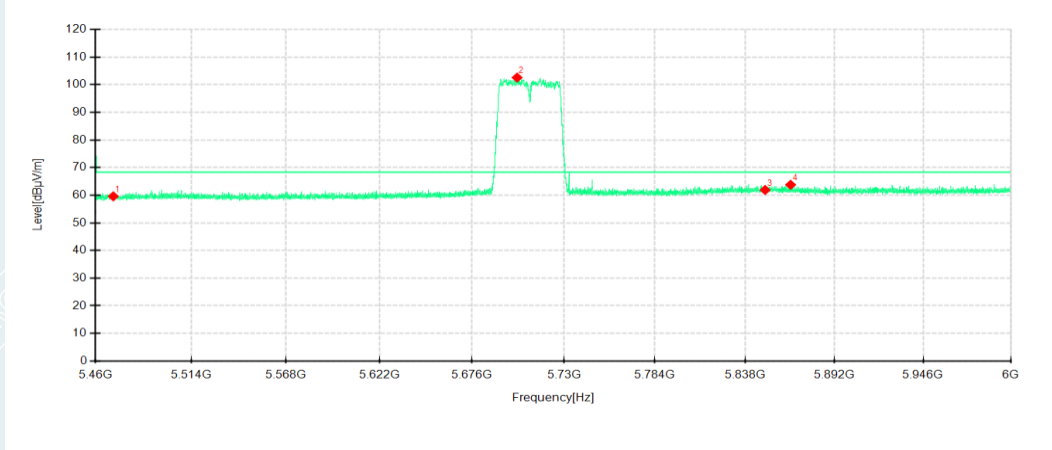

Detector mode: Peak

Polarity:

Vertical

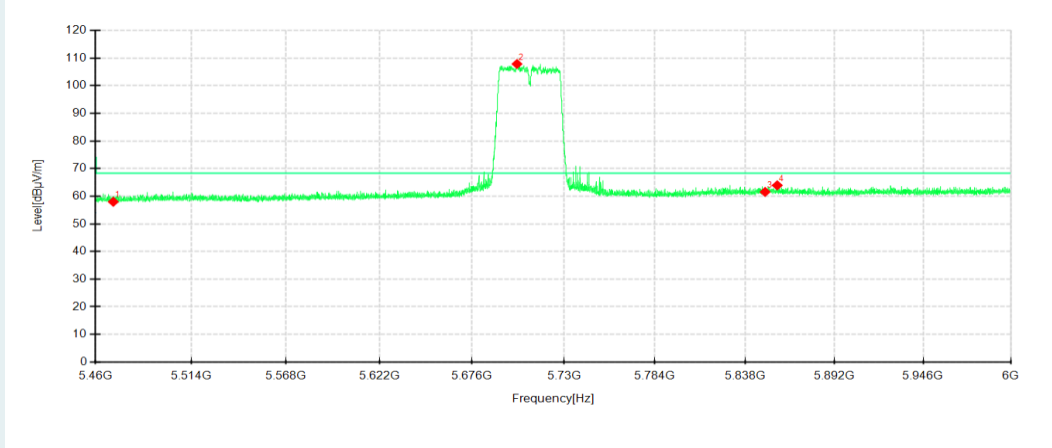


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5470	39.53	59.59	20.06	68.30	8.71	200	97	Horizontal	/
2	5702.406	81.56	102.57	21.01	-	-	200	339	Horizontal	No limit
3	5850	39.12	61.90	22.78	68.30	6.40	100	315	Horizontal	/
4	5865.432	41.23	63.77	22.54	68.30	4.53	200	159	Horizontal	/
1	5470	38.36	57.98	19.62	68.30	10.32	100	259	Vertical	/
2	5702.352	86.95	107.85	20.90	-	-	100	45	Vertical	No limit
3	5850	39.08	61.56	22.48	68.30	6.74	100	310	Vertical	/
4	5857.332	41.53	63.93	22.40	68.30	4.37	200	59	Vertical	/

802.11ax HE80 SDM/5210MHz

Detector mode: Peak

Polarity:


Horizontal

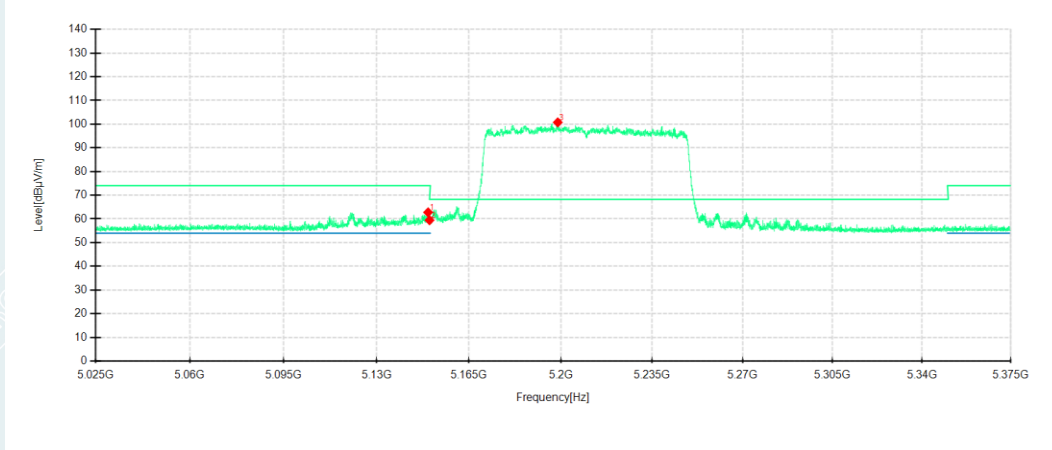

Detector mode: Peak

Polarity:

Vertical

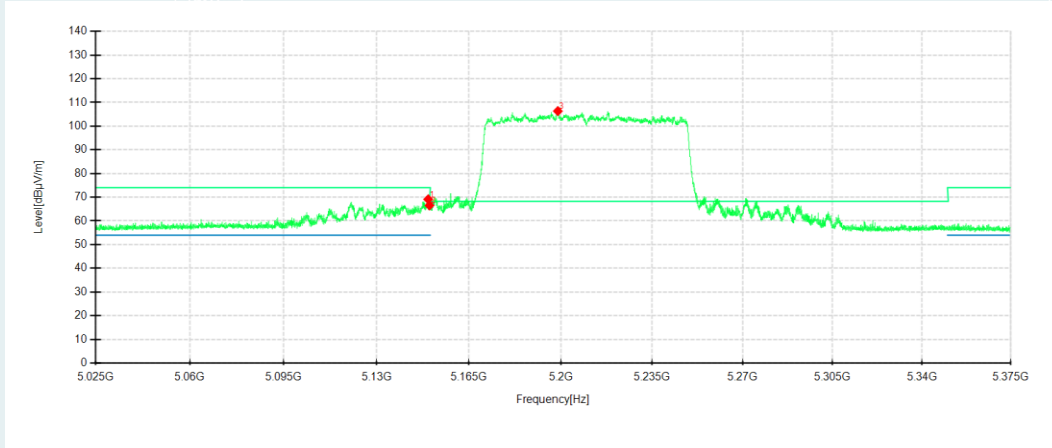


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.46	47.19	62.77	15.58	74.00	11.23	200	160	Horizontal	/
2	5150	43.85	59.43	15.58	68.30	8.87	200	223	Horizontal	/
3	5198.81	85.05	100.74	15.69	-	-	200	160	Horizontal	No limit
1	5149.495	53.65	69.13	15.48	74.00	4.87	100	222	Vertical	/
2	5150	51.05	66.53	15.48	68.30	1.77	200	80	Vertical	/
3	5198.845	90.57	106.36	15.79	-	-	100	222	Vertical	No limit

802.11ax HE80 SDM/5210MHz

Detector mode: Average

Polarity:


Horizontal

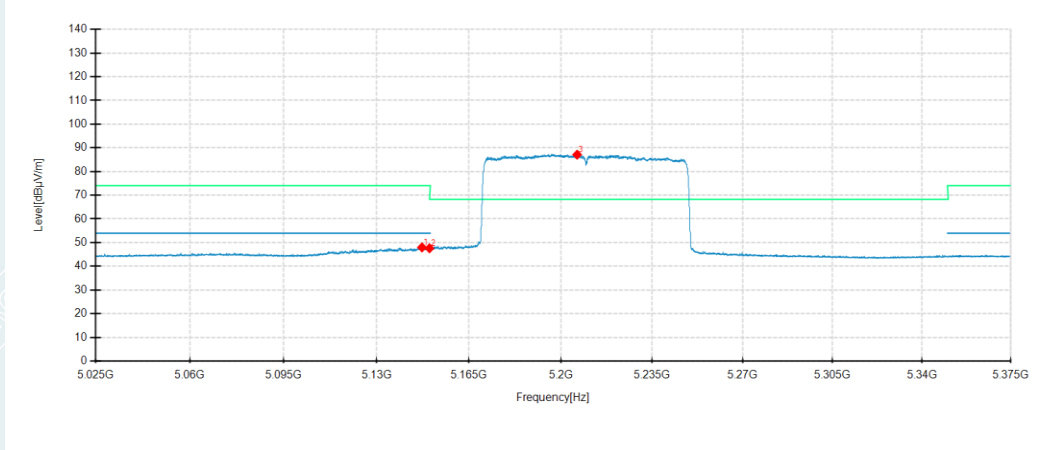

Detector mode: Average

Polarity:

Vertical

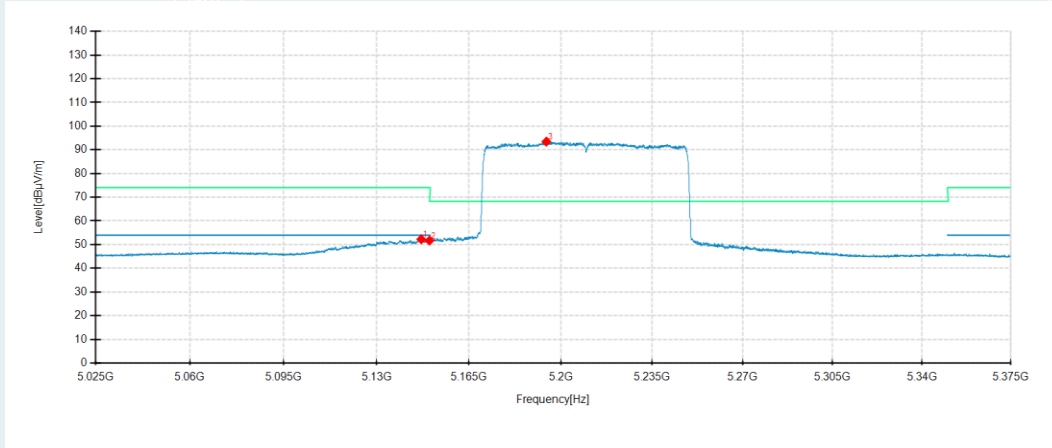


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5147.15	32.38	47.98	15.60	54.00	6.02	100	155	Horizontal	/
2	5150	32.02	47.60	15.58	54.00	6.40	200	162	Horizontal	/
3	5206.23	71.46	87.12	15.66	-	-	100	155	Horizontal	No limit
1	5146.87	36.76	52.25	15.49	54.00	1.75	100	221	Vertical	/
2	5150	36.23	51.71	15.48	54.00	2.29	100	221	Vertical	/
3	5194.47	77.71	93.47	15.76	-	-	100	221	Vertical	No limit

802.11ax HE80 SDM/5290MHz

Detector mode: Peak

Polarity:


Horizontal

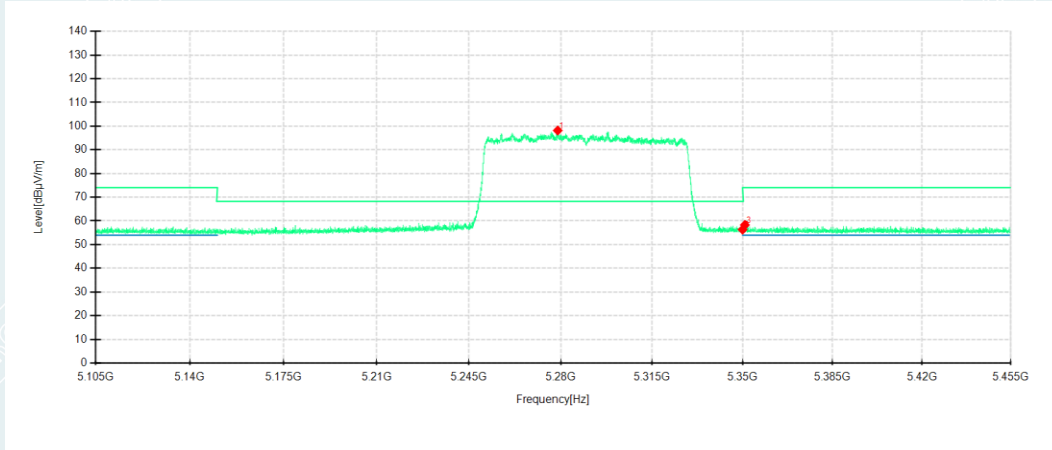

Detector mode: Peak

Polarity:

Vertical

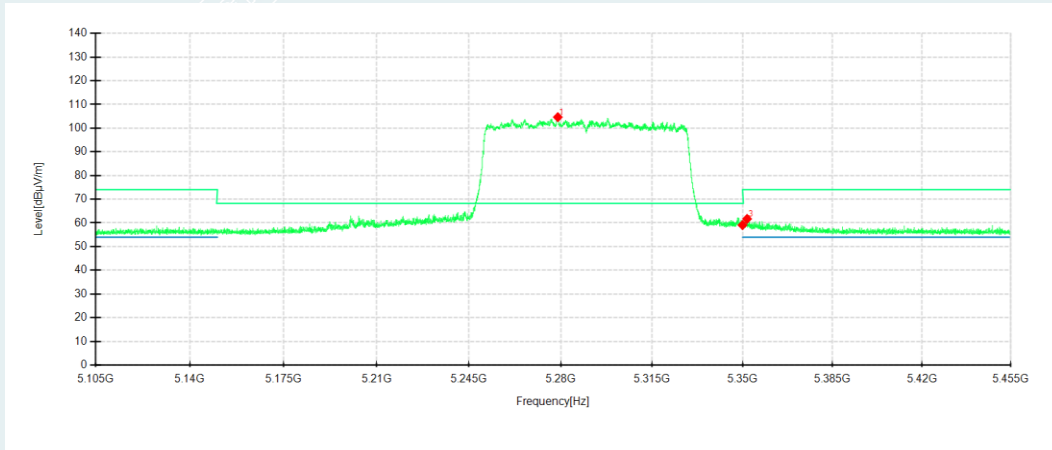


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5278.845	82.78	98.17	15.39	-	-	200	163	Horizontal	No limit
2	5350	40.80	56.34	15.54	68.30	11.96	100	87	Horizontal	/
3	5350.91	42.73	58.28	15.55	74.00	15.72	200	243	Horizontal	/
1	5278.88	88.95	104.64	15.69	-	-	100	226	Vertical	No limit
2	5350	43.55	59.09	15.54	68.30	9.21	100	226	Vertical	/
3	5351.75	46.14	61.68	15.54	74.00	12.32	100	226	Vertical	/

802.11ax HE80 SDM/5290MHz

Detector mode: Average

Polarity:


Horizontal

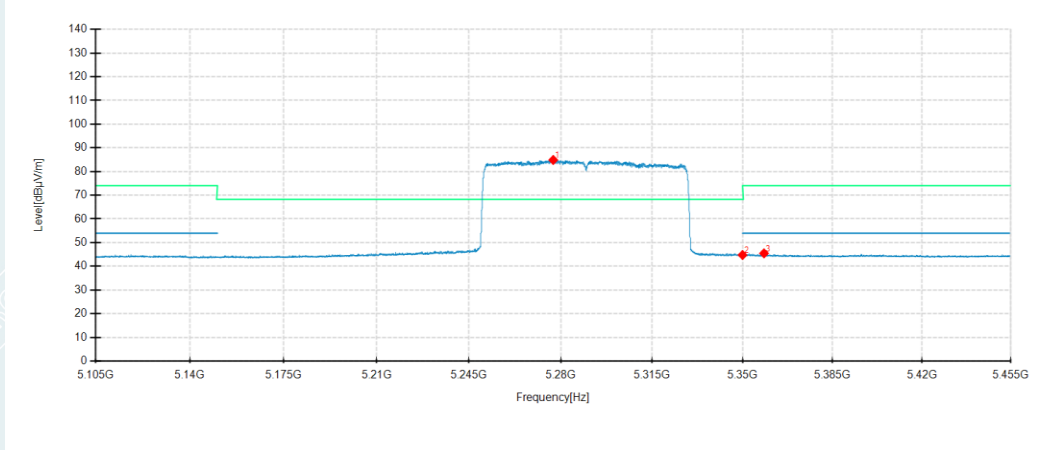

Detector mode: Average

Polarity:

Vertical

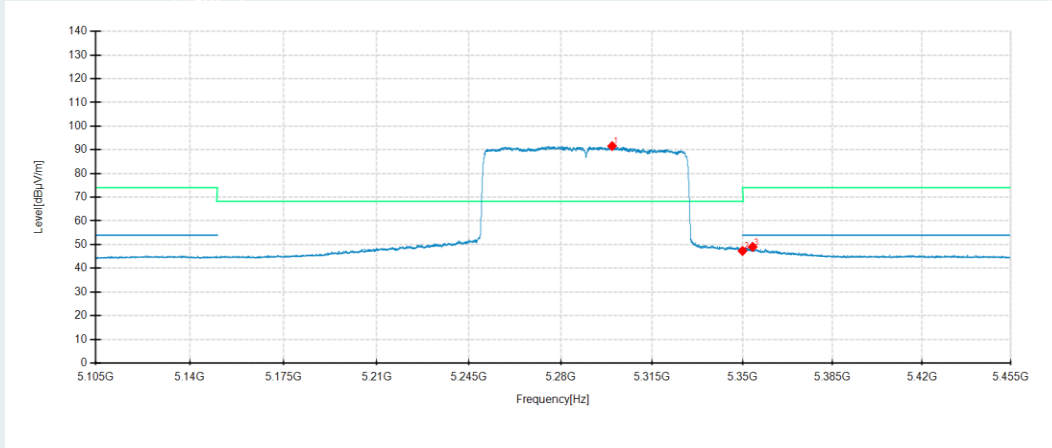


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5277.13	69.49	84.88	15.39	-	-	200	137	Horizontal	No limit
2	5350	29.22	44.76	15.54	54.00	9.24	200	188	Horizontal	/
3	5358.33	29.82	45.46	15.64	54.00	8.54	200	188	Horizontal	/
1	5299.705	75.91	91.60	15.69	-	-	100	221	Vertical	No limit
2	5350	31.78	47.32	15.54	54.00	6.68	100	289	Vertical	/
3	5353.92	33.47	49.02	15.55	54.00	4.98	100	221	Vertical	/

802.11ax HE80 SDM/5530MHz

Detector mode: Peak

Polarity:


Horizontal

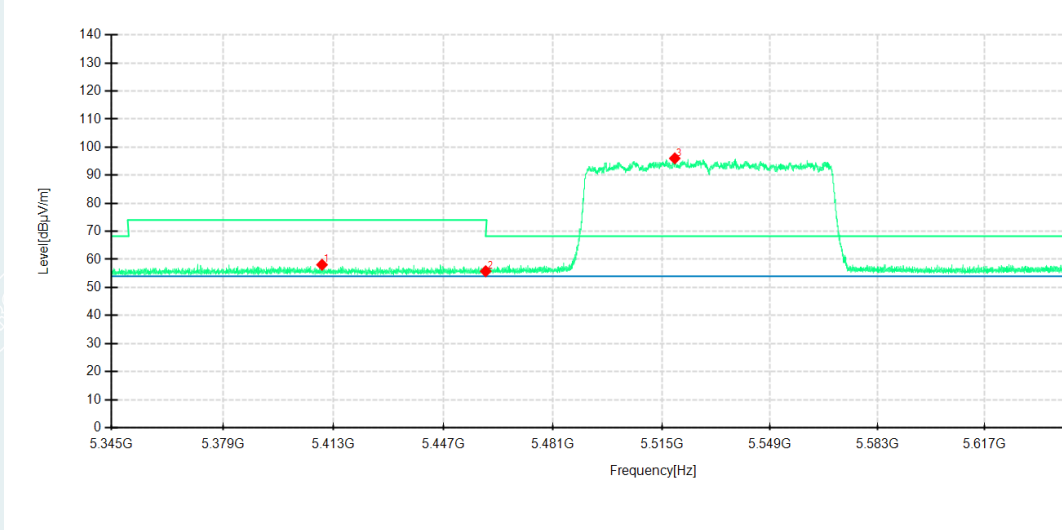

Detector mode: Peak

Polarity:

Vertical

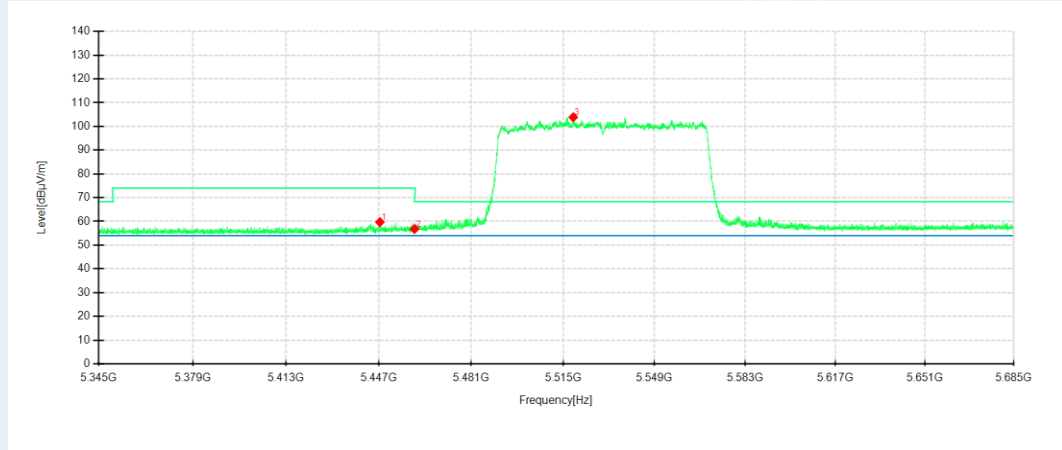


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5409.43	41.97	58.08	16.11	74.00	15.92	100	37	Horizontal	/
2	5460	39.68	55.77	16.09	68.30	12.53	100	220	Horizontal	/
3	5519.012	79.69	96.01	16.32	-	-	200	204	Horizontal	No limit
1	5447.306	44.03	59.71	15.68	74.00	14.29	100	231	Vertical	/
2	5460	40.95	56.78	15.83	68.30	11.52	100	271	Vertical	/
3	5518.74	87.54	103.88	16.34	-	-	100	222	Vertical	No limit

802.11ax HE80 SDM/5530MHz

Detector mode: Average

Polarity:


Horizontal

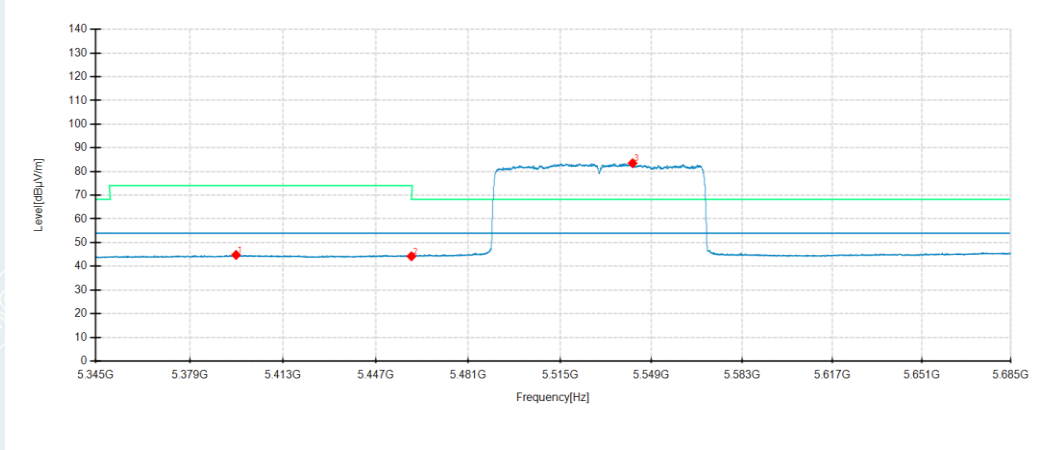

Detector mode: Average

Polarity:

Vertical

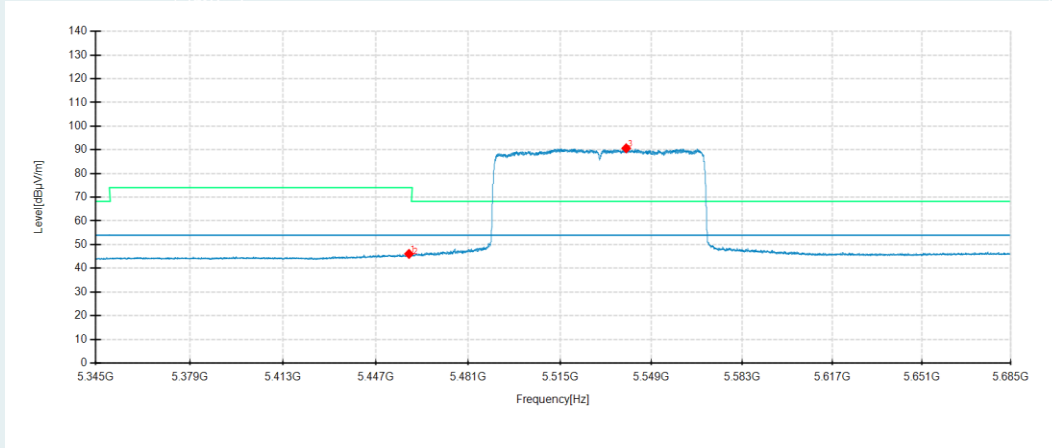


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5395.864	28.69	44.78	16.09	54.00	9.22	200	141	Horizontal	/
2	5460	28.11	44.20	16.09	54.00	9.80	100	286	Horizontal	/
3	5541.962	67.43	83.51	16.08	-	-	200	180	Horizontal	No limit
1	5459.104	30.26	46.07	15.81	54.00	7.93	100	229	Vertical	/
2	5460	29.21	45.04	15.83	54.00	8.96	100	293	Vertical	/
3	5539.582	74.41	90.65	16.24	-	-	100	229	Vertical	No limit

802.11ax HE80 SDM/5610MHz

Detector mode: Peak

Polarity:


Horizontal

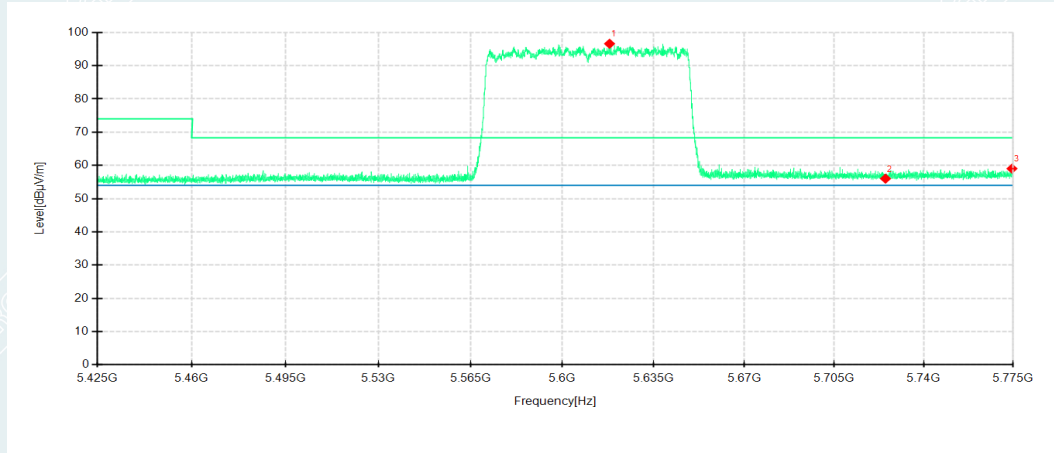

Detector mode: Peak

Polarity:

Vertical

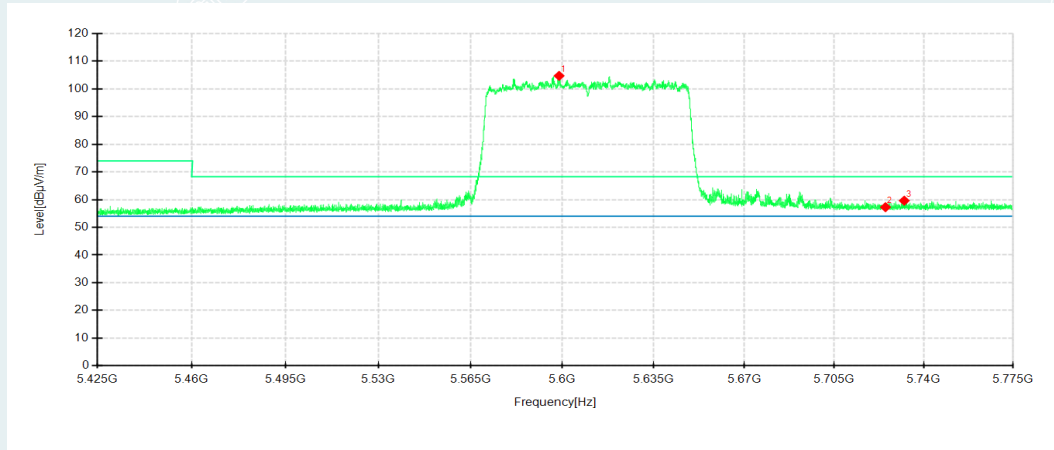


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5618.095	80.23	96.60	16.37	-	-	200	12	Horizontal	No limit
2	5725.00	38.96	56.02	17.06	68.30	12.28	200	221	Horizontal	/
3	5774.685	41.79	59.03	17.24	68.30	9.27	200	34	Horizontal	/
1	5598.775	88.08	104.70	16.62	-	-	100	220	Vertical	No limit
2	5725.00	40.37	57.28	16.91	68.30	11.02	200	190	Vertical	/
3	5732.335	42.69	59.63	16.94	68.30	8.67	100	168	Vertical	/

802.11ax HE80 SDM/5690MHz

Detector mode: Peak

Polarity:


Horizontal

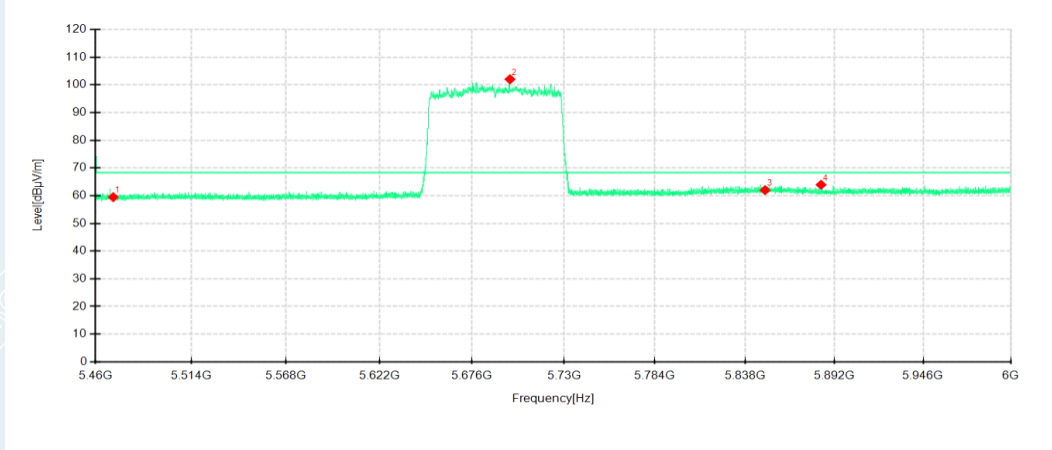

Detector mode: Peak

Polarity:

Vertical

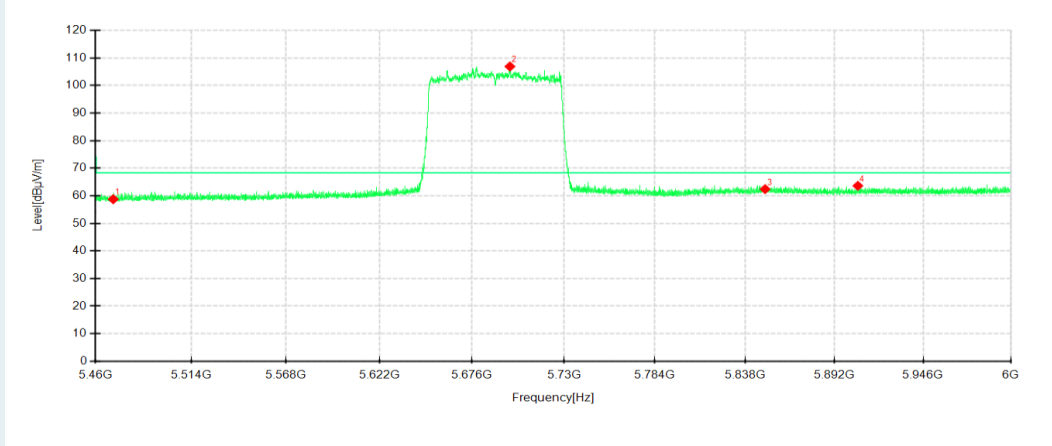


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5470	39.40	59.46	20.06	68.30	8.84	100	171	Horizontal	/
2	5698.248	81.03	102.01	20.98	-	-	200	26	Horizontal	No limit
3	5850	39.22	62.00	22.78	68.30	6.30	200	247	Horizontal	/
4	5883.846	41.67	63.93	22.26	68.30	4.37	100	130	Horizontal	/
1	5470	39.14	58.76	19.62	68.30	9.54	100	116	Vertical	/
2	5698.194	86.01	106.89	20.88	-	-	100	55	Vertical	No limit
3	5850	39.93	62.41	22.48	68.30	5.89	200	90	Vertical	/
4	5906.202	41.68	63.61	21.93	68.30	4.69	200	160	Vertical	/

802.11ax HE80 SDM/5775MHz

Detector mode: Peak

Polarity:


Horizontal

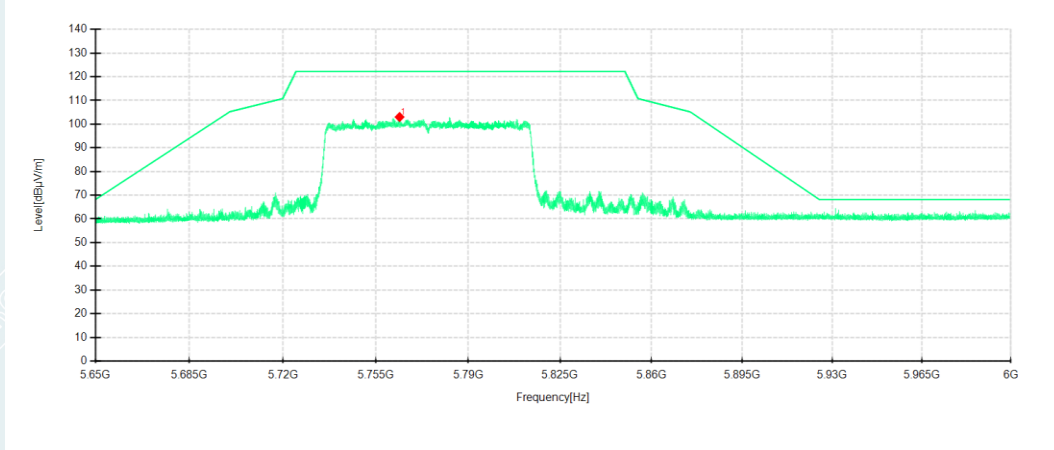

Detector mode: Peak

Polarity:

Vertical

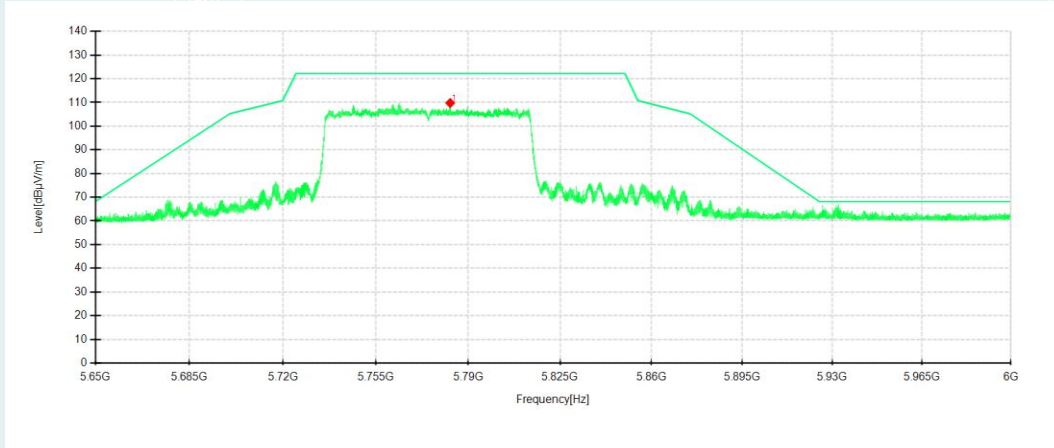

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5763.9425	82.80	103.00	20.20	-	-	200	194	Horizontal	No limit
1	5783.14	89.66	109.77	20.11	-	-	100	223	Vertical	No limit


----- The following blanks -----

802.11ac VHT160 SDM/5250MHz

Detector mode: Peak

Polarity:


Horizontal

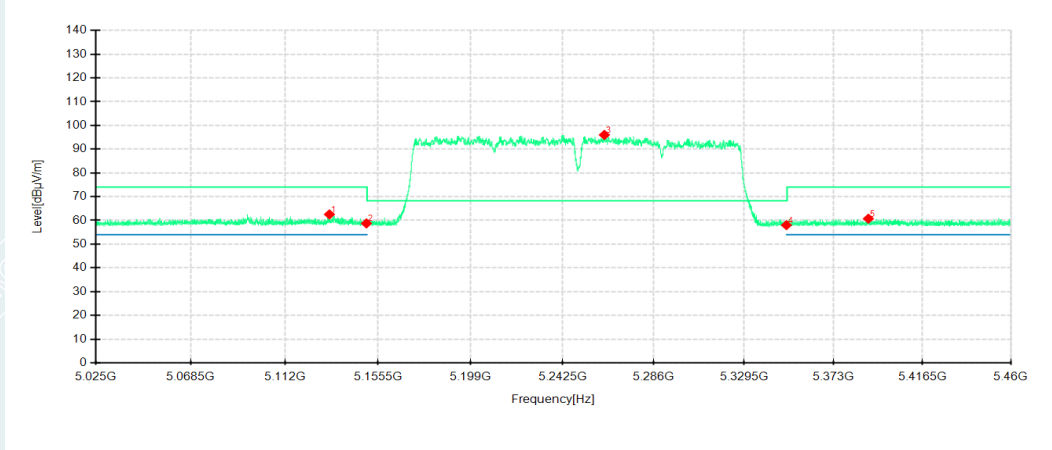

Detector mode: Peak

Polarity:

Vertical

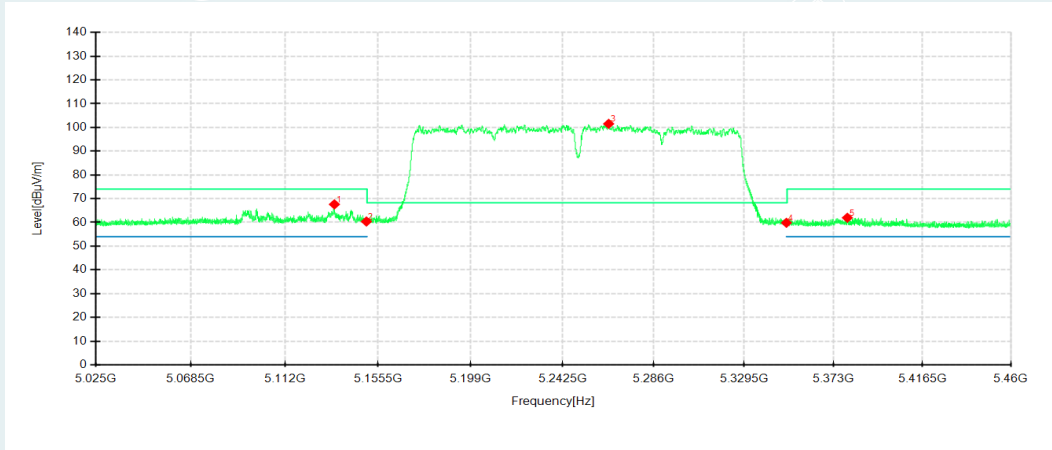


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5132.7495	43.88	62.52	18.64	74.00	11.48	200	341	Horizontal	/
2	5150	40.16	58.74	18.58	68.30	9.56	100	314	Horizontal	/
3	5262.3795	77.60	96.00	18.40	-	-	200	341	Horizontal	No limit
4	5350	39.46	58.00	18.54	68.30	10.30	200	15	Horizontal	/
5	5389.9215	41.69	60.71	19.02	74.00	13.29	100	9	Horizontal	/
1	5135.055	49.09	67.60	18.51	74.00	6.40	200	101	Vertical	/
2	5150	41.89	60.37	18.48	68.30	7.93	200	346	Vertical	/
3	5264.424	82.81	101.51	18.70	-	-	100	106	Vertical	No limit
4	5350	41.30	59.84	18.54	68.30	8.46	100	248	Vertical	/
5	5379.6555	43.29	61.95	18.66	74.00	12.05	100	106	Vertical	/

802.11ac VHT160 SDM/5250MHz

Detector mode: Average

Polarity:


Horizontal

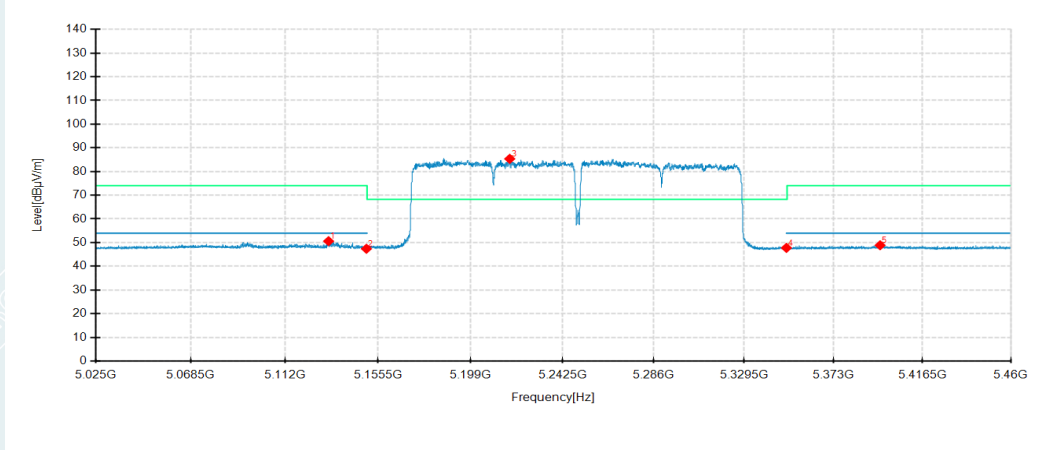

Detector mode: Average

Polarity:

Vertical

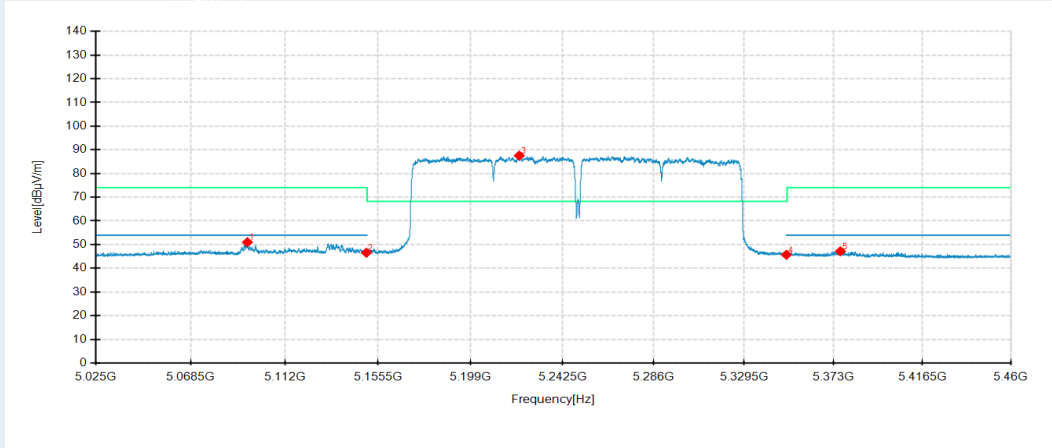


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5132.358	31.96	50.61	18.65	54.00	3.39	200	331	Horizontal	/
2	5150	28.82	47.40	18.58	54.00	6.60	100	325	Horizontal	/
3	5217.4005	66.75	85.35	18.60	-	-	200	340	Horizontal	No limit
4	5350	29.22	47.76	18.54	54.00	6.24	100	344	Horizontal	/
5	5395.6635	29.79	48.88	19.09	54.00	5.12	100	154	Horizontal	/
1	5094.687	32.38	50.99	18.61	54.00	0.01	200	93	Vertical	/
2	5150	28.10	46.58	18.48	54.00	4.42	200	123	Vertical	/
3	5221.881	68.79	87.55	18.76	-	-	100	106	Vertical	No limit
4	5350	27.15	45.69	18.54	54.00	5.31	100	45	Vertical	/
5	5376.2625	28.54	47.18	18.64	54.00	3.82	100	36	Vertical	/

802.11ac VHT160 SDM/5570MHz

Detector mode: Peak

Polarity:


Horizontal

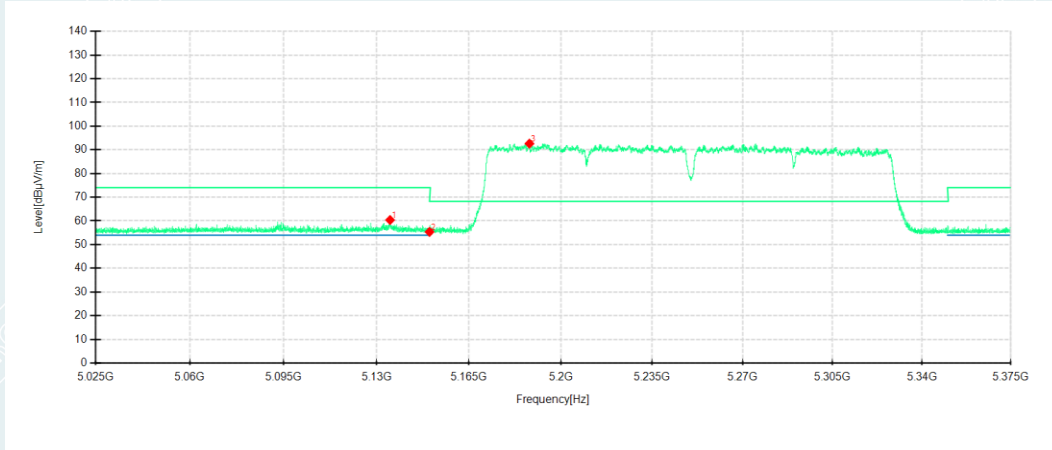

Detector mode: Peak

Polarity:

Vertical

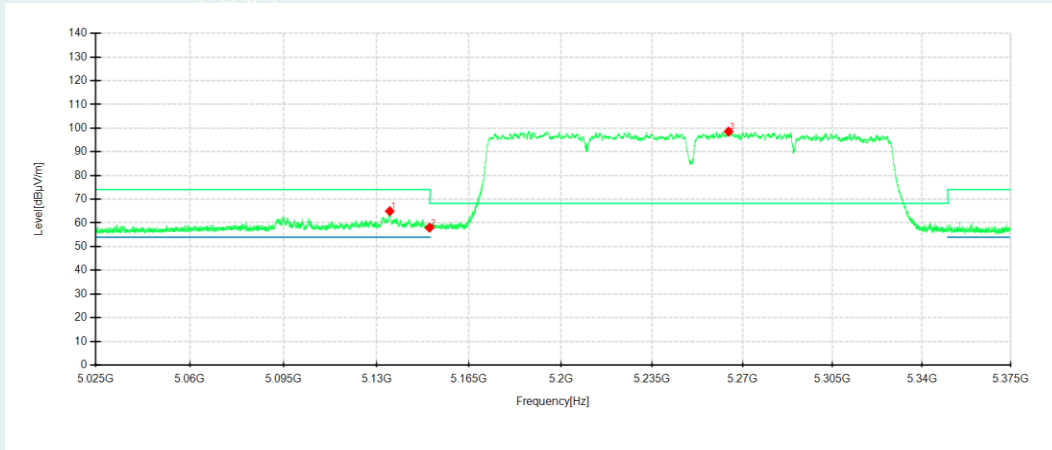


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5135.075	44.74	60.38	15.64	74.00	13.62	100	182	Horizontal	/
2	5150	39.78	55.36	15.58	68.30	12.94	200	201	Horizontal	/
3	5187.995	76.95	92.62	15.67	-	-	200	159	Horizontal	No limit
1	5134.97	49.44	64.95	15.51	74.00	9.05	200	285	Vertical	/
2	5150	42.51	57.99	15.48	68.30	10.31	100	226	Vertical	/
3	5264.54	82.86	98.56	15.70	-	-	100	299	Vertical	No limit

802.11ac VHT160 SDM/5570MHz

Detector mode: Average

Polarity:


Horizontal

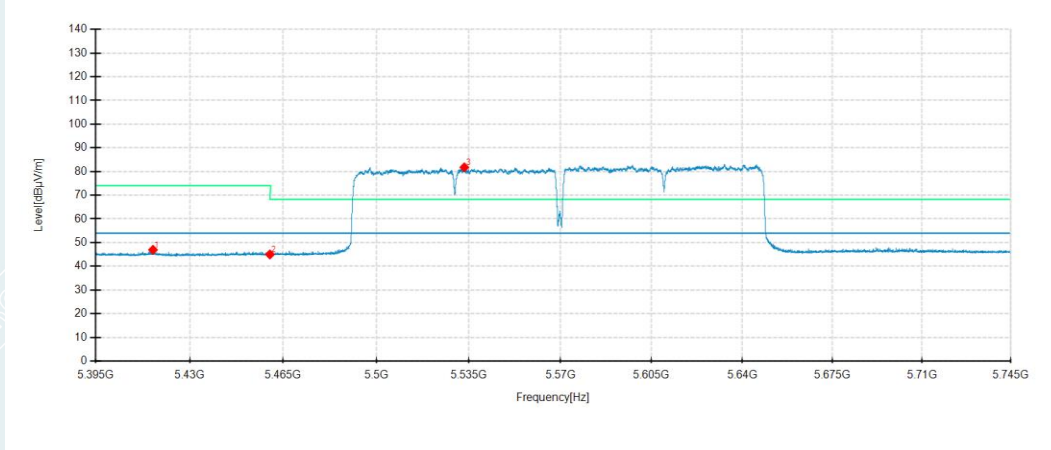

Detector mode: Average

Polarity:

Vertical

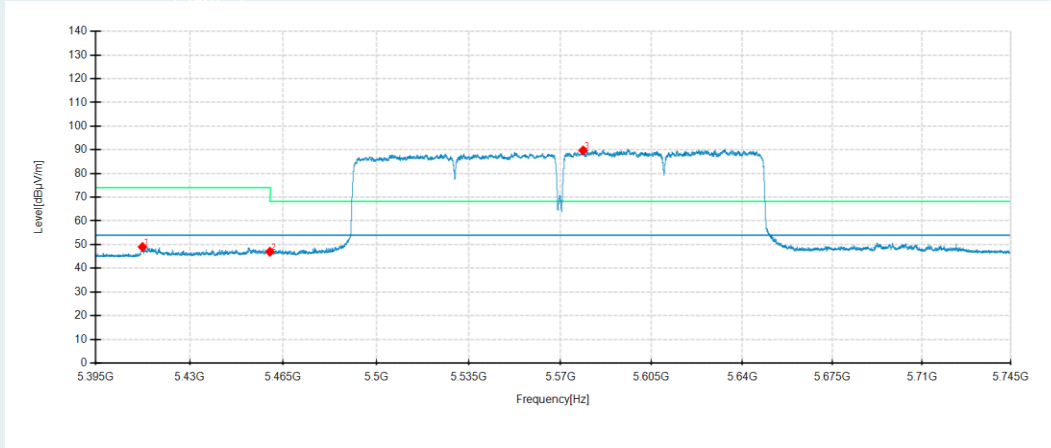

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5416.35	30.88	46.96	16.08	54.00	7.04	200	187	Horizontal	/
2	5460	28.90	44.99	16.09	54.00	9.01	100	20	Horizontal	/
3	5533.39	65.58	81.75	16.17	-	-	200	165	Horizontal	No limit
1	5412.465	33.27	49.00	15.73	54.00	5.00	100	227	Vertical	/
2	5460	31.14	46.97	15.83	54.00	7.03	100	293	Vertical	/
3	5578.715	73.30	89.74	16.44	-	-	100	227	Vertical	No limit

8. 6DB BANDWIDTH & 26DB BANDWIDTH & 99% OCCUPIED BANDWIDTH

8.1. LIMITS

Band	Frequency (MHz)	Test Item	Limit
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2C	5470-5725.00	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-3	5725.00-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth≥500KHz

8.2. TEST PROCEDURES

For 26dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with table 1.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurements as needed until the RBW/EBW ratio is approximately 1%.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 6dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with table 2.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 99% Occupied Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with table 3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the 99% power bandwidth function to measure bandwidth.
- Repeat above procedures until all modes and channels were measured.

Record the results in the test report.

Table 1:

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	> RBW
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)

Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


Table 2:

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

Table 3:

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

8.3. TEST SETUP

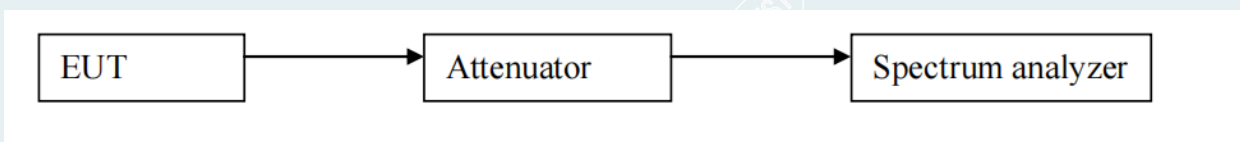

8.4. TEST RESULTS

Environmental Conditions	22.3°C/65%RH/101.0kPa	Test Voltage	AC120V/60Hz
Tested By	Huang Tianmei	Tested Date	2023-04-11 to 2023-04-12

Pre-scan all modes (SISO,CDD, SDM) and recorded the worst case results in this report.

6dB BANDWIDTH

Test Mode	Antenna	Freq(MHz)	6dB EBW [MHz]	F _L [MHz]	F _H [MHz]	Limit[MHz]	Verdict
802.11a-CD D	Ant1	5745	16.32	5736.84	5753.16	≥0.5	PASS
	Ant2	5745	16.32	5736.84	5753.16	≥0.5	PASS
	Ant1	5785	16.32	5776.84	5793.16	≥0.5	PASS
	Ant2	5785	16.32	5776.84	5793.16	≥0.5	PASS
	Ant1	5825	16.32	5816.84	5833.16	≥0.5	PASS
	Ant2	5825	16.36	5816.84	5833.20	≥0.5	PASS
802.11n HT20 MIMO-CDD	Ant1	5745	17.60	5736.20	5753.80	≥0.5	PASS
	Ant2	5745	17.60	5736.20	5753.80	≥0.5	PASS
	Ant1	5785	17.56	5776.24	5793.80	≥0.5	PASS
	Ant2	5785	17.56	5776.24	5793.80	≥0.5	PASS
	Ant1	5825	17.56	5816.24	5833.80	≥0.5	PASS
	Ant2	5825	17.56	5816.24	5833.80	≥0.5	PASS
802.11n HT40 MIMO-CDD	Ant1	5755	36.32	5736.84	5773.16	≥0.5	PASS
	Ant2	5755	36.32	5736.84	5773.16	≥0.5	PASS
	Ant1	5795	36.32	5776.84	5813.16	≥0.5	PASS
	Ant2	5795	36.40	5776.84	5813.24	≥0.5	PASS
802.11ac VHT20 MIMO-CDD	Ant1	5745	17.60	5736.20	5753.80	≥0.5	PASS
	Ant2	5745	17.56	5736.24	5753.80	≥0.5	PASS
	Ant1	5785	17.56	5776.24	5793.80	≥0.5	PASS
	Ant2	5785	17.56	5776.24	5793.80	≥0.5	PASS
	Ant1	5825	17.60	5816.20	5833.80	≥0.5	PASS
	Ant2	5825	17.56	5816.24	5833.80	≥0.5	PASS

Test Mode	Antenna	Freq(MHz)	6dB EBW [MHz]	F _L [MHz]	F _H [MHz]	Limit[MHz]	Verdict
802.11ac VHT40 MIMO-CDD	Ant1	5755	36.32	5736.84	5773.16	≥0.5	PASS
	Ant2	5755	36.08	5737.08	5773.16	≥0.5	PASS
	Ant1	5795	36.32	5776.84	5813.16	≥0.5	PASS
	Ant2	5795	36.32	5776.84	5813.16	≥0.5	PASS
802.11ac VHT80 MIMO-CDD	Ant1	5775	75.84	5736.76	5812.60	≥0.5	PASS
	Ant2	5775	76.00	5736.76	5812.76	≥0.5	PASS
802.11ax HE20 MIMO-CDD	Ant1	5745	18.96	5735.52	5754.48	≥0.5	PASS
	Ant2	5745	18.84	5735.60	5754.44	≥0.5	PASS
	Ant1	5785	18.84	5775.60	5794.44	≥0.5	PASS
	Ant2	5785	19.00	5775.52	5794.52	≥0.5	PASS
	Ant1	5825	18.84	5815.56	5834.40	≥0.5	PASS
	Ant2	5825	18.84	5815.60	5834.44	≥0.5	PASS
802.11ax HE40 MIMO-CDD	Ant1	5755	37.28	5736.20	5773.48	≥0.5	PASS
	Ant2	5755	36.56	5737.24	5773.80	≥0.5	PASS
	Ant1	5795	37.44	5776.20	5813.64	≥0.5	PASS
	Ant2	5795	37.04	5776.76	5813.80	≥0.5	PASS
802.11ax HE80 MIMO-CDD	Ant1	5775	76.32	5736.60	5812.92	≥0.5	PASS
	Ant2	5775	75.36	5737.24	5812.60	≥0.5	PASS

----- The following blanks -----

26dB BANDWIDTH

Test Mode	Antenna	Freq(MHz)	26dB EBW [MHz]	F _L [MHz]	F _H [MHz]	Limit [MHz]	Verdict
802.11a-CDD	Ant1	5180	21.48	5169.36	5190.84	---	PASS
	Ant2	5180	21.40	5169.28	5190.68	---	PASS
	Ant1	5200	21.12	5189.52	5210.64	---	PASS
	Ant2	5200	20.72	5189.60	5210.32	---	PASS
	Ant1	5240	21.40	5229.24	5250.64	---	PASS
	Ant2	5240	21.12	5229.56	5250.68	---	PASS
	Ant1	5260	21.16	5249.52	5270.68	---	PASS
	Ant2	5260	20.80	5249.52	5270.32	---	PASS
	Ant1	5280	21.32	5269.32	5290.64	---	PASS
	Ant2	5280	20.88	5269.56	5290.44	---	PASS
	Ant1	5320	21.16	5309.48	5330.64	---	PASS
	Ant2	5320	20.76	5309.56	5330.32	---	PASS
	Ant1	5500	21.24	5489.36	5510.60	---	PASS
	Ant2	5500	21.12	5489.60	5510.72	---	PASS
	Ant1	5580	21.24	5569.36	5590.60	---	PASS
	Ant2	5580	20.80	5569.60	5590.40	---	PASS
	Ant1	5700	21.32	5689.32	5710.64	---	PASS
	Ant2	5700	20.80	5689.64	5710.44	---	PASS
	Ant1	5745	20.96	5734.64	5755.60	---	PASS
	Ant2	5745	21.00	5734.48	5755.48	---	PASS
	Ant1	5785	21.16	5774.48	5795.64	---	PASS
	Ant2	5785	20.84	5774.52	5795.36	---	PASS
	Ant1	5825	21.24	5814.36	5835.60	---	PASS
	Ant2	5825	20.84	5814.52	5835.36	---	PASS
802.11n HT20 MIMO-CDD	Ant1	5180	21.64	5169.24	5190.88	---	PASS
	Ant2	5180	21.36	5169.36	5190.72	---	PASS
	Ant1	5200	21.64	5189.28	5210.92	---	PASS
	Ant2	5200	21.32	5189.32	5210.64	---	PASS
	Ant1	5240	21.56	5229.28	5250.84	---	PASS
	Ant2	5240	21.48	5229.32	5250.80	---	PASS
	Ant1	5260	21.60	5249.16	5270.76	---	PASS
	Ant2	5260	21.40	5249.32	5270.72	---	PASS
	Ant1	5280	21.64	5269.24	5290.88	---	PASS
	Ant2	5280	21.48	5269.28	5290.76	---	PASS

Test Mode	Antenna	Freq(MHz)	26dB EBW [MHz]	F _L [MHz]	F _H [MHz]	Limit [MHz]	Verdict
802.11n HT20 MIMO-CDD	Ant1	5320	21.56	5309.16	5330.72	---	PASS
	Ant2	5320	21.32	5309.32	5330.64	---	PASS
	Ant1	5500	21.48	5489.32	5510.80	---	PASS
	Ant2	5500	21.48	5489.28	5510.76	---	PASS
	Ant1	5580	21.52	5569.20	5590.72	---	PASS
	Ant2	5580	21.40	5569.28	5590.68	---	PASS
	Ant1	5700	21.60	5689.24	5710.84	---	PASS
	Ant2	5700	21.40	5689.32	5710.72	---	PASS
	Ant1	5745	21.76	5734.12	5755.88	---	PASS
	Ant2	5745	21.44	5734.32	5755.76	---	PASS
	Ant1	5785	21.56	5774.24	5795.80	---	PASS
	Ant2	5785	21.36	5774.24	5795.60	---	PASS
	Ant1	5825	21.36	5814.32	5835.68	---	PASS
	Ant2	5825	21.48	5814.28	5835.76	---	PASS
802.11n HT40 MIMO-CDD	Ant1	5190	40.24	5169.84	5210.08	---	PASS
	Ant2	5190	39.76	5170.08	5209.84	---	PASS
	Ant1	5230	40.32	5209.76	5250.08	---	PASS
	Ant2	5230	39.60	5210.16	5249.76	---	PASS
	Ant1	5270	39.92	5250.08	5290.00	---	PASS
	Ant2	5270	39.92	5250.16	5290.08	---	PASS
	Ant1	5310	39.92	5290.08	5330.00	---	PASS
	Ant2	5310	39.76	5290.24	5330.00	---	PASS
	Ant1	5510	40.00	5490.08	5530.08	---	PASS
	Ant2	5510	39.68	5490.16	5529.84	---	PASS
	Ant1	5550	40.08	5530.08	5570.16	---	PASS
	Ant2	5550	39.76	5530.08	5569.84	---	PASS
	Ant1	5670	40.08	5650.00	5690.08	---	PASS
	Ant2	5670	39.60	5650.24	5689.84	---	PASS
	Ant1	5755	39.84	5735.16	5775.00	---	PASS
	Ant2	5755	39.60	5735.32	5774.92	---	PASS
	Ant1	5795	40.40	5774.60	5815.00	---	PASS
	Ant2	5795	39.68	5775.24	5814.92	---	PASS

Test Mode	Antenna	Freq(MHz)	26dB EBW [MHz]	F _L [MHz]	F _H [MHz]	Limit [MHz]	Verdict	
802.11ac VHT20 MIMO-CDD	Ant1	5180	21.48	5169.24	5190.72	---	PASS	
	Ant2	5180	21.36	5169.28	5190.64	---	PASS	
	Ant1	5200	21.44	5189.36	5210.80	---	PASS	
	Ant2	5200	21.44	5189.24	5210.68	---	PASS	
	Ant1	5240	21.60	5229.20	5250.80	---	PASS	
	Ant2	5240	21.40	5229.36	5250.76	---	PASS	
	Ant1	5260	21.64	5249.24	5270.88	---	PASS	
	Ant2	5260	21.40	5249.36	5270.76	---	PASS	
	Ant1	5280	21.76	5269.16	5290.92	---	PASS	
	Ant2	5280	21.40	5269.36	5290.76	---	PASS	
	Ant1	5320	21.72	5309.04	5330.76	---	PASS	
	Ant2	5320	21.48	5309.28	5330.76	---	PASS	
	Ant1	5500	21.44	5489.28	5510.72	---	PASS	
	Ant2	5500	21.44	5489.28	5510.72	---	PASS	
	Ant1	5580	21.68	5569.16	5590.84	---	PASS	
	Ant2	5580	21.40	5569.32	5590.72	---	PASS	
	Ant1	5700	21.56	5689.24	5710.80	---	PASS	
	Ant2	5700	21.40	5689.40	5710.80	---	PASS	
	802.11ac VHT40 MIMO-CDD	Ant1	5745	21.68	5734.16	5755.84	---	PASS
		Ant2	5745	21.24	5734.40	5755.64	---	PASS
Ant1		5785	21.56	5774.20	5795.76	---	PASS	
Ant2		5785	21.44	5774.24	5795.68	---	PASS	
Ant1		5825	21.60	5814.08	5835.68	---	PASS	
Ant2		5825	21.48	5814.24	5835.72	---	PASS	
Ant1		5190	40.40	5169.76	5210.16	---	PASS	
Ant2		5190	40.00	5169.76	5209.76	---	PASS	
Ant1		5230	40.32	5209.76	5250.08	---	PASS	
Ant2		5230	39.92	5209.84	5249.76	---	PASS	
Ant1		5270	40.24	5249.92	5290.16	---	PASS	
Ant2		5270	40.00	5249.84	5289.84	---	PASS	
Ant1	5310	40.16	5289.92	5330.08	---	PASS		
Ant2	5310	39.92	5289.92	5329.84	---	PASS		
Ant1	5510	40.24	5489.84	5530.08	---	PASS		
Ant2	5510	40.00	5489.92	5529.92	---	PASS		

Test Mode	Antenna	Freq(MHz)	26dB EBW [MHz]	F _L [MHz]	F _H [MHz]	Limit [MHz]	Verdict
802.11ac VHT40 MIMO-CDD	Ant1	5550	40.40	5529.84	5570.24	---	PASS
	Ant2	5550	40.08	5529.92	5570.00	---	PASS
	Ant1	5670	40.32	5649.84	5690.16	---	PASS
	Ant2	5670	39.92	5649.92	5689.84	---	PASS
	Ant1	5755	40.16	5734.84	5775.00	---	PASS
	Ant2	5755	39.92	5735.00	5774.92	---	PASS
	Ant1	5795	40.32	5774.76	5815.08	---	PASS
	Ant2	5795	40.08	5774.84	5814.92	---	PASS
802.11ac VHT80 MIMO-CDD	Ant1	5210	82.40	5168.88	5251.28	---	PASS
	Ant2	5210	81.60	5169.04	5250.64	---	PASS
	Ant1	5290	81.28	5249.84	5331.12	---	PASS
	Ant2	5290	81.12	5249.04	5330.16	---	PASS
	Ant1	5530	81.92	5489.20	5571.12	---	PASS
	Ant2	5530	81.76	5489.04	5570.80	---	PASS
	Ant1	5610	81.44	5569.84	5651.28	---	PASS
	Ant2	5610	81.60	5569.04	5650.64	---	PASS
	Ant1	5775	82.40	5733.56	5815.96	---	PASS
	Ant2	5775	81.92	5734.04	5815.96	---	PASS
802.11ac VHT160MIMO- CDD	Ant1	5250	163.84	5168.08	5331.92	---	PASS
	Ant2	5250	164.80	5168.08	5332.88	---	PASS
	Ant1	5250_UNII-1	81.92	5168.08	5250.00	---	PASS
	Ant2	5250_UNII-1	81.92	5168.08	5250.00	---	PASS
	Ant1	5250_UNII-2A	81.92	5250.00	5331.92	---	PASS
	Ant2	5250_UNII-2A	82.88	5250.00	5332.88	---	PASS
	Ant1	5570	164.80	5488.40	5653.20	---	PASS
	Ant2	5570	163.52	5488.72	5652.24	---	PASS
802.11ax HE20 MIMO-CDD	Ant1	5180	21.32	5169.36	5190.68	---	PASS
	Ant2	5180	21.48	5169.24	5190.72	---	PASS
	Ant1	5200	21.44	5189.16	5210.60	---	PASS
	Ant2	5200	21.64	5189.08	5210.72	---	PASS
	Ant1	5240	21.44	5229.28	5250.72	---	PASS
	Ant2	5240	21.40	5229.28	5250.68	---	PASS
	Ant1	5260	21.60	5249.16	5270.76	---	PASS
	Ant2	5260	21.36	5249.36	5270.72	---	PASS

Test Mode	Antenna	Freq(MHz)	26dB EBW [MHz]	F _L [MHz]	F _H [MHz]	Limit [MHz]	Verdict
802.11ax HE20 MIMO-CDD	Ant1	5280	21.48	5269.32	5290.80	---	PASS
	Ant2	5280	21.20	5269.40	5290.60	---	PASS
	Ant1	5320	21.36	5309.24	5330.60	---	PASS
	Ant2	5320	21.52	5309.20	5330.72	---	PASS
	Ant1	5500	21.40	5489.16	5510.56	---	PASS
	Ant2	5500	21.40	5489.32	5510.72	---	PASS
	Ant1	5580	21.56	5569.12	5590.68	---	PASS
	Ant2	5580	21.44	5569.24	5590.68	---	PASS
	Ant1	5700	21.64	5689.12	5710.76	---	PASS
	Ant2	5700	21.36	5689.36	5710.72	---	PASS
	Ant1	5745	21.44	5734.28	5755.72	---	PASS
	Ant2	5745	21.48	5734.32	5755.80	---	PASS
	Ant1	5785	21.44	5774.24	5795.68	---	PASS
	Ant2	5785	21.36	5774.32	5795.68	---	PASS
	Ant1	5825	21.32	5814.28	5835.60	---	PASS
	Ant2	5825	21.20	5814.40	5835.60	---	PASS
802.11ax HE40 MIMO-CDD	Ant1	5190	40.24	5169.92	5210.16	---	PASS
	Ant2	5190	40.08	5170.16	5210.24	---	PASS
	Ant1	5230	40.16	5209.92	5250.08	---	PASS
	Ant2	5230	40.00	5210.00	5250.00	---	PASS
	Ant1	5270	40.24	5249.92	5290.16	---	PASS
	Ant2	5270	39.92	5250.08	5290.00	---	PASS
	Ant1	5310	40.16	5289.92	5330.08	---	PASS
	Ant2	5310	39.92	5290.16	5330.08	---	PASS
	Ant1	5510	40.16	5489.92	5530.08	---	PASS
	Ant2	5510	40.08	5490.00	5530.08	---	PASS
	Ant1	5550	40.16	5529.92	5570.08	---	PASS
	Ant2	5550	39.92	5530.08	5570.00	---	PASS
	Ant1	5670	40.08	5650.00	5690.08	---	PASS
	Ant2	5670	40.00	5650.00	5690.00	---	PASS
	Ant1	5755	40.16	5734.92	5775.08	---	PASS
	Ant2	5755	40.00	5735.16	5775.16	---	PASS
Ant1	5795	40.16	5774.92	5815.08	---	PASS	
Ant2	5795	39.92	5775.08	5815.00	---	PASS	

Test Mode	Antenna	Freq(MHz)	26dB EBW [MHz]	F _L [MHz]	F _H [MHz]	Limit [MHz]	Verdict
802.11ax HE80 MIMO-CDD	Ant1	5210	80.32	5169.84	5250.16	---	PASS
	Ant2	5210	80.96	5169.20	5250.16	---	PASS
	Ant1	5290	80.96	5249.68	5330.64	---	PASS
	Ant2	5290	80.96	5249.52	5330.48	---	PASS
	Ant1	5530	81.60	5489.20	5570.80	---	PASS
	Ant2	5530	80.64	5489.68	5570.32	---	PASS
	Ant1	5610	81.44	5569.36	5650.80	---	PASS
	Ant2	5610	81.44	5569.52	5650.96	---	PASS
	Ant1	5775	81.44	5734.20	5815.64	---	PASS
	Ant2	5775	80.96	5734.84	5815.80	---	PASS
802.11ax HE160 MIMO-CDD	Ant1	5250	162.88	5168.72	5331.60	---	PASS
	Ant2	5250	164.16	5167.76	5331.92	---	PASS
	Ant1	5250_UNII-1	81.28	5168.72	5250.00	---	PASS
	Ant2	5250_UNII-1	82.24	5167.76	5250.00	---	PASS
	Ant1	5250_UNII-2A	81.60	5250.00	5331.60	---	PASS
	Ant2	5250_UNII-2A	81.92	5250.00	5331.92	---	PASS
	Ant1	5570	163.52	5488.08	5651.60	---	PASS
	Ant2	5570	164.48	5487.76	5652.24	---	PASS

----- The following blanks -----

Test Mode	Antenna	Freq(MHz)	26dB EBW [MHz]	F _L [MHz]	F _H [MHz]	Limit [MHz]	Verdict
802.11a-CDD	Ant1	5720	21.20	5709.44	5730.64	---	PASS
	Ant2	5720	20.96	5709.60	5730.56	---	PASS
	Ant1	5720_UNII-2C	15.56	5709.44	5725.00	---	PASS
	Ant2	5720_UNII-2C	15.4	5709.60	5725.00	---	PASS
	Ant1	5720_UNII-3	5.64	5725.00	5730.64	---	PASS
	Ant2	5720_UNII-3	5.56	5725.00	5730.56	---	PASS
802.11n HT20 MIMO-CDD	Ant1	5720	21.56	5709.24	5730.80	---	PASS
	Ant2	5720	21.44	5709.24	5730.68	---	PASS
	Ant1	5720_UNII-2C	15.76	5709.24	5725.00	---	PASS
	Ant2	5720_UNII-2C	15.76	5709.24	5725.00	---	PASS
	Ant1	5720_UNII-3	5.80	5725.00	5730.80	---	PASS
	Ant2	5720_UNII-3	5.68	5725.00	5730.68	---	PASS
802.11n HT40 MIMO-CDD	Ant1	5710	40.08	5690.00	5730.08	---	PASS
	Ant2	5710	39.92	5690.08	5730.00	---	PASS
	Ant1	5710_UNII-2C	35.00	5690.00	5725.00	---	PASS
	Ant2	5710_UNII-2C	34.92	5690.08	5725.00	---	PASS
	Ant1	5710_UNII-3	5.08	5725.00	5730.08	---	PASS
	Ant2	5710_UNII-3	5.00	5725.00	5730.00	---	PASS
802.11ac VHT20 MIMO-CDD	Ant1	5720	21.56	5709.20	5730.76	---	PASS
	Ant2	5720	21.56	5709.28	5730.84	---	PASS
	Ant1	5720_UNII-2C	15.80	5709.20	5725.00	---	PASS
	Ant2	5720_UNII-2C	15.72	5709.28	5725.00	---	PASS
	Ant1	5720_UNII-3	5.76	5725.00	5730.76	---	PASS
	Ant2	5720_UNII-3	5.84	5725.00	5730.84	---	PASS
802.11ac VHT40 MIMO-CDD	Ant1	5710	40.24	5689.84	5730.08	---	PASS
	Ant2	5710	39.92	5690.00	5729.92	---	PASS
	Ant1	5710_UNII-2C	35.16	5689.84	5725.00	---	PASS
	Ant2	5710_UNII-2C	35	5690.00	5725.00	---	PASS
	Ant1	5710_UNII-3	5.08	5725.00	5730.08	---	PASS
	Ant2	5710_UNII-3	4.92	5725.00	5729.92	---	PASS
802.11ac VHT80 MIMO-CDD	Ant1	5690	81.92	5649.36	5731.28	---	PASS
	Ant2	5690	80.32	5649.84	5730.16	---	PASS
	Ant1	5690_UNII-2C	75.64	5649.36	5725.00	---	PASS
	Ant2	5690_UNII-2C	75.16	5649.84	5725.00	---	PASS
	Ant1	5690_UNII-3	6.28	5725.00	5731.28	---	PASS
	Ant2	5690_UNII-3	5.16	5725.00	5730.16	---	PASS