



Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

# APPROVAL SHEET

CUSTOMER NAME		
CUSTOMER P/N		
PART NAME	2. 4G/5. 8G 黑色 PCB 内置天线 1. 13黑色线 L=80mm (适用机型: GM3000, NM3098, NM3098B)	
P/ N	YJC-6N080-B87	
APPROVAL REV.	A0	
DELIVERY DATE	May 24, 2023	
PREPARED BY	Yin Feijie	
CHECKED BY	Fang Wenfeng	
APPROVED BY	Chauhan	
Customer Approved		
Prepared By	Checked By	Approved By

Contact Information (factory) :

Company address: building A.C, guangming valley, hongyu guangming valley, no. 11, jiangyou magang, shiwei community, matantian office, guangming district, shenzhen

Hangzhou Office: 212, Building B, Dahua Jianghong International Innovation Park, No. 369, Internet of Things Street, Binjiang District, Hangzhou

Phone + 86-755-27810060/23192199; Fax: + 86-0755-27810057

Company website: <http://www.szsyjc.com> E-mail: [yjc@szsyjc.com](mailto:yjc@szsyjc.com)



## Catalogue

1、	cover	1
2、	catalogue	2
3、	resume	3
4、	Antenna plan	4
5、	Antenna technical parameters	5
6、	Environmental testing	5
7、	antenna physical picture	6
8、	Attached location map	6
9、	Antennaperformancetestdiagram	6
10、	2D.3D (2.4G/5.8G) test data	7-9
11、	Wirespecificationparameters	10
12、	ROHS Material control report	11




resume:

edition	Content of change and reasons for change	date	release
A/0	Initial release	May 24, 2023	



Antenna plan:

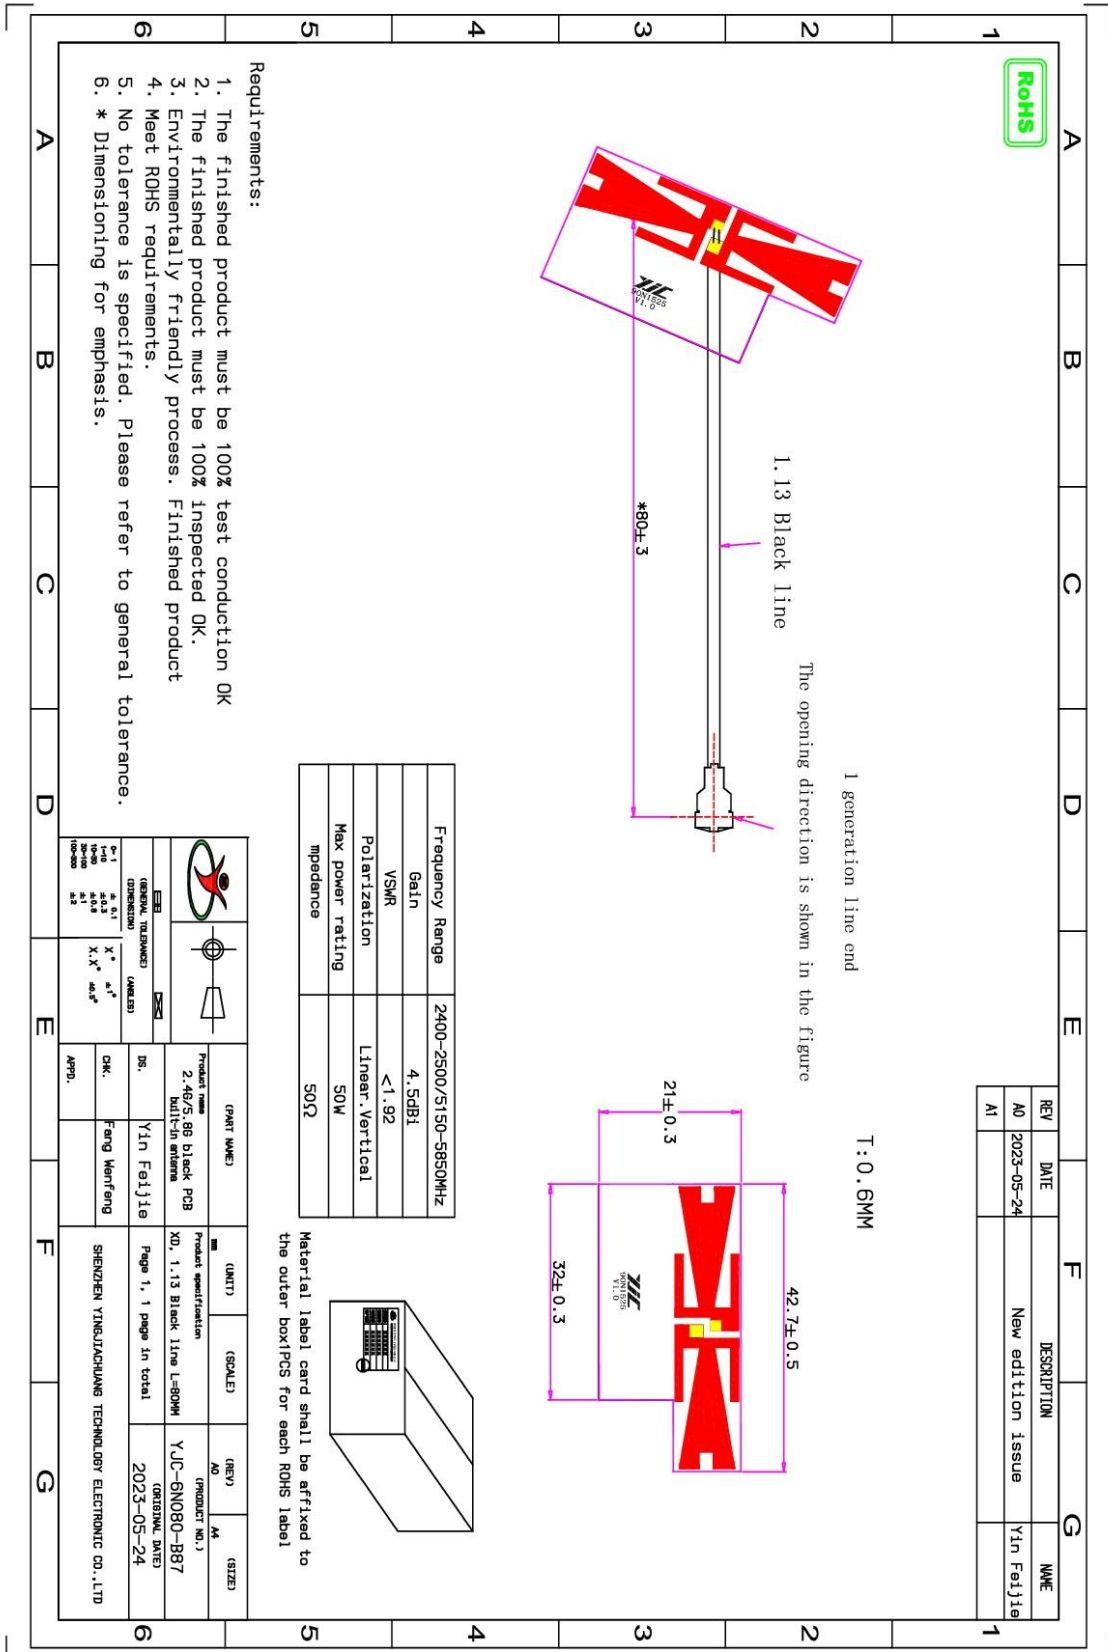



Antenna technical parameters and environmental testing:



Electrical technical parameter			
Electrical Specifications		Mechanical Specifications	
Frequency Range	2400-2500/5150-5850M Hz	Cable Color	Black
VSWR	<1.92	Input connector	XD
Input Impedance	50 Ω	Cable length	80mm
Direction	All	Working Temperature	-20℃~+70℃
Gain	3.0±1dBi	Working Humidity	20%~80%

Environmental performance test:

Project	Test condition	Standard
Storage Conditions	In the absence of specified test temperature, humidity, air pressure is as follows: 1. Temperature is - 30 °C ~ + 80 °C 2. Relative humidity of 45% to 45% 3. Air pressure is 86 kpa to 106 kpa	Electrical and mechanical performance is normal
High and low temperature test	Between 70 °C and -20 °C for 5 loops, then 1-2 h under normal conditions, check the appearance quality.	Size should meet the requirements and meet the performance of machinery and electric.
Constant damp and hot resistance test	95 + / - 3% relative humidity, temperature test: 40 °C. Lasts 2 h after, try to take out the determination of electrical properties, within 5 min after try 1-2 h under article normal thing, check the appearance quality	Size should meet the requirements and meet the performance of machinery and electric.
vibration test	10-55 hz, vibration frequency range of displacement amplitude: 0.35 MM, acceleration amplitude: 50.0 M/S, sweep cycles: 30 times	Electrical and mechanical performance is normal
Fall down test	1 m high altitude in accordance with the perpendicular axis free drop 3 times	Electrical and mechanical performance is normal



Antenna physical diagram and attached location diagram:

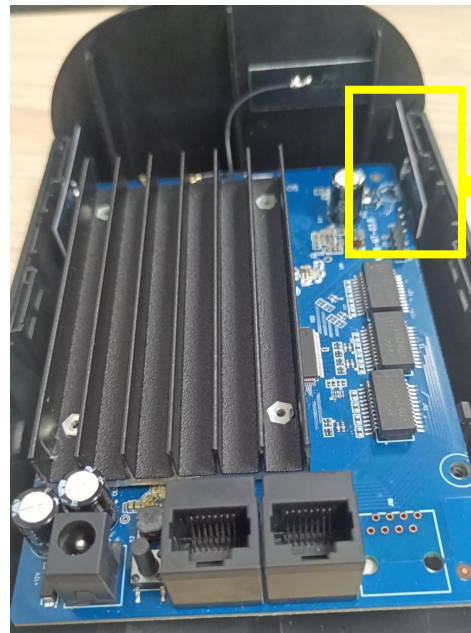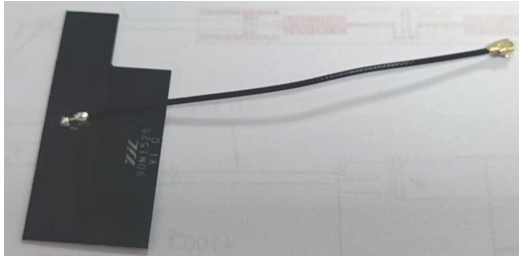

Antenna attachment position

Antenna performance test diagram:







2D and 3D test data (2.4G/5.8G):

Frequency	Efficiency (%)	Gain. (dBi)
2400MHz	63.39	3.17
2410MHz	64.86	3.13
2420MHz	65.77	3.2
2430MHz	65.61	3.01
2440MHz	69.18	2.99
2450MHz	67.45	3.04
2460MHz	69.82	3.14
2470MHz	71.12	3.15
2480MHz	70.15	3.28
2490MHz	71.94	3.42
2500MHz	66.53	3.5
5150MHz	53.83	2.2
5250MHz	54.2	2.1
5350MHz	56.36	2.57
5450MHz	58.48	3.39
5550MHz	62.52	3.57
5650MHz	60.67	3.17
5750MHz	61.38	3.45
5850MHz	59.84	3.71


Phi 0 2D 图:

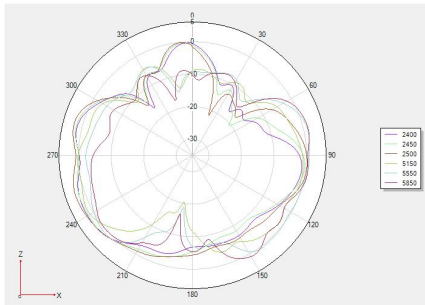


Phi 90 2D 图

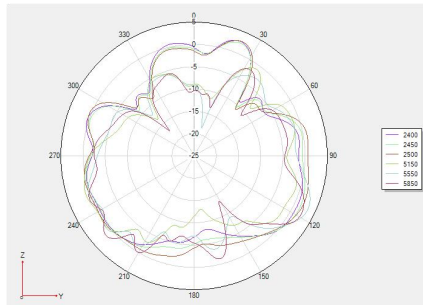

Theta 90 2D 图

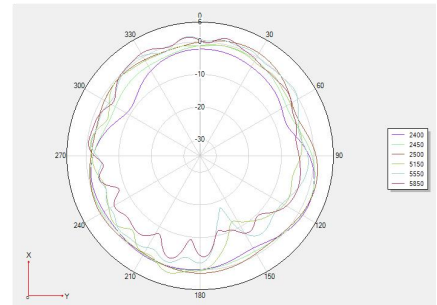




3D 2400:

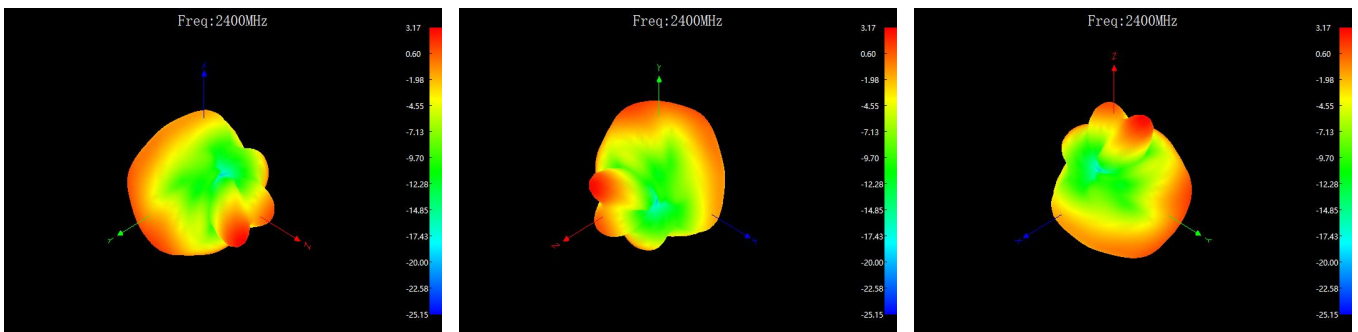











### 3D 2450:

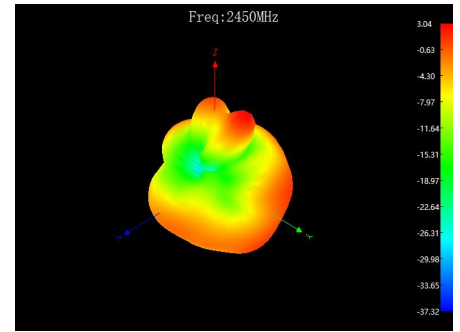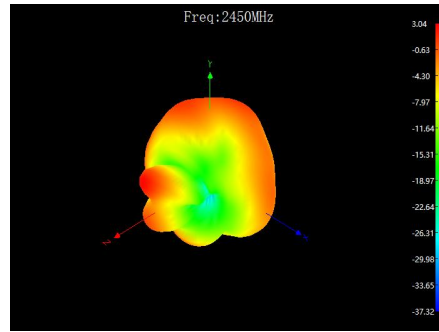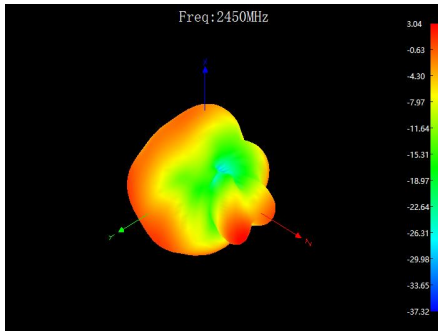

### 3D 2500:

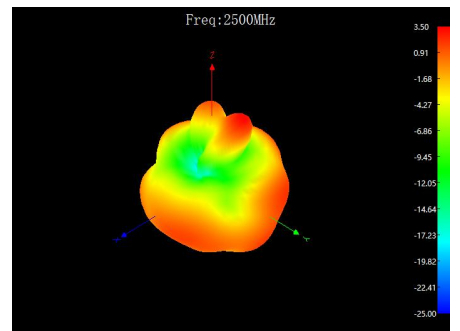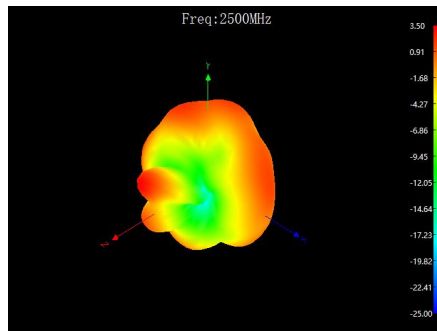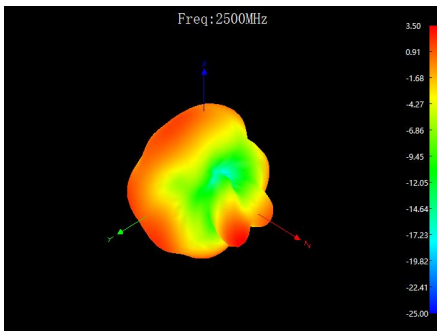


### 3D 5150:

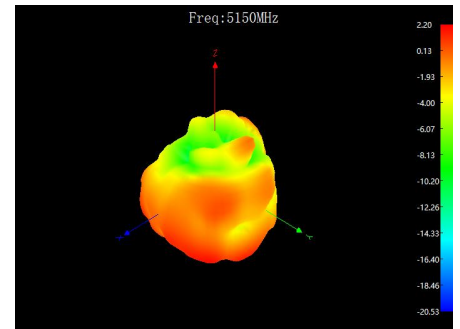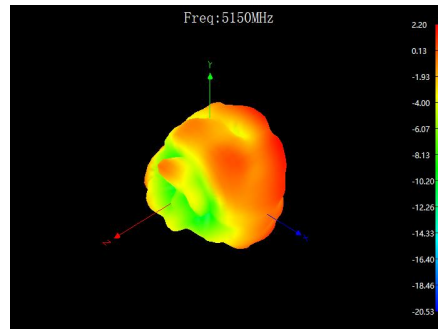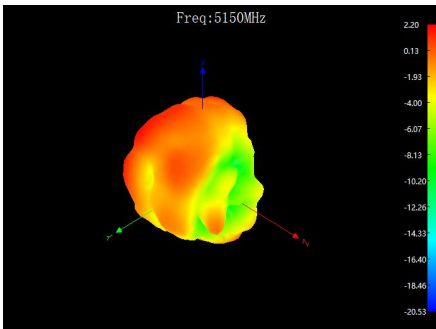







### 3D 5550:

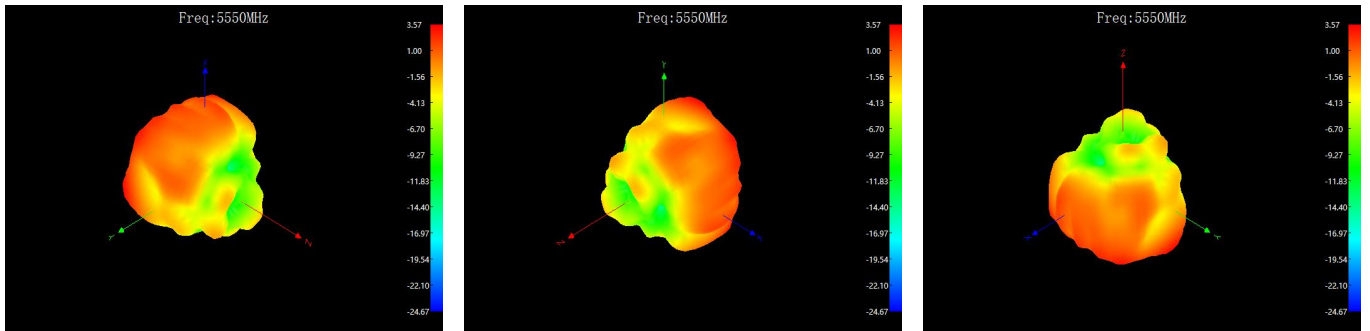

### 3D 5850:

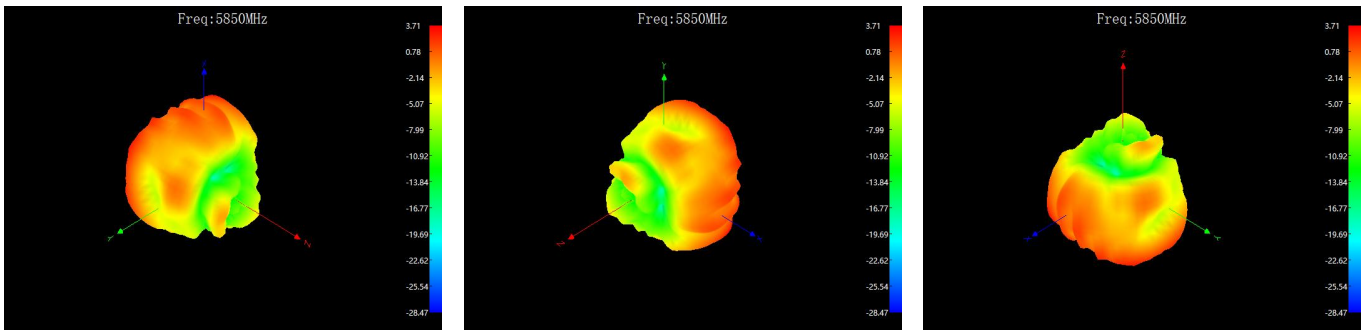



Product Type		1.13 Wire		
Structure Drawing				
Structure Characteristics				
Structure	Item	Standard Value		
Inner Conductor	Material	Silver plated copper wire		
	(mm/Composition(No./mm))	7/0.08±0.005		
	Nom.Dia(mm)	Φ0.24±0.01		
Insulation	Material	FEP		
	Nom.Dia(mm)	Φ0.7±0.03		
Outer Conductor	Material	Tinned copper		
	From	Weaving		
	Shielding rate	≥90%		
	Nom.Dia(mm)	Φ0.92±0.03		
Jacket	Material	FEP		
	Nom.Dia(mm)	Φ1.13±0.05		
电气性能 Electrical Characteristics				
Item	Standard Value	Item	Frequency	Standard Value
Impedance (Ω)	50±3	Attenuation@20 °C (dB/100m)	1GHz	≤2.23
Capacitance(pF/m)	98		2GHz	≤3.15
Tensile strengthkgf/mm <sup>2</sup>	1.76		3GHz	≤3.96
VSWR	≤1.40@0-6GHz		4GHz	≤4.6
Dielectric Strength (A.C V/1min)	1000		5GHz	≤5.15
(MHz) Max.oper. frequency	6000		6GHz	≤5.7
Dependability				
Min.Bending Radius/Single	mm	4		
Min.Bending Radius/Repeated	mm	8		
Operating Temperature	°C	-20~+80		
Packing				
Packing Mode	1000 (m/disc)Reel			
Trips for Use				
Storage Environment	Temperature: below 30°C, humidity: 20-65%			
Teflon Shrink	Insulation shrinkage ≅0.2mm; Sheath shrinkage ≅0.3mm			
Processing temperature	Under the condition of 250°C~260°C, it can withstand for a short time; Thermal decomposition occurs above 300°C			
The best save cycle	After 2 months, the effect of tin becomes worse after 2 months, but the soon as possible after peeling in the high temperature and high humidity environment in summer			



Material RoHS conformity declaration form

This is to certify that the delivery to your company's components, raw materials, auxiliary materials used and the additives in the production engineering are accord with RoHS environmental requirements of the restrictions on the use of hazardous substances directive (RoHS directive 2011/65 / EU)

About components used raw materials, packaging materials, auxiliary materials and additives used in the production process such as composition of the report is as follows:

Component /Part Name	Material Composition	ICP report #	Test Org.	Test Date	Content of harmful substances (ppm)						PASS?
					Cd	Pb	Hg	Cr <sup>6+</sup>	PBB	PBDE	PASS
PCB	PCB	CANEC2221844502	SGS	22/10/20	ND	12	ND	ND	ND	ND	PASS
Wire rod	Coaxial cable	CANEC2301851703	SGS	23/02/23	ND	ND	ND	ND	ND	ND	PASS
Eco-friendly tin wire	Eco-friendly tin wire	SHAEC23006357502	SGS	23/05/23	ND	43	ND	ND	ND	ND	PASS
terminal	Phosphor bronze	CANEC2301145810	SGS	23/02/08	ND	5	ND	ND	ND	ND	PASS
	Gold coating	A2230400553101001E	CTI	23/08/12	ND	ND	ND	ND	ND	ND	PASS
	Rubber core	A2230035037101002E	SGS	23/02/06	ND	ND	ND	ND	ND	ND	PASS