
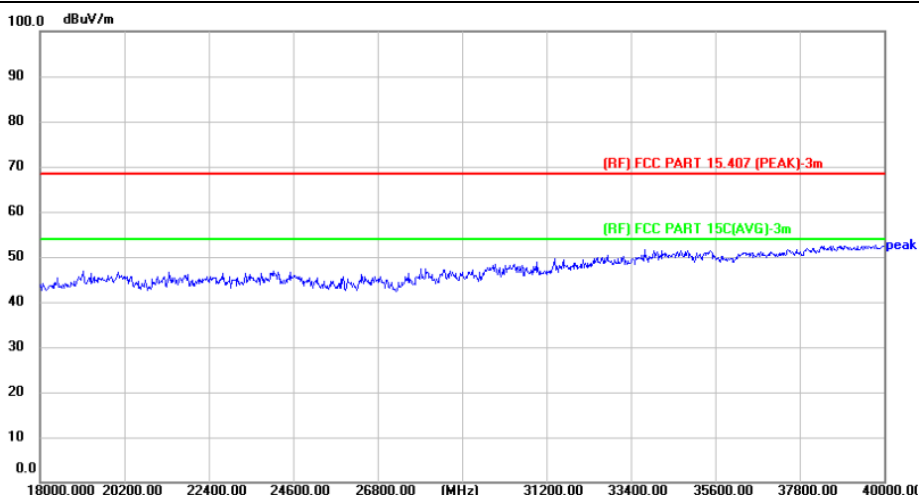


| | | | |
|----------------------|-----------------------------------|---------------------------|-----|
| Temperature: | 23.8°C | Relative Humidity: | 49% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11n(HT20) Mode 5745MHz-CDD | | |

Vertical

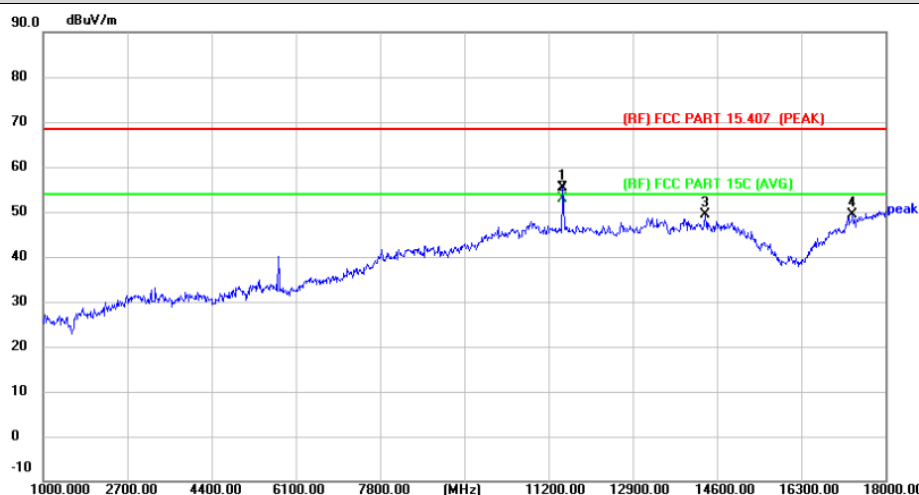

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11489.000 | 46.33 | 9.00 | 55.33 | 68.30 | -12.97 | peak | P |
| 2 * | 11492.680 | 43.77 | 8.99 | 52.76 | 54.00 | -1.24 | AVG | P |
| 3 | 14362.000 | 38.69 | 10.73 | 49.42 | 68.30 | -18.88 | peak | P |
| 4 | 17337.000 | 35.32 | 14.07 | 49.39 | 68.30 | -18.91 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|-----------------------------------|--------------------|-----|
| Temperature: | 23.8°C | Relative Humidity: | 49% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11n(HT20) Mode 5785MHz-CDD | | |

Horizontal

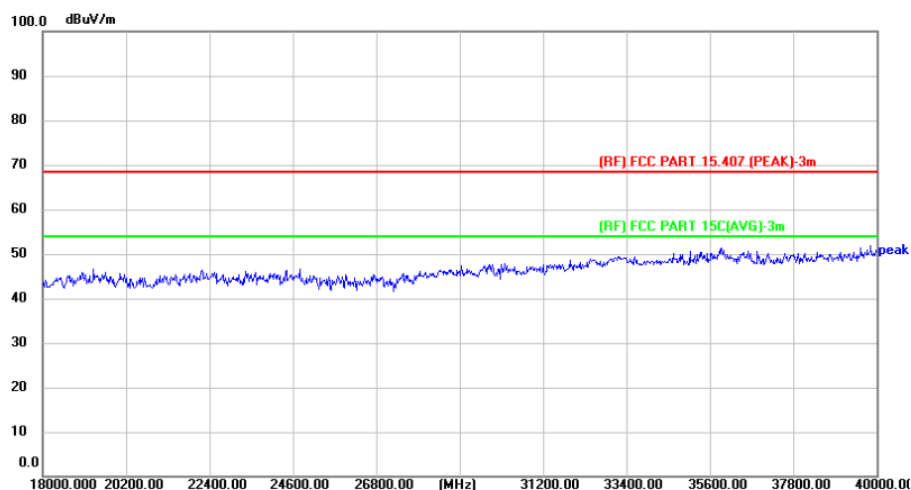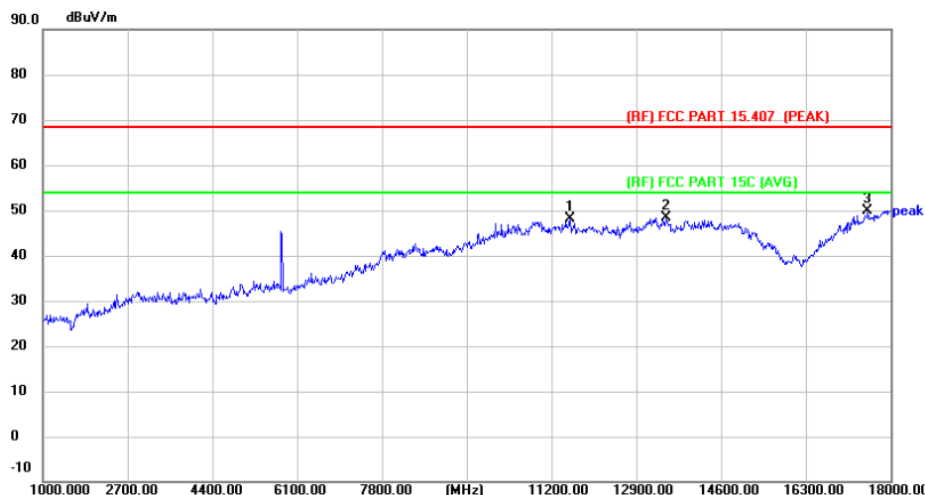

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11574.000 | 39.46 | 8.73 | 48.19 | 68.30 | -20.11 | peak | P |
| 2 | 13495.000 | 38.36 | 10.11 | 48.47 | 68.30 | -19.83 | peak | P |
| 3 * | 17541.000 | 34.57 | 15.30 | 49.87 | 68.30 | -18.43 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|-----------------------------------|---------------------------|-----|
| Temperature: | 23.8°C | Relative Humidity: | 49% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11n(HT20) Mode 5785MHz-CDD | | |

Vertical

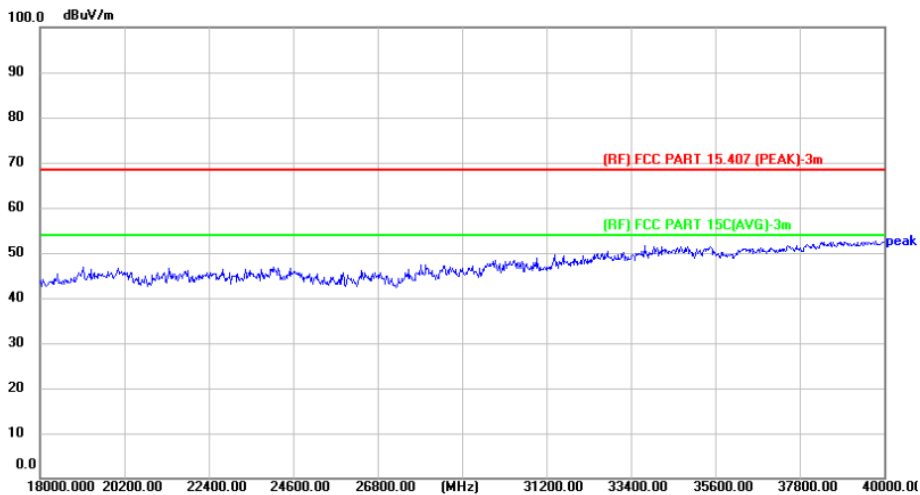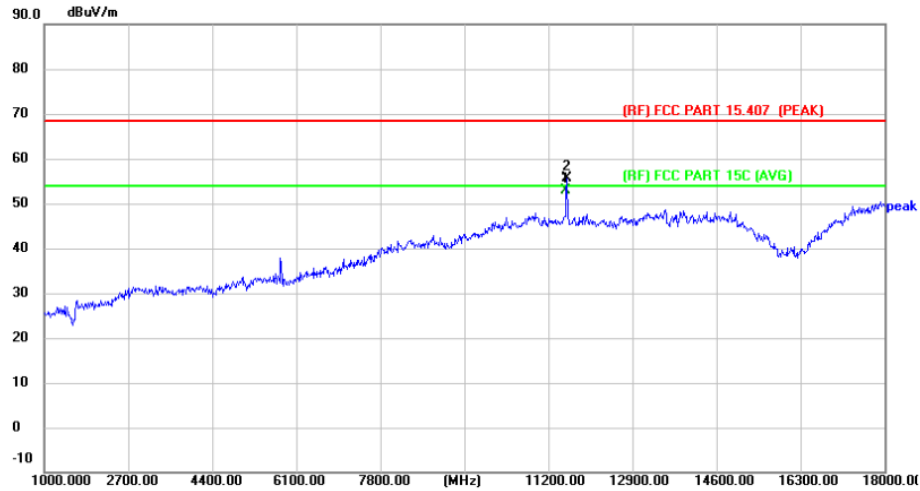

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 11566.920 | 44.04 | 8.76 | 52.80 | 54.00 | -1.20 | AVG | P |
| 2 | 11574.000 | 47.02 | 8.73 | 55.75 | 68.30 | -12.55 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|-----------------------------------|---------------------------|-----|
| Temperature: | 23.8°C | Relative Humidity: | 49% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11n(HT20) Mode 5825MHz-CDD | | |

Horizontal

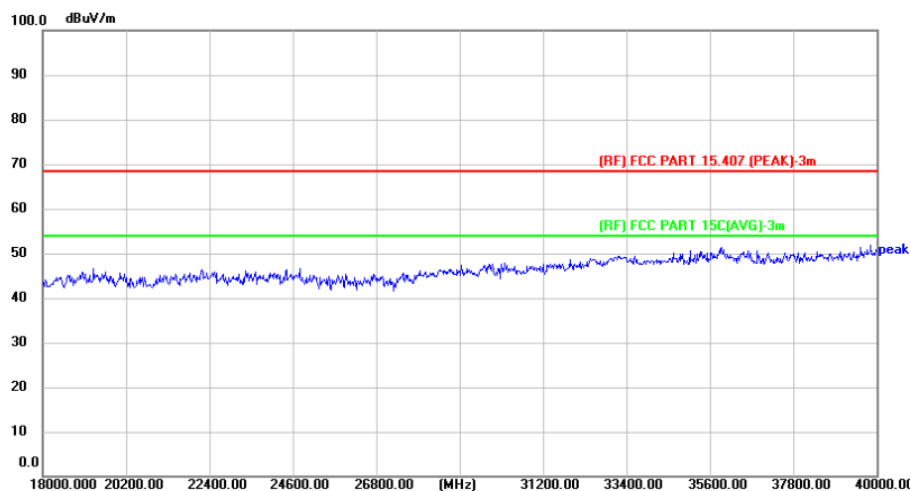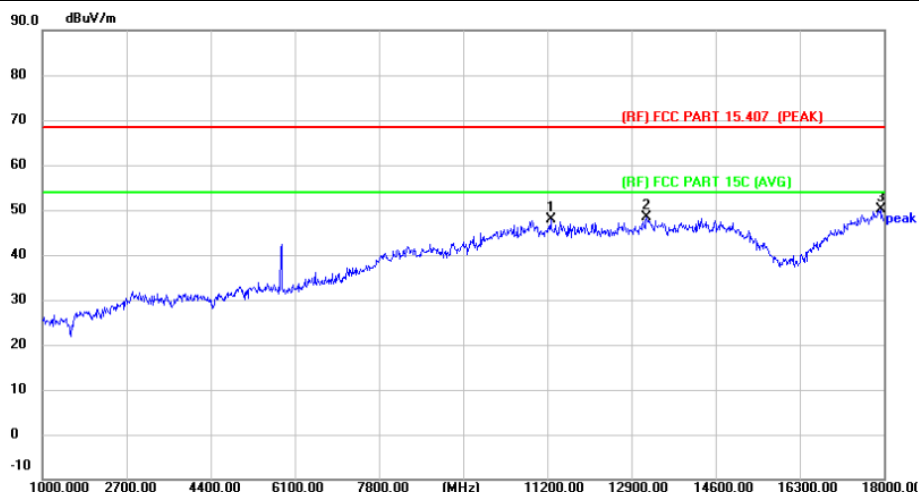

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11268.000 | 39.33 | 8.55 | 47.88 | 68.30 | -20.42 | peak | P |
| 2 | 13206.000 | 38.61 | 9.80 | 48.41 | 68.30 | -19.89 | peak | P |
| 3 * | 17932.000 | 32.41 | 17.61 | 50.02 | 68.30 | -18.28 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|-----------------------------------|---------------------------|-----|
| Temperature: | 23.8°C | Relative Humidity: | 49% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11n(HT20) Mode 5825MHz-CDD | | |

Vertical

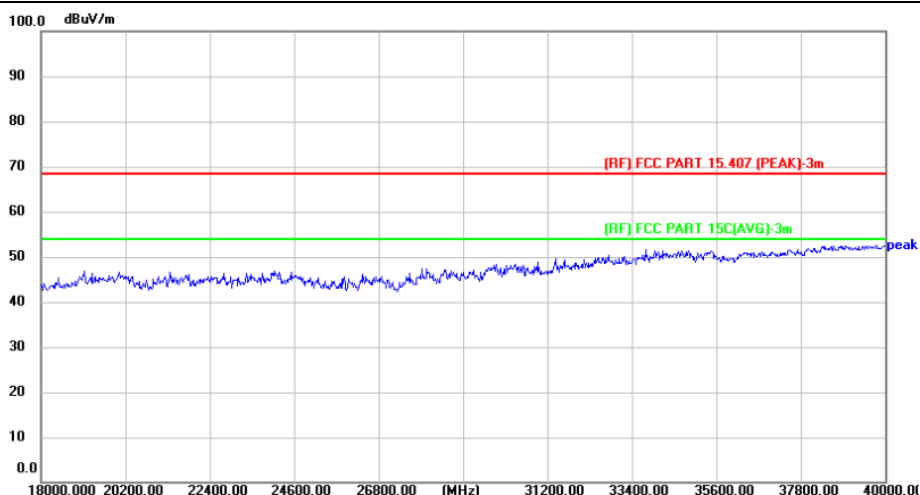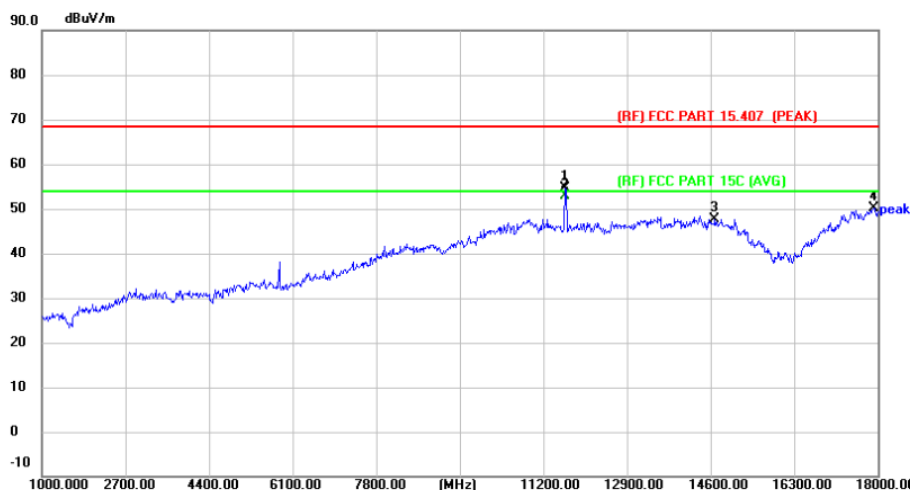

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11642.000 | 45.94 | 8.70 | 54.64 | 68.30 | -13.66 | peak | P |
| 2 * | 11651.240 | 44.29 | 8.70 | 52.99 | 54.00 | -1.01 | AVG | P |
| 3 | 14685.000 | 36.71 | 10.89 | 47.60 | 68.30 | -20.70 | peak | P |
| 4 | 17915.000 | 32.62 | 17.56 | 50.18 | 68.30 | -18.12 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|-------------------------------------|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5745MHz-CDD | | |

Horizontal

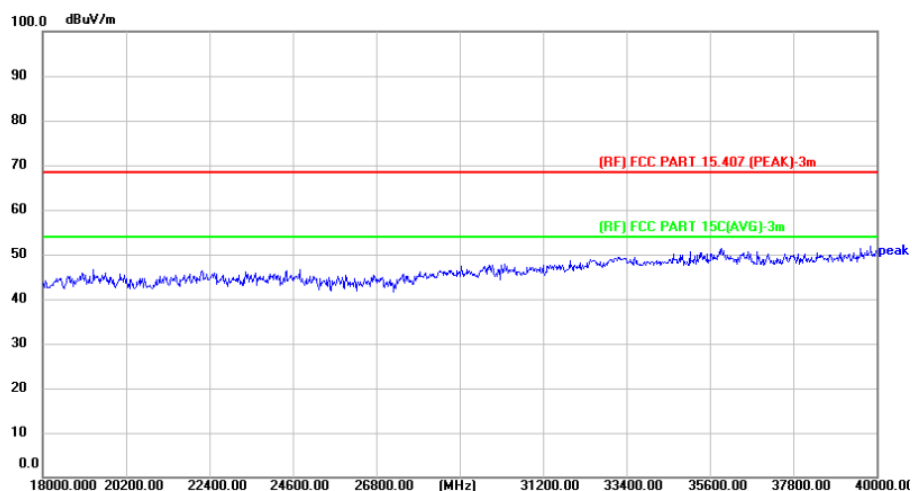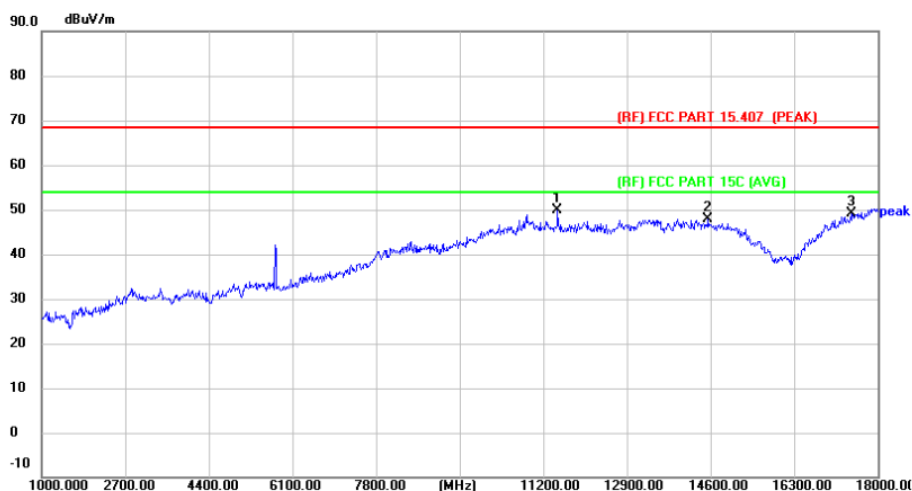

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 11489.000 | 40.85 | 9.00 | 49.85 | 68.30 | -18.45 | peak | P |
| 2 | 14549.000 | 37.06 | 10.75 | 47.81 | 68.30 | -20.49 | peak | P |
| 3 | 17473.000 | 34.11 | 14.92 | 49.03 | 68.30 | -19.27 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|-------------------------------------|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5745MHz-CDD | | |

Vertical

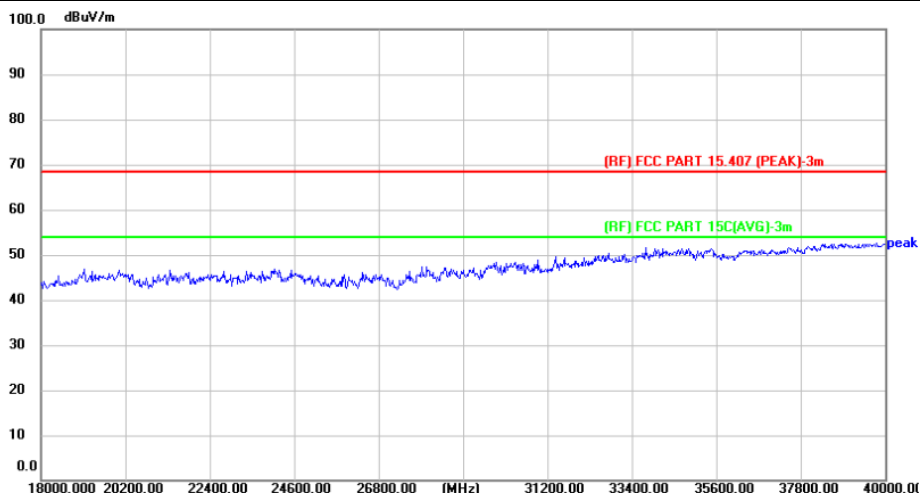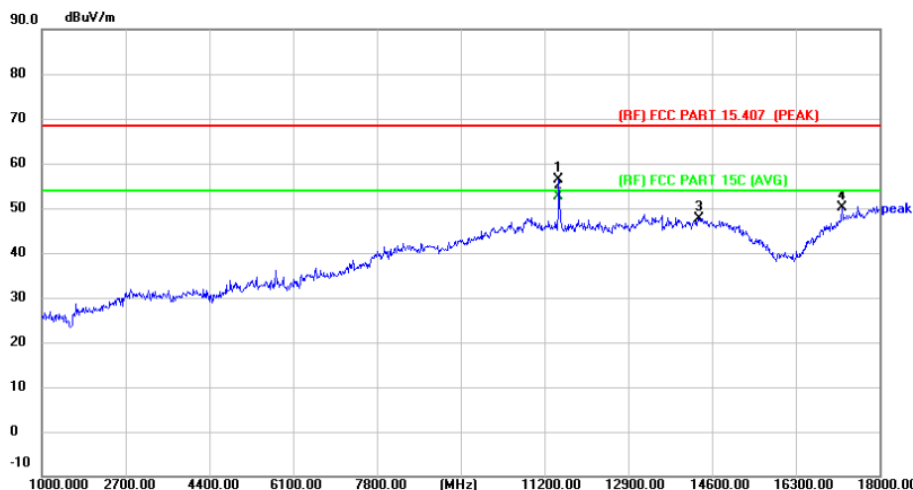

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11489.000 | 47.42 | 9.00 | 56.42 | 68.30 | -11.88 | peak | P |
| 2 * | 11492.660 | 43.67 | 8.99 | 52.66 | 54.00 | -1.34 | AVG | P |
| 3 | 14345.000 | 37.09 | 10.61 | 47.70 | 68.30 | -20.60 | peak | P |
| 4 | 17235.000 | 36.63 | 13.44 | 50.07 | 68.30 | -18.23 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|-------------------------------------|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5785MHz-CDD | | |

Horizontal

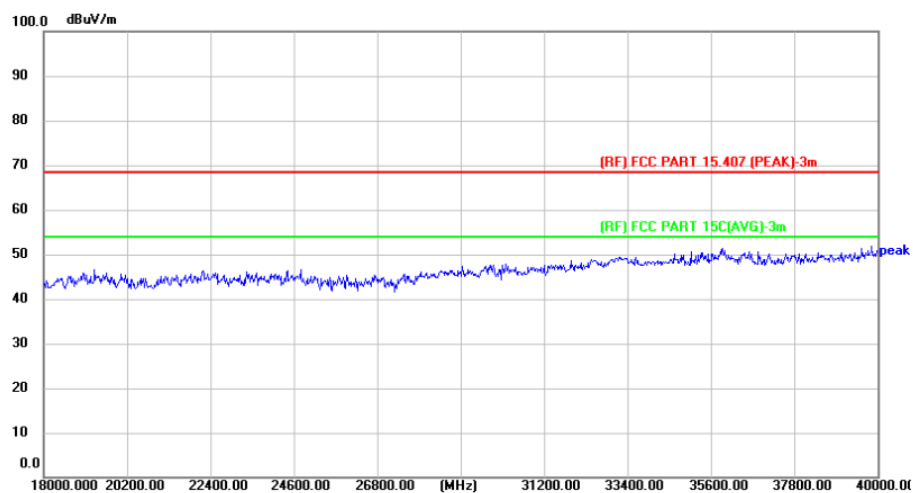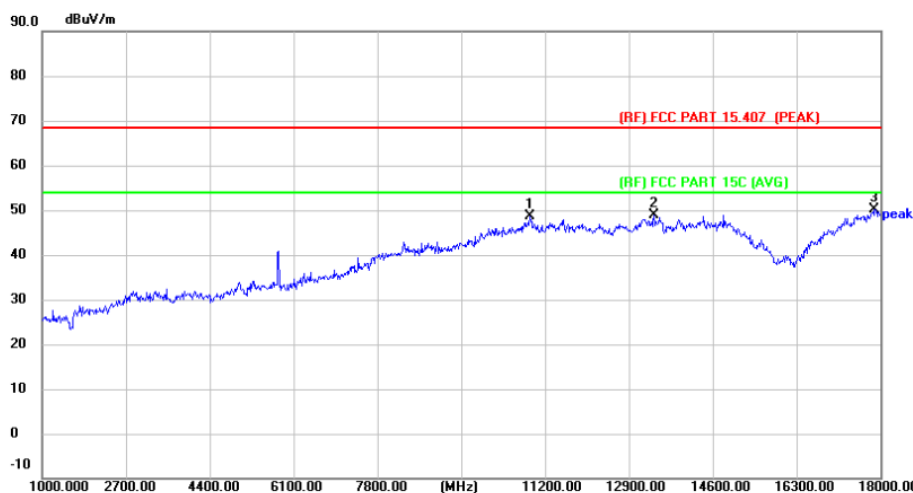

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 10894.000 | 40.43 | 8.20 | 48.63 | 68.30 | -19.67 | peak | P |
| 2 | 13410.000 | 38.65 | 10.17 | 48.82 | 68.30 | -19.48 | peak | P |
| 3 * | 17881.000 | 32.82 | 17.36 | 50.18 | 68.30 | -18.12 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|-------------------------------------|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5785MHz-CDD | | |

Vertical

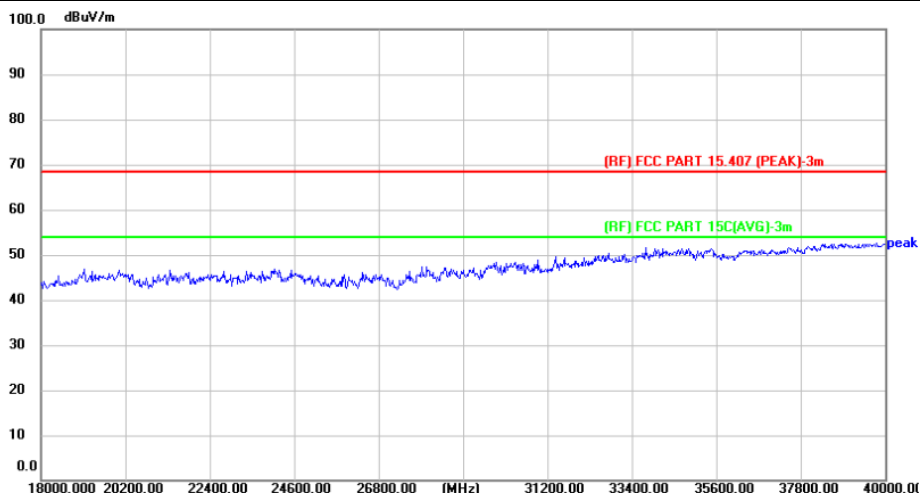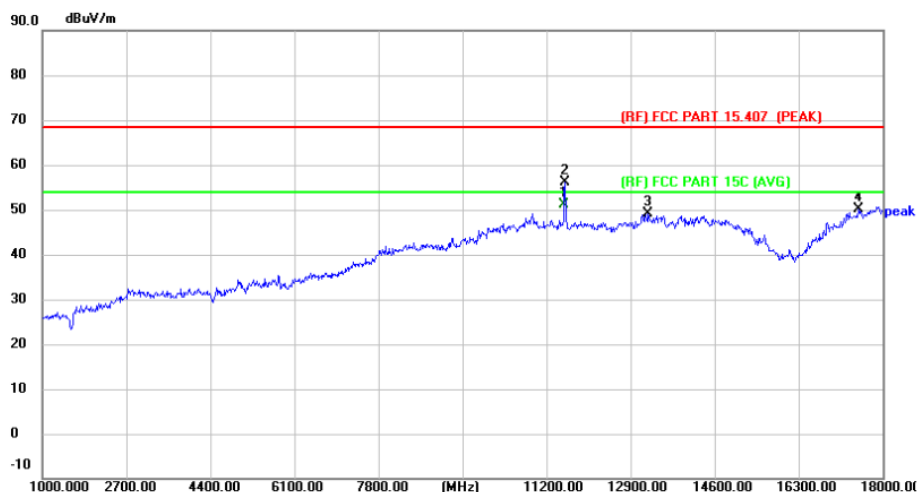

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 11571.600 | 42.45 | 8.74 | 51.19 | 54.00 | -2.81 | AVG | P |
| 2 | 11574.000 | 47.50 | 8.73 | 56.23 | 68.30 | -12.07 | peak | P |
| 3 | 13257.000 | 39.32 | 9.79 | 49.11 | 68.30 | -19.19 | peak | P |
| 4 | 17507.000 | 35.08 | 15.12 | 50.20 | 68.30 | -18.10 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|-------------------------------------|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5825MHz-CDD | | |

Horizontal

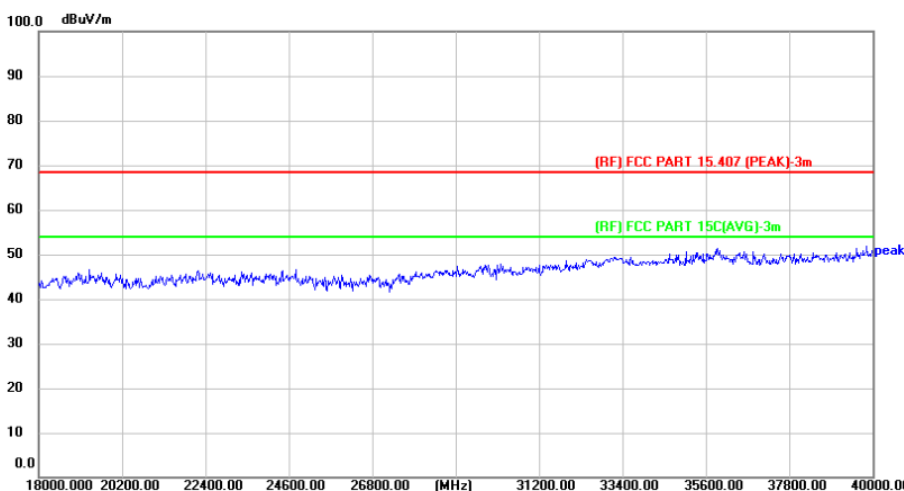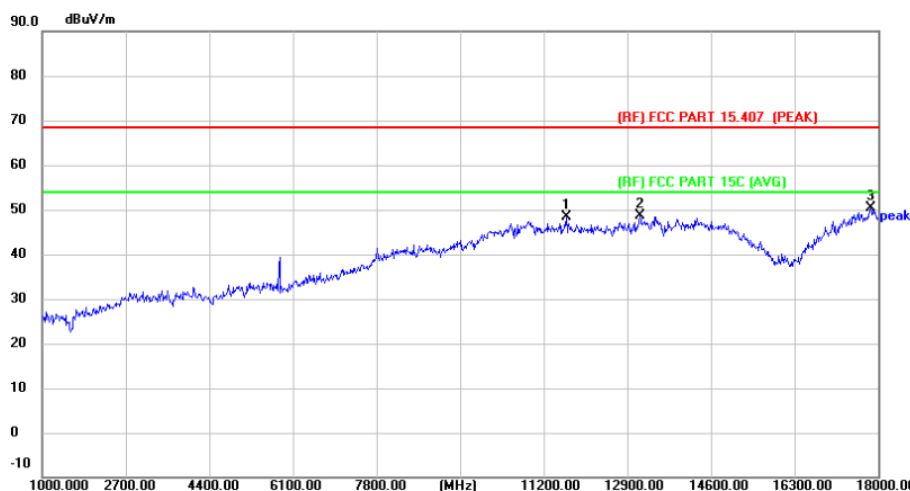

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11659.000 | 39.62 | 8.70 | 48.32 | 68.30 | -19.98 | peak | P |
| 2 | 13155.000 | 38.93 | 9.82 | 48.75 | 68.30 | -19.55 | peak | P |
| 3 * | 17847.000 | 33.19 | 17.08 | 50.27 | 68.30 | -18.03 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|-------------------------------------|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5825MHz-CDD | | |

Vertical

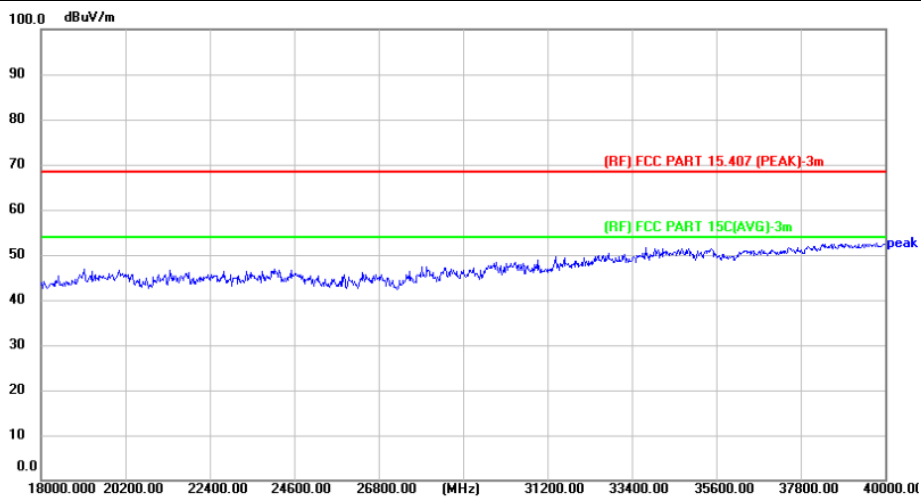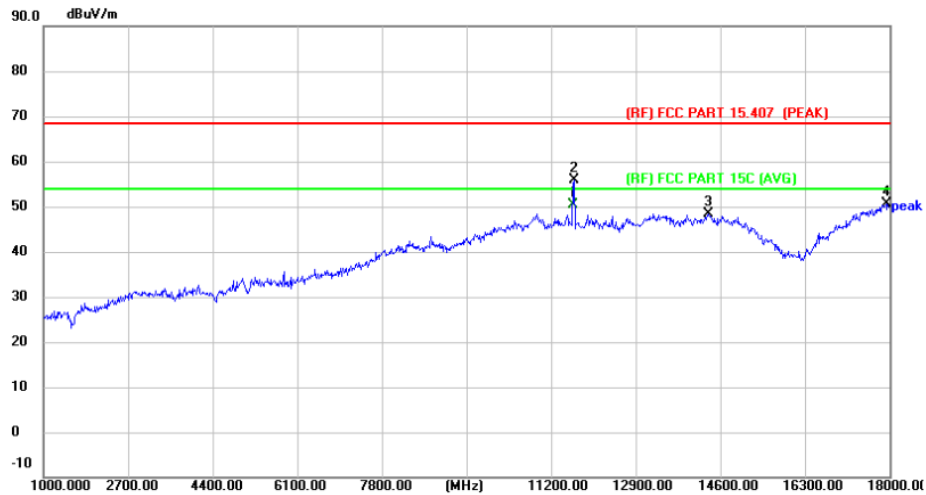

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 11647.340 | 41.79 | 8.70 | 50.49 | 54.00 | -3.51 | AVG | P |
| 2 | 11659.000 | 47.08 | 8.70 | 55.78 | 68.30 | -12.52 | peak | P |
| 3 | 14362.000 | 37.62 | 10.73 | 48.35 | 68.30 | -19.95 | peak | P |
| 4 | 17932.000 | 33.12 | 17.61 | 50.73 | 68.30 | -17.57 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|-----------------------------------|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11n(HT40) Mode 5755MHz-CDD | | |

Horizontal

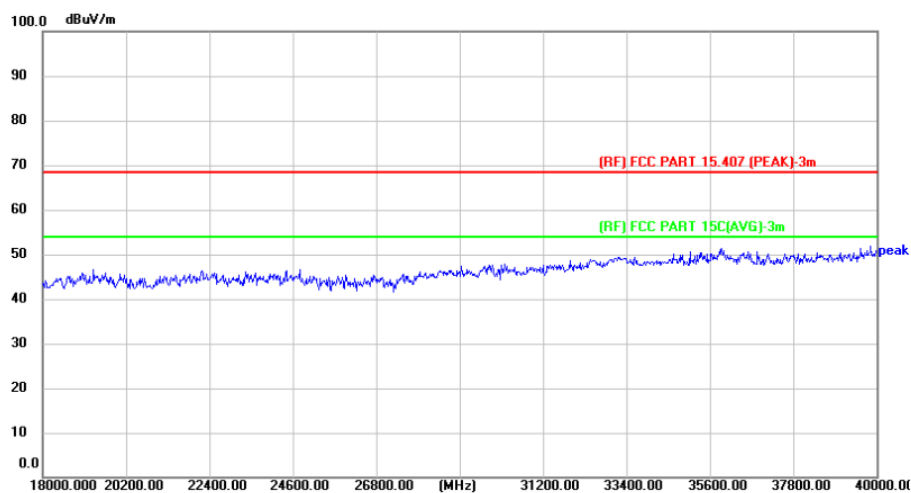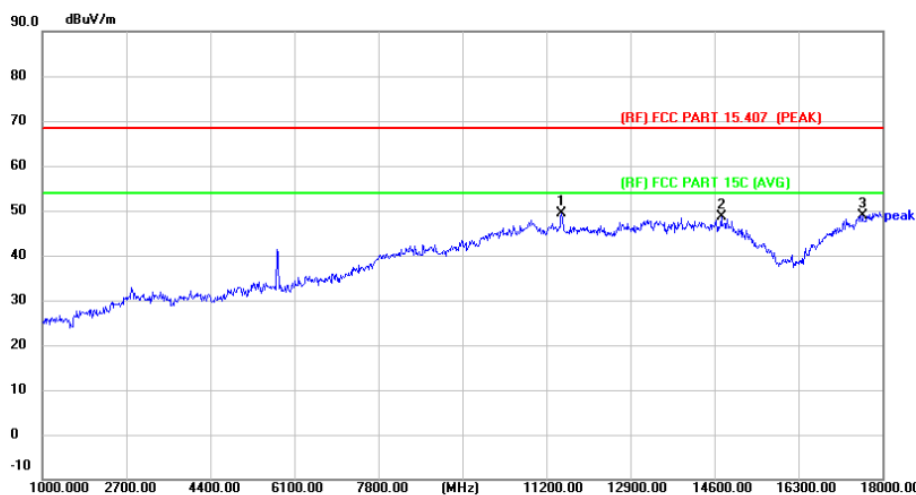

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 11506.000 | 40.37 | 8.97 | 49.34 | 68.30 | -18.96 | peak | P |
| 2 | 14736.000 | 37.74 | 10.77 | 48.51 | 68.30 | -19.79 | peak | P |
| 3 | 17592.000 | 33.37 | 15.58 | 48.95 | 68.30 | -19.35 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|-----------------------------------|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11n(HT40) Mode 5755MHz-CDD | | |

Vertical

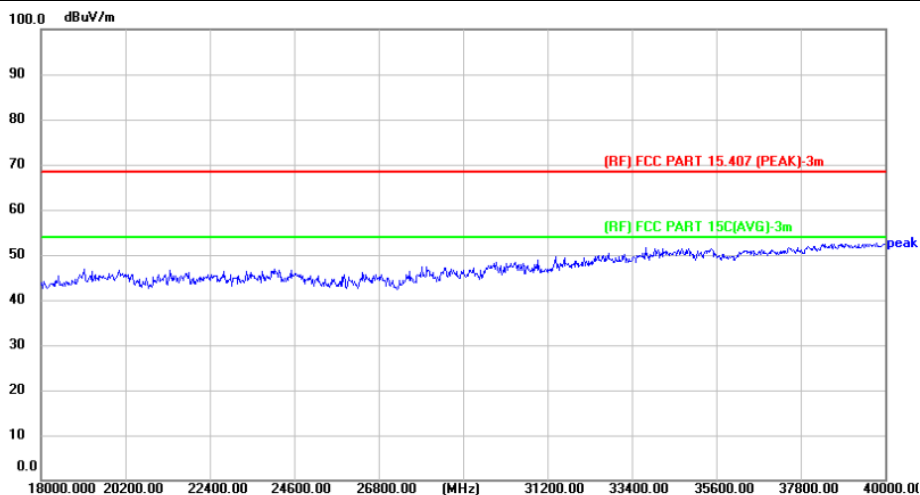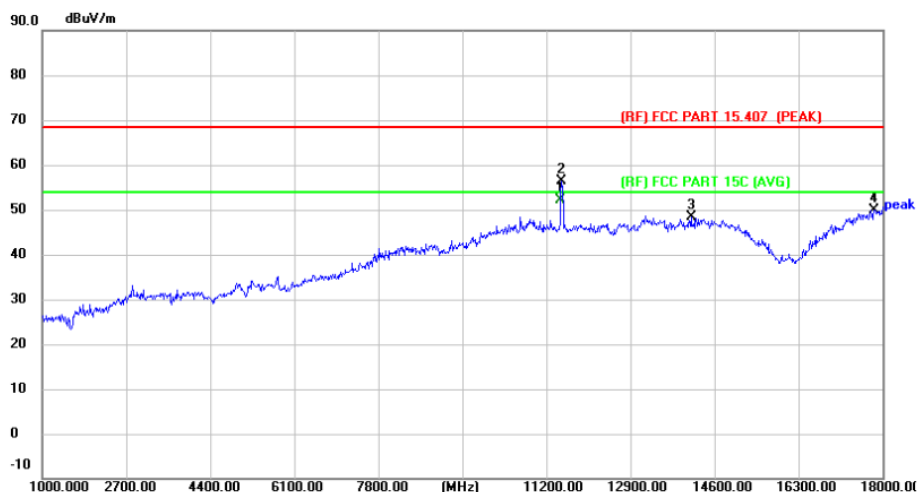

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 11501.800 | 43.09 | 8.98 | 52.07 | 54.00 | -1.93 | AVG | P |
| 2 | 11506.000 | 47.51 | 8.97 | 56.48 | 68.30 | -11.82 | peak | P |
| 3 | 14124.000 | 38.20 | 10.18 | 48.38 | 68.30 | -19.92 | peak | P |
| 4 | 17830.000 | 32.99 | 16.95 | 49.94 | 68.30 | -18.36 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|-----------------------------------|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11n(HT40) Mode 5795MHz-CDD | | |

Horizontal

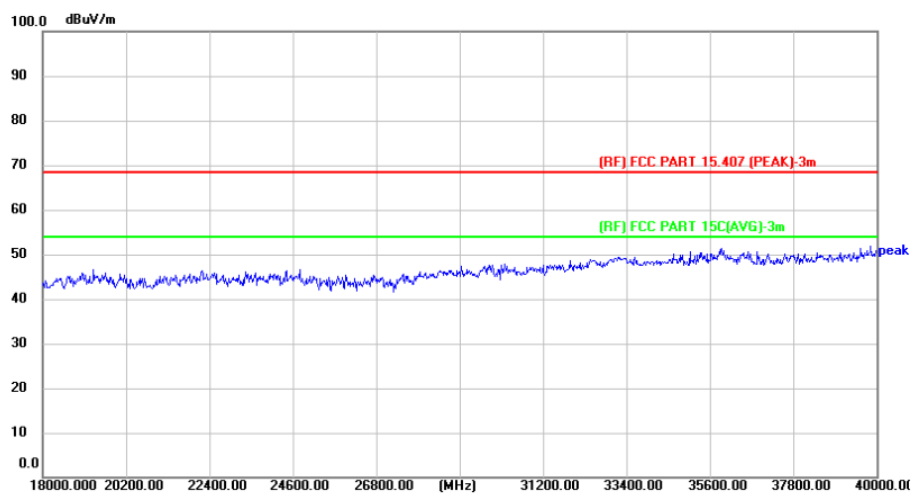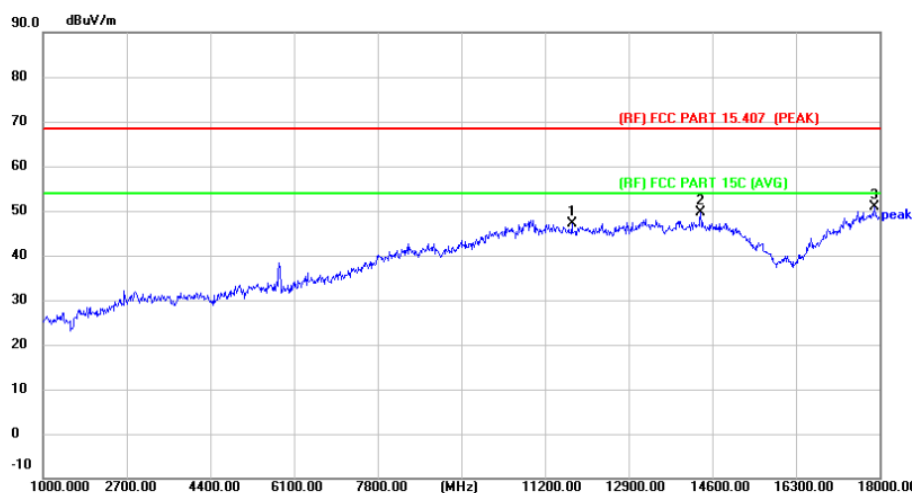

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11744.000 | 38.20 | 8.90 | 47.10 | 68.30 | -21.20 | peak | P |
| 2 | 14362.000 | 38.94 | 10.73 | 49.67 | 68.30 | -18.63 | peak | P |
| 3 * | 17898.000 | 33.46 | 17.50 | 50.96 | 68.30 | -17.34 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|-----------------------------------|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11n(HT40) Mode 5795MHz-CDD | | |

Vertical

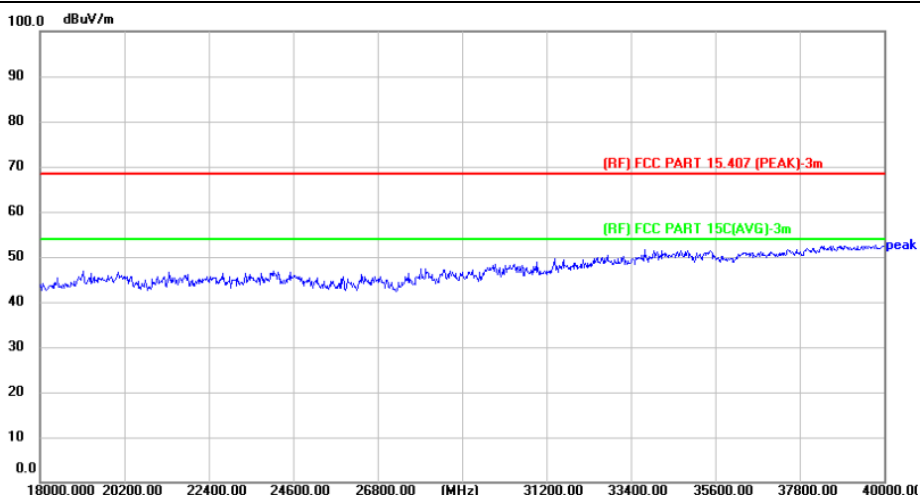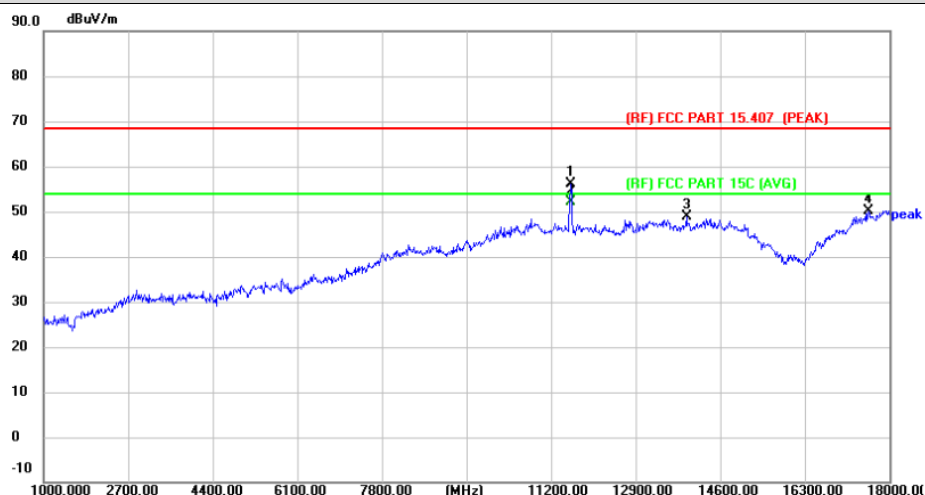

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11591.000 | 47.38 | 8.69 | 56.07 | 68.30 | -12.23 | peak | P |
| 2 * | 11591.000 | 43.38 | 8.69 | 52.07 | 54.00 | -1.93 | AVG | P |
| 3 | 13920.000 | 38.03 | 10.90 | 48.93 | 68.30 | -19.37 | peak | P |
| 4 | 17575.000 | 34.76 | 15.49 | 50.25 | 68.30 | -18.05 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|-------------------------------------|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5755MHz-CDD | | |

Horizontal

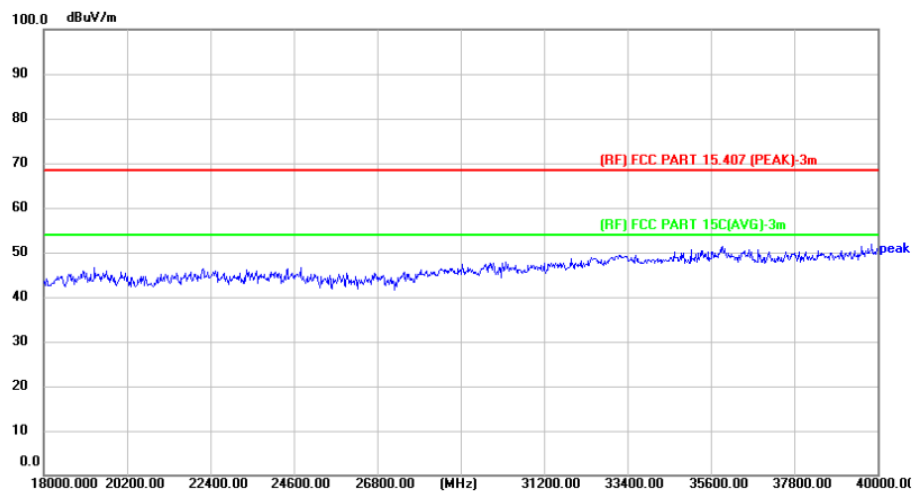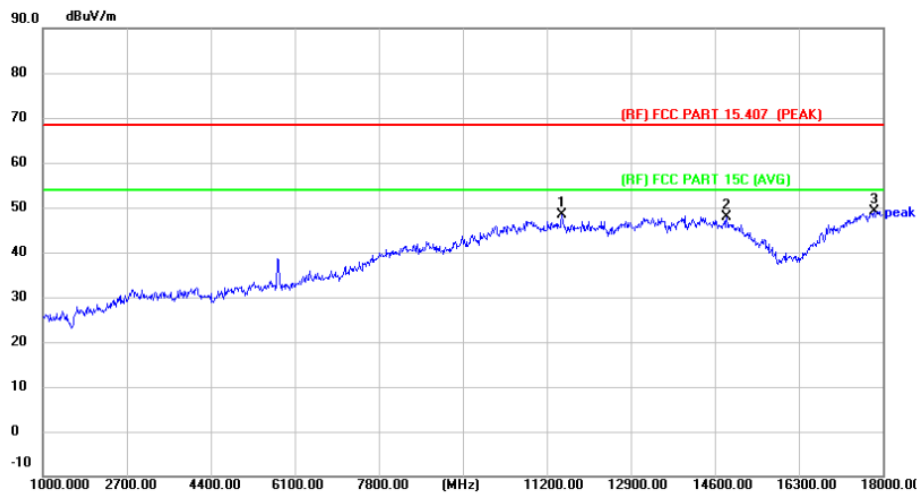

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11506.000 | 39.38 | 8.97 | 48.35 | 68.30 | -19.95 | peak | P |
| 2 | 14838.000 | 36.90 | 10.87 | 47.77 | 68.30 | -20.53 | peak | P |
| 3 * | 17830.000 | 32.30 | 16.95 | 49.25 | 68.30 | -19.05 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|-------------------------------------|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5755MHz-CDD | | |

Vertical

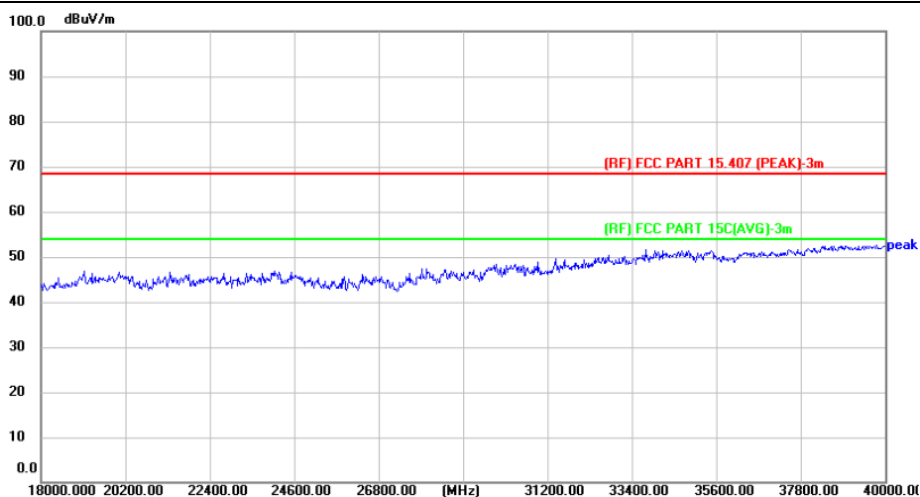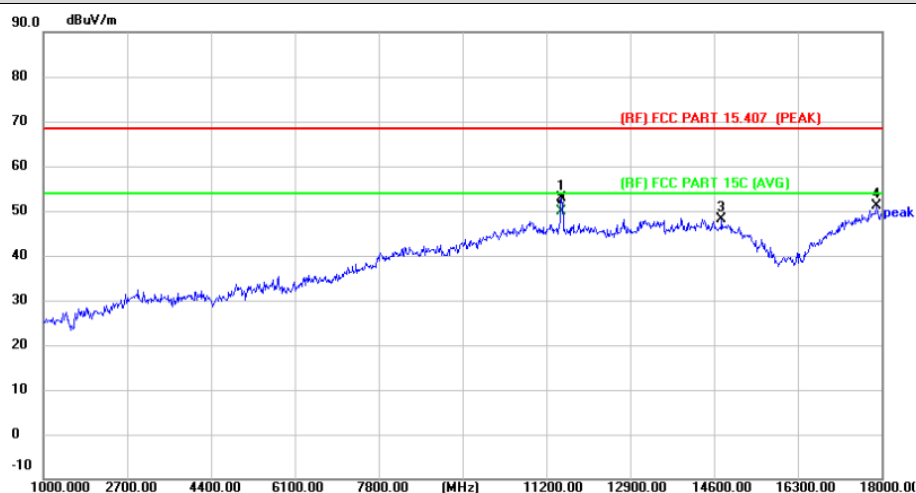

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11506.000 | 43.85 | 8.97 | 52.82 | 68.30 | -15.48 | peak | P |
| 2 * | 11506.000 | 40.85 | 8.97 | 49.82 | 54.00 | -4.18 | AVG | P |
| 3 | 14753.000 | 37.37 | 10.72 | 48.09 | 68.30 | -20.21 | peak | P |
| 4 | 17898.000 | 33.61 | 17.50 | 51.11 | 68.30 | -17.19 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|-------------------------------------|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5795MHz-CDD | | |

Horizontal

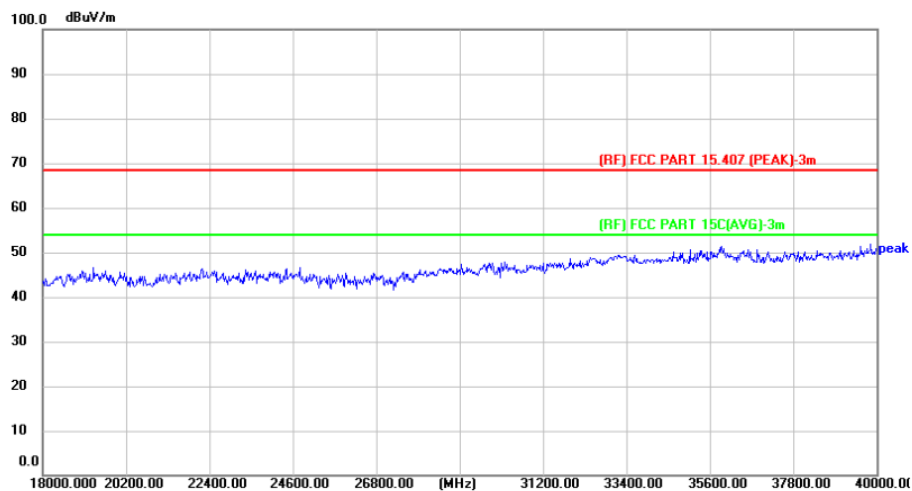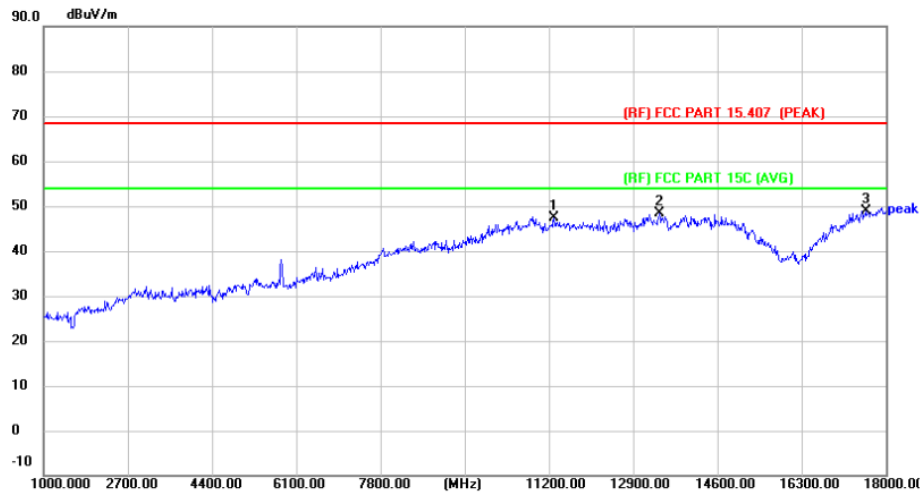

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11302.000 | 38.64 | 8.85 | 47.49 | 68.30 | -20.81 | peak | P |
| 2 | 13427.000 | 38.17 | 10.16 | 48.33 | 68.30 | -19.97 | peak | P |
| 3 * | 17592.000 | 33.40 | 15.58 | 48.98 | 68.30 | -19.32 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|----------------------|-------------------------------------|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5795MHz-CDD | | |

Vertical

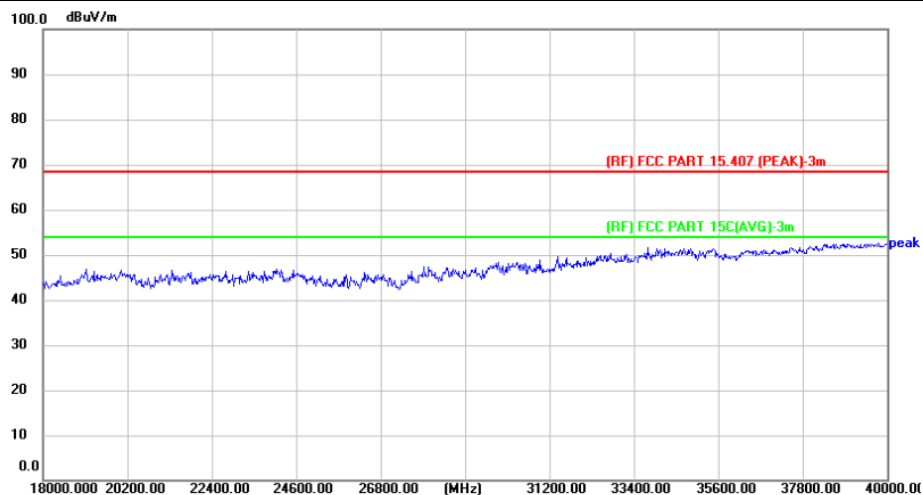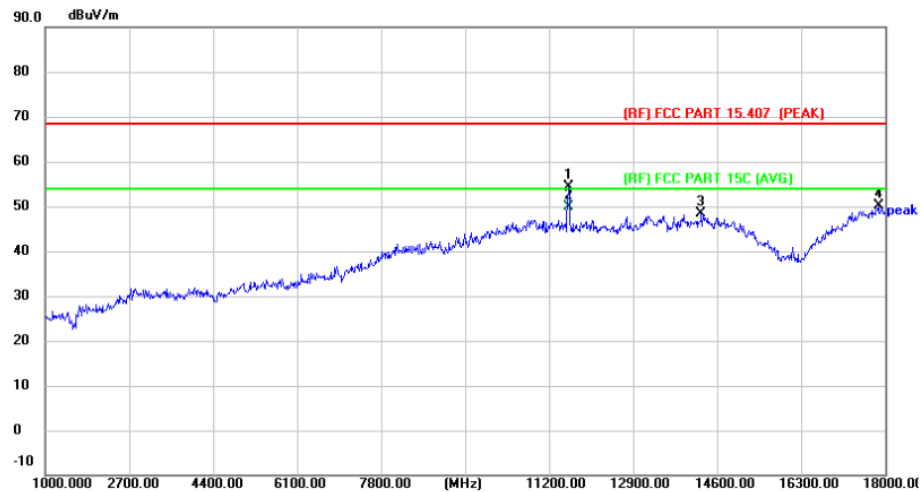

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11591.000 | 45.81 | 8.69 | 54.50 | 68.30 | -13.80 | peak | P |
| 2 * | 11591.100 | 41.24 | 8.69 | 49.93 | 54.00 | -4.07 | AVG | P |
| 3 | 14277.000 | 38.09 | 10.30 | 48.39 | 68.30 | -19.91 | peak | P |
| 4 | 17864.000 | 32.82 | 17.22 | 50.04 | 68.30 | -18.26 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|-------------------------------------|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5775MHz-CDD | | |

Horizontal

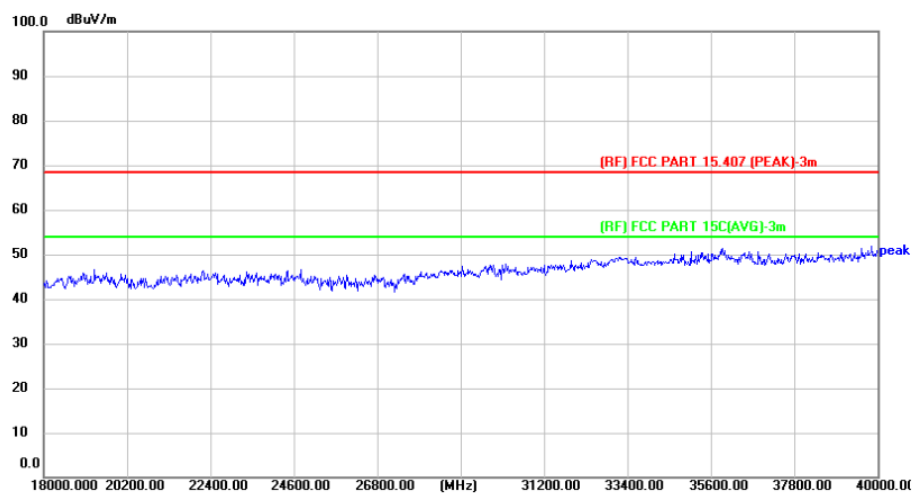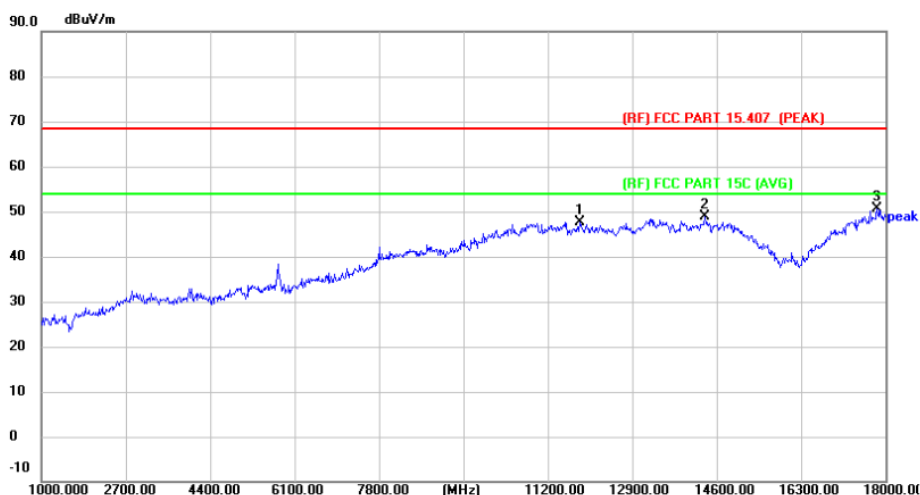

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 11846.000 | 38.63 | 8.98 | 47.61 | 68.30 | -20.69 | peak | P |
| 2 | 14362.000 | 38.11 | 10.73 | 48.84 | 68.30 | -19.46 | peak | P |
| 3 * | 17830.000 | 33.78 | 16.95 | 50.73 | 68.30 | -17.57 | peak | P |



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



| | | | |
|---------------|-------------------------------------|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5775MHz-CDD | | |

Vertical

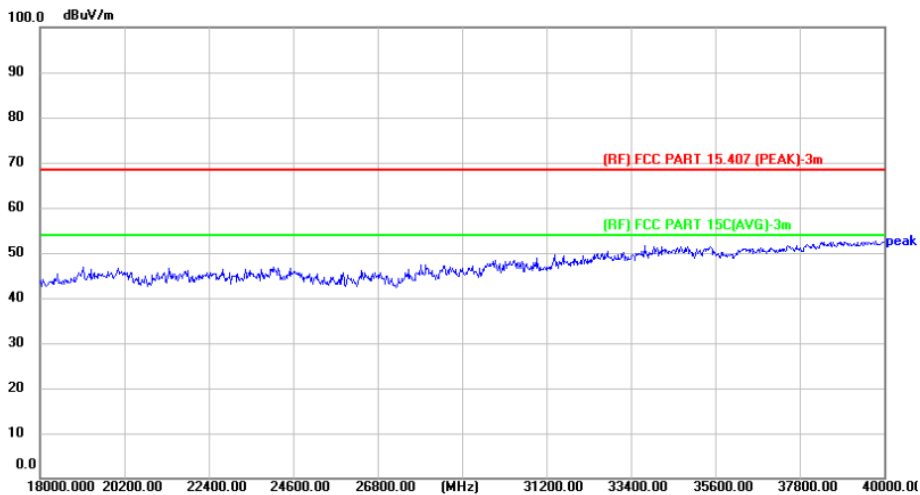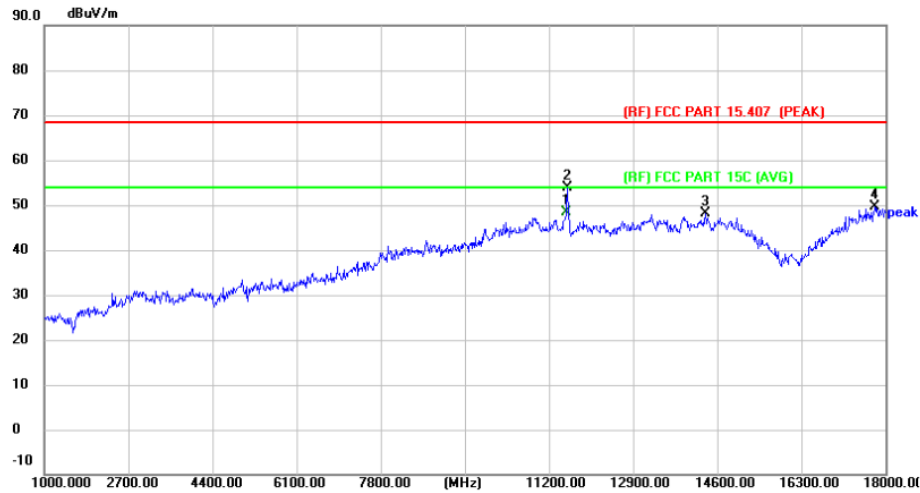

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 11551.700 | 39.66 | 8.81 | 48.47 | 54.00 | -5.53 | AVG | P |
| 2 | 11574.000 | 45.24 | 8.73 | 53.97 | 68.30 | -14.33 | peak | P |
| 3 | 14362.000 | 37.44 | 10.73 | 48.17 | 68.30 | -20.13 | peak | P |
| 4 | 17779.000 | 33.00 | 16.54 | 49.54 | 68.30 | -18.76 | peak | P |

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Attachment C-- Restricted Bands Requirement Test Data

-----Radiation Test

| | | | |
|---------------|---|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5180 MHz (U-NII-1)-SISO | | |
| Remark: | | | |

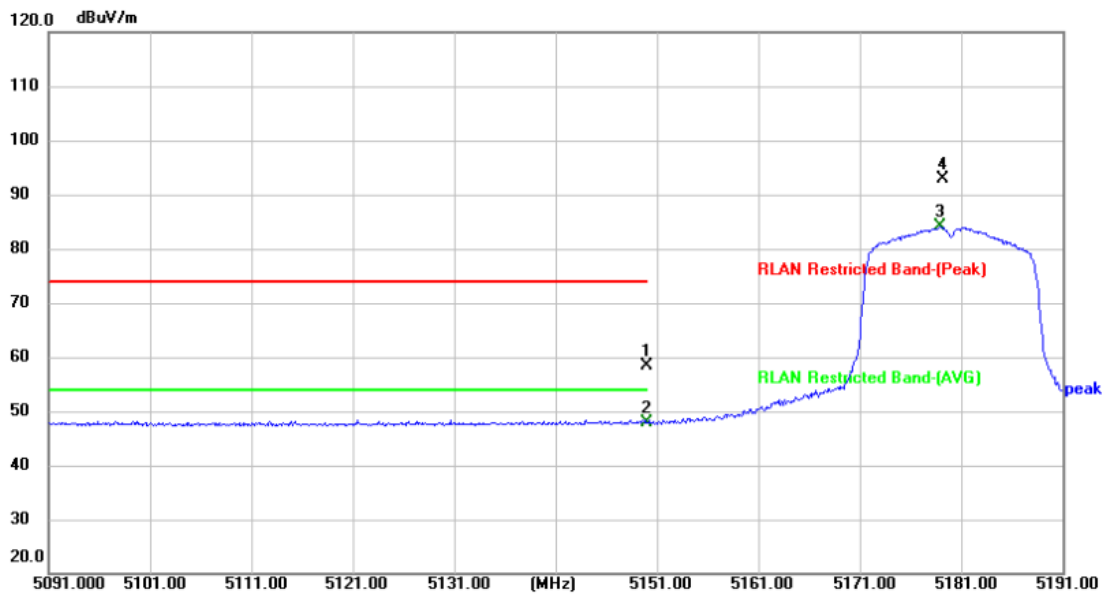


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 44.41 | 14.08 | 58.49 | 74.00 | -15.51 | peak | P |
| 2 * | 5150.000 | 33.82 | 14.08 | 47.90 | 54.00 | -6.10 | AVG | P |
| 3 | 5178.900 | 69.83 | 14.18 | 84.01 | | | AVG | |
| 4 | 5179.200 | 78.59 | 14.18 | 92.77 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5180 MHz (U-NII-1) -SISO | | |
| Remark: | | | |

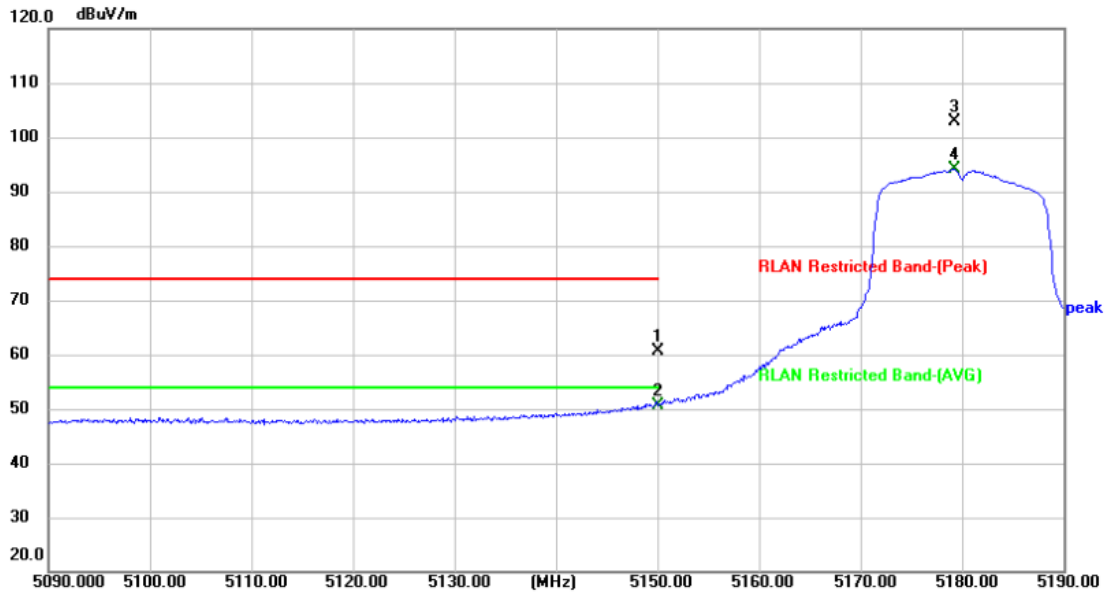


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 46.55 | 14.08 | 60.63 | 74.00 | -13.37 | peak | P |
| 2 * | 5150.000 | 36.58 | 14.08 | 50.66 | 54.00 | -3.34 | AVG | P |
| 3 | 5179.300 | 88.65 | 14.18 | 102.83 | | | peak | |
| 4 | 5179.300 | 79.93 | 14.18 | 94.11 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5320 MHz (U-NII-2A) -SISO | | |
| Remark: | | | |

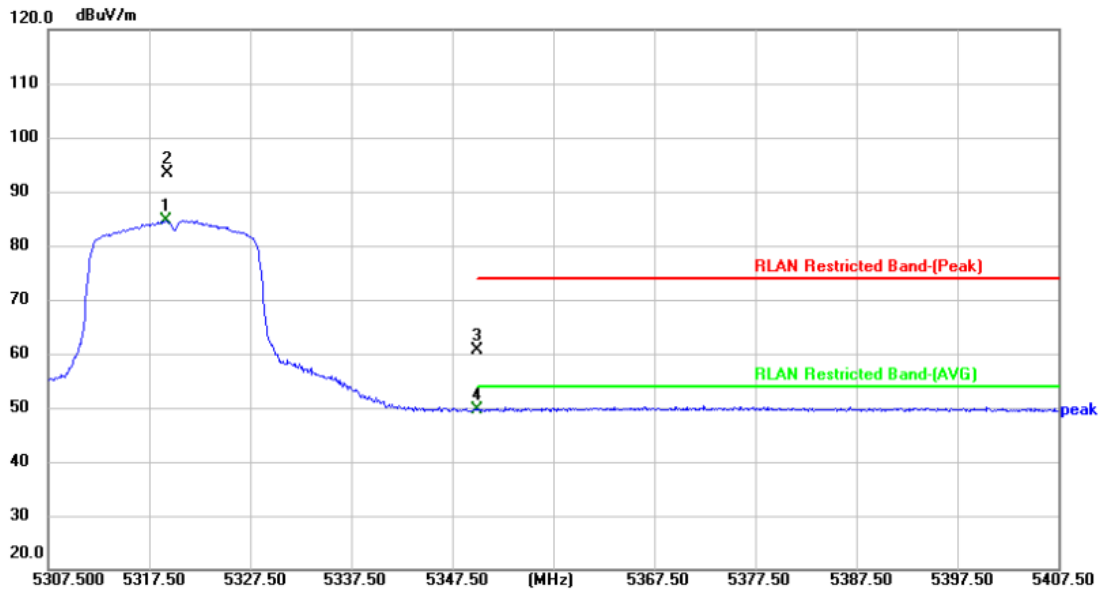


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5319.200 | 70.19 | 14.52 | 84.71 | | | AVG | |
| 2 | 5319.300 | 78.95 | 14.52 | 93.47 | | | peak | |
| 3 | 5350.000 | 46.02 | 14.68 | 60.70 | 74.00 | -13.30 | peak | P |
| 4 * | 5350.000 | 35.00 | 14.68 | 49.68 | 54.00 | -4.32 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5320 MHz (U-NII-2A) -SISO | | |
| Remark: | | | |

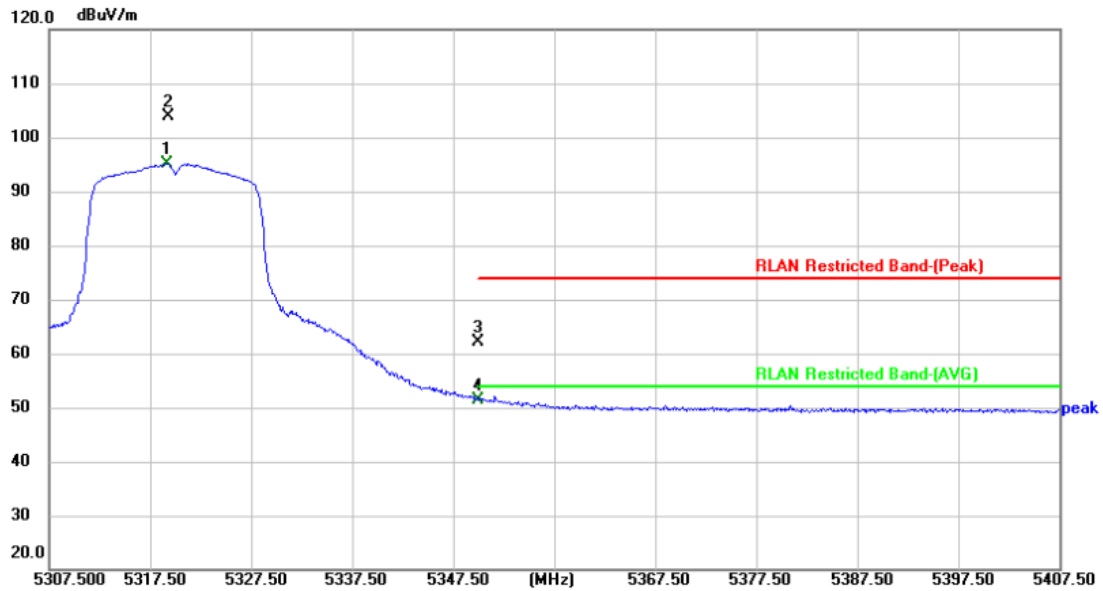


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5319.200 | 80.62 | 14.52 | 95.14 | | | AVG | |
| 2 | 5319.300 | 89.42 | 14.52 | 103.94 | | | peak | |
| 3 | 5350.000 | 47.43 | 14.68 | 62.11 | 74.00 | -11.89 | peak | P |
| 4 * | 5350.000 | 36.82 | 14.68 | 51.50 | 54.00 | -2.50 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)-CDD | | |
| Remark: | | | |

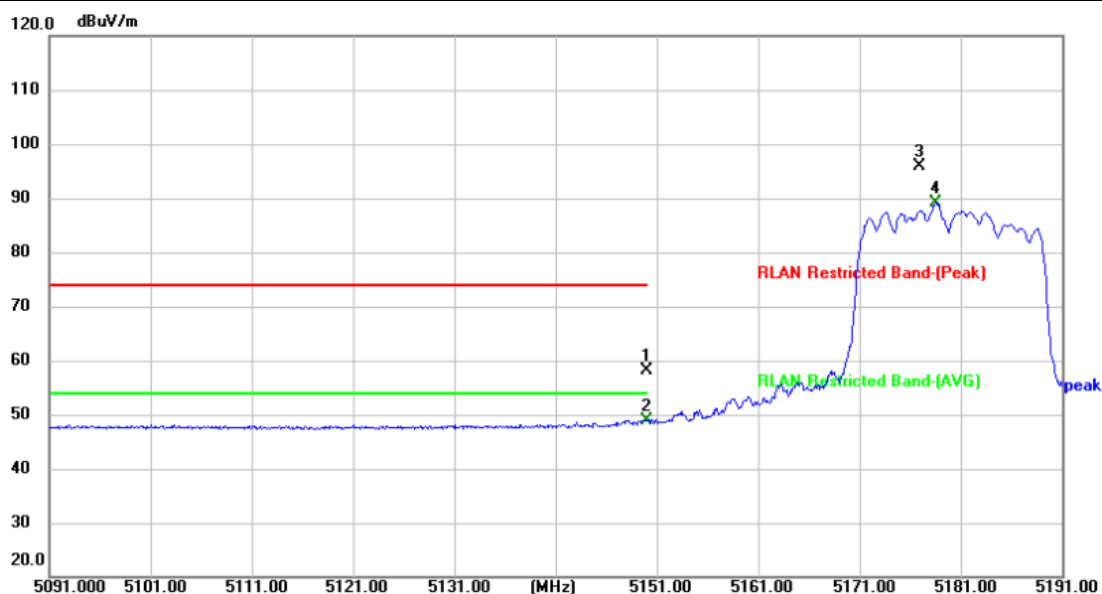


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 44.09 | 14.08 | 58.17 | 74.00 | -15.83 | peak | P |
| 2 * | 5150.000 | 34.90 | 14.08 | 48.98 | 54.00 | -5.02 | AVG | P |
| 3 | 5176.900 | 81.78 | 14.17 | 95.95 | | | peak | |
| 4 | 5178.500 | 75.02 | 14.18 | 89.20 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5180 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

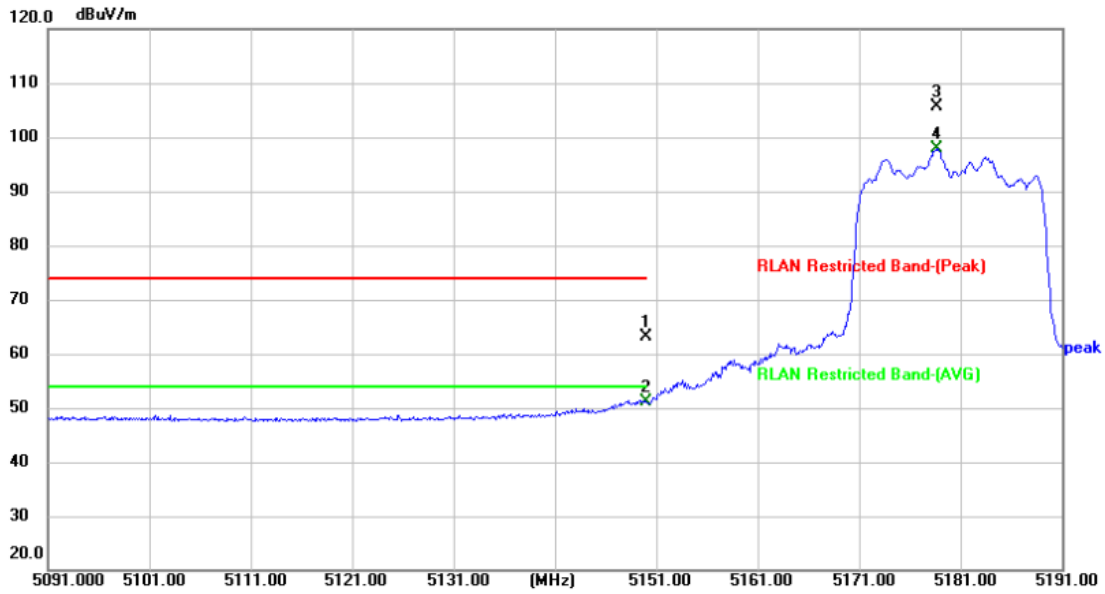


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 49.17 | 14.08 | 63.25 | 74.00 | -10.75 | peak | P |
| 2 * | 5150.000 | 37.01 | 14.08 | 51.09 | 54.00 | -2.91 | AVG | P |
| 3 | 5178.600 | 91.50 | 14.18 | 105.68 | | | peak | |
| 4 | 5178.600 | 83.65 | 14.18 | 97.83 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5320MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

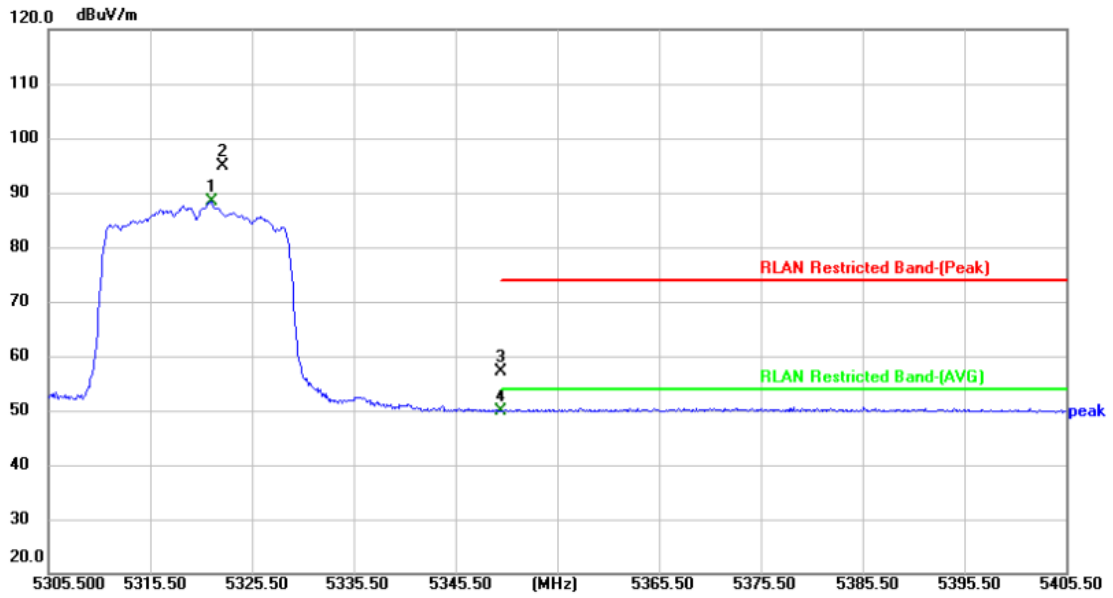


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5321.500 | 73.91 | 14.52 | 88.43 | | | AVG | |
| 2 | 5322.600 | 80.33 | 14.53 | 94.86 | | | peak | |
| 3 | 5350.000 | 42.43 | 14.68 | 57.11 | 74.00 | -16.89 | peak | P |
| 4 * | 5350.000 | 35.19 | 14.68 | 49.87 | 54.00 | -4.13 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

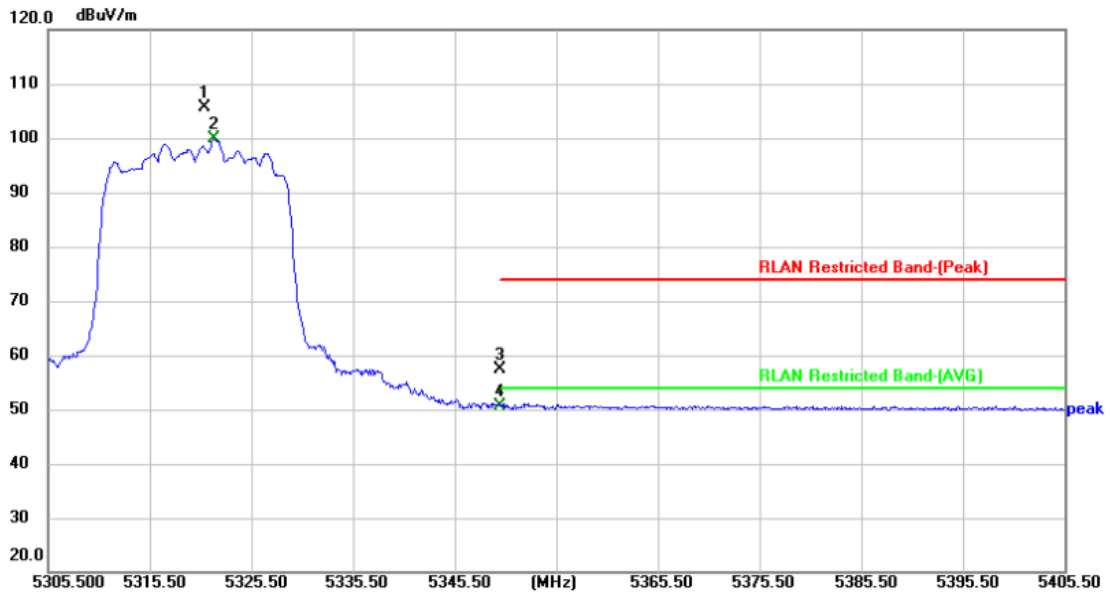


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5320.900 | 91.09 | 14.52 | 105.61 | | | peak | |
| 2 | 5321.800 | 85.25 | 14.52 | 99.77 | | | AVG | |
| 3 | 5350.000 | 42.58 | 14.68 | 57.26 | 74.00 | -16.74 | peak | P |
| 4 * | 5350.000 | 36.05 | 14.68 | 50.73 | 54.00 | -3.27 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

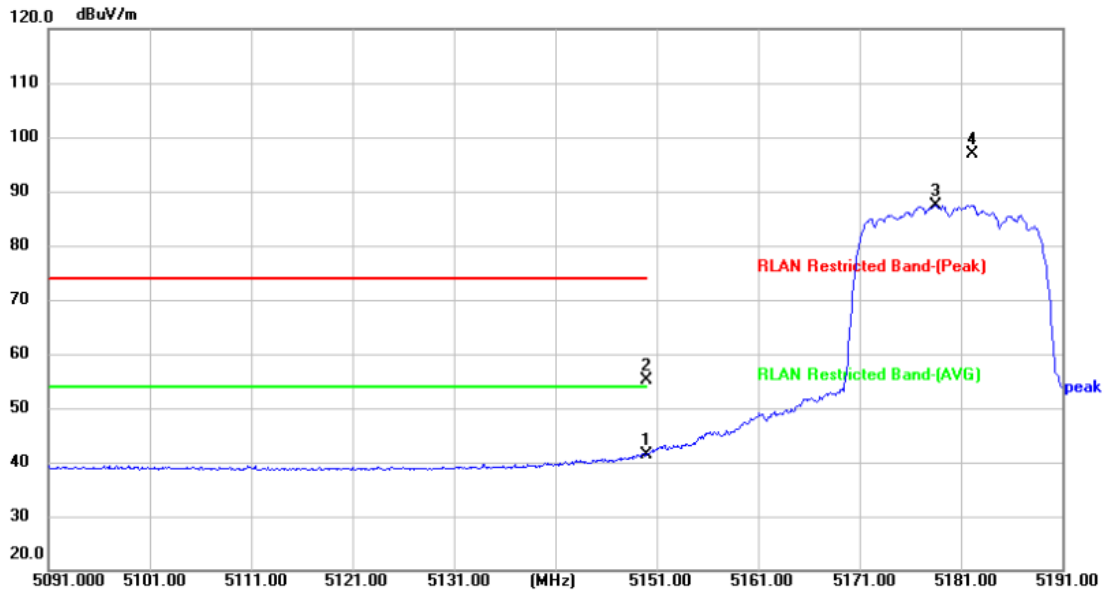


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 37.34 | 4.08 | 41.42 | 74.00 | -32.58 | peak | P |
| 2 * | 5150.000 | 50.98 | 4.08 | 55.06 | 74.00 | -18.94 | peak | P |
| 3 | 5178.500 | 83.29 | 4.18 | 87.47 | | | peak | |
| 4 | 5182.100 | 92.70 | 4.19 | 96.89 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

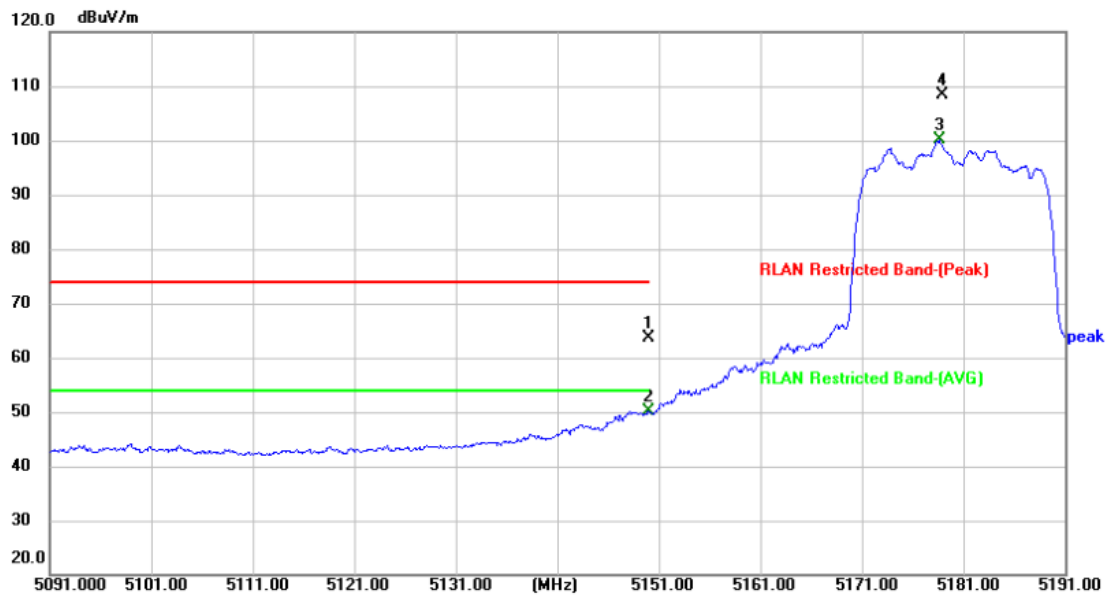


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 59.45 | 4.08 | 63.53 | 74.00 | -10.47 | peak | P |
| 2 * | 5150.000 | 46.12 | 4.08 | 50.20 | 54.00 | -3.80 | AVG | P |
| 3 | 5178.600 | 95.86 | 4.18 | 100.04 | | | AVG | |
| 4 | 5178.900 | 104.25 | 4.18 | 108.43 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

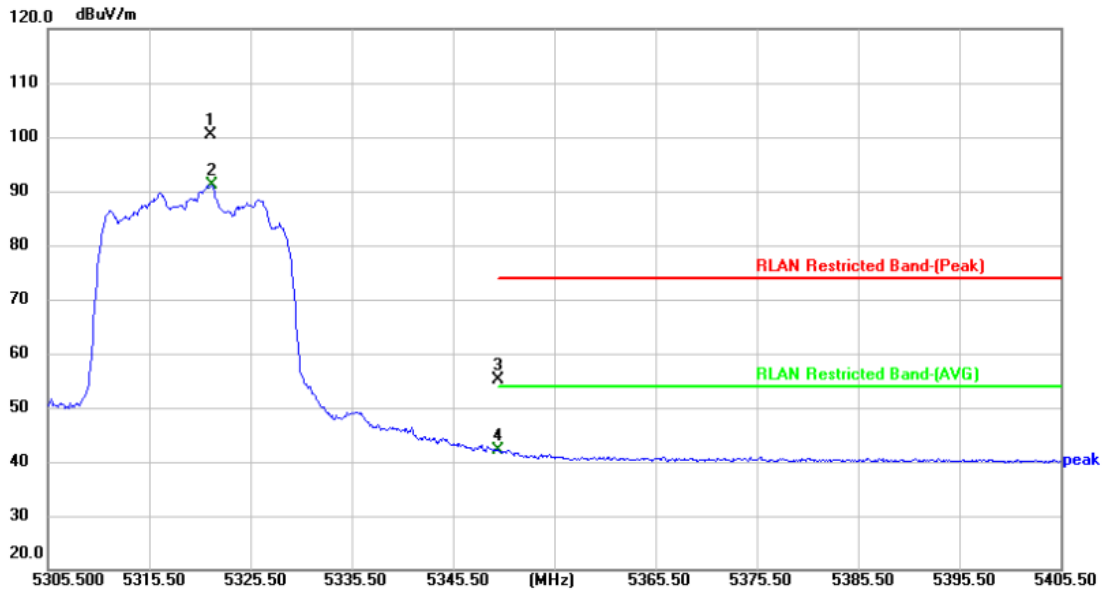


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5321.600 | 95.84 | 4.52 | 100.36 | | | peak | |
| 2 | 5321.700 | 86.61 | 4.52 | 91.13 | | | AVG | |
| 3 | 5350.000 | 50.42 | 4.68 | 55.10 | 74.00 | -18.90 | peak | P |
| 4 * | 5350.000 | 37.54 | 4.68 | 42.22 | 54.00 | -11.78 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

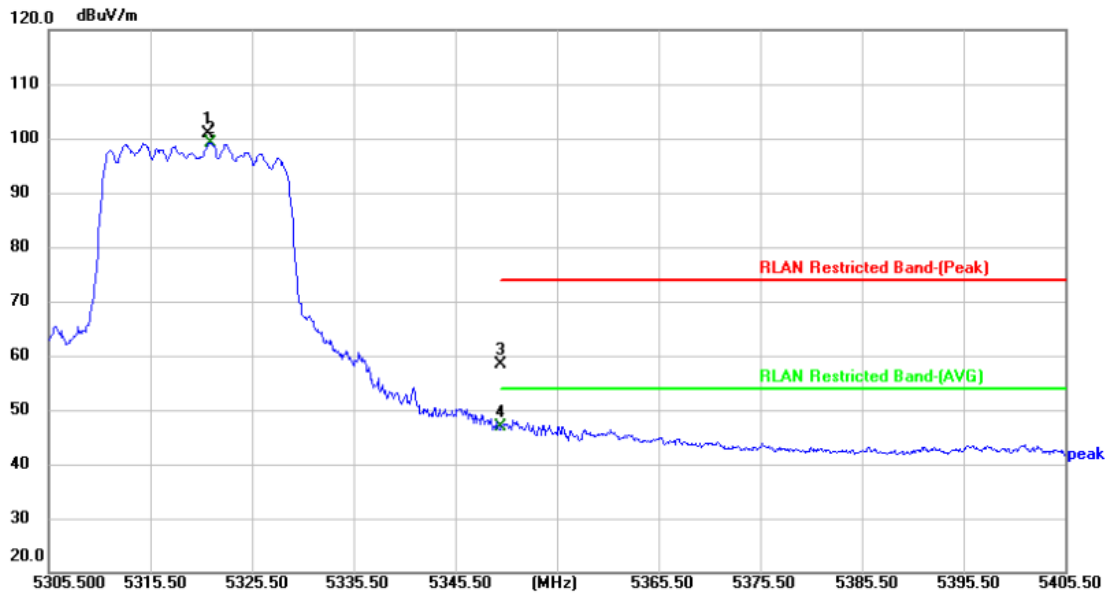


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5321.200 | 96.29 | 4.52 | 100.81 | | | peak | |
| 2 | 5321.400 | 94.70 | 4.52 | 99.22 | | | AVG | |
| 3 | 5350.000 | 53.72 | 4.68 | 58.40 | 74.00 | -15.60 | peak | P |
| 4 * | 5350.000 | 42.26 | 4.68 | 46.94 | 54.00 | -7.06 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

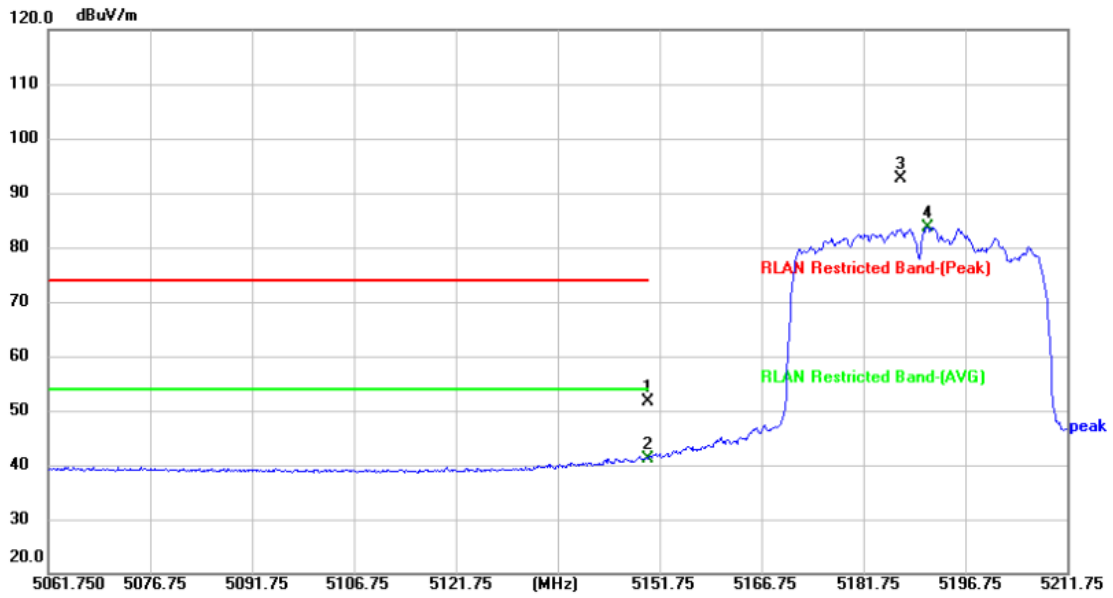


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 47.48 | 4.08 | 51.56 | 74.00 | -22.44 | peak | P |
| 2 * | 5150.000 | 37.02 | 4.08 | 41.10 | 54.00 | -12.90 | AVG | P |
| 3 | 5187.150 | 88.35 | 4.20 | 92.55 | | | peak | |
| 4 | 5191.200 | 79.40 | 4.23 | 83.63 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

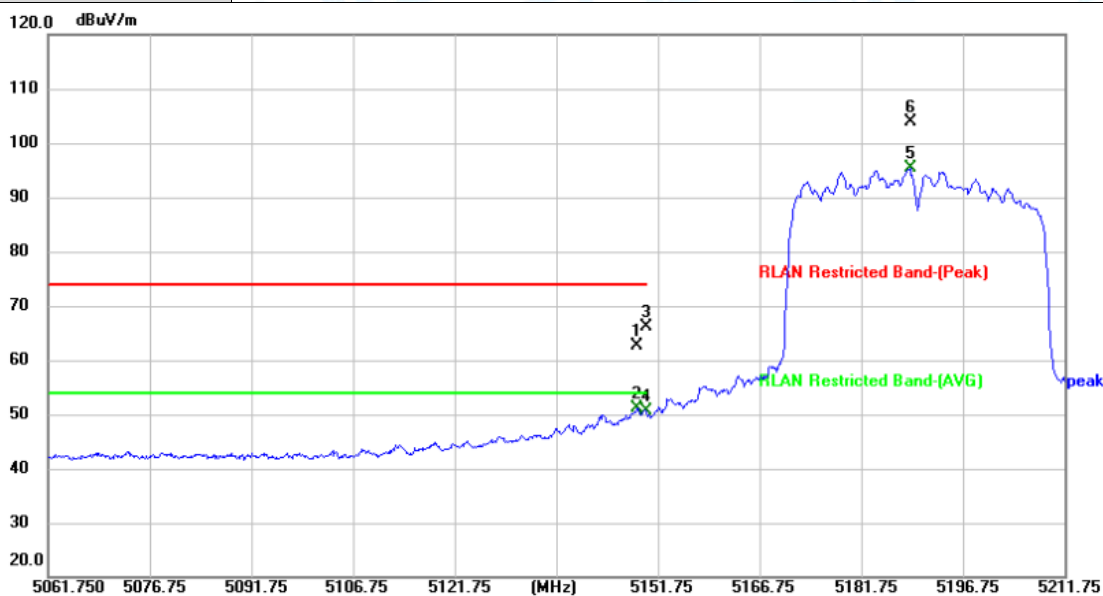


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5148.600 | 58.57 | 4.08 | 62.65 | 74.00 | -11.35 | peak | P |
| 2 * | 5148.600 | 47.09 | 4.08 | 51.17 | 54.00 | -2.83 | AVG | P |
| 3 | 5150.000 | 61.94 | 4.08 | 66.02 | 74.00 | -7.98 | peak | P |
| 4 | 5150.000 | 46.56 | 4.08 | 50.64 | 54.00 | -3.36 | AVG | P |
| 5 | 5188.950 | 91.08 | 4.21 | 95.29 | | | AVG | |
| 6 | 5189.100 | 99.60 | 4.21 | 103.81 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

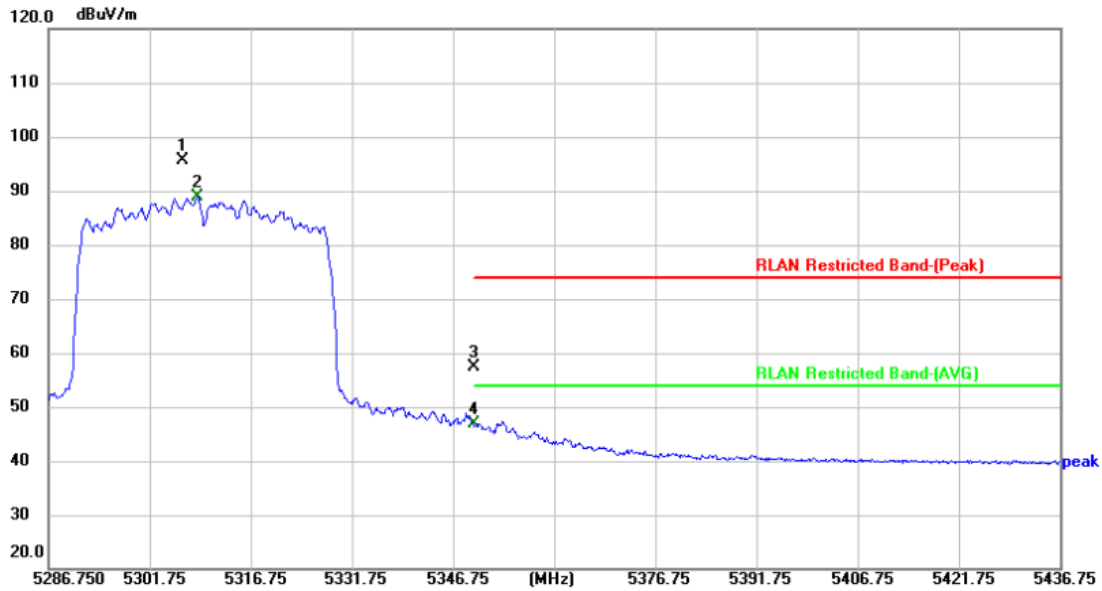


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5306.550 | 91.14 | 4.44 | 95.58 | | | peak | |
| 2 | 5308.800 | 84.53 | 4.45 | 88.98 | | | AVG | |
| 3 | 5350.000 | 52.67 | 4.68 | 57.35 | 74.00 | -16.65 | peak | P |
| 4 * | 5350.000 | 42.22 | 4.68 | 46.90 | 54.00 | -7.10 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

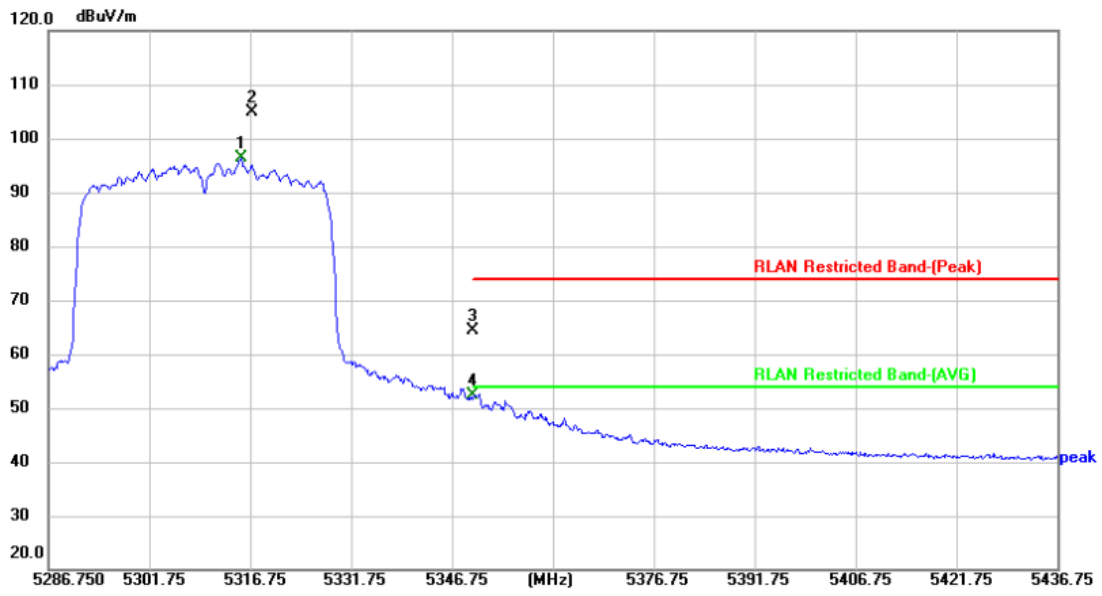


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5315.400 | 91.83 | 4.49 | 96.32 | | | AVG | |
| 2 | 5317.050 | 100.36 | 4.50 | 104.86 | | | peak | |
| 3 | 5350.000 | 59.67 | 4.68 | 64.35 | 74.00 | -9.65 | peak | P |
| 4 * | 5350.000 | 47.65 | 4.68 | 52.33 | 54.00 | -1.67 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

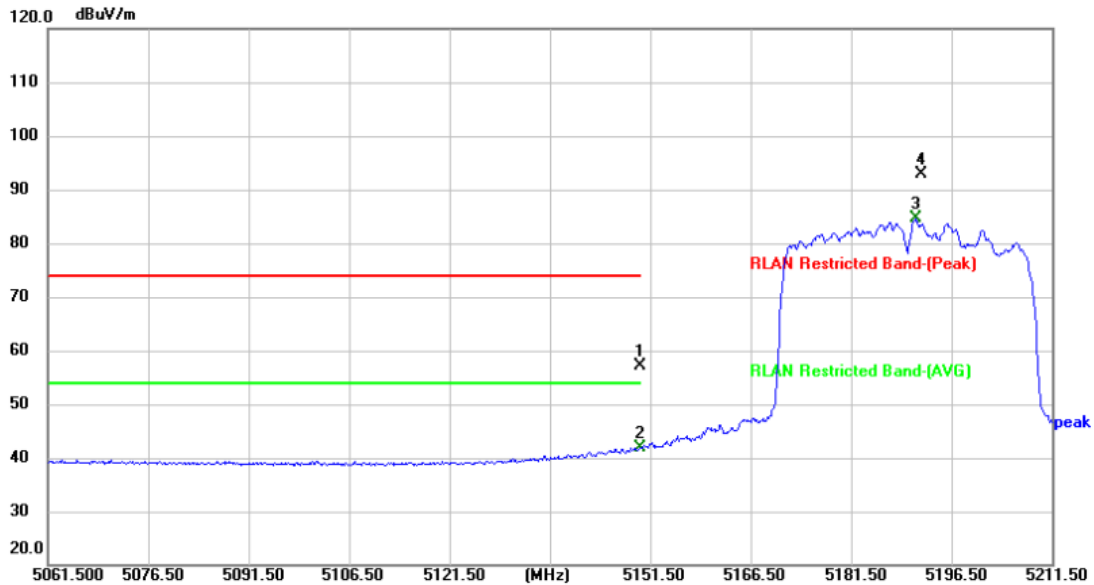


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5150.000 | 53.09 | 4.08 | 57.17 | 74.00 | -16.83 | peak | P |
| 2 * | 5150.000 | 37.88 | 4.08 | 41.96 | 54.00 | -12.04 | AVG | P |
| 3 | 5191.100 | 80.34 | 4.23 | 84.57 | | | AVG | |
| 4 | 5192.000 | 88.76 | 4.23 | 92.99 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

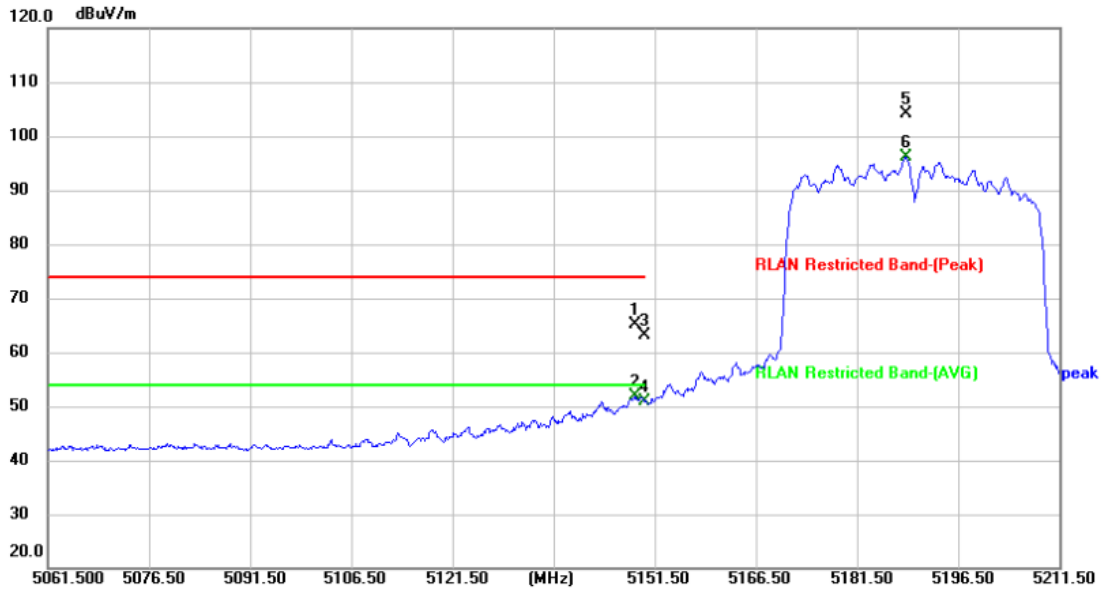


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5148.650 | 61.13 | 4.08 | 65.21 | 74.00 | -8.79 | peak | P |
| 2 * | 5148.650 | 47.80 | 4.08 | 51.88 | 54.00 | -2.12 | AVG | P |
| 3 | 5150.000 | 59.11 | 4.08 | 63.19 | 74.00 | -10.81 | peak | P |
| 4 | 5150.000 | 46.90 | 4.08 | 50.98 | 54.00 | -3.02 | AVG | P |
| 5 | 5188.700 | 99.91 | 4.21 | 104.12 | | | peak | |
| 6 | 5188.700 | 92.01 | 4.21 | 96.22 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

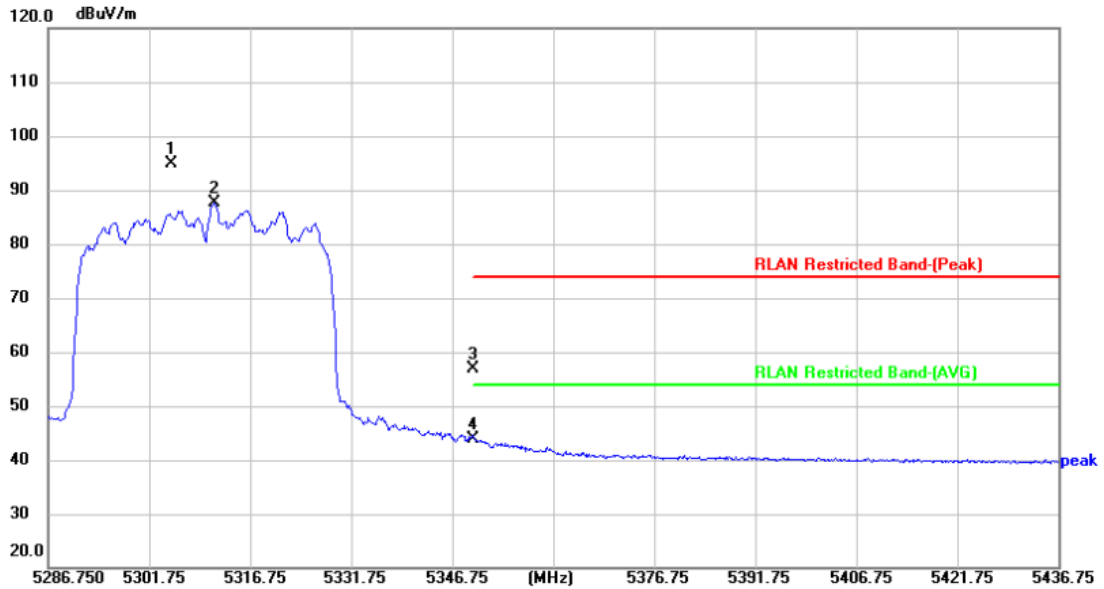


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5305.050 | 90.35 | 4.42 | 94.77 | | | peak | |
| 2 | 5311.500 | 83.25 | 4.46 | 87.71 | | | peak | |
| 3 * | 5350.000 | 52.09 | 4.68 | 56.77 | 74.00 | -17.23 | peak | P |
| 4 | 5350.000 | 39.32 | 4.68 | 44.00 | 74.00 | -30.00 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

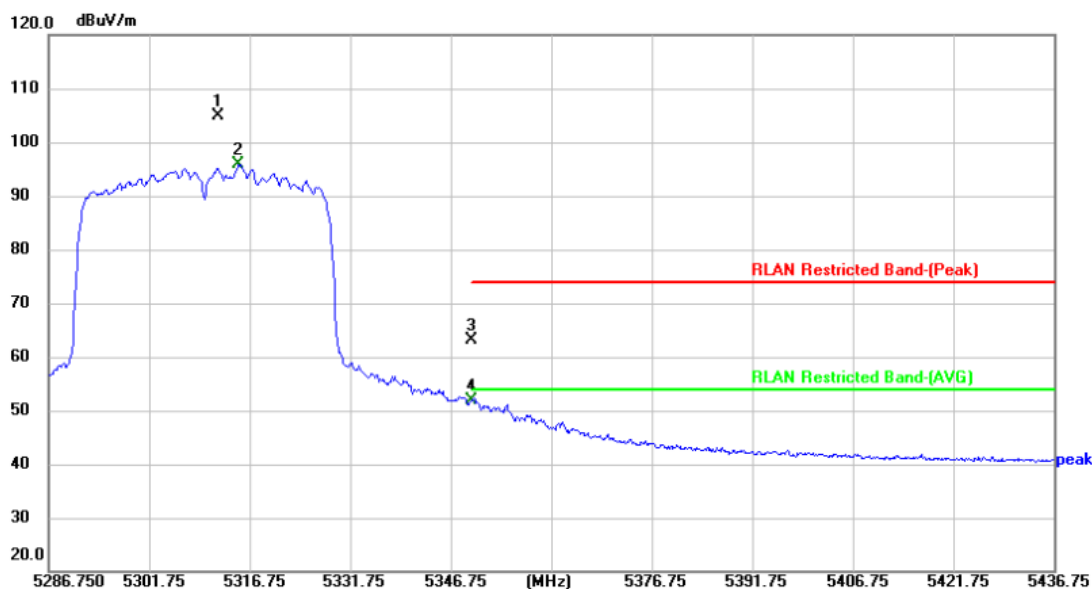


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5312.100 | 100.31 | 4.47 | 104.78 | | | peak | |
| 2 | 5315.100 | 91.49 | 4.49 | 95.98 | | | AVG | |
| 3 | 5350.000 | 58.54 | 4.68 | 63.22 | 74.00 | -10.78 | peak | P |
| 4 * | 5350.000 | 47.24 | 4.68 | 51.92 | 54.00 | -2.08 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

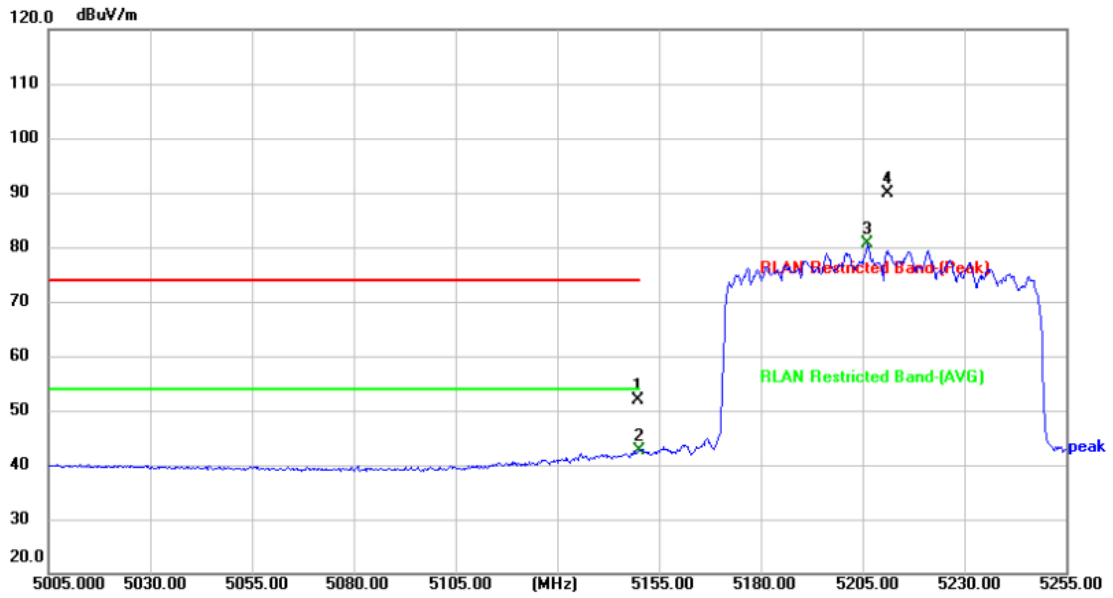


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5149.750 | 47.68 | 4.08 | 51.76 | 74.00 | -22.24 | peak | P |
| 2 * | 5150.000 | 38.47 | 4.08 | 42.55 | 54.00 | -11.45 | AVG | P |
| 3 | 5206.250 | 76.31 | 4.25 | 80.56 | | | AVG | |
| 4 | 5211.250 | 85.57 | 4.27 | 89.84 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) -CDD | | |
| Remark: | | | |

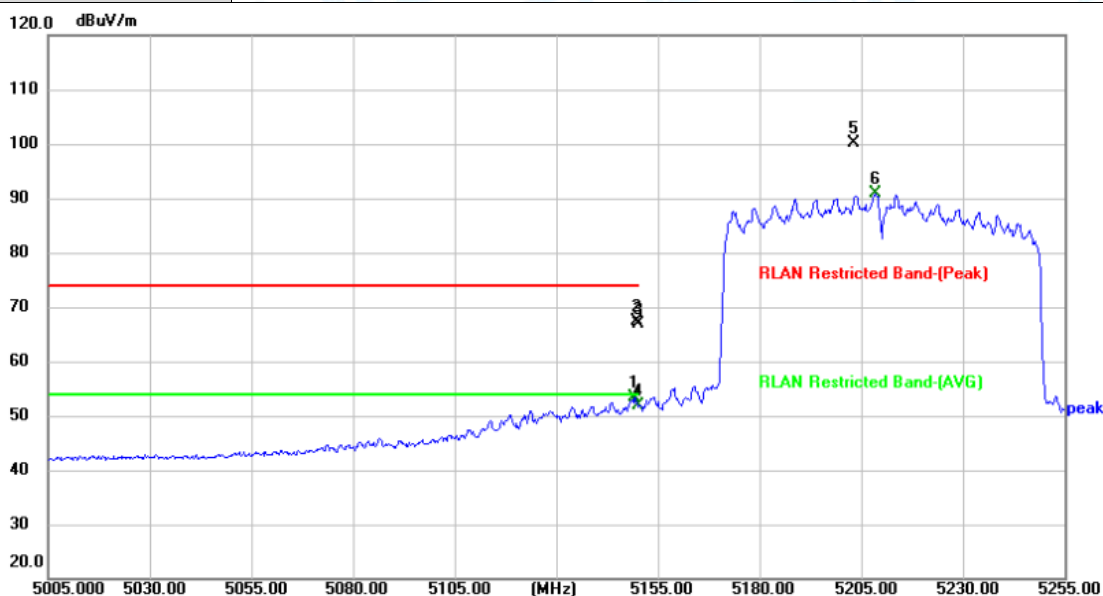


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5149.250 | 49.31 | 4.08 | 53.39 | 54.00 | -0.61 | AVG | P |
| 2 | 5149.750 | 63.22 | 4.08 | 67.30 | 74.00 | -6.70 | peak | P |
| 3 | 5150.000 | 62.86 | 4.08 | 66.94 | 74.00 | -7.06 | peak | P |
| 4 | 5150.000 | 47.91 | 4.08 | 51.99 | 54.00 | -2.01 | AVG | P |
| 5 | 5203.250 | 95.92 | 4.26 | 100.18 | | | peak | |
| 6 | 5208.500 | 86.74 | 4.26 | 91.00 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

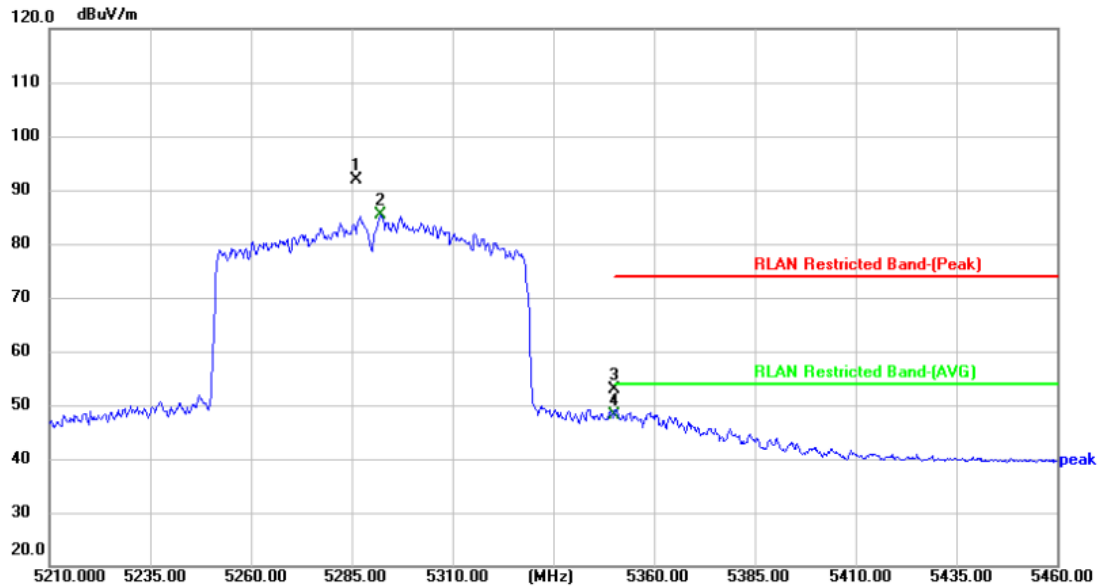


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5286.000 | 87.54 | 4.38 | 91.92 | | | peak | |
| 2 | 5292.250 | 81.00 | 4.39 | 85.39 | | | AVG | |
| 3 | 5350.000 | 48.22 | 4.68 | 52.90 | 74.00 | -21.10 | peak | P |
| 4 * | 5350.000 | 43.55 | 4.68 | 48.23 | 54.00 | -5.77 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A) -CDD | | |
| Remark: | | | |

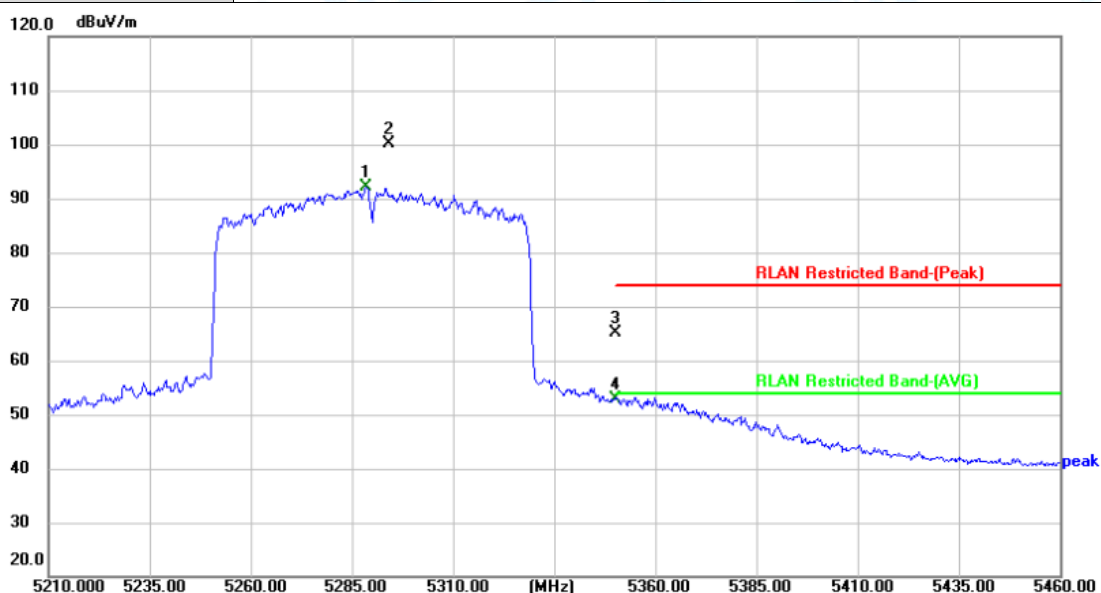


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5288.500 | 87.64 | 4.38 | 92.02 | | | AVG | |
| 2 | 5294.000 | 95.61 | 4.40 | 100.01 | | | peak | |
| 3 | 5350.000 | 60.40 | 4.68 | 65.08 | 74.00 | -8.92 | peak | P |
| 4 * | 5350.000 | 48.20 | 4.68 | 52.88 | 54.00 | -1.12 | AVG | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5500 MHz (U-NII-2C)-SISO | | |
| Remark: | | | |

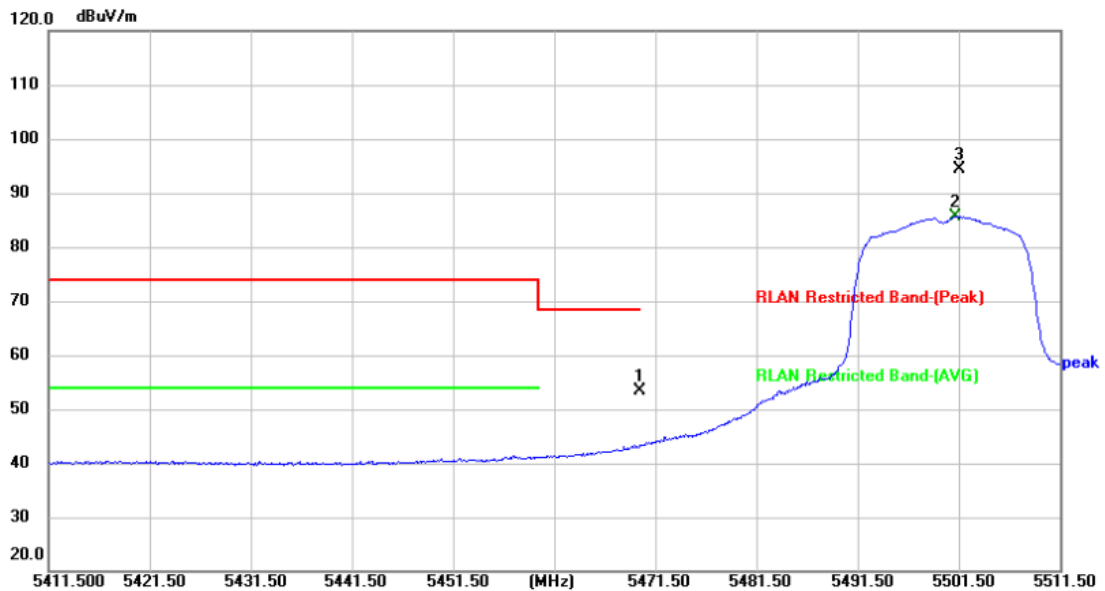


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 48.20 | 5.30 | 53.50 | 68.30 | -14.80 | peak | P |
| 2 | 5501.200 | 80.27 | 5.43 | 85.70 | | | AVG | |
| 3 | 5501.600 | 88.84 | 5.43 | 94.27 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5500 MHz (U-NII-2C) -SISO | | |
| Remark: | | | |

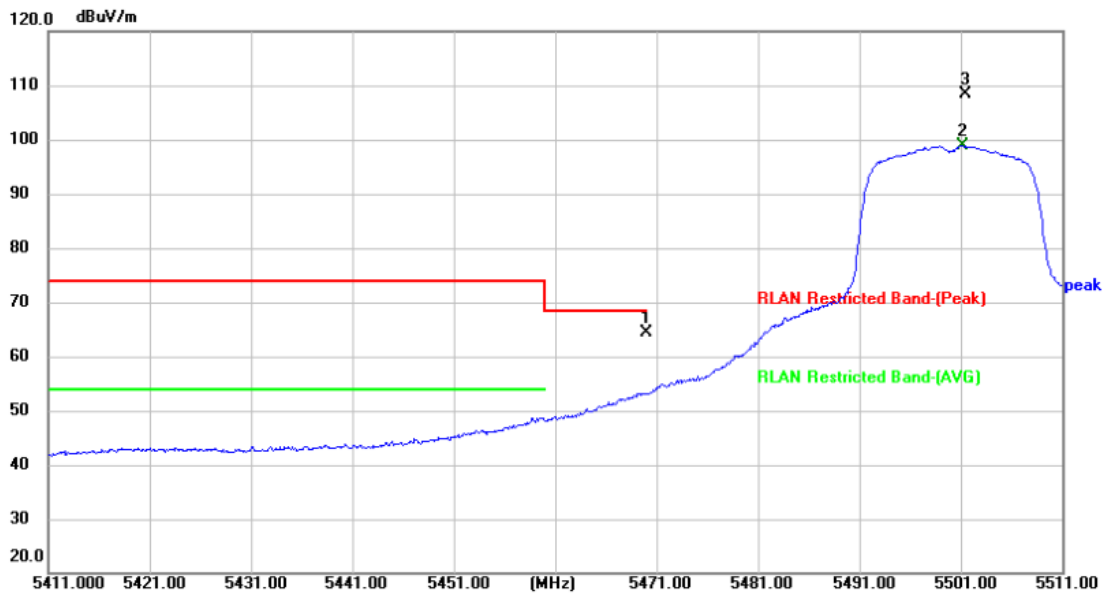


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5470.000 | 59.14 | 5.30 | 64.44 | 68.30 | -3.86 | peak | P |
| 2 | 5501.200 | 93.49 | 5.43 | 98.92 | | | AVG | |
| 3 | 5501.400 | 102.98 | 5.43 | 108.41 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11a Mode 5700 MHz (U-NII-2C) -SISO | | |
| Remark: | | | |

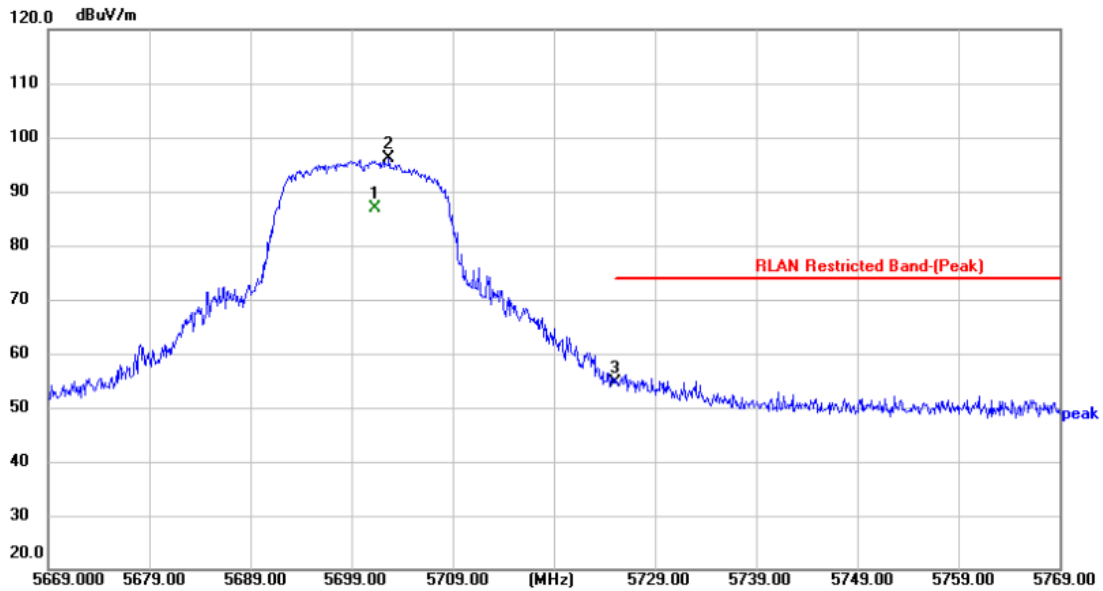


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5701.300 | 81.37 | 5.60 | 86.97 | | | AVG | |
| 2 | 5702.700 | 90.57 | 5.60 | 96.17 | | | peak | |
| 3 * | 5725.000 | 49.07 | 5.58 | 54.65 | 74.00 | -19.35 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11a Mode 5700 MHz (U-NII-2C) -SISO | | |
| Remark: | | | |

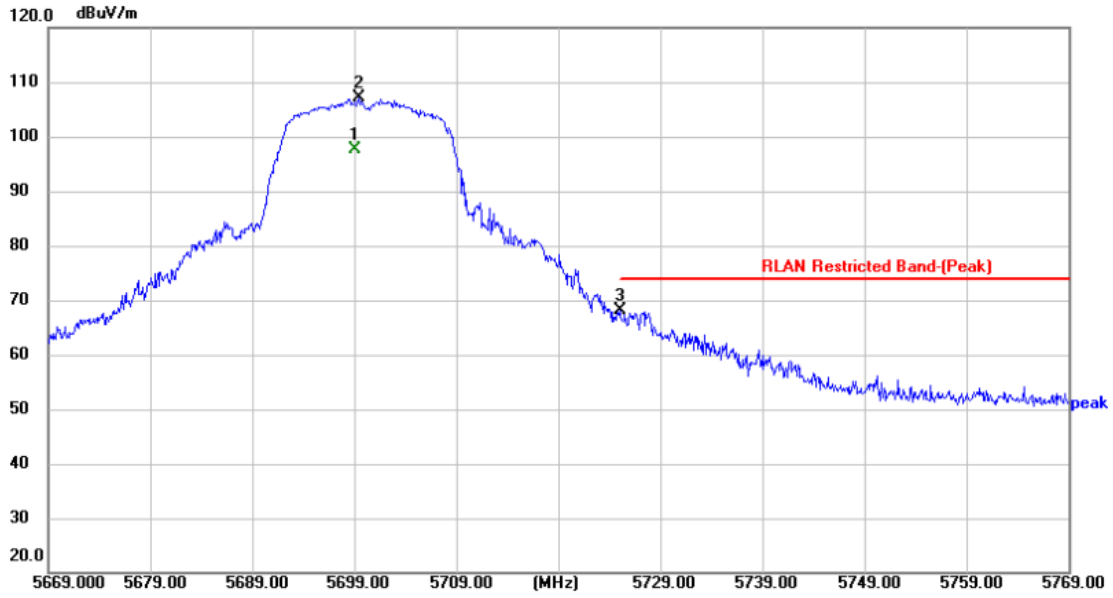


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5699.000 | 92.03 | 5.60 | 97.63 | | | AVG | |
| 2 | 5699.400 | 101.47 | 5.60 | 107.07 | | | peak | |
| 3 * | 5725.000 | 62.67 | 5.58 | 68.25 | 74.00 | -5.75 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|---|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)-CDD | | |
| Remark: | | | |

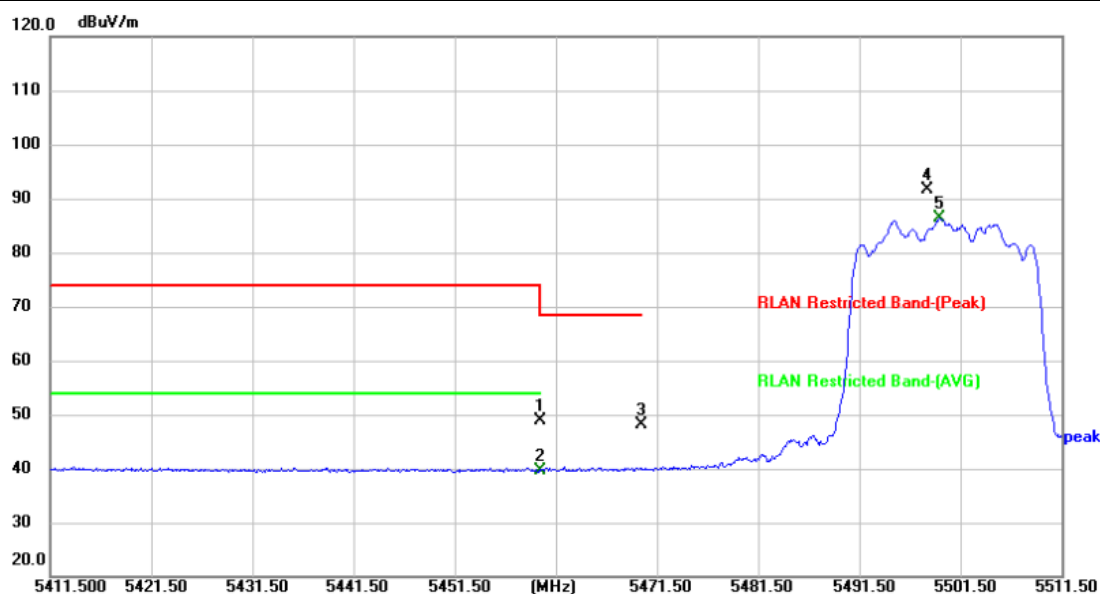


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5460.000 | 43.71 | 5.24 | 48.95 | 68.30 | -19.35 | peak | P |
| 2 * | 5460.000 | 34.33 | 5.24 | 39.57 | 54.00 | -14.43 | AVG | P |
| 3 | 5470.000 | 42.85 | 5.30 | 48.15 | 68.30 | -20.15 | peak | P |
| 4 | 5498.200 | 86.31 | 5.43 | 91.74 | | | peak | |
| 5 | 5499.400 | 80.92 | 5.43 | 86.35 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

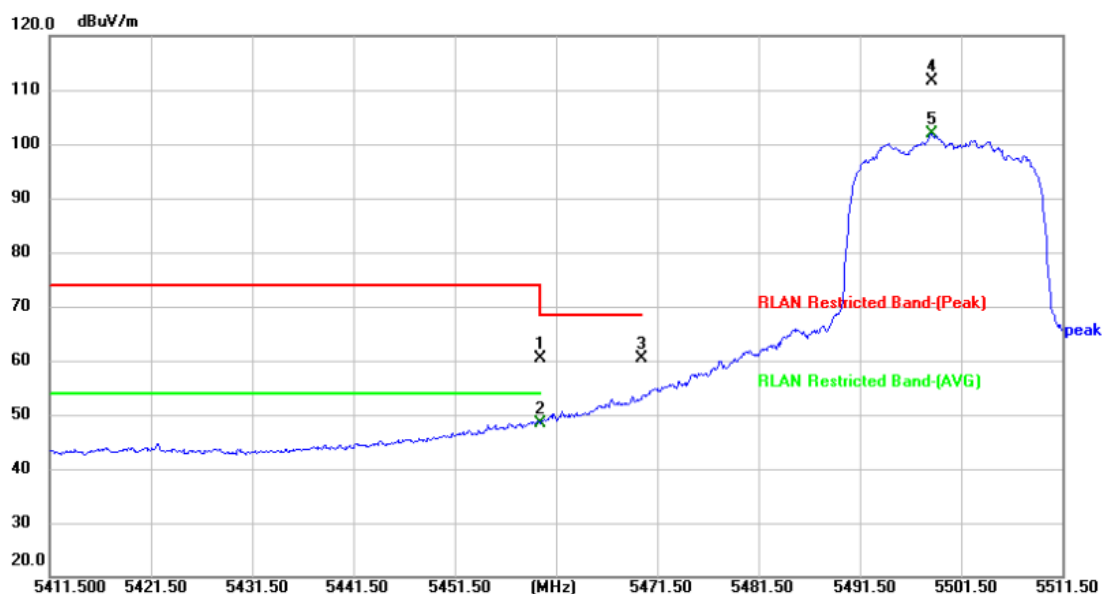

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5460.000 | 55.04 | 5.24 | 60.28 | 68.30 | -8.02 | peak | P |
| 2 * | 5460.000 | 43.21 | 5.24 | 48.45 | 54.00 | -5.55 | AVG | P |
| 3 | 5470.000 | 54.96 | 5.30 | 60.26 | 68.30 | -8.04 | peak | P |
| 4 | 5498.600 | 106.16 | 5.43 | 111.59 | | | peak | |
| 5 | 5498.600 | 96.54 | 5.43 | 101.97 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |




| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5698.400 | 89.63 | 5.60 | 95.23 | | | peak | |
| 2 * | 5725.000 | 42.96 | 5.58 | 48.54 | 74.00 | -25.46 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

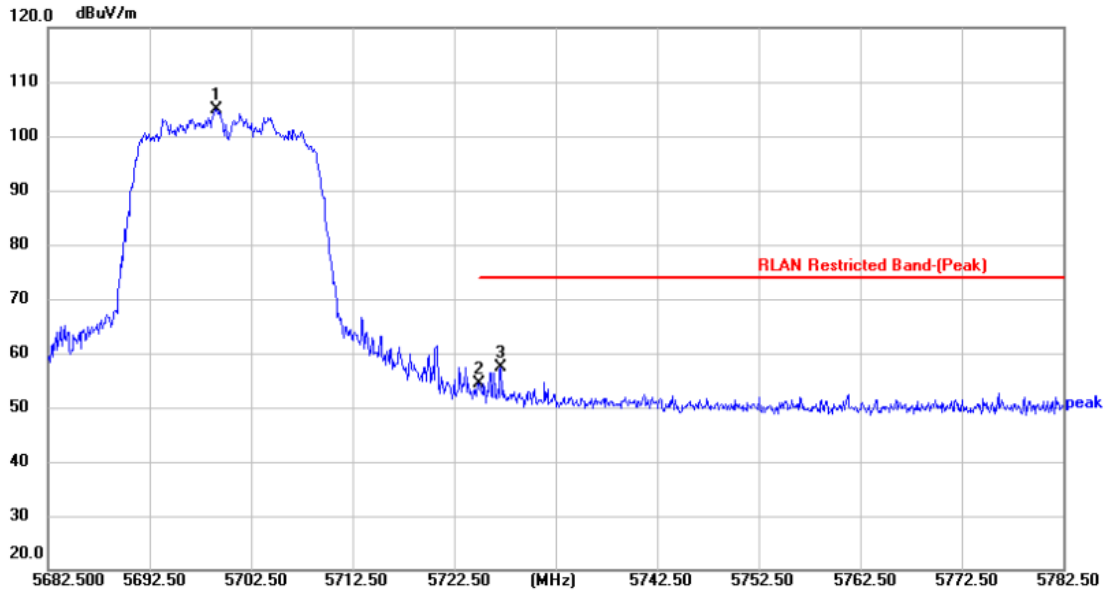


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5699.100 | 99.33 | 5.60 | 104.93 | | | peak | |
| 2 | 5725.000 | 48.85 | 5.58 | 54.43 | 74.00 | -19.57 | peak | P |
| 3 * | 5727.100 | 51.77 | 5.58 | 57.35 | 74.00 | -16.65 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|---------------|--|--------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

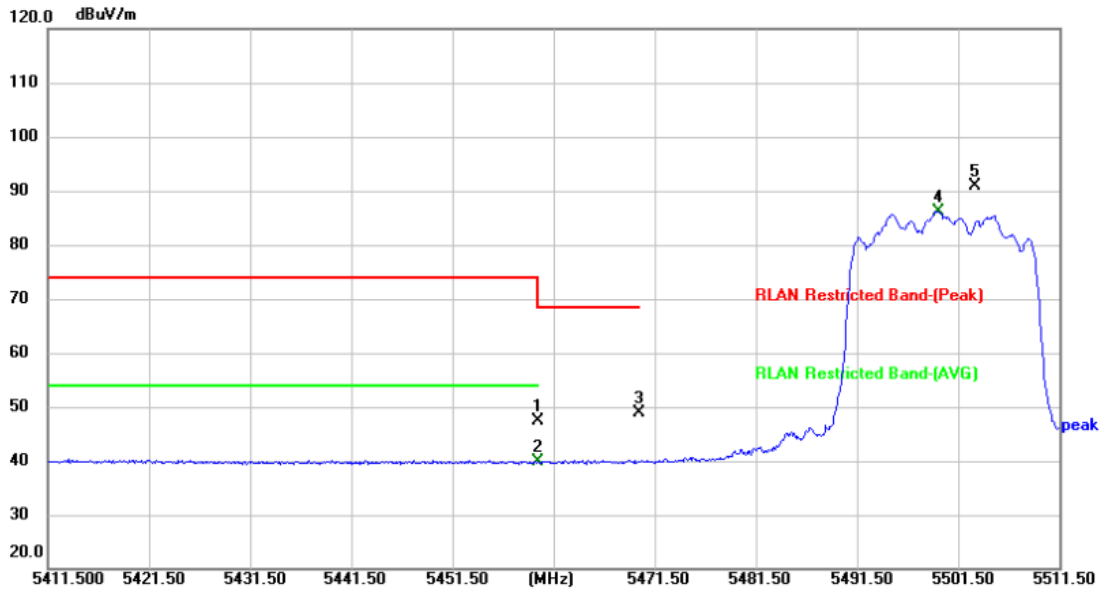


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5460.000 | 42.16 | 5.24 | 47.40 | 68.30 | -20.90 | peak | P |
| 2 * | 5460.000 | 34.64 | 5.24 | 39.88 | 54.00 | -14.12 | AVG | P |
| 3 | 5470.000 | 43.46 | 5.30 | 48.76 | 68.30 | -19.54 | peak | P |
| 4 | 5499.500 | 80.78 | 5.43 | 86.21 | | | AVG | |
| 5 | 5503.100 | 85.51 | 5.43 | 90.94 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

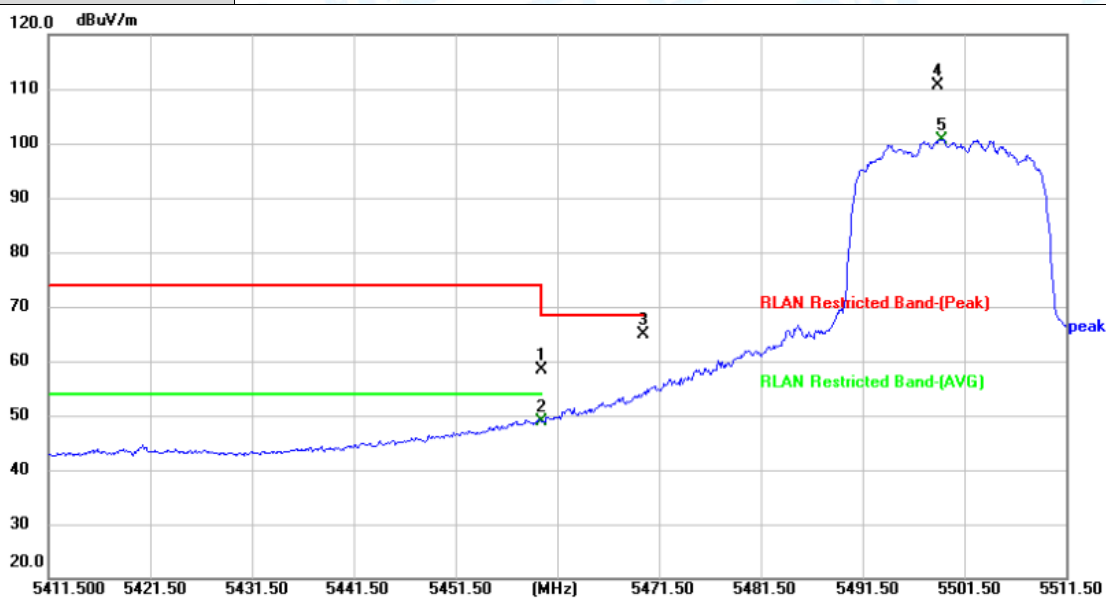


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5460.000 | 53.17 | 5.24 | 58.41 | 68.30 | -9.89 | peak | P |
| 2 | 5460.000 | 43.74 | 5.24 | 48.98 | 54.00 | -5.02 | AVG | P |
| 3 * | 5470.000 | 59.47 | 5.30 | 64.77 | 68.30 | -3.53 | peak | P |
| 4 | 5498.900 | 105.27 | 5.43 | 110.70 | | | peak | |
| 5 | 5499.300 | 95.24 | 5.43 | 100.67 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

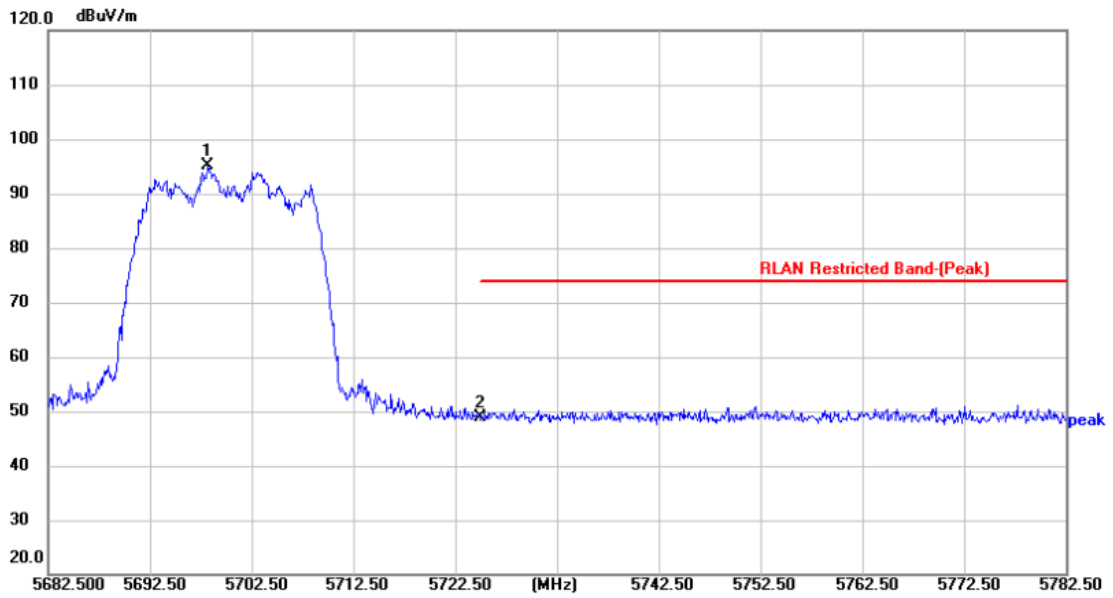


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5698.200 | 89.50 | 5.60 | 95.10 | | | peak | |
| 2 * | 5725.000 | 43.32 | 5.58 | 48.90 | 74.00 | -25.10 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

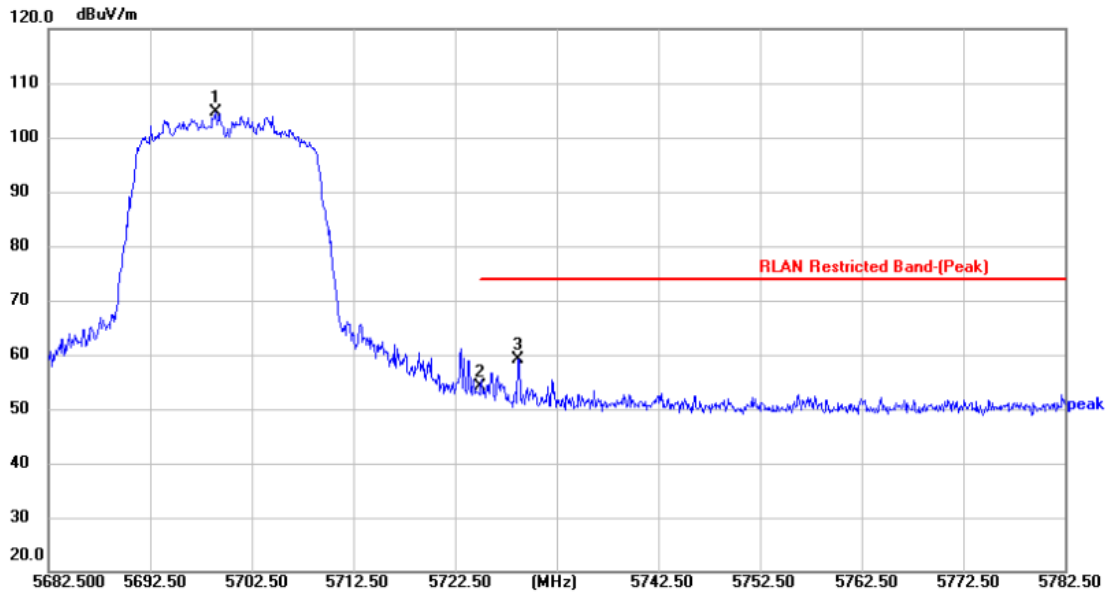


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5698.900 | 99.00 | 5.60 | 104.60 | | | peak | |
| 2 | 5725.000 | 48.65 | 5.58 | 54.23 | 74.00 | -19.77 | peak | P |
| 3 * | 5728.700 | 53.60 | 5.58 | 59.18 | 74.00 | -14.82 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

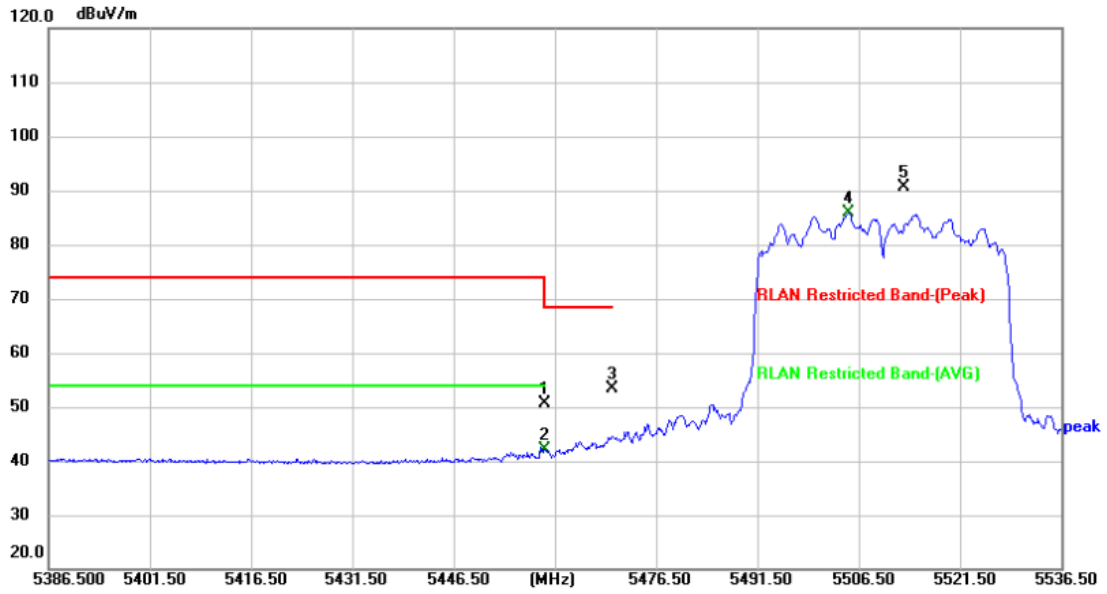


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5460.000 | 45.34 | 5.24 | 50.58 | 68.30 | -17.72 | peak | P |
| 2 * | 5460.000 | 36.91 | 5.24 | 42.15 | 54.00 | -11.85 | AVG | P |
| 3 | 5470.000 | 47.99 | 5.30 | 53.29 | 68.30 | -15.01 | peak | P |
| 4 | 5505.000 | 80.35 | 5.43 | 85.78 | | | AVG | |
| 5 | 5513.100 | 85.09 | 5.42 | 90.51 | | | peak | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

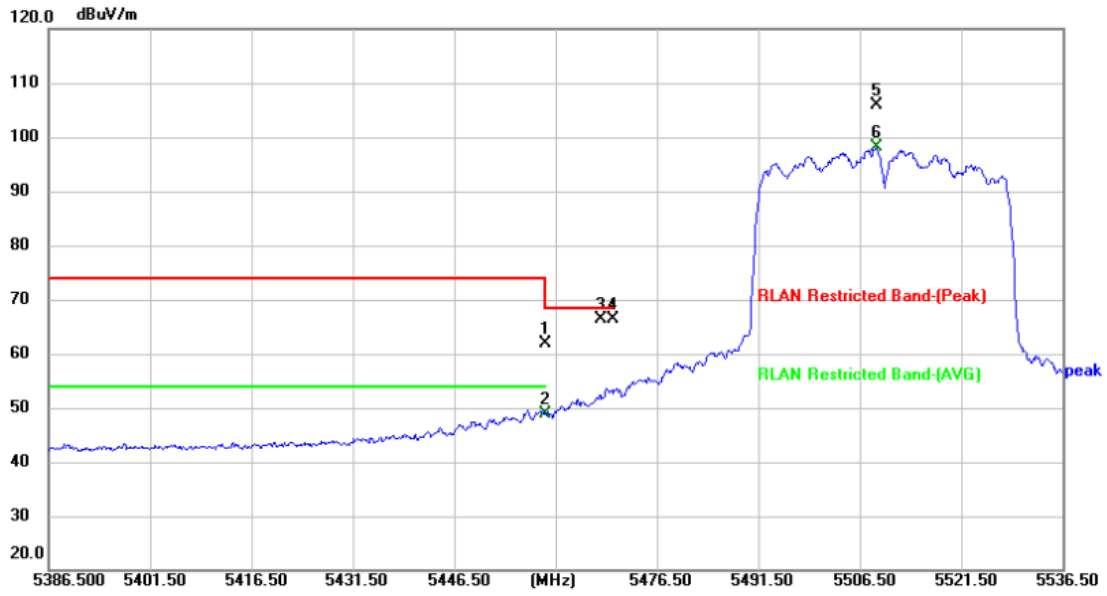


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5460.000 | 56.55 | 5.24 | 61.79 | 68.30 | -6.51 | peak | P |
| 2 | 5460.000 | 43.71 | 5.24 | 48.95 | 54.00 | -5.05 | AVG | P |
| 3 * | 5468.350 | 61.20 | 5.28 | 66.48 | 68.30 | -1.82 | peak | P |
| 4 | 5470.000 | 61.14 | 5.30 | 66.44 | 68.30 | -1.86 | peak | P |
| 5 | 5508.900 | 100.55 | 5.43 | 105.98 | | | peak | |
| 6 | 5508.900 | 92.68 | 5.43 | 98.11 | | | AVG | |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Horizontal | | |
| Test Mode: | TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

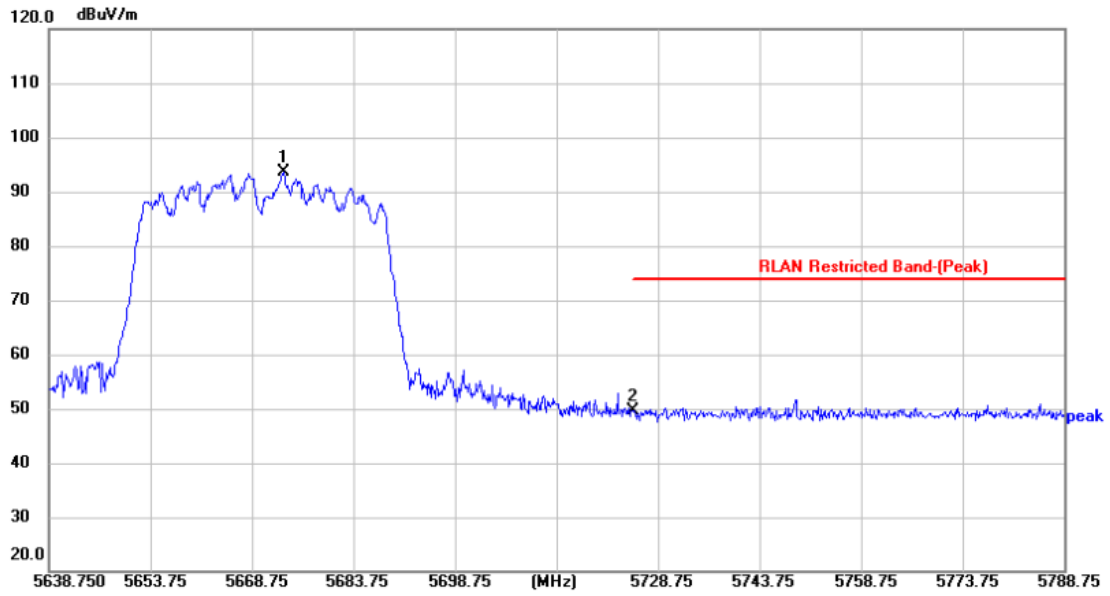


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5673.400 | 87.96 | 5.55 | 93.51 | | | peak | |
| 2 * | 5725.000 | 44.10 | 5.58 | 49.68 | 74.00 | -24.32 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



| | | | |
|----------------------|--|---------------------------|-----|
| Temperature: | 24.6°C | Relative Humidity: | 53% |
| Test Voltage: | AC 120V/60Hz | | |
| Ant. Pol. | Vertical | | |
| Test Mode: | TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C) -CDD | | |
| Remark: | | | |

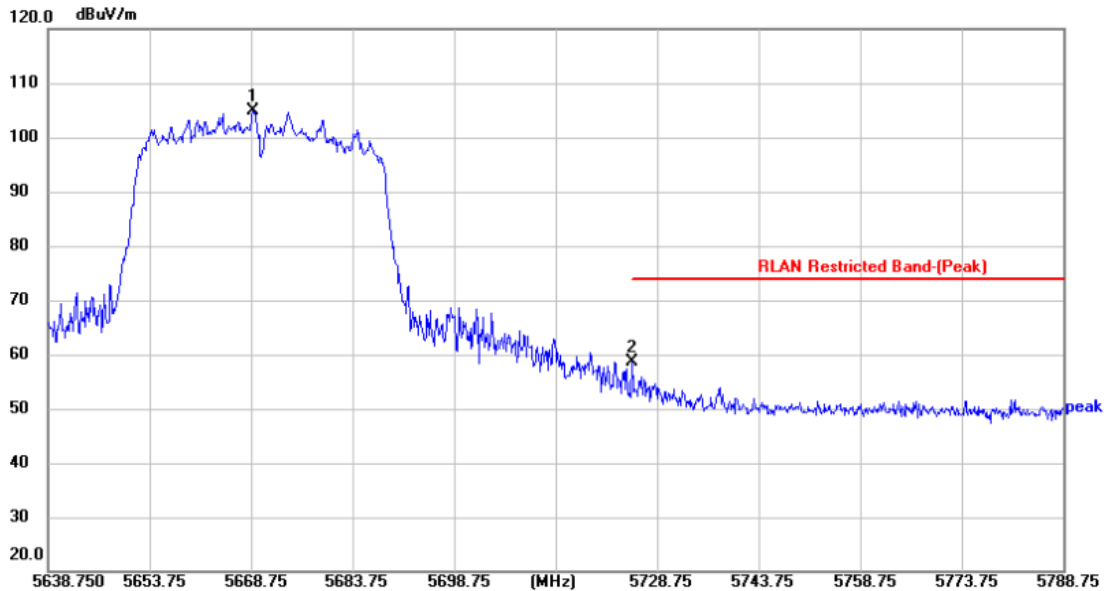

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 | 5669.050 | 99.25 | 5.54 | 104.79 | | | peak | |
| 2 * | 5725.000 | 53.08 | 5.58 | 58.66 | 74.00 | -15.34 | peak | P |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

