


<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

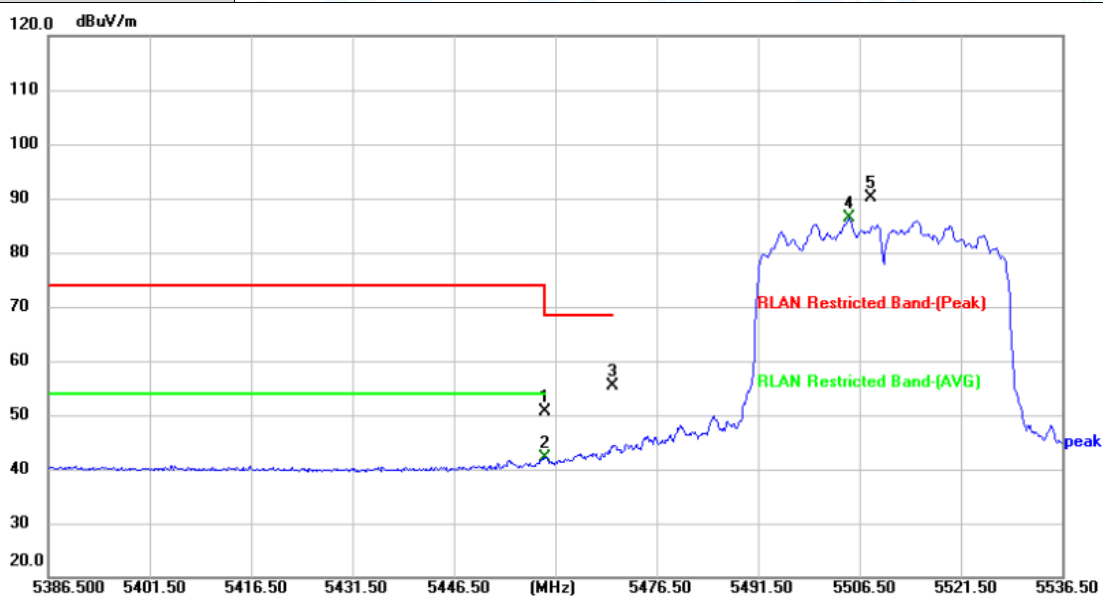


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	45.32	5.24	50.56	68.30	-17.74	peak	P
2 *	5460.000	36.94	5.24	42.18	54.00	-11.82	AVG	P
3	5470.000	50.14	5.30	55.44	68.30	-12.86	peak	P
4	5505.000	80.87	5.43	86.30			AVG	
5	5508.150	84.59	5.43	90.02			peak	

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature:	24.6°C	Relative Humidity:	53%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) -CDD		
Remark:			

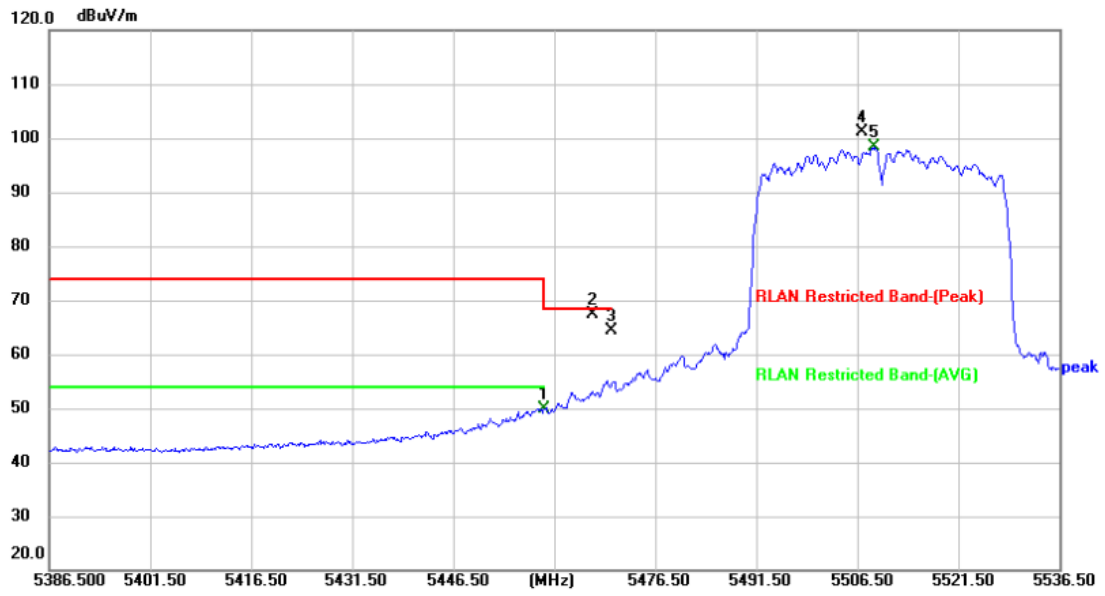

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.59	5.24	49.83	54.00	-4.17	AVG	P
2 *	5467.300	62.02	5.28	67.30	68.30	-1.00	peak	P
3	5470.000	58.98	5.30	64.28	68.30	-4.02	peak	P
4	5507.100	95.62	5.43	101.05			peak	
5	5509.050	92.87	5.43	98.30			AVG	


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

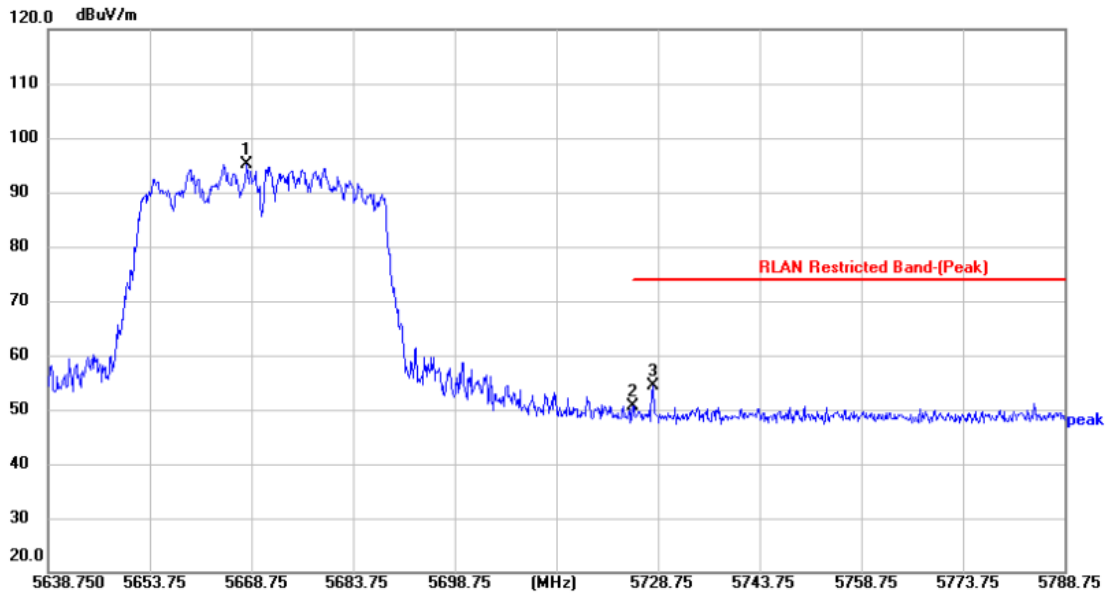


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5668.000	89.70	5.54	95.24			peak	
2	5725.000	45.02	5.58	50.60	74.00	-23.40	peak	P
3 *	5728.000	48.74	5.58	54.32	74.00	-19.68	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

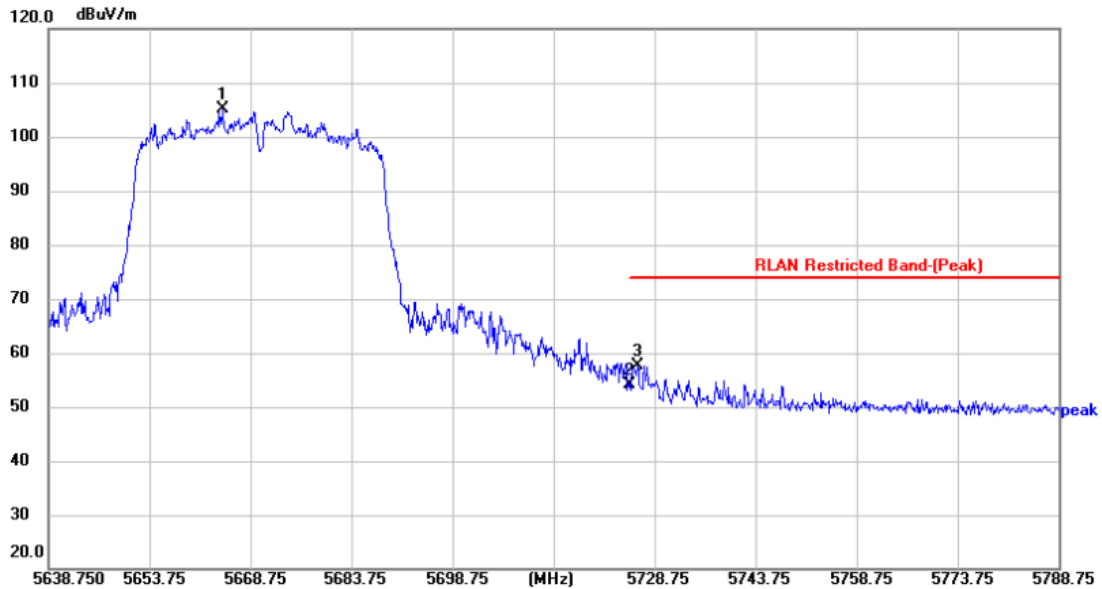

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5664.550	99.70	5.53	105.23			peak	
2	5725.000	48.52	5.58	54.10	74.00	-19.90	peak	P
3 *	5726.200	52.11	5.58	57.69	74.00	-16.31	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

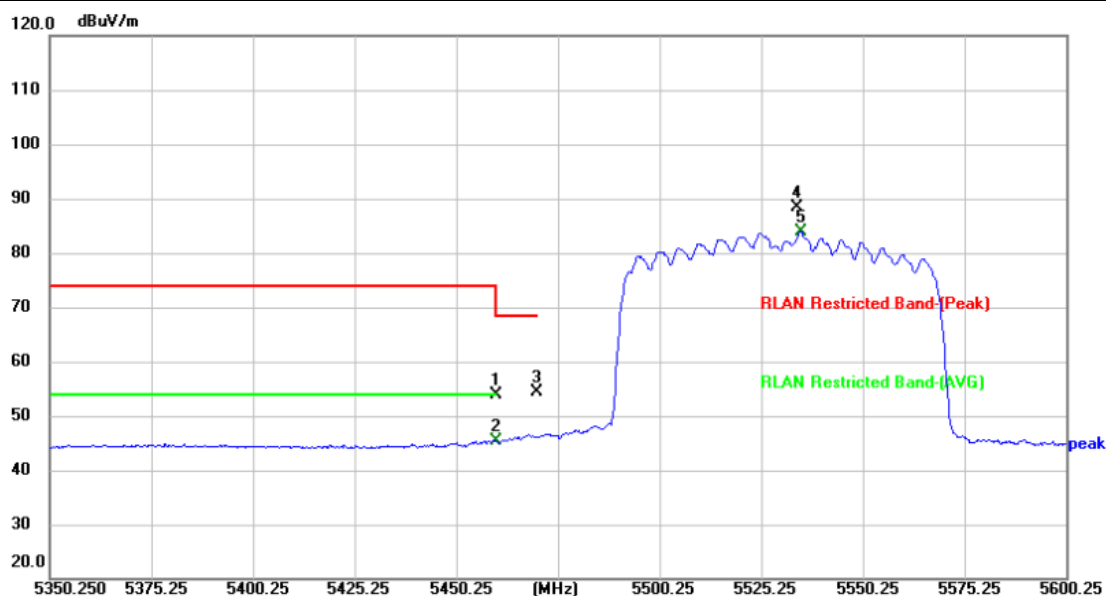


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	48.54	5.24	53.78	68.30	-14.52	peak	P
2 *	5460.000	40.08	5.24	45.32	54.00	-8.68	AVG	P
3	5470.000	49.00	5.30	54.30	68.30	-14.00	peak	P
4	5534.000	83.02	5.43	88.45			peak	
5	5535.000	78.44	5.43	83.87			AVG	

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) -CDD		
<b>Remark:</b>			

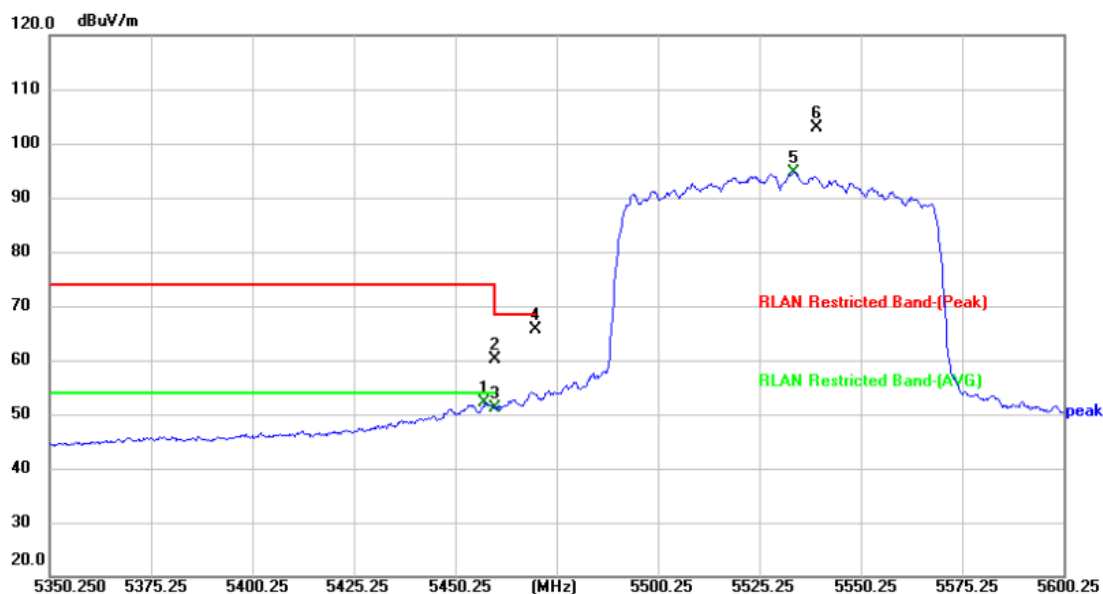

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5457.500	46.86	5.23	52.09	54.00	-1.91	AVG	P
2	5460.000	54.93	5.24	60.17	68.30	-8.13	peak	P
3	5460.000	45.90	5.24	51.14	54.00	-2.86	AVG	P
4	5470.000	60.38	5.30	65.68	68.30	-2.62	peak	P
5	5533.750	89.18	5.43	94.61			AVG	
6	5539.250	97.37	5.42	102.79			peak	


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)-CDD		
<b>Remark:</b>			

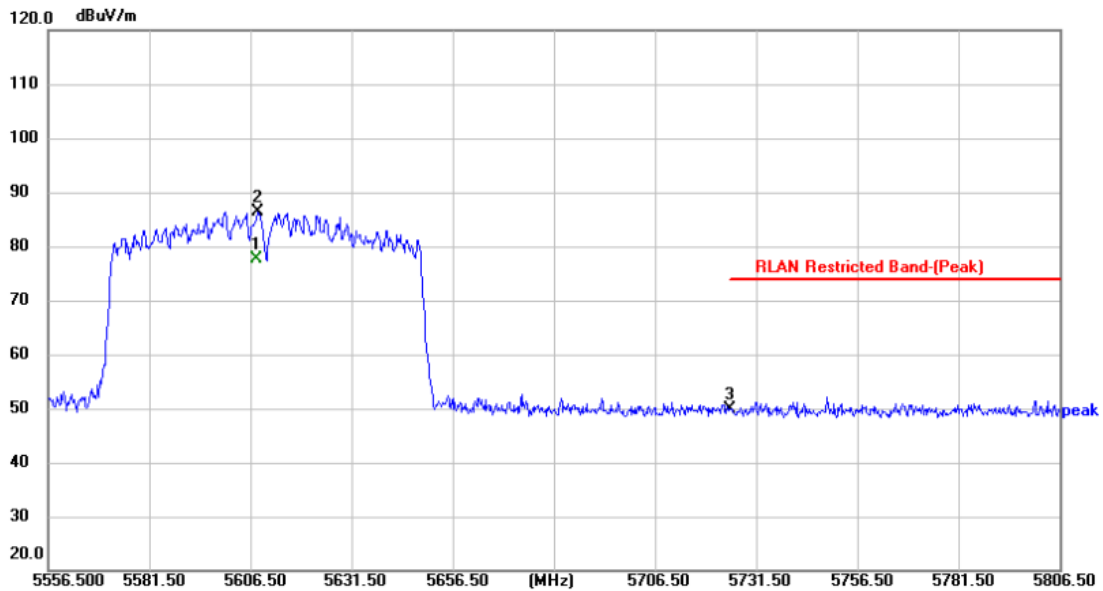


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5608.000	72.21	5.44	77.65			AVG	
2	5608.250	81.01	5.44	86.45			peak	
3 *	5725.000	44.24	5.58	49.82	74.00	-24.18	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)-CDD		
<b>Remark:</b>			

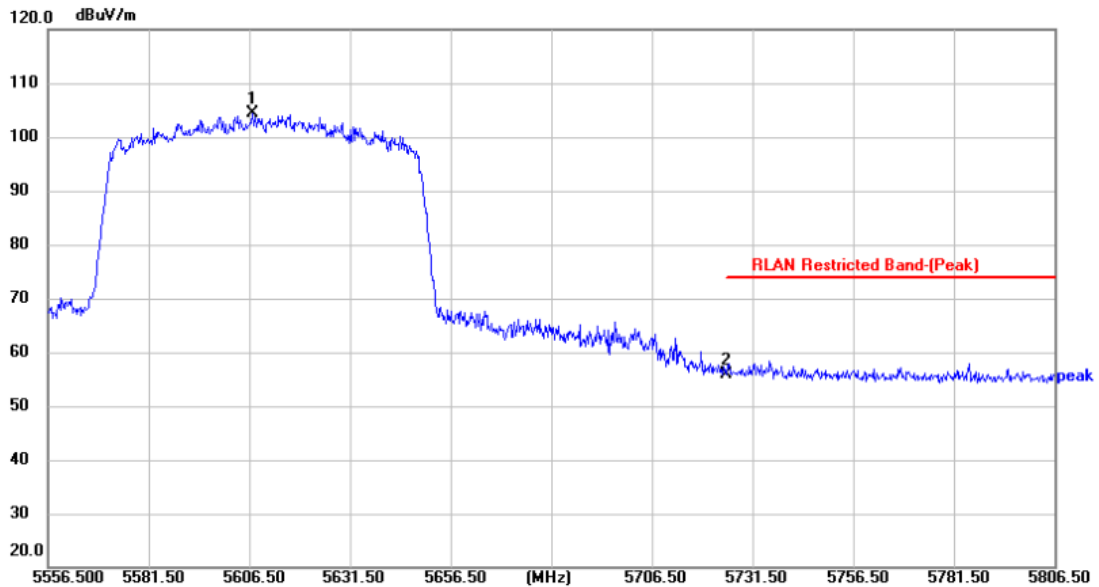

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5607.250	99.05	5.43	104.48			peak	
2 *	5725.000	50.30	5.58	55.88	74.00	-18.12	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5745 MHz (U-NII-3)-SISO		
<b>Remark:</b>			

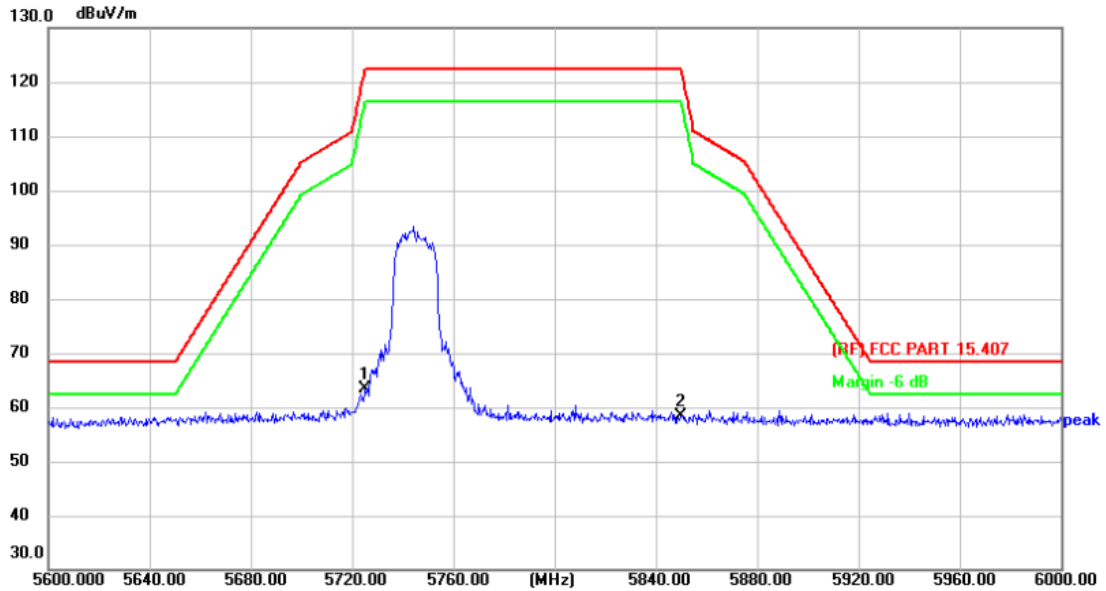


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	49.78	13.58	63.36	122.30	-58.94	peak	P
2	5850.000	44.93	13.54	58.47	122.30	-63.83	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5745 MHz (U-NII-3) -SISO		
<b>Remark:</b>			

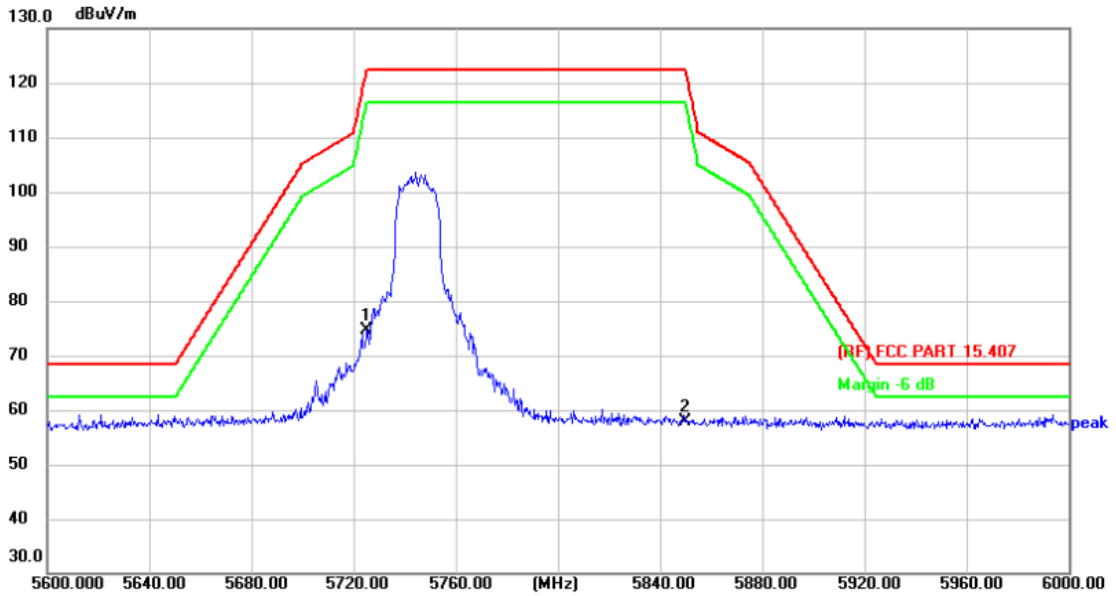

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	60.96	13.58	74.54	122.30	-47.76	peak	P
2	5850.000	44.27	13.54	57.81	122.30	-64.49	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11a Mode 5825 MHz (U-NII-3) -SISO		
<b>Remark:</b>			

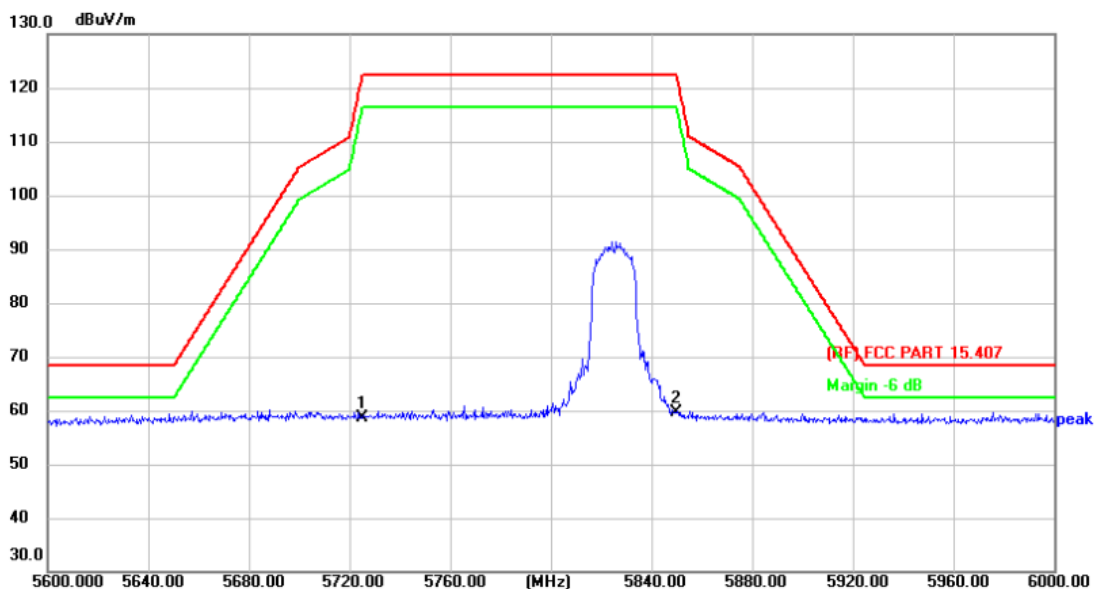


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	44.94	13.58	58.52	122.30	-63.78	peak	P
2 *	5850.000	46.07	13.54	59.61	122.30	-62.69	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5825 MHz (U-NII-3) -SISO		
<b>Remark:</b>			

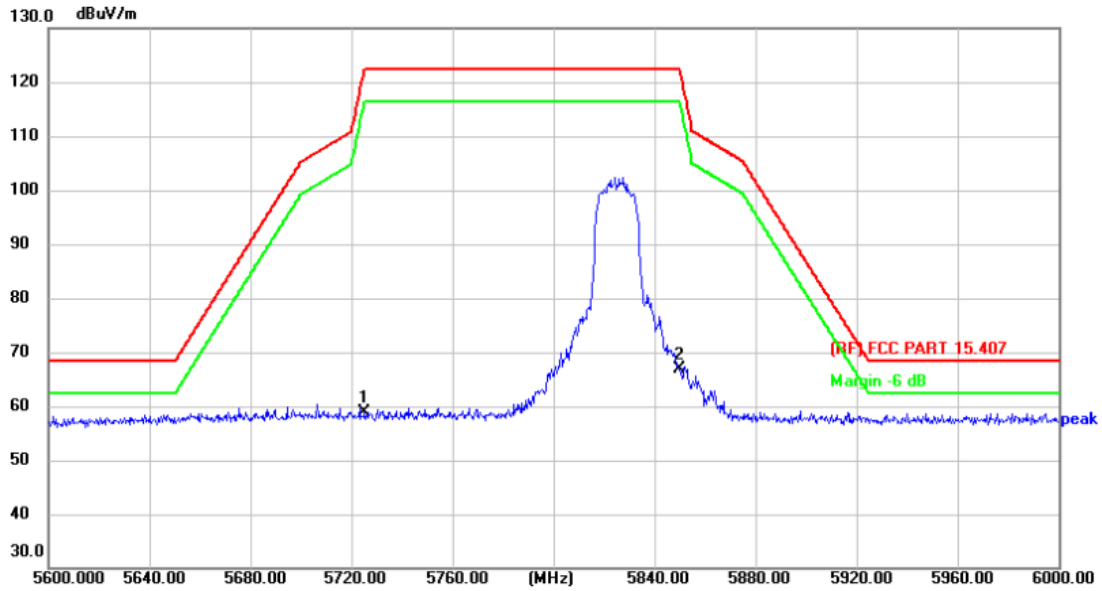

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	45.26	13.58	58.84	122.30	-63.46	peak	P
2 *	5850.000	53.27	13.54	66.81	122.30	-55.49	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

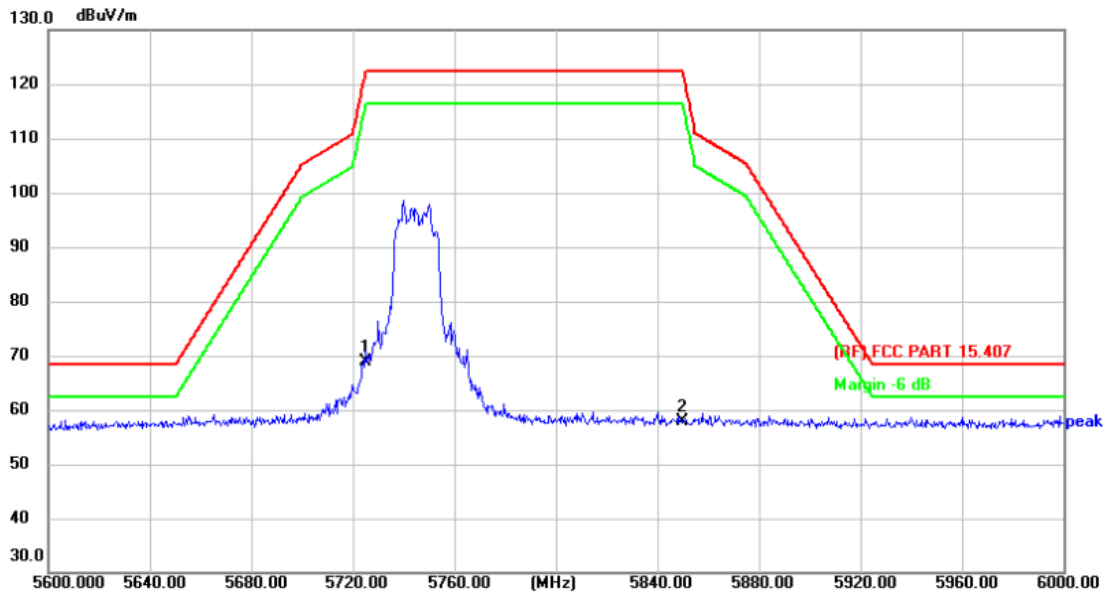


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	55.37	13.58	68.95	122.30	-53.35	peak	P
2	5850.000	44.42	13.54	57.96	122.30	-64.34	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

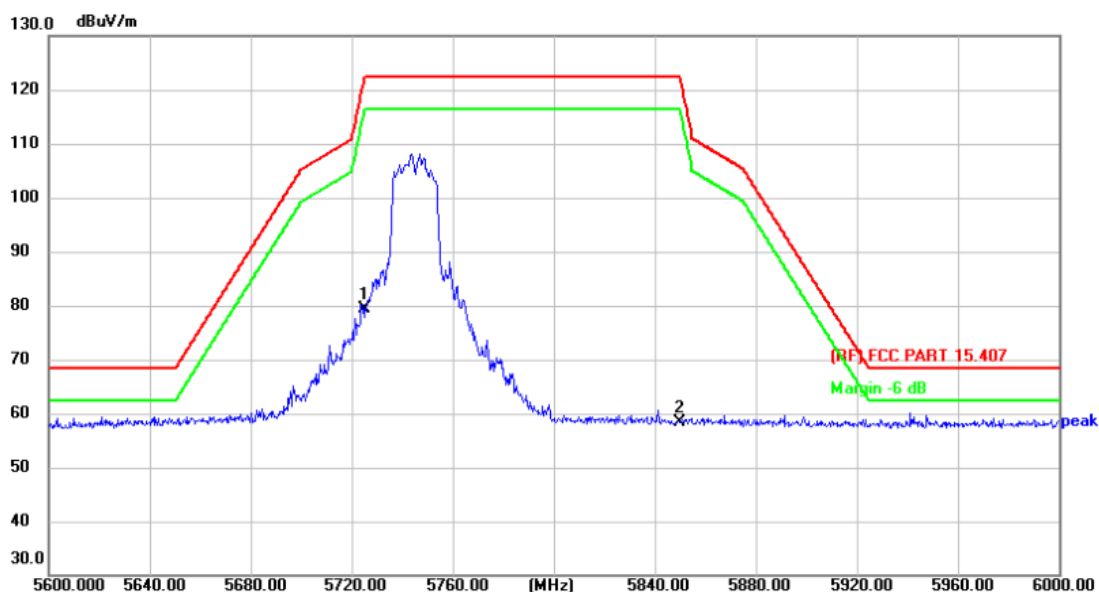

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	65.75	13.58	79.33	122.30	-42.97	peak	P
2	5850.000	44.82	13.54	58.36	122.30	-63.94	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

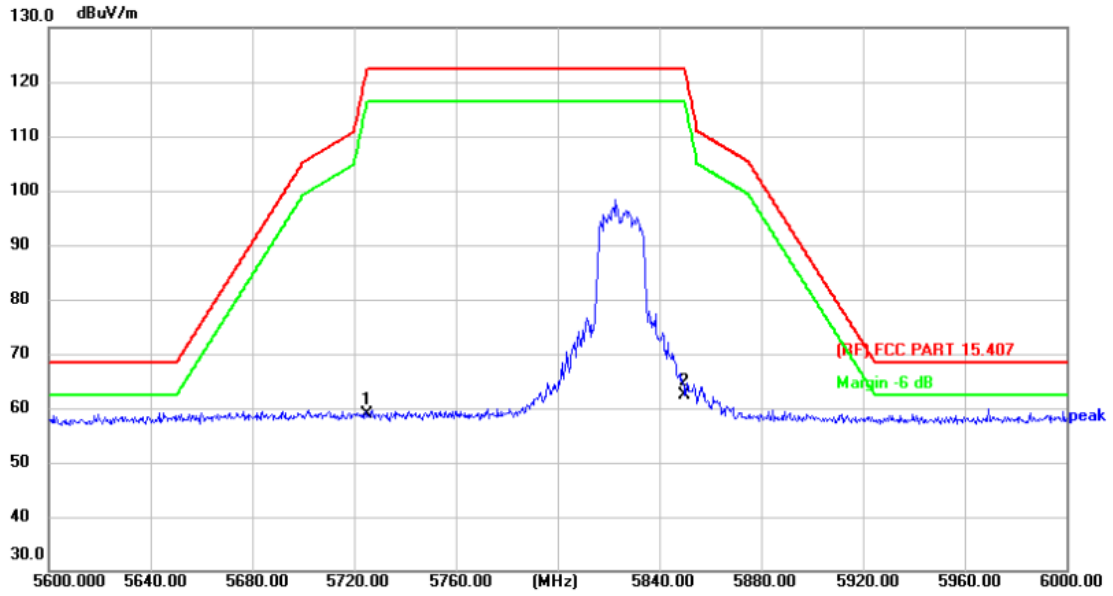


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	45.24	13.58	58.82	122.30	-63.48	peak
2 *	5850.000	48.88	13.54	62.42	122.30	-59.88	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

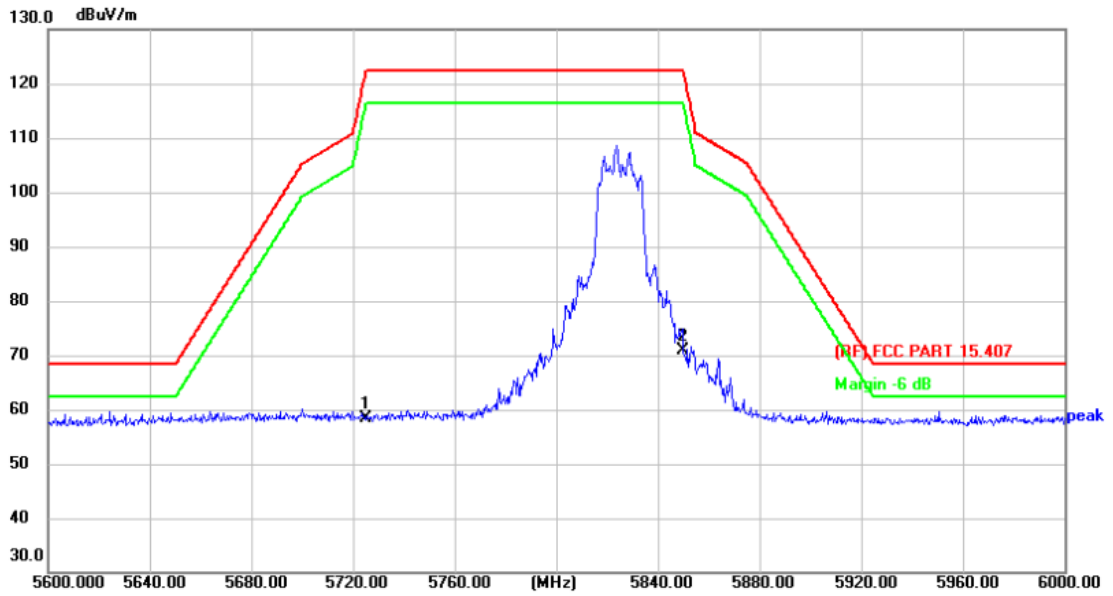

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	44.78	13.58	58.36	122.30	-63.94	peak	P
2 *	5850.000	57.41	13.54	70.95	122.30	-51.35	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

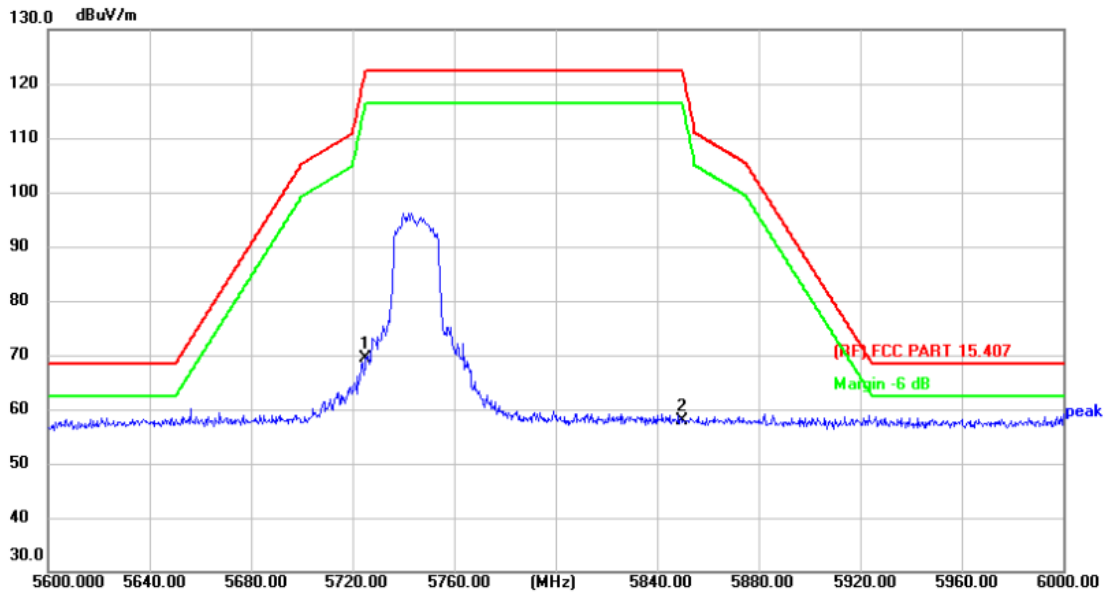


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	55.77	13.58	69.35	122.30	-52.95	peak	P
2	5850.000	44.30	13.54	57.84	122.30	-64.46	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

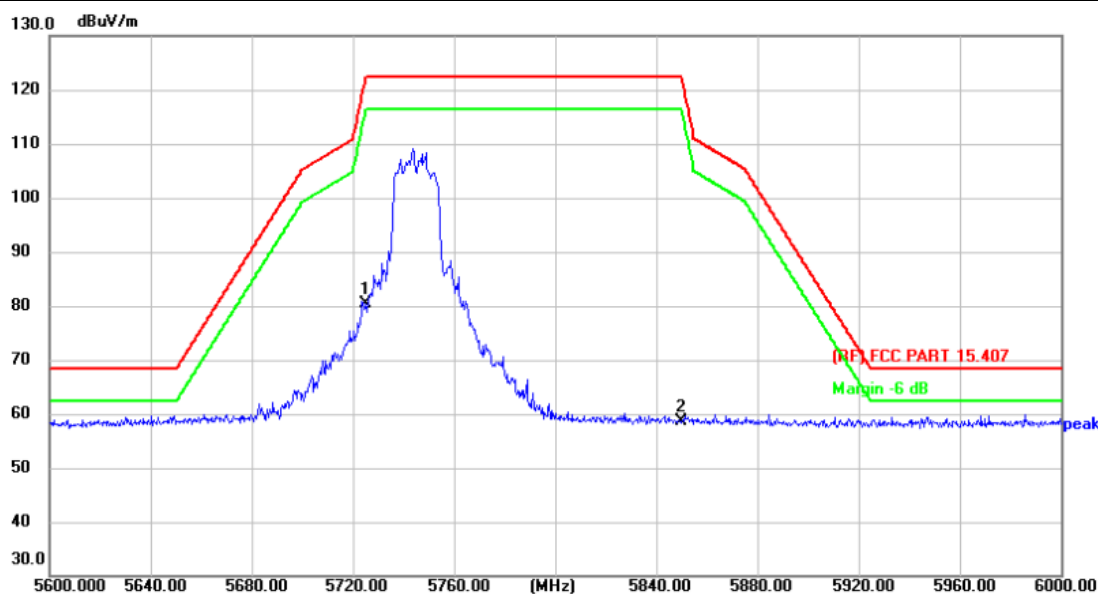

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	66.81	13.58	80.39	122.30	-41.91	peak	P
2	5850.000	45.05	13.54	58.59	122.30	-63.71	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

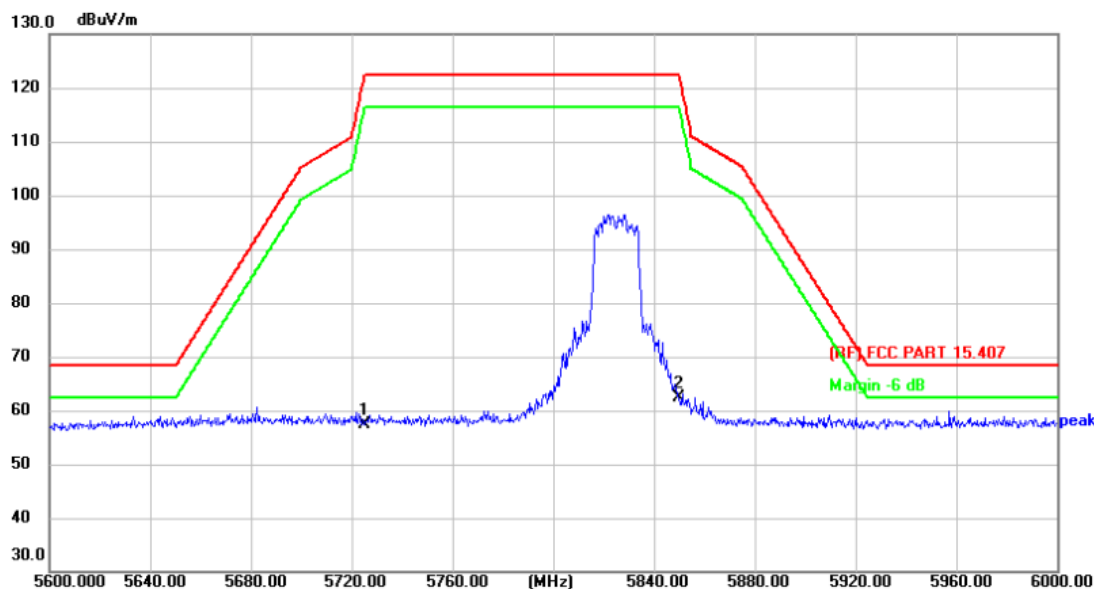


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	43.73	13.58	57.31	122.30	-64.99	peak	P
2 *	5850.000	48.72	13.54	62.26	122.30	-60.04	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

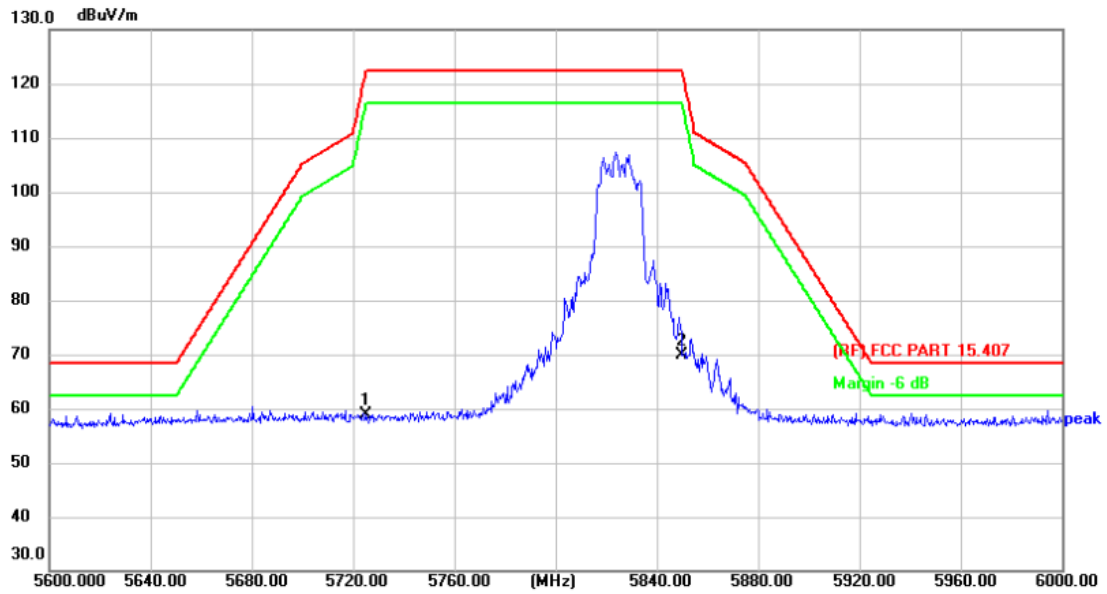

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	45.23	13.58	58.81	122.30	-63.49	peak	P
2 *	5850.000	56.28	13.54	69.82	122.30	-52.48	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

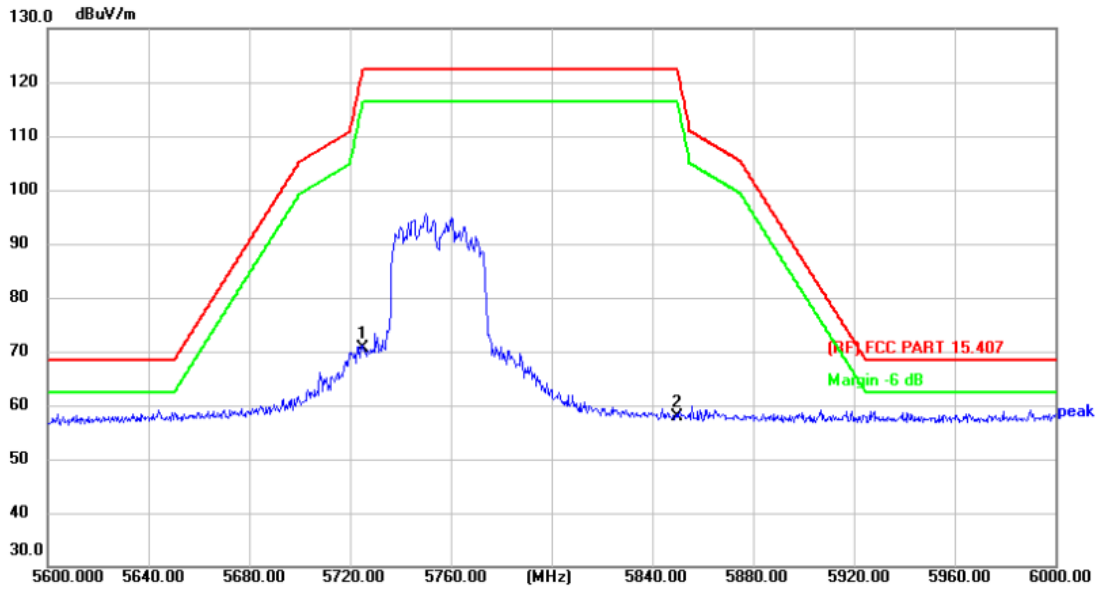


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	57.16	13.58	70.74	122.30	-51.56	peak	P
2	5850.000	44.45	13.54	57.99	122.30	-64.31	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

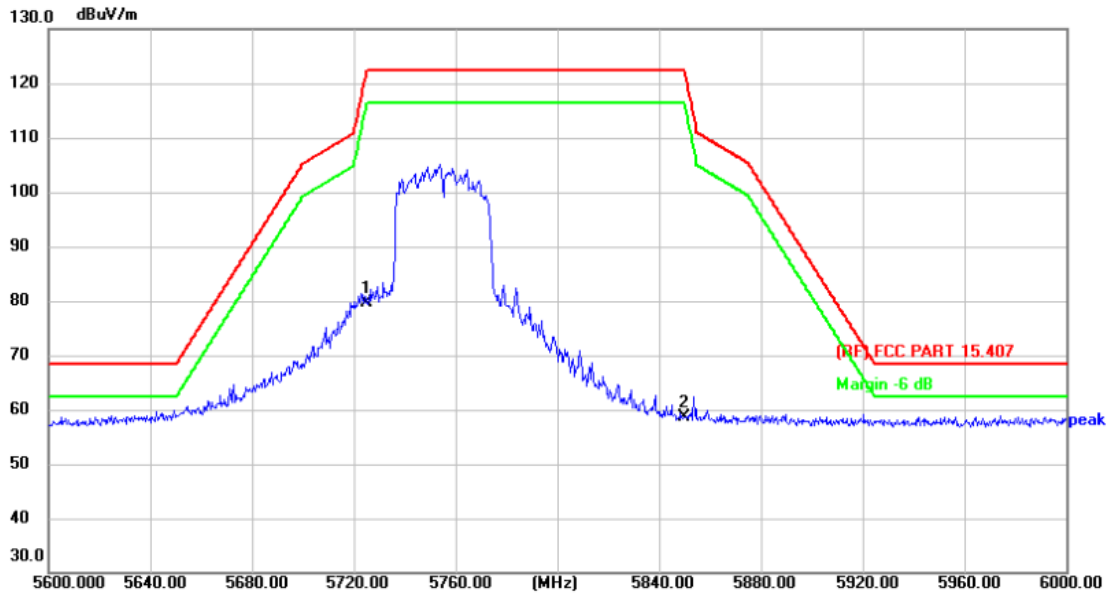

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	65.98	13.58	79.56	122.30	-42.74	peak	P
2	5850.000	45.12	13.54	58.66	122.30	-63.64	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

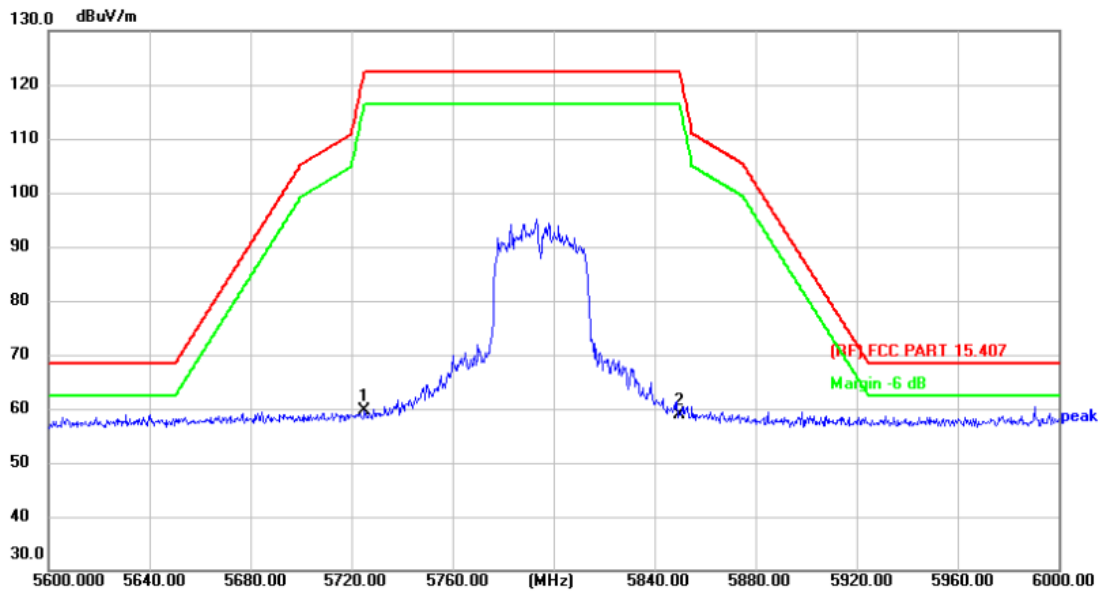


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	46.01	13.58	59.59	122.30	-62.71	peak	P
2	5850.000	45.32	13.54	58.86	122.30	-63.44	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

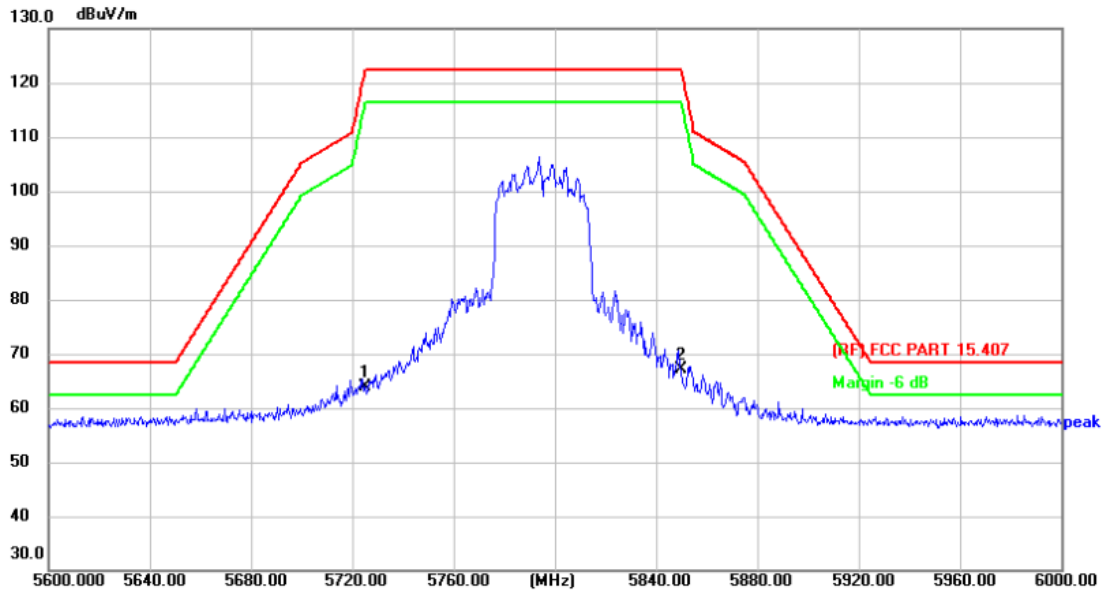

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	50.23	13.58	63.81	122.30	-58.49	peak	P
2 *	5850.000	53.48	13.54	67.02	122.30	-55.28	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

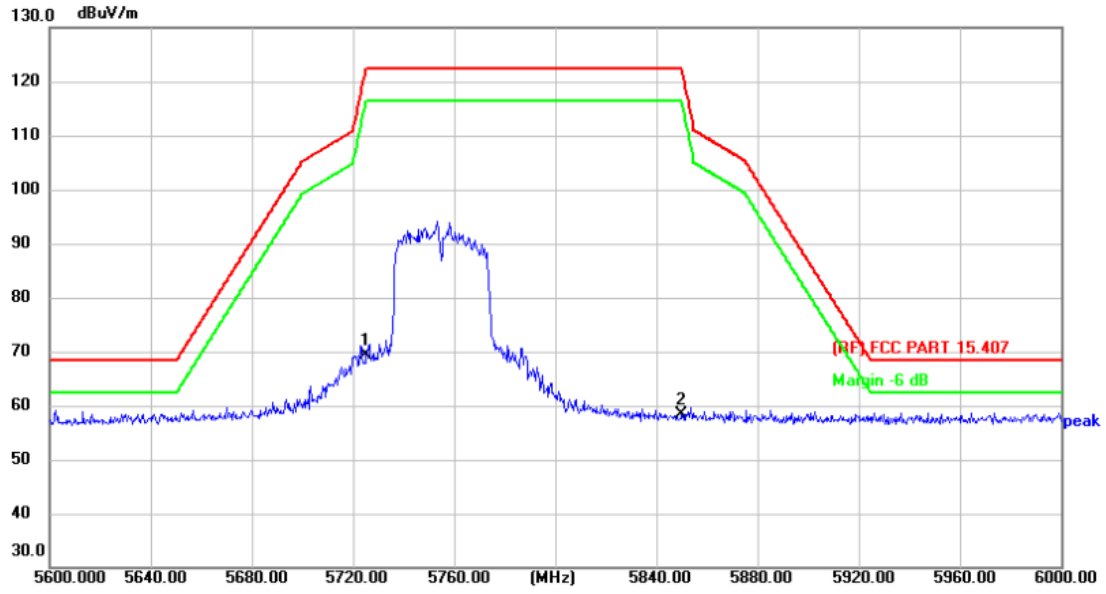


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	55.71	13.58	69.29	122.30	-53.01	peak	P
2	5850.000	44.74	13.54	58.28	122.30	-64.02	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

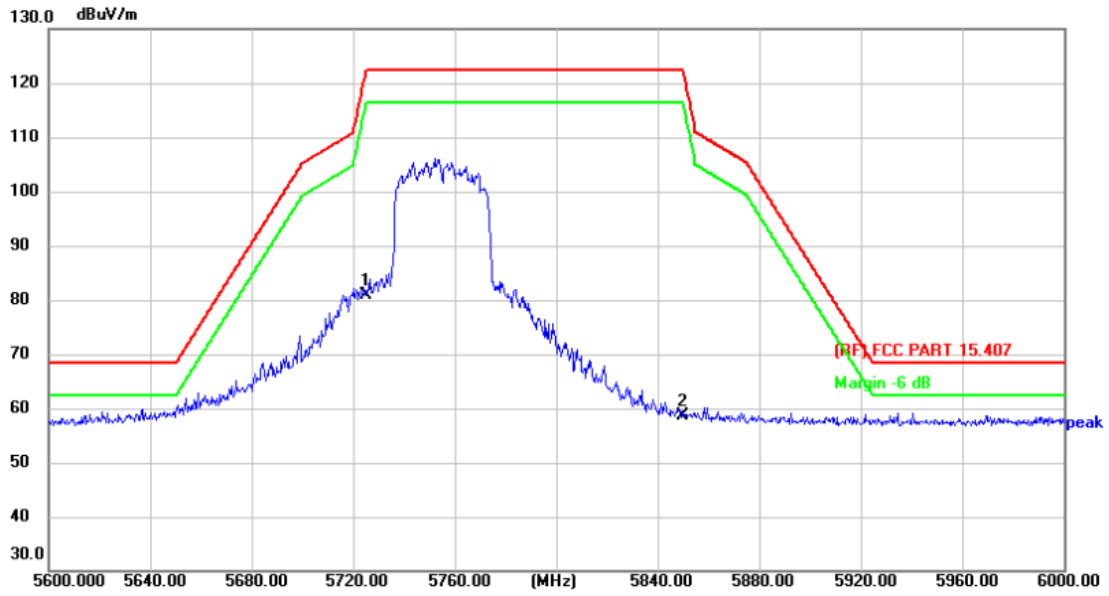

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	67.20	13.58	80.78	122.30	-41.52	peak	P
2	5850.000	45.18	13.54	58.72	122.30	-63.58	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

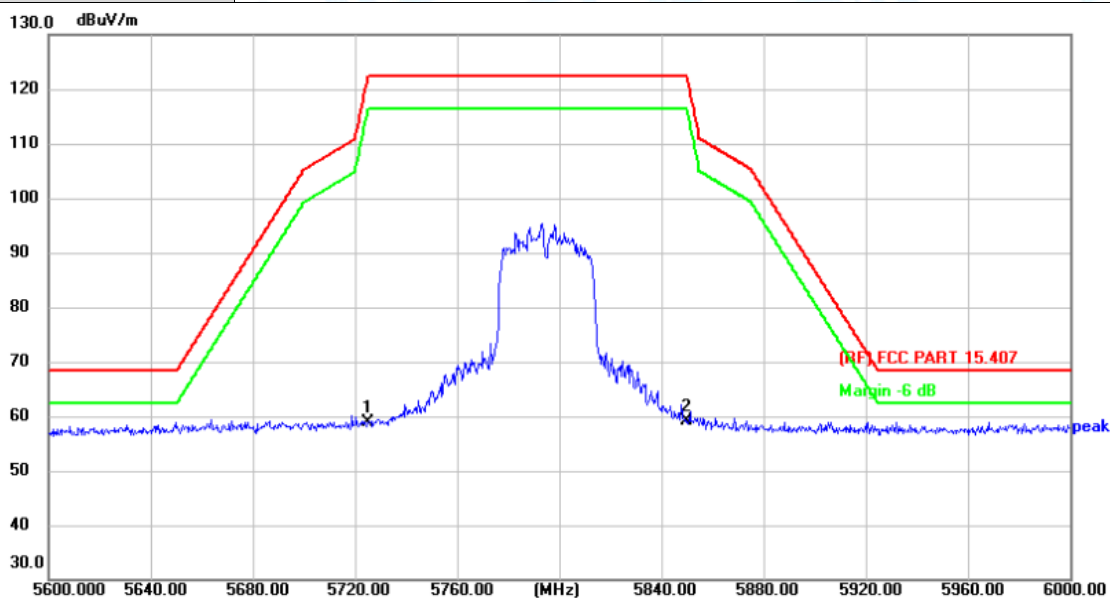


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	45.31	13.58	58.89	122.30	-63.41	peak	P
2 *	5850.000	45.53	13.54	59.07	122.30	-63.23	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

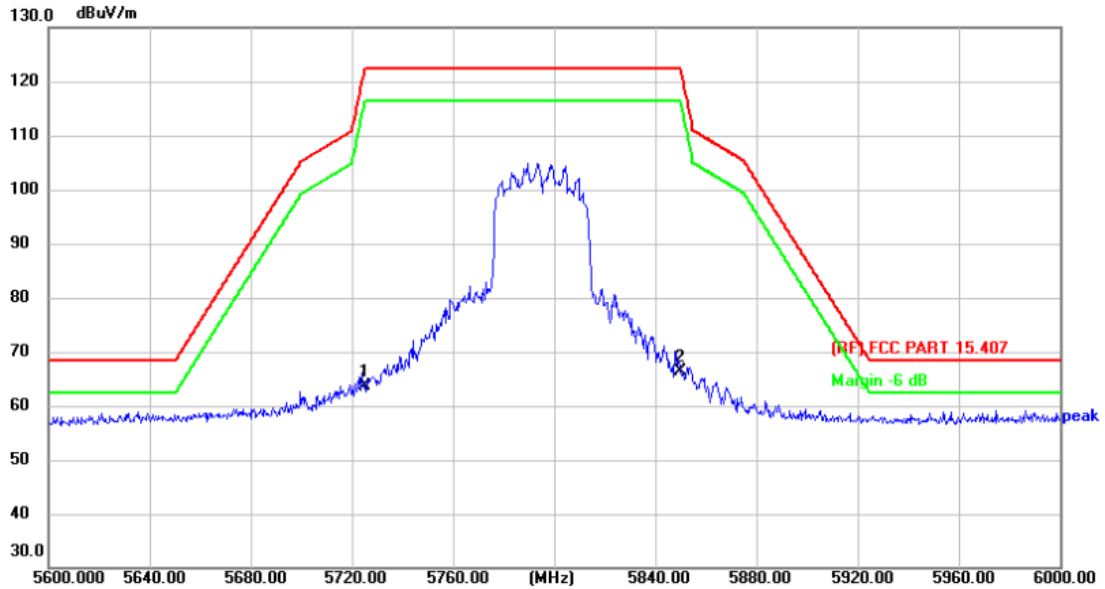

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	49.99	13.58	63.57	122.30	-58.73	peak	P
2 *	5850.000	52.87	13.54	66.41	122.30	-55.89	peak	P


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

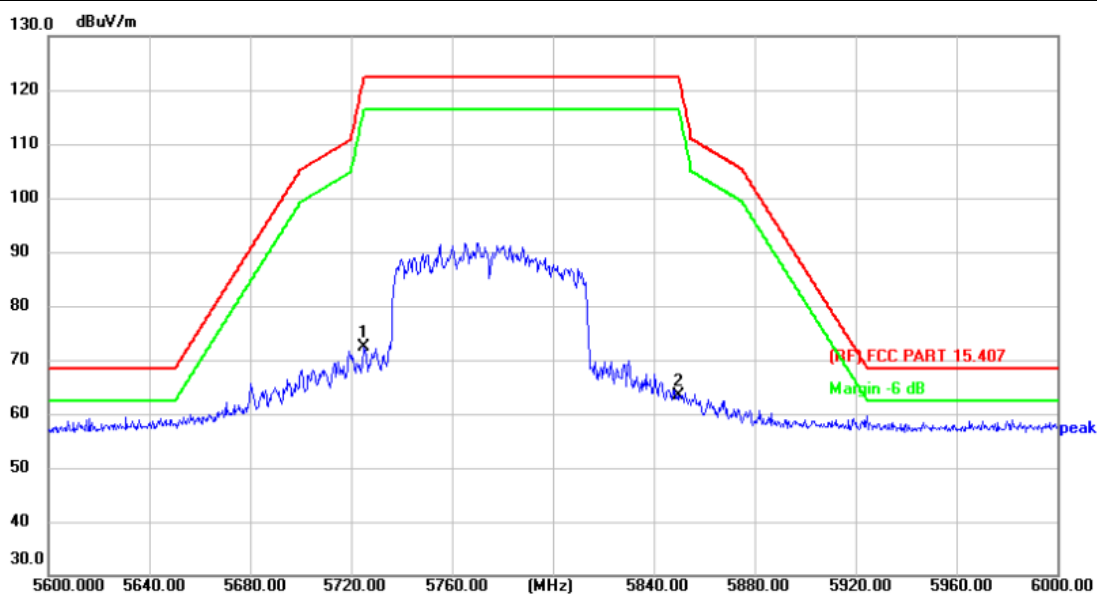


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	58.87	13.58	72.45	122.30	-49.85	peak	P
2	5850.000	49.90	13.54	63.44	122.30	-58.86	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.6°C	<b>Relative Humidity:</b>	53%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) -CDD		
<b>Remark:</b>			

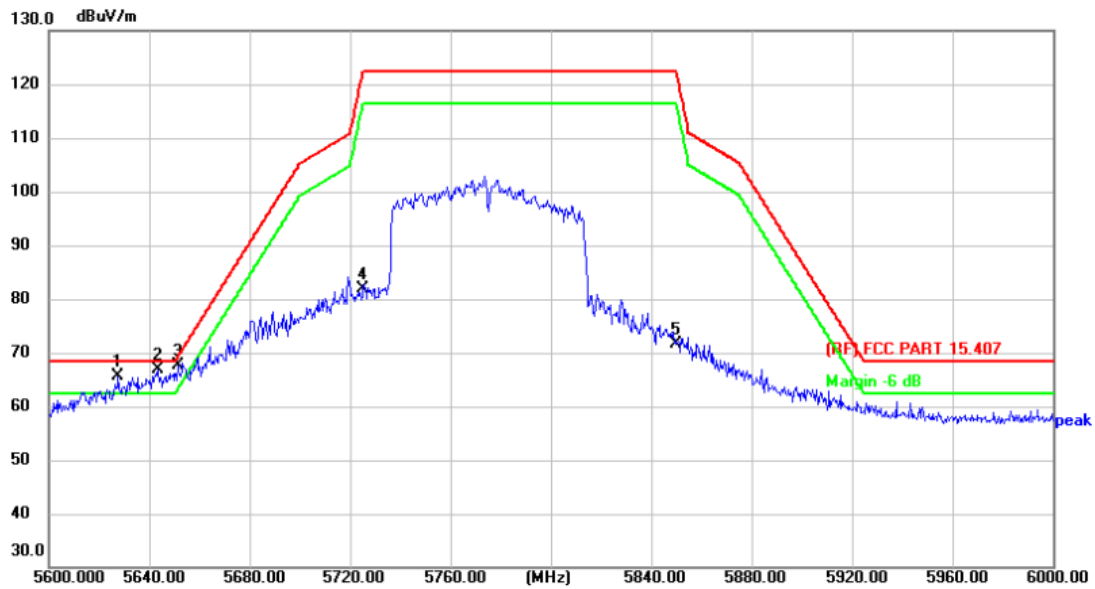

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 !	5627.600	52.21	13.48	65.69	68.30	-2.61	peak	P
2 *	5643.200	53.50	13.50	67.00	68.30	-1.30	peak	P
3 !	5651.200	54.10	13.51	67.61	69.19	-1.58	peak	P
4	5725.000	68.39	13.58	81.97	122.30	-40.33	peak	P
5	5850.000	58.08	13.54	71.62	122.30	-50.68	peak	P

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

-----END OF REPORT-----

