



深圳市英佳創電子科技有限公司

<http://www.szsyjc.com>

APPROVAL SHEET

承认书

CUSTOMER NAME 客戶名稱		
CUSTOMER P/N 客戶料號		
PART NAME 品名	2.4G/5G 內置金屬插件天線 (WIFI-R) 2.4G/5G built-in metal plug-in antenna	
P/ N 料號	YJC-6N000-B403	
APPROVAL REV. 版次	A1	
DELIVERY DATE 送樣日期	2022 年 11 月 24 日	
PREPARED BY 承辦	吳佳雄	
CHECKED BY 審核	方文鋒	
APPROVED BY 核準	肖漢	
Customer Approved 客戶承認		
Prepared By 承辦	Checked By 審核	Approved By 核準

英總部地址：深圳市光明區馬田街道油麻崗路 11 號宏域光明谷 C 棟

Headquarters Address: Building C, Hongyu Guangming Valley, No. 11, Youma Gang Road, Matan Street, Guangming District, Shenzhen City

東莞分廠：東莞市橋頭鎮石水口銀河三路 2 號英佳創產業園

Dongguan Branch: Yingjiachuang Industrial Park, No. 2 Yinhe 3rd Road, Shishuikou, Qiaotou Town, Dongguan City

杭州辦事處：杭州市濱江區物聯網街 369 號大華江虹國際創新園 B 棟 212

Hangzhou Office: 212, Building B, Dahua Jianghong International Innovation Park, No. 369 Internet of Things Street, Binjiang District, Hangzhou

綿陽辦事處：四川省綿陽市高新區綿興東路 35 號萬向高新國際 4F-34

Mianyang Office: No. 4F-34 Wanxiang High-tech International, No. 35 Mianxing East Road, Gaoxin District, Mianyang City, Sichuan Province

電話：0755-27810060

傳真：0755-27810057

網址：<http://www.szsyjc.com>



目錄 (Catalogue)

1、	封面 (Cover)	1
2、	目錄 (Catalogue)	2
3、	履歷表 (Resume)	3
4、	產品平面圖 (Product plan)	4
5、	天線技術參數 (Antenna technical parameters)	5
6、	環境性能測試 (Environmental performance testing)	6
7、	天線貼附位置圖 (Antenna attachment position diagram)	7
8、	天線性能測試圖 (Antenna performance test diagram)	7-8
9、	隔離度測試圖 (Isolation test chart)	8-9
10、	2D. 3D (2. 4G/5G) 測試數據 (Test data)	10-16
11、	吞吐量測試數據 (Throughput test data)	17-20
12、	OTA有源測試數據統計 (OTA active test data statistics)	21
13、	ROHS物料控制報告 (ROHS Material control report)	22



履歷表(Resumer):

版本 Version	變更內容及更改原因 Changes and reasons	發行 publish	發行 publish
A/0	初版發行 (Issued)	2022 年 10 月 28 日 (October 28, 2022)	
A/1	增加鋼印 (Adding steel marks)	2022 年 11 月 24 日 (November 24, 2022)	



產品平面圖 (Product plan):

由 Autodesk 教育版产品制作

频率范围(Frequency Range)	2400-2500/5150-5850MHZ
增益 (Gain)	4dBi
电压驻波比(VSWR)	<1.92
极化 (Polarization)	Linear, Vertical
最大功率(Max power rating)	50W
特性阻抗 (Impedance)	50Ω

WIFI-R

Requirement:

1. The finished product must be tested 100% through OK
2. The finished product shall be subject to 100% full inspection OK.
3. Adopt environmental protection process. Finished product
4. Meet ROHS requirements
5. No tolerance shall be subject to general tolerances
6. The packing method is braided tape packing.

要求:

1. 成品须100%测试导通OK
2. 成品须100%全检OK.
3. 采用环保制程. 成品
4. 符合ROHS要求.
5. 未注公差请以一般公差为准.
6. *包装方式采用编带包装.

REV	DATE	DESCRIPTION	NAME
A0	2022-10-27	NEW	吴佳雄
A1	2022-11-24	更新增加钢印	吴佳雄

	零件名称 (PART NAME) 型号: 2.4G/5G 内置贴片金属天线	单位 (UNIT) mm	比例 (SCALE) 20.3x3.2mm@0.3mm	版本 (REV) A0	日期 (DATE) 2022-11-24
设计: 吴佳雄	审核: 方文锋	深圳市英佳创电子科技有限公司 SHENZHEN YINGJIACREAT ELECTRONIC CO.,LTD			

产品料号 (PRODUCT NO.) YJC-SN000-BA03	数量 (SIZE) M	日期 (DATE) 2022-11-24	深圳市英佳创电子科技有限公司 SHENZHEN YINGJIACREAT ELECTRONIC CO.,LTD
--------------------------------------	----------------	-------------------------	--

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作



天線技術參數(Antenna technical parameters):

電氣技術參數 (Electrical technical parameters)	
電性能指標 (Electrical Specifications)	
頻率範圍 (Frequency Range)	2400 -2500/5150-5850MHZ
電壓駐波比 (VSWR)	<1.92
輸入阻抗 (Input Impedance)	50 Ω
方向 (Direction)	全向
增益 (Gain)	WIFI2: 2.4G \geq 1.76dBi, 5G \geq 1.71dBi
機械指標 (Mechanical Specifications)	
材質	304 不鏽鋼 (Stainless steel)
工作溫度	-20°C~+70°C
工作溼度	20~80%

包裝方式 (The packing way) :



環境性能測試(Environmental performance testing):



項目(Project)	測試條件 (Test condition)	規格(Specification)
儲存環境 Storage Conditions	In the absence of specified test temperature, humidity, air pressure is as follows: 在沒有指定的情況下測試溫度、溼度、氣壓如下: 1. Temperature is - 30 °C ~ + 80 °C 1. 溫度為-30°C~+80°C 2. Relative humidity of 45% to 85% 2. 相對溼度為45%-85% 3. Air pressure is 86 kpa to 106 kpa 3. 氣壓為86kpa-106kpa	Electrical and mechanical properties is normal 電氣機械性能正常
高低溫試驗 high and low temperature test	Between 70 °C and -20 °C for 5 loops, then 1-2 h under normal conditions, check the appearance quality. 在70°C與-20°C之間進行5次循環,然後在正常條件下1-2H, 檢查外觀質量。	Size should meet the requirements and should satisfy the content with the electrical and mechanical properties 尺寸應滿足規定並應滿足於機械、電氣性能
耐恆定 溼熱試驗 Constant damp and hot resistance test	95 + / - 3% relative humidity, temperature test: 40 °C. Lasts 2 h after, try to take out the determination of electrical properties, within 5 min after try 1-2 h under article normal thing, check the appearance quality 相對溼度 95±3%, 試驗溫度: 40°C.持續 2H 作用後, 試品取出後 5min 之內測定電氣性能, 試品在正常條件下 1-2H, 檢查外觀質量	Size should meet the requirements and should satisfy the content with the electrical and mechanical properties 尺寸應滿足規定並應於機械、電氣性能
振動試驗vibration test	10-55 hz, vibration frequency range of displacement amplitude: 0.35 MM, acceleration amplitude: 50.0 M/S, sweep cycles: 30 times 振頻範圍 10-55HZ, 位移幅值: 0.35MM, 加速度幅值: 50.0M/S, 掃頻循環次數: 30 次	Electrical and mechanical properties is normal 電氣機械性能正常
跌落試驗 fall down test	1 m high altitude in accordance with the perpendicular axis free drop 3 times 1M高空按照互相垂直的軸方向自由跌落3次	Electrical and mechanical properties is normal 電氣機械性能正常




天線貼附位置圖 (Antenna attachment position diagram) :

天線貼附位置圖
Antenna attachment position diagram




天線性能測試圖 (Antenna performance test diagram) (WIFI2) :

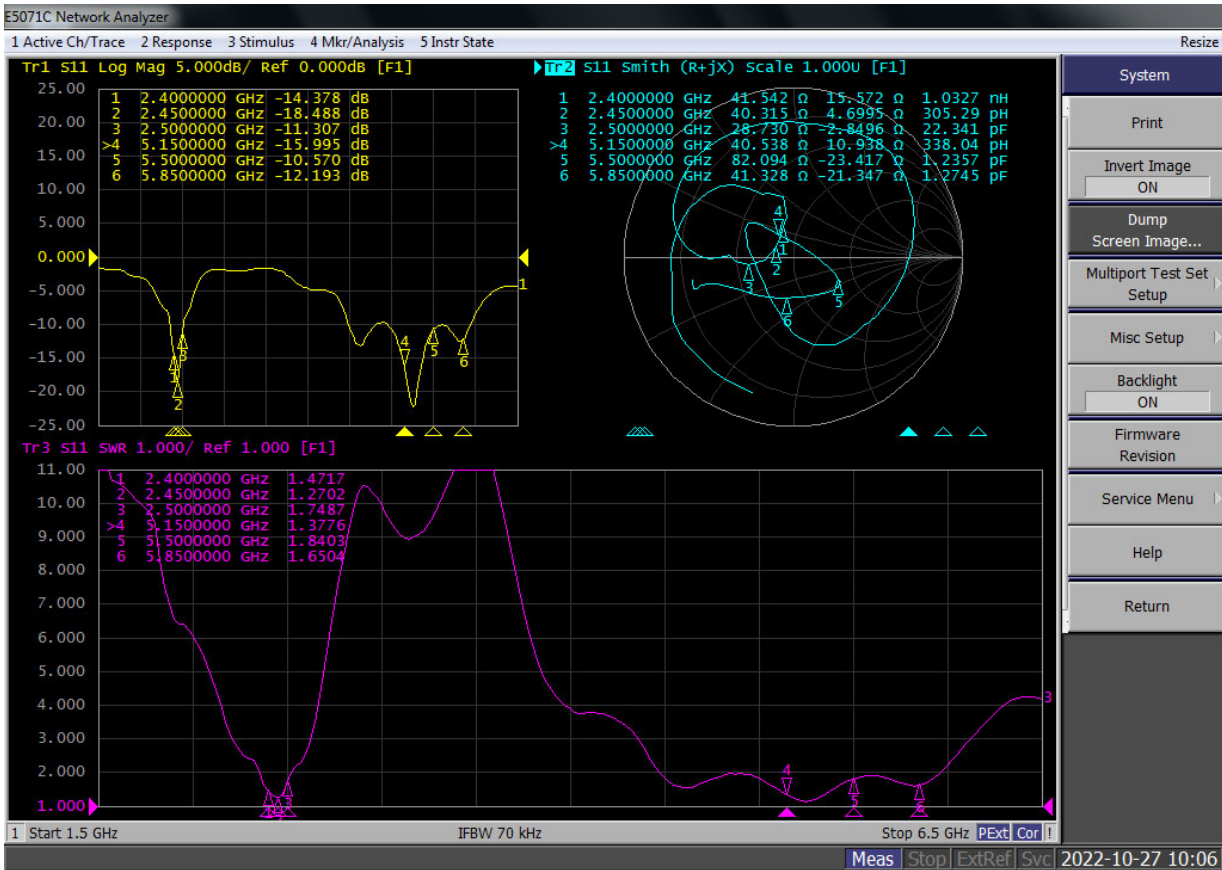




天線性能測試圖 (Antenna performance test diagram) (BT) :

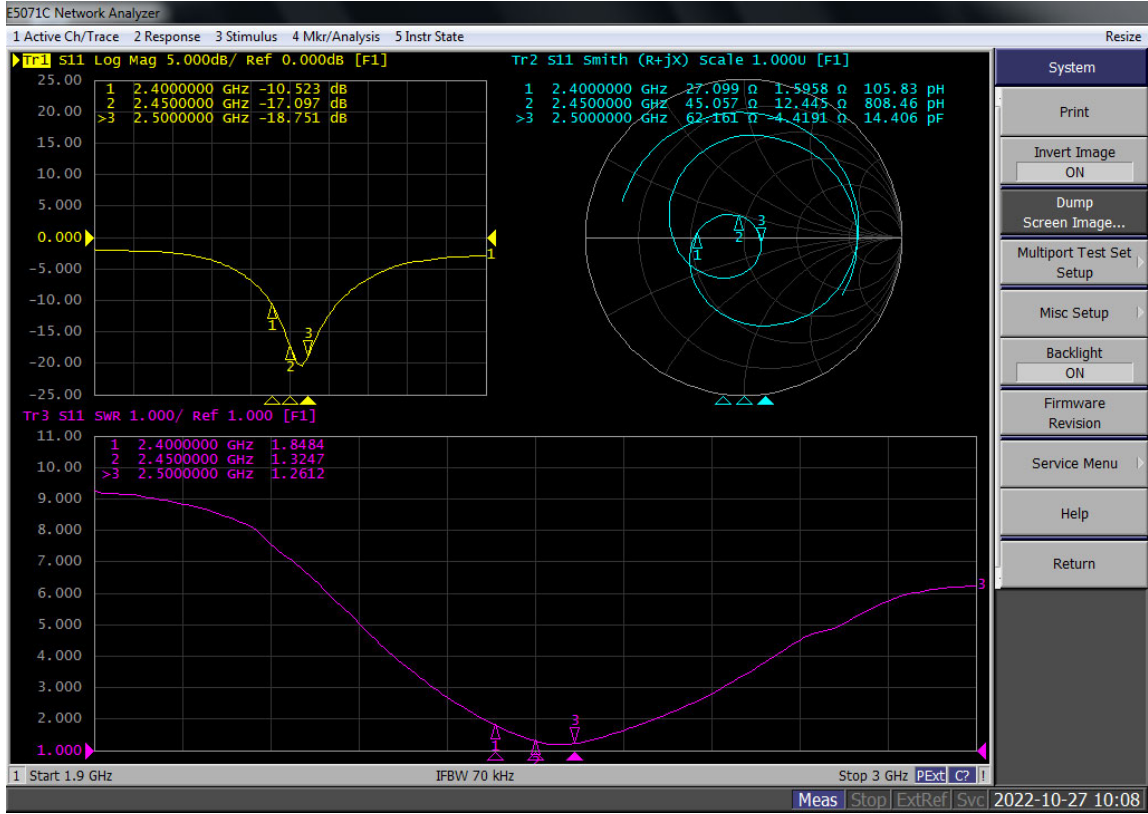


WIFI 1--WIFI 2 隔離層

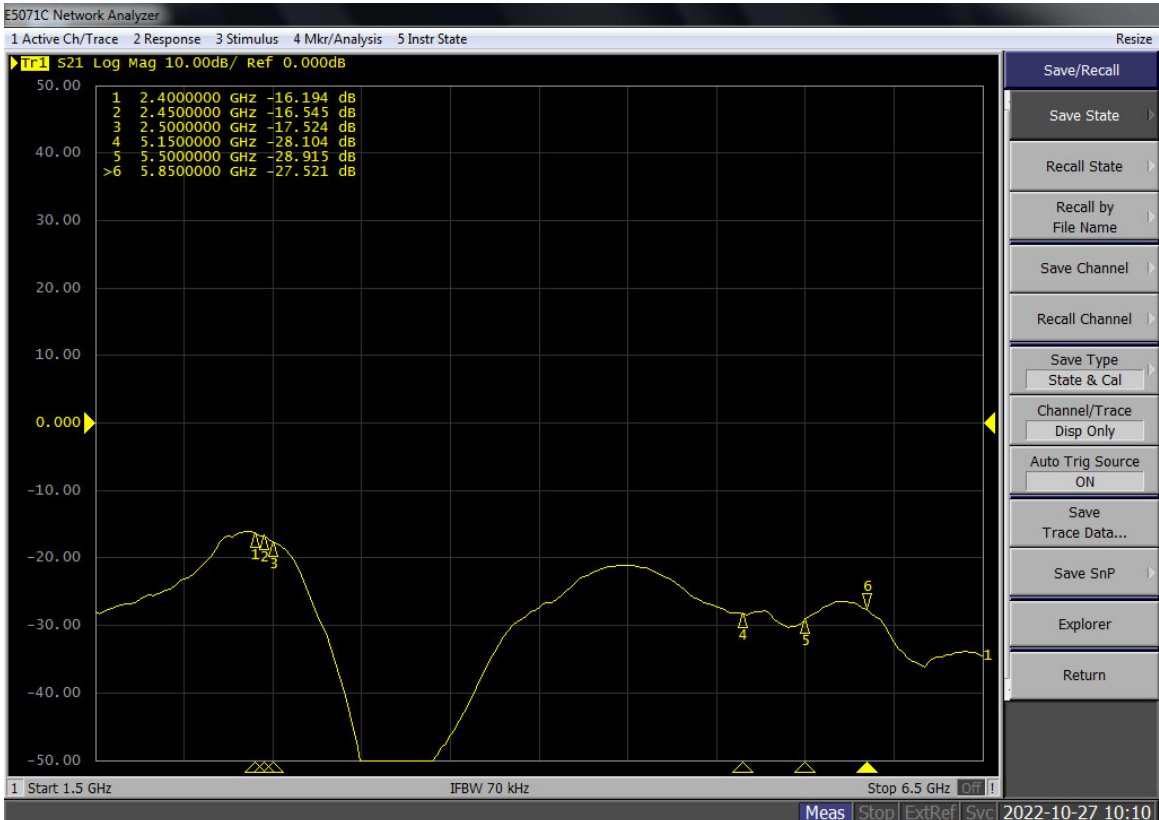




WIFI 2--BT 隔離層

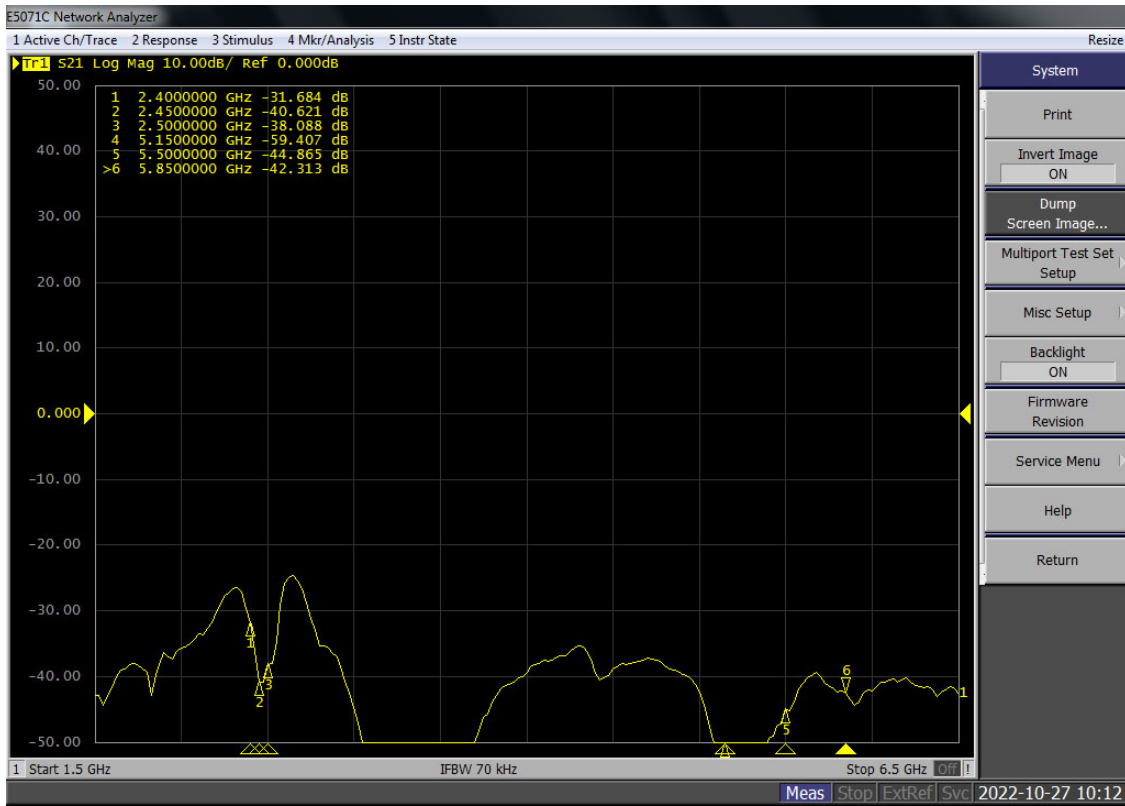

WIFI 1--BT 隔離層

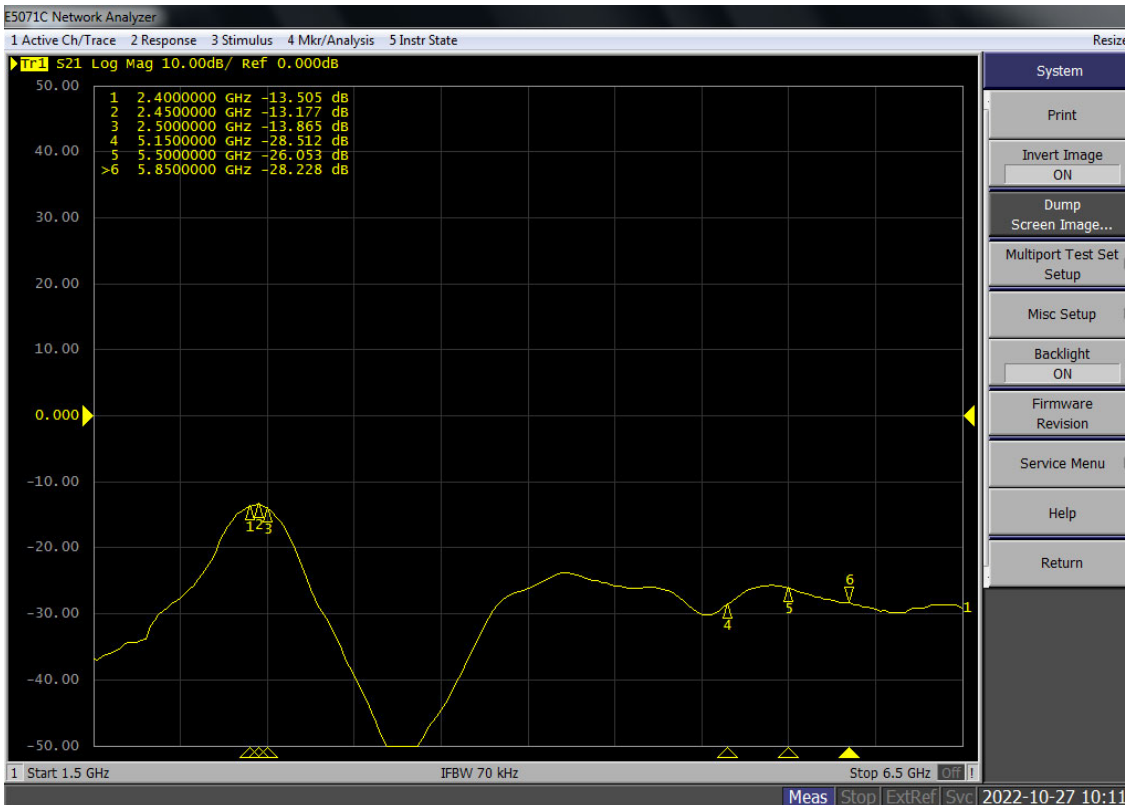



2D、3D-測試數據 Test data(WIFI 2: 2.4G/5G) :

Frequency (MHz)	Efficiency (%)	Gain. (dBi)
2400	61.38	2.86
2410	60.53	2.61
2420	61.52	2.6
2430	61.09	2.51
2440	62.66	2.6
2450	62.52	2.53
2460	63.68	2.39
2470	63.68	1.98
2480	64.12	1.76
2490	64.86	1.95
2500	64.27	1.97
5000	60.39	2.27
5025	61.09	2.16
5050	61.38	1.97
5075	59.98	1.71
5100	62.09	1.8
5125	64.57	2.13
5150	62.37	2.17
5175	62.23	2.4
5200	63.68	2.69
5225	64.12	2.63
5250	64.71	2.8
5275	66.07	3.07
5300	68.71	3.24
5325	68.87	3.24
5350	68.23	3.29
5375	69.98	3.59
5400	70.63	3.85
5425	69.98	3.85
5450	69.98	3.92
5475	68.23	3.95
5500	66.83	3.87
5525	65.16	3.83
5550	65.46	3.91
5575	65.46	3.92
5600	64.27	3.88









Frequency (MHz)	Efficiency (%)	Gain. (dBi)
5625	64.27	3.75
5650	62.81	3.71
5675	61.52	3.91
5700	61.52	4.02
5725	61.38	3.88
5750	60.81	3.71
5775	60.39	3.65
5800	59.57	3.62
5825	60.81	3.79
5850	60.67	3.88

WIFI 2 天線方向圖-2.4G/5G(Antenna direction diagram - 2.4G/5G)

Phi =0 freq=2400MHz


Phi =90 freq=2400MHz

Theta =90 freq=2400MHz

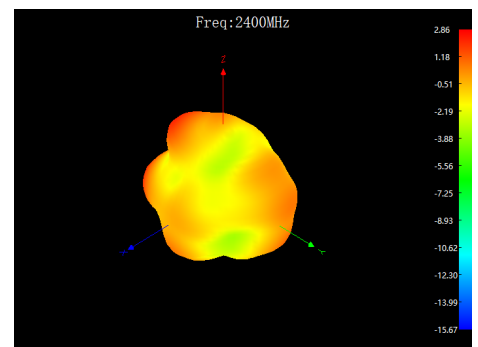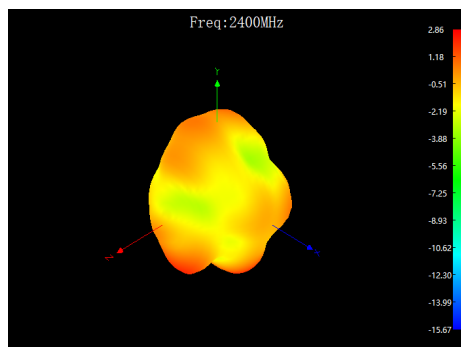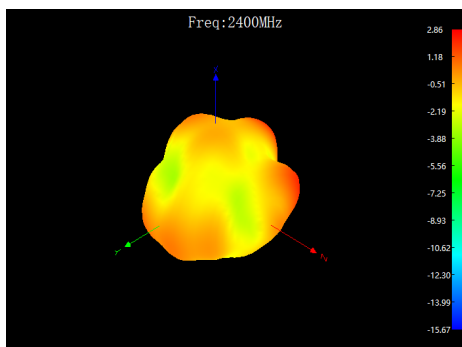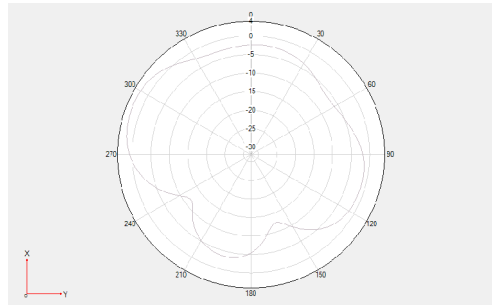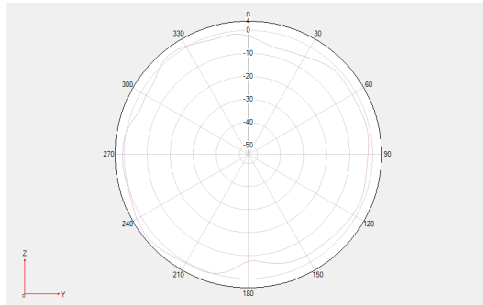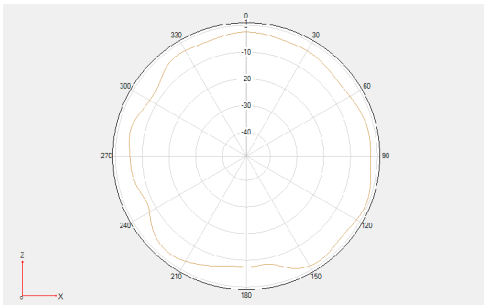








Phi =0 freq=2450MHz

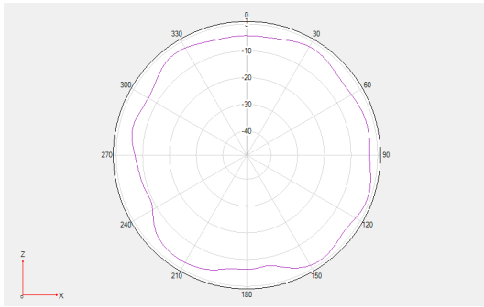

Phi =90 freq=2450MHz

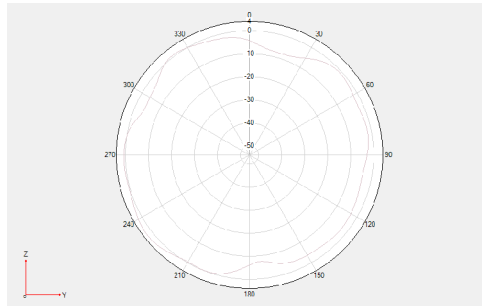


Theta =90 freq=2450MHz

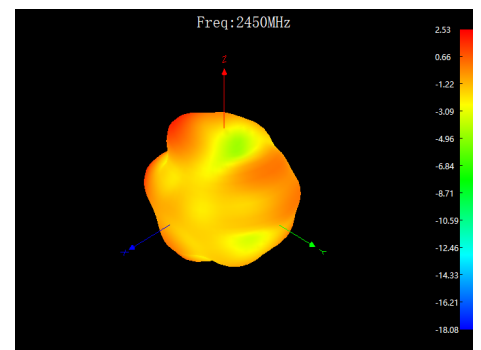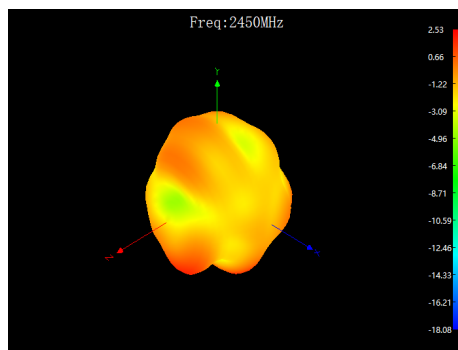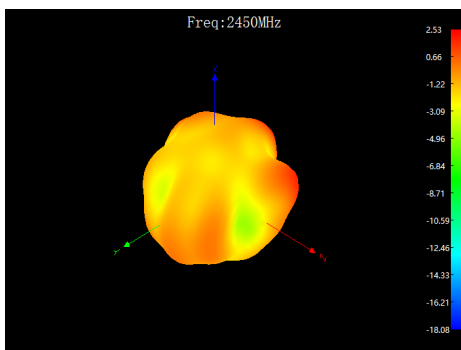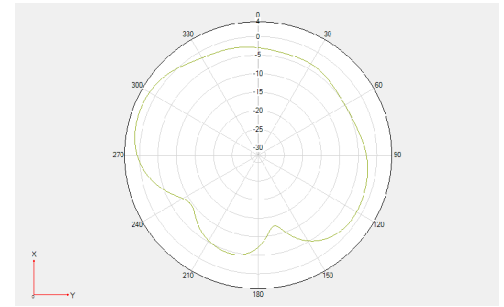


Phi =0 freq=2500MHz





S

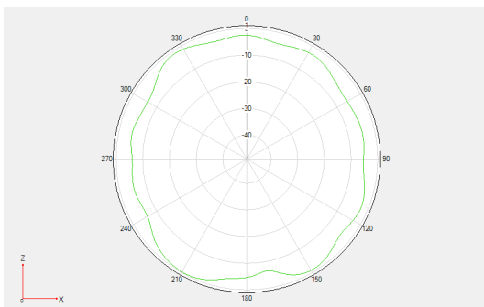

Phi =90 freq=2500MHz

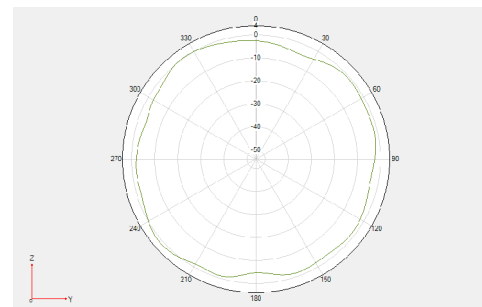

Theta =90 freq=2500MHz



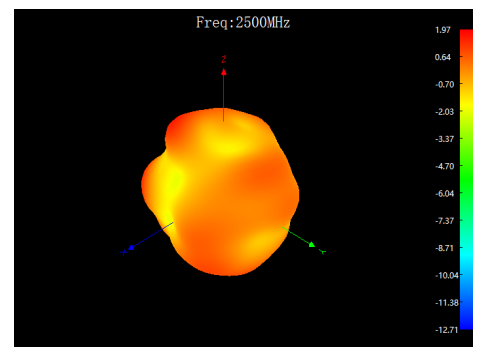
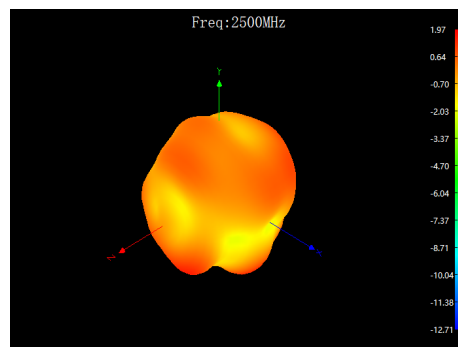
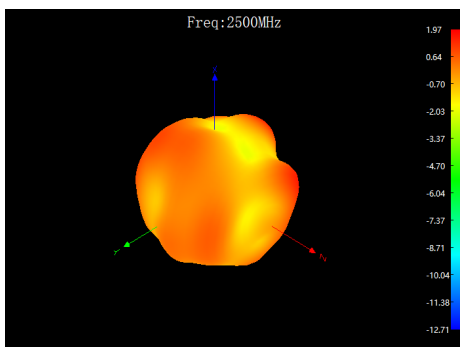
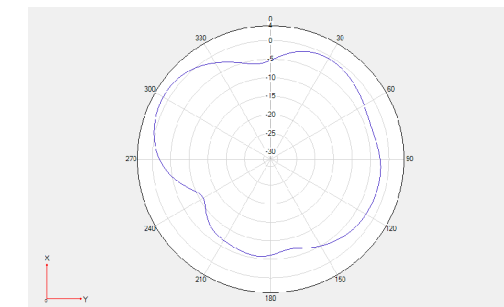




Phi =0 freq=5150MHz

Phi =90 freq=5150MHz







Theta =90 freq=5150MHz

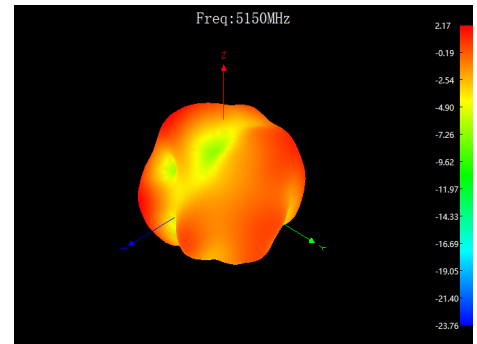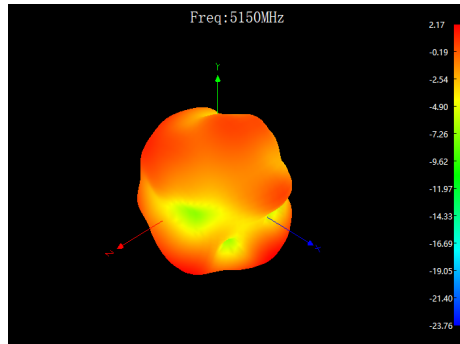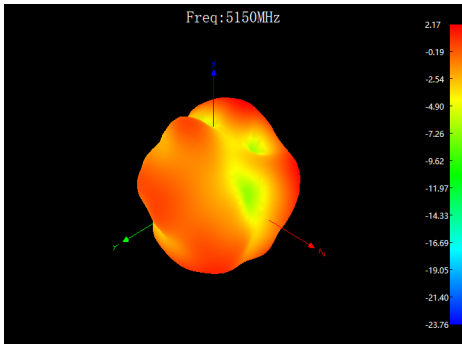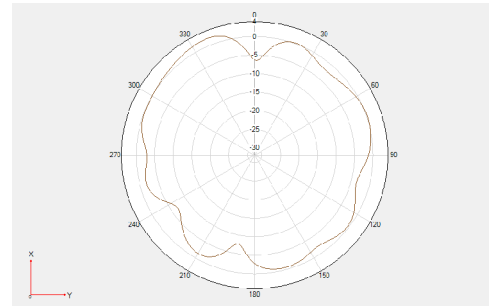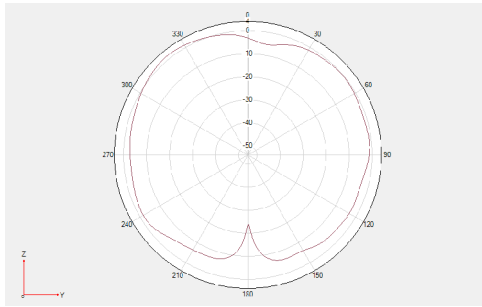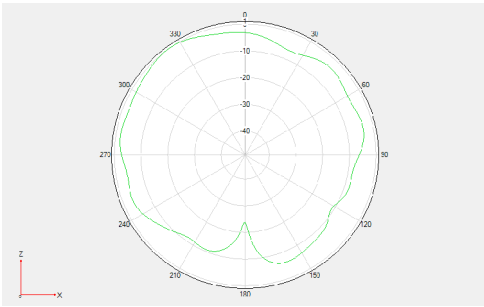

Phi =0 freq=5350MHz

Phi =90 freq=5350MHz

Theta =90 freq=5350MHz

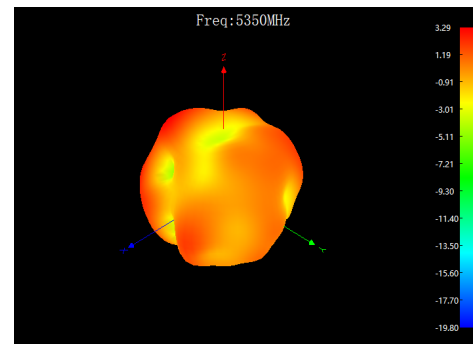
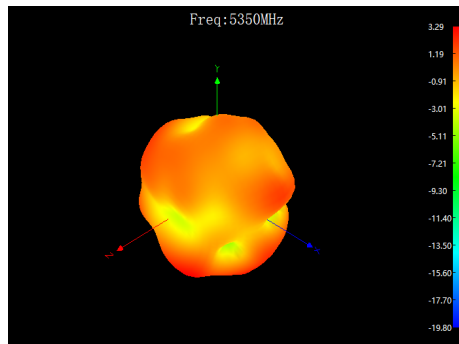
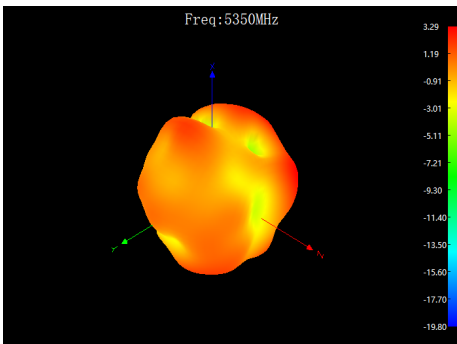
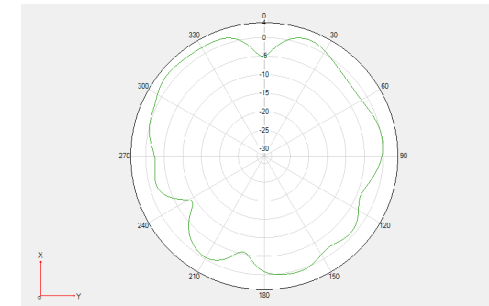
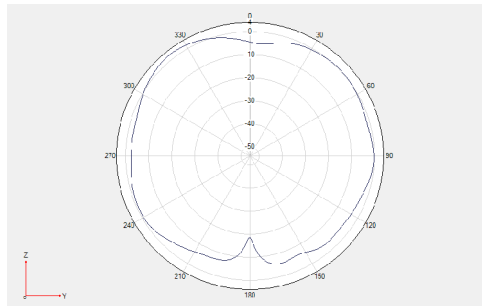
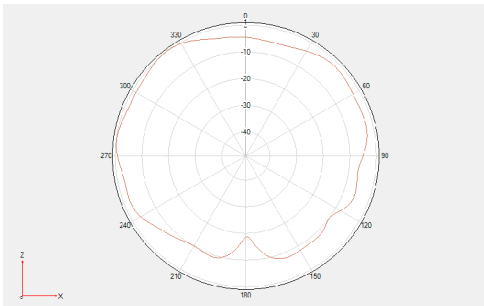




Phi =0 freq=5500MHz

Phi =90 freq=5500MHz







Theta =90 freq=5500MHz

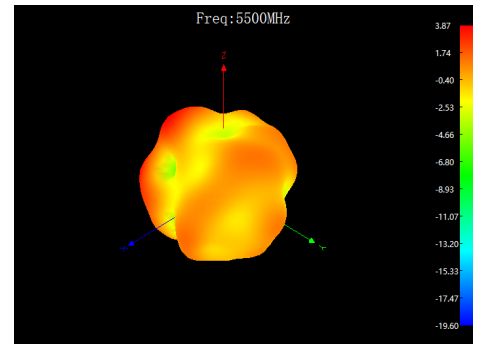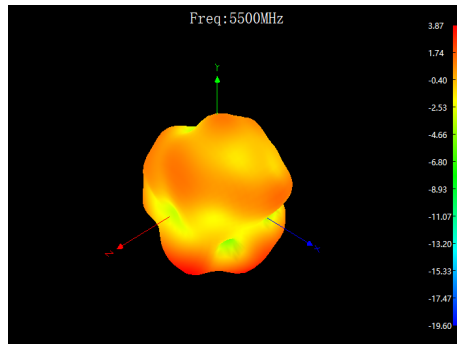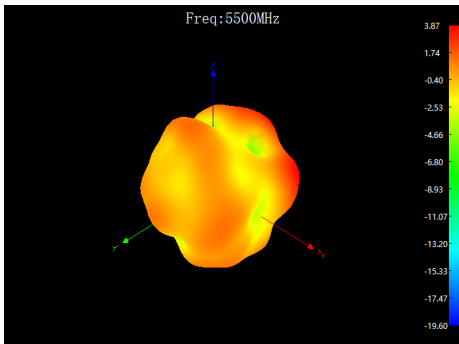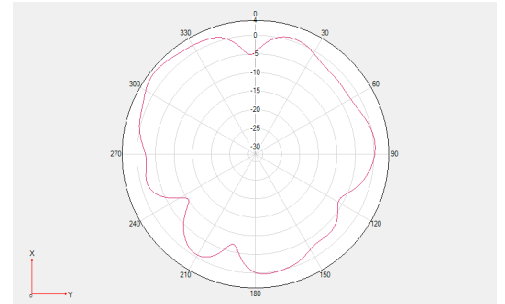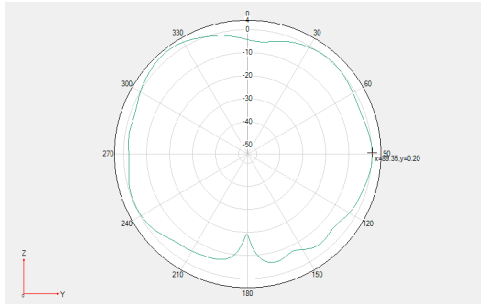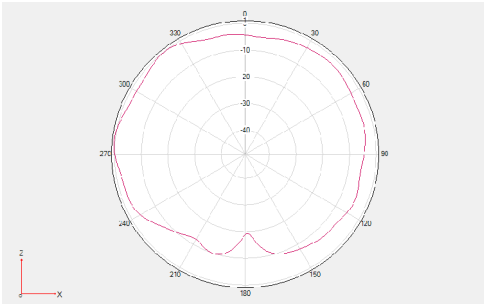

Phi =0 freq=5850MHz

Phi =90 freq=5850MHz

Theta =90 freq=5850MHz

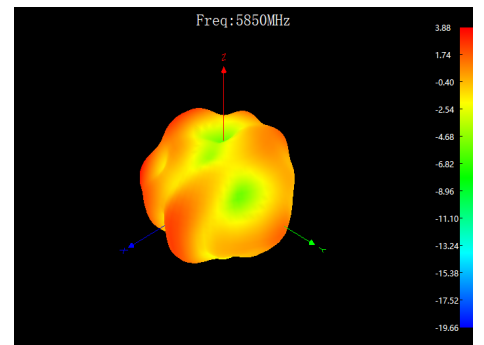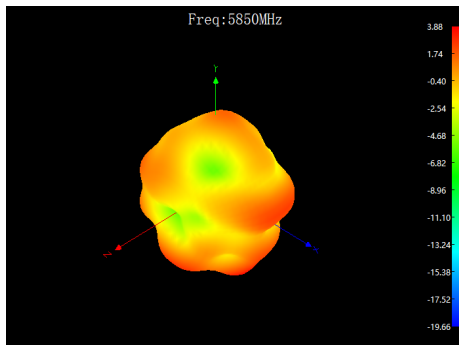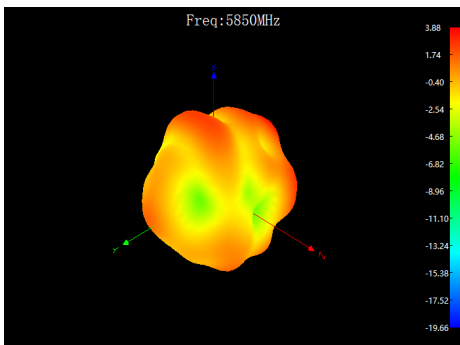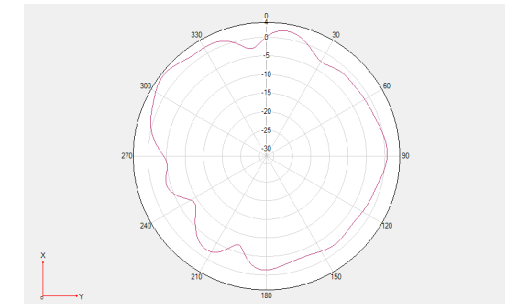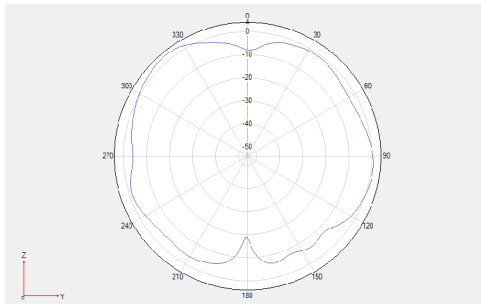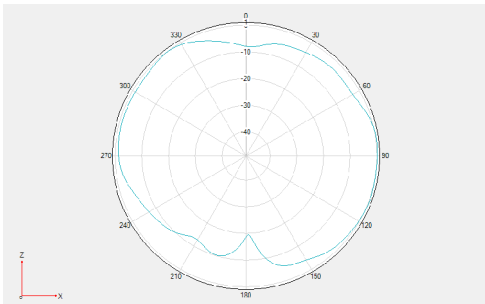



吞吐量測試數據(Throughput test data):

2.4G 11n HT20

NO.	Item	CH	ATT (Unit:dB)	Standard	Throughput	
					RX (Unit:Mb)	TX (Unit:Mb)
1	Attenuation throughput test 11n HT20	1	0	RX>90M TX>70M	109	108
2			25	RX>80%Peak value TX>80%Peak value	113	108
3			45		33	98
4		6	0	RX>90M TX>70M	109	108
5			25	RX>80%Peak value TX>80%Peak value	112	107
6			45		44	102
7		11	0	RX>90M TX>70M	111	107
8			25	RX>80%Peak value TX>80%Peak value	112	107
9			45		31	99

2.4G 11n HT40

NO.	Item	CH	ATT (Unit:dB)	Standard	Throughput	
					RX (Unit:Mb)	TX (Unit:Mb)
1	Attenuation throughput test 11n HT40	1	0	RX>180M TX>140M	231	215
2			25	RX>70%Peak value TX>70%Peak value	227	211
3			45		27	162
4		6	0	RX>180M TX>140M	233	218
5			25	RX>70%Peak value TX>70%Peak value	221	217
6			45		62	175
7		11	0	RX>180M TX>140M	229	212
8			25	RX>70%Peak value TX>70%Peak value	220	211
9			45		43	164



5G 11ac HT80

NO.	Item	CH	ATT (Unit:dB)	Standard	Throughput	
					RX (Unit:Mb)	TX (Unit:Mb)
1	Attenuation throughput test 11ac HT80	36	0	RX>350M TX>250M	483	481
2			5	RX>80%Peak value TX>70%Peak value	476	480
3			25		209	439
4		64	0	RX>350M TX>250M	472	484
5			5	RX>80%Peak value TX>70%Peak value	462	481
6			25		159	433
7		100	0	RX>350M TX>250M	459	484
8			5	RX>80%Peak value TX>70%Peak value	446	486
9			25		104	337
10		161	0	RX>350M TX>250M	448	486
11			5	RX>80%Peak value TX>70%Peak value	456	483
12			25		243	351



2.4G 11n HT20

NO.	Item	Distance (Unit:m)	CH	Angle	ATT (Unit:dB)	RSSI (Unit:dBm)	Standard (Unit:Mb)	Throughput	
								RX	TX
								Average (Unit:Mb)	Average (Unit:Mb)
1	Angle throughput test 11n HT20	25	1	0°	0	-43	RXTput>80 TXTput>60	101	96
2				90°	0	-44		103	93
3				180°	0	-44		105	93
4				270°	0	-43		99	94
5			6	0°	0	-41	RXTput>80 TXTput>60	109	93
6				90°	0	-42		110	97
7				180°	0	-40		110	99
8				270°	0	-41		101	82
9			11	0°	0	-43	RXTput>80 TXTput>60	96	92
10				90°	0	-45		109	78
11				180°	0	-43		102	90
12				270°	0	-45		85	81

2.4G 11n HT40

NO.	Item	Distance (Unit:m)	CH	Angle	ATT (Unit:dB)	RSSI (Unit:dBm)	Standard (Unit:Mb)	Throughput	
								RX	TX
								Average (Unit:Mb)	Average (Unit:Mb)
1	Angle throughput test 11n HT40	25	1	0°	0	-43	RXTput>140 TXTput>120	180	187
2				90°	0	-43		174	166
3				180°	0	-43		204	187
4				270°	0	-41		161	164
5			6	0°	0	-40	RXTput>140 TXTput>120	206	171
6				90°	0	-44		201	173
7				180°	0	-43		197	146
8				270°	0	-45		174	178
9			11	0°	0	-43	RXTput>140 TXTput>120	169	166
10				90°	0	-43		173	183
11				180°	0	-44		187	188
12				270°	0	-47		170	154



5G 11ac HT80

NO.	Item	Distance (Unit:m)	CH	Angle	ATT (Unit:dB)	RSSI (Unit:dBm)	Standard (Unit:Mb)	Throughput	
								RX	TX
								Average (Unit:Mb)	Average (Unit:Mb)
1	Angle throughput test 11ac HT80	25	36	0°	0	-46	RXTput>320 TX Tput>220	457	465
2				90°	0	-41		428	462
3				180°	0	-43		446	463
4				270°	0	-42		436	460
5			64	0°	0	-52	RXTput>320 TX Tput>220	419	475
6				90°	0	-49		416	475
7				180°	0	-49		411	461
8				270°	0	-47		406	462
9			100	0°	0	-48	RXTput>320 TX Tput>220	408	474
10				90°	0	-49		384	453
11				180°	0	-52		382	467
12				270°	0	-51		391	475
13			161	0°	0	-42	RXTput>320 TX Tput>220	433	473
14				90°	0	-43		440	474
15				180°	0	-41		440	477
16				270°	0	-44		443	475

2.4G 11n HT20

Item	Bluetooth	CH	ATT (Unit:dB)	Standard	RX (Unit:Mb)	TX (Unit:Mb)
2.4G 11n HT20	Bluetooth speaker Disconnected to play audio	1	0	RX>90M TX>70M	109	108
		6	0	RX>90M TX>70M	109	108
		11	0	RX>90M TX>70M	111	107
	Bluetooth speaker Connected to play audio	1	0	RX>60%Peak value TX>60%Peak value &Smooth audio	109	108
		6	0	RX>60%Peak value TX>60%Peak value &Smooth audio	109	108
		11	0	RX>60%Peak value TX>60%Peak value &Smooth audio	110	108



OTA 有源測試數據統計(OTA active test data statistics):

Item	Measurement	Band	Channel	Frequency	Total
1	TRP	WIFI_B (11M)	1	2412	12.91
2	TRP	WIFI_B (11M)	6	2437	13.83
3	TRP	WIFI_B (11M)	11	2462	14.87
4	TIS FAST	WIFI_B (11M)	1	2412	-81.74
5	TIS FAST	WIFI_B (11M)	6	2437	-72.79
6	TIS FAST	WIFI_B (11M)	11	2462	-72.86
7	TRP	WIFI_A (54M)	36	5180	14.32
8	TRP	WIFI_A (54M)	64	5320	14.79
9	TRP	WIFI_A (54M)	100	5500	15.58
10	TRP	WIFI_A (54M)	161	5805	13.73
11	TIS FAST	WIFI_A (54M)	36	5180	-70.08
12	TIS FAST	WIFI_A (54M)	64	5320	-70.06
13	TIS FAST	WIFI_A (54M)	100	5500	-67.16
14	TIS FAST	WIFI_A (54M)	161	5805	-69.61
15	TRP	WIFI_N_ISM (65M)	1	2412	10.16
16	TRP	WIFI_N_ISM (65M)	6	2437	11.73
17	TRP	WIFI_N_ISM (65M)	11	2462	11.86
18	TIS FAST	WIFI_N_ISM (65M)	1	2412	-67.32
19	TIS FAST	WIFI_N_ISM (65M)	6	2437	-61.67
20	TIS FAST	WIFI_N_ISM (65M)	11	2462	-60.73
21	TRP	WIFI_N_UNII (65M)	36	5180	13.04
22	TRP	WIFI_N_UNII (65M)	64	5320	13.63
23	TRP	WIFI_N_UNII (65M)	100	5500	14.3
24	TRP	WIFI_N_UNII (65M)	161	5805	12.59
25	TIS FAST	WIFI_N_UNII (65M)	36	5180	-67.44
26	TIS FAST	WIFI_N_UNII (65M)	64	5320	-66.59
27	TIS FAST	WIFI_N_UNII (65M)	100	5500	-62.74
28	TIS FAST	WIFI_N_UNII (65M)	161	5805	-66.26