


|               |                                                  |                    |     |
|---------------|--------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                           | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                     |                    |     |
| Ant. Pol.     | Horizontal                                       |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) -CDD |                    |     |
| Remark:       |                                                  |                    |     |

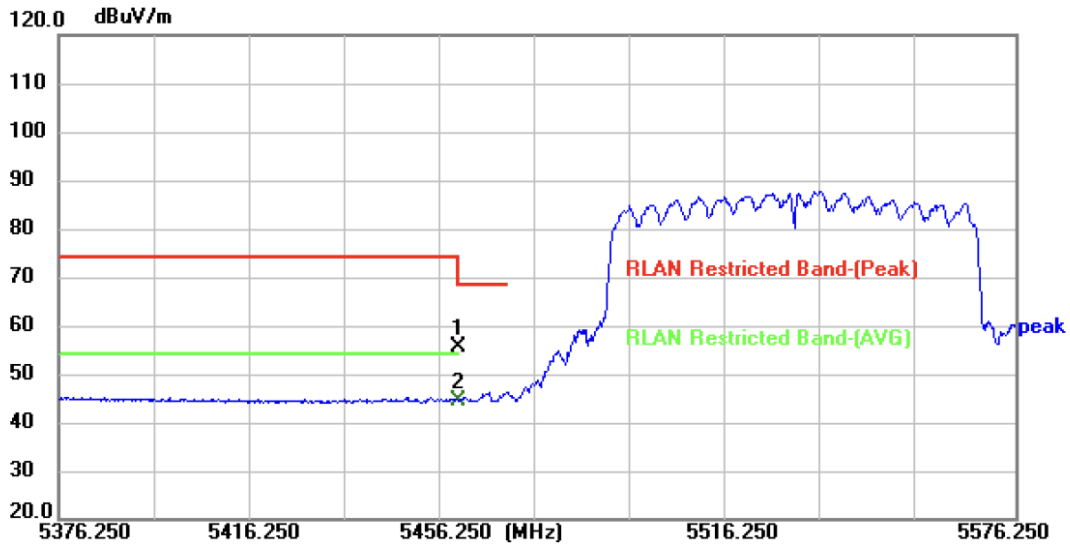


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 45.36          | 10.12         | 55.48          | 68.30          | -12.82      | peak     | P   |
| 2 * | 5460.000        | 34.34          | 10.12         | 44.46          | 54.00          | -9.54       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                  |                    |     |
|---------------|--------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                           | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                     |                    |     |
| Ant. Pol.     | Vertical                                         |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C) -CDD |                    |     |
| Remark:       |                                                  |                    |     |

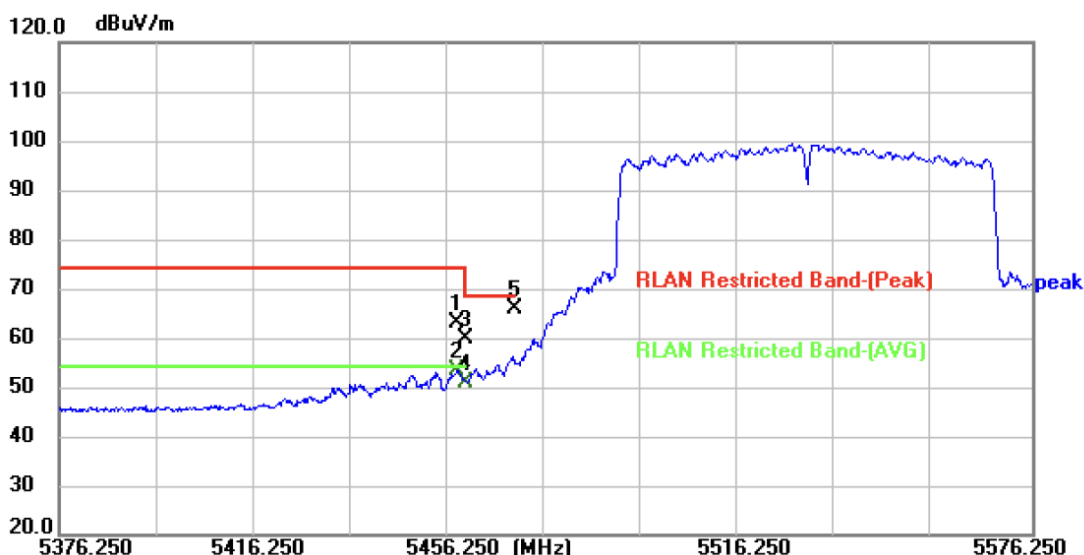


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5458.050        | 52.74          | 10.13         | 62.87          | 74.00          | -11.13      | peak     | P   |
| 2 * | 5458.050        | 43.30          | 10.13         | 53.43          | 54.00          | -0.57       | AVG      | P   |
| 3   | 5460.000        | 49.55          | 10.12         | 59.67          | 68.30          | -8.63       | peak     | P   |
| 4   | 5460.000        | 40.60          | 10.12         | 50.72          | 54.00          | -3.28       | AVG      | P   |
| 5   | 5470.000        | 55.91          | 10.07         | 65.98          | 68.30          | -2.32       | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                  |                    |     |
|---------------|--------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                           | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                     |                    |     |
| Ant. Pol.     | Horizontal                                       |                    |     |
| Test Mode:    | TX 802.11 ax(HE80) Mode 5530 MHz (U-NII-2C) -CDD |                    |     |
| Remark:       |                                                  |                    |     |

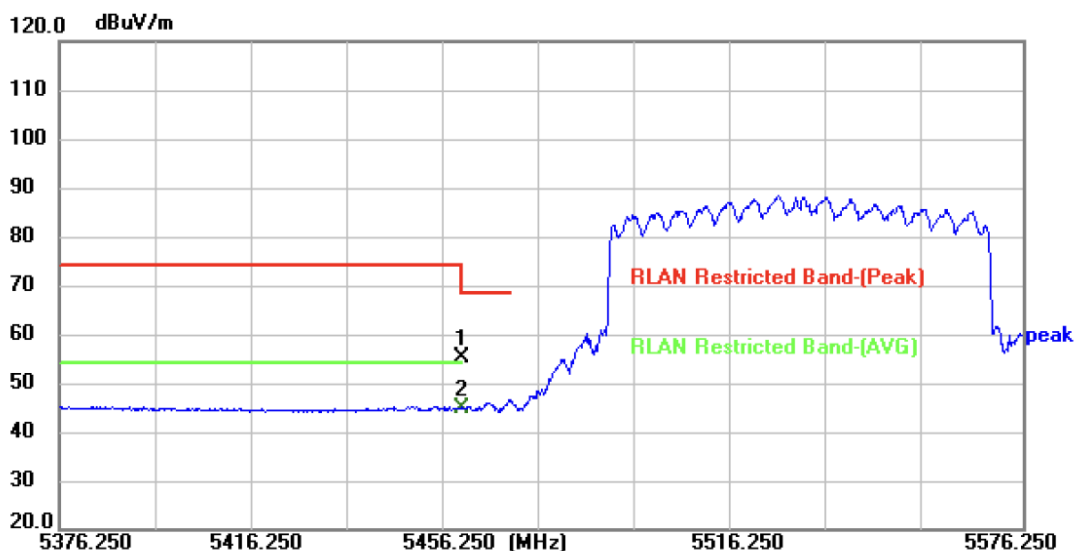


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 45.11          | 10.12         | 55.23          | 68.30          | -13.07      | peak     | P   |
| 2 * | 5460.000        | 34.63          | 10.12         | 44.75          | 54.00          | -9.25       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Vertical                                        |                    |     |
| Test Mode:    | TX 802.11ax(HE80) Mode 5530 MHz (U-NII-2C) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

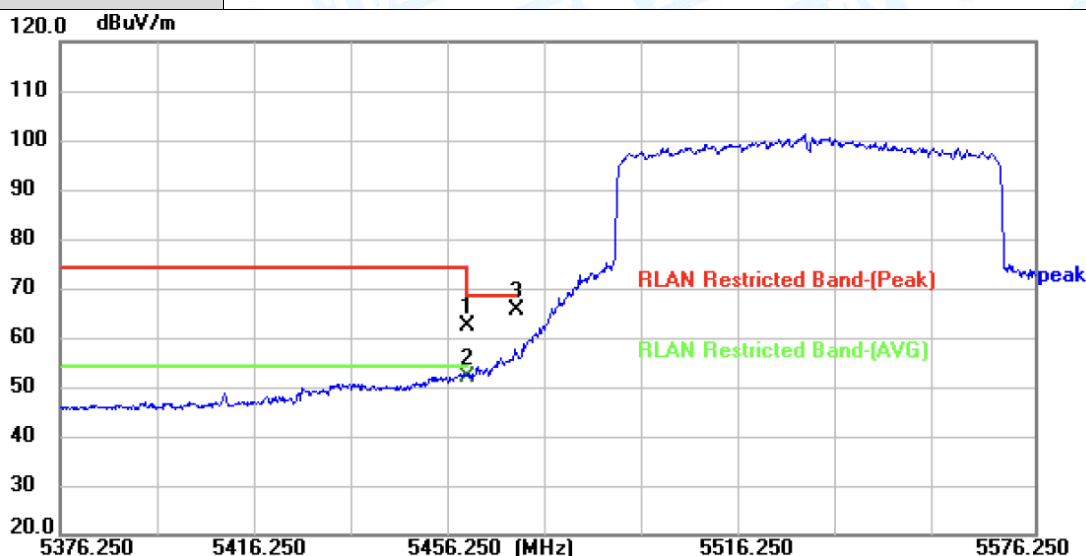


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 52.05          | 10.12         | 62.17          | 68.30          | -6.13       | peak     | P   |
| 2 * | 5460.000        | 41.67          | 10.12         | 51.79          | 54.00          | -2.21       | AVG      | P   |
| 3   | 5470.000        | 55.52          | 10.07         | 65.59          | 68.30          | -2.71       | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                   |                    |     |
|---------------|---------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                            | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                      |                    |     |
| Ant. Pol.     | Horizontal                                        |                    |     |
| Test Mode:    | TX 802.11ac(VHT160) Mode 5570 MHz (U-NII-2C) -CDD |                    |     |
| Remark:       |                                                   |                    |     |

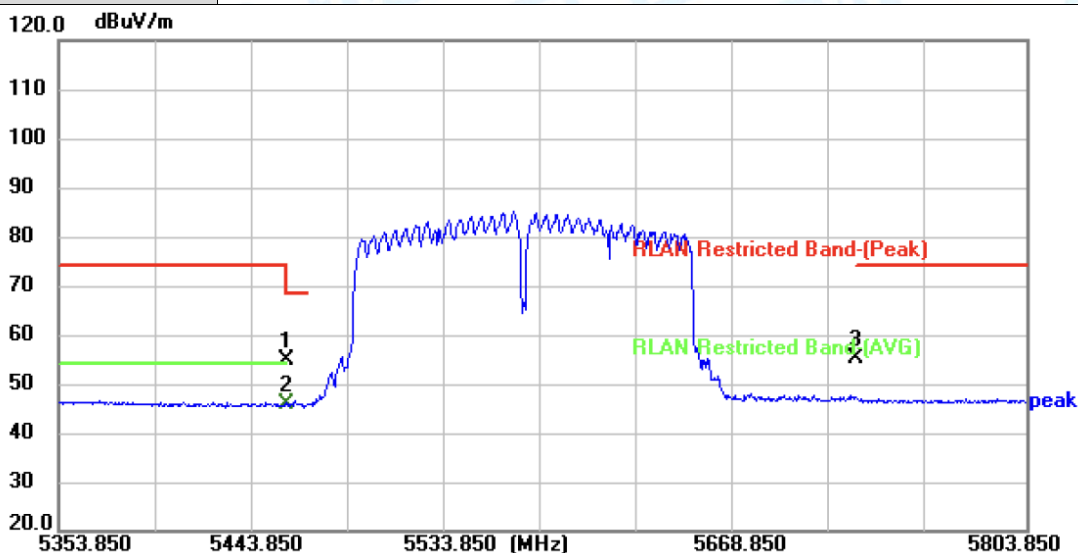


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 44.54          | 10.12         | 54.66          | 68.30          | -13.64      | peak     | P   |
| 2 * | 5460.000        | 35.86          | 10.12         | 45.98          | 54.00          | -8.02       | AVG      | P   |
| 3   | 5725.000        | 43.62          | 11.59         | 55.21          | 74.00          | -18.79      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                   |                    |     |
|---------------|---------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                            | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                      |                    |     |
| Ant. Pol.     | Vertical                                          |                    |     |
| Test Mode:    | TX 802.11ac(VHT160) Mode 5570 MHz (U-NII-2C) -CDD |                    |     |
| Remark:       |                                                   |                    |     |

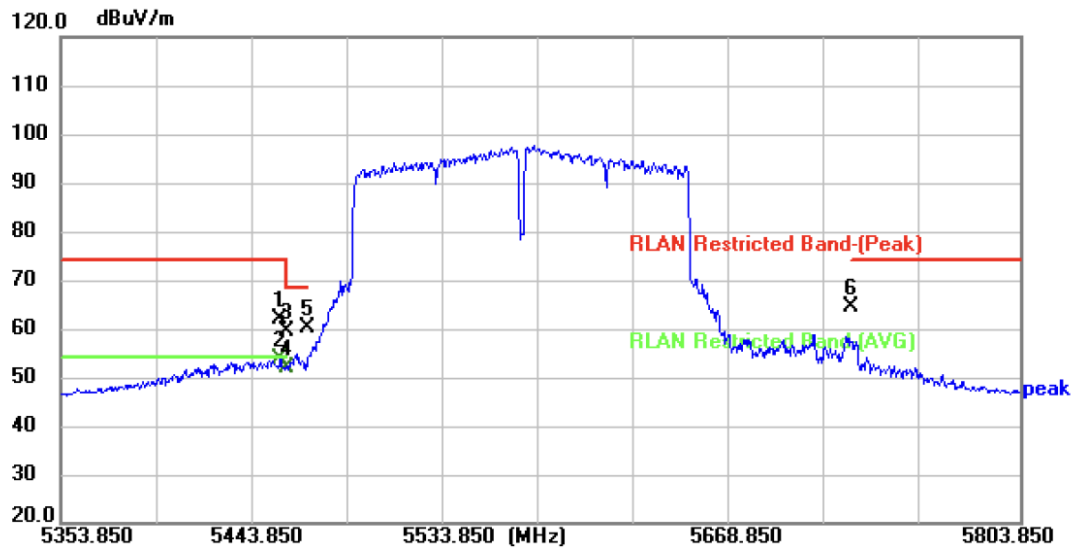


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5456.900        | 51.83          | 10.14         | 61.97          | 74.00          | -12.03      | peak     | P   |
| 2 * | 5456.900        | 43.53          | 10.14         | 53.67          | 54.00          | -0.33       | AVG      | P   |
| 3   | 5460.000        | 49.36          | 10.12         | 59.48          | 68.30          | -8.82       | peak     | P   |
| 4   | 5460.000        | 41.86          | 10.12         | 51.98          | 54.00          | -2.02       | AVG      | P   |
| 5   | 5470.000        | 50.26          | 10.07         | 60.33          | 68.30          | -7.97       | peak     | P   |
| 6   | 5725.000        | 52.96          | 11.59         | 64.55          | 74.00          | -9.45       | peak     | P   |


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



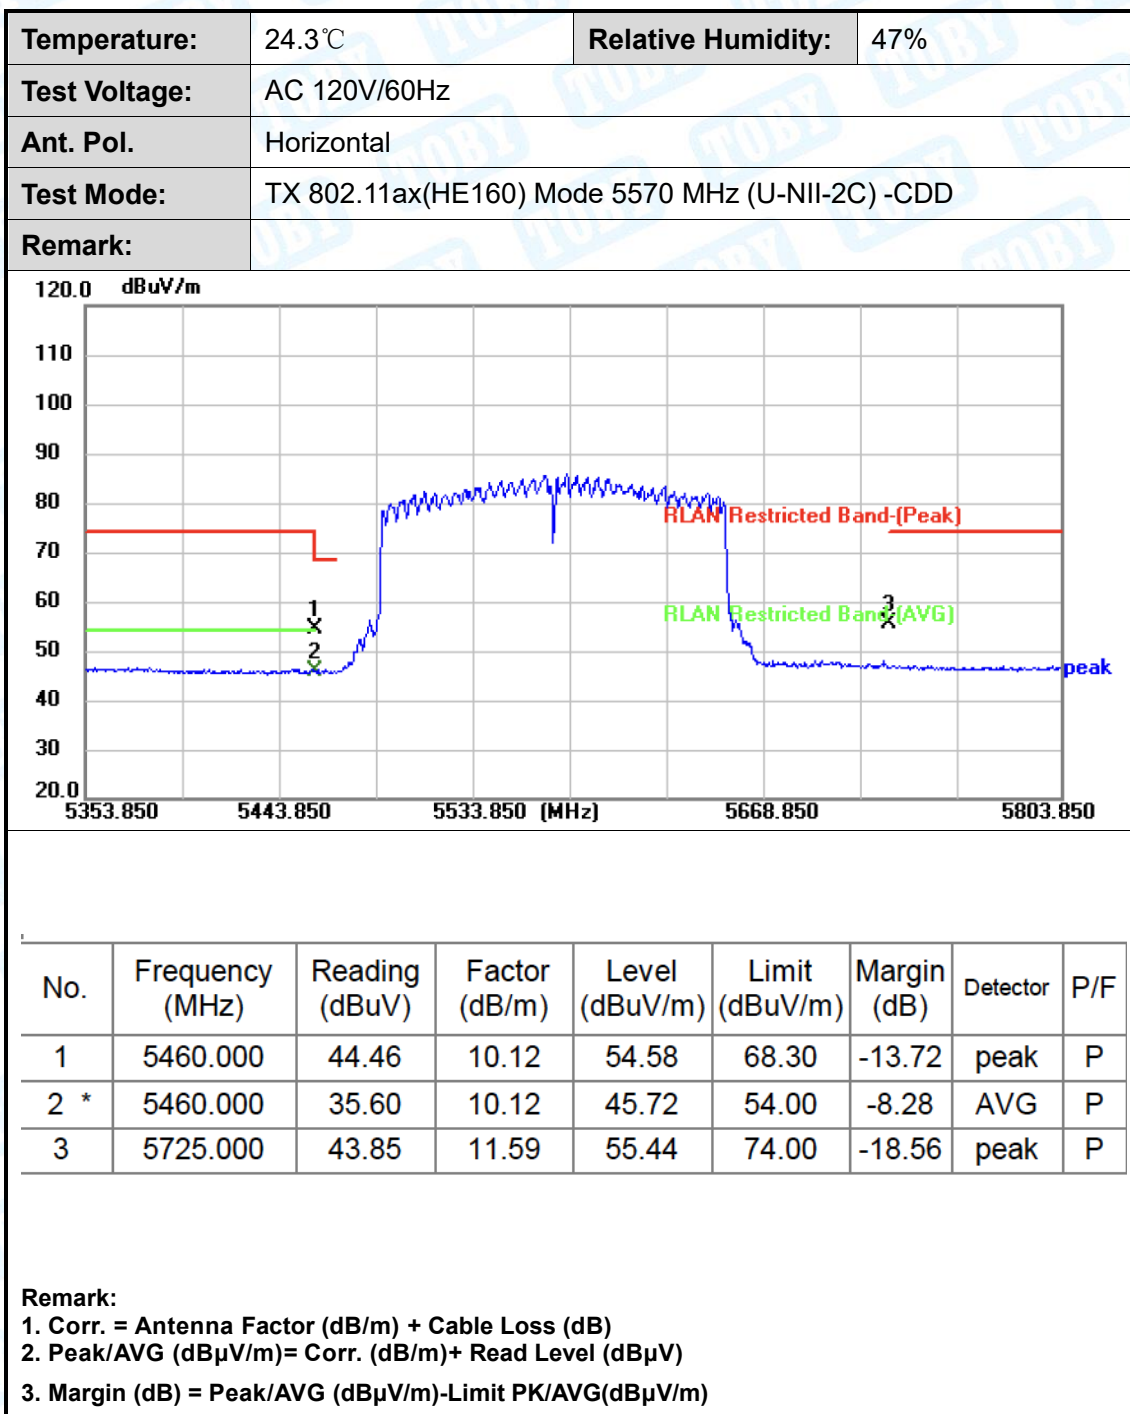

|               |                                                  |                    |     |
|---------------|--------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                           | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                     |                    |     |
| Ant. Pol.     | Vertical                                         |                    |     |
| Test Mode:    | TX 802.11ax(HE160) Mode 5570 MHz (U-NII-2C) -CDD |                    |     |
| Remark:       |                                                  |                    |     |

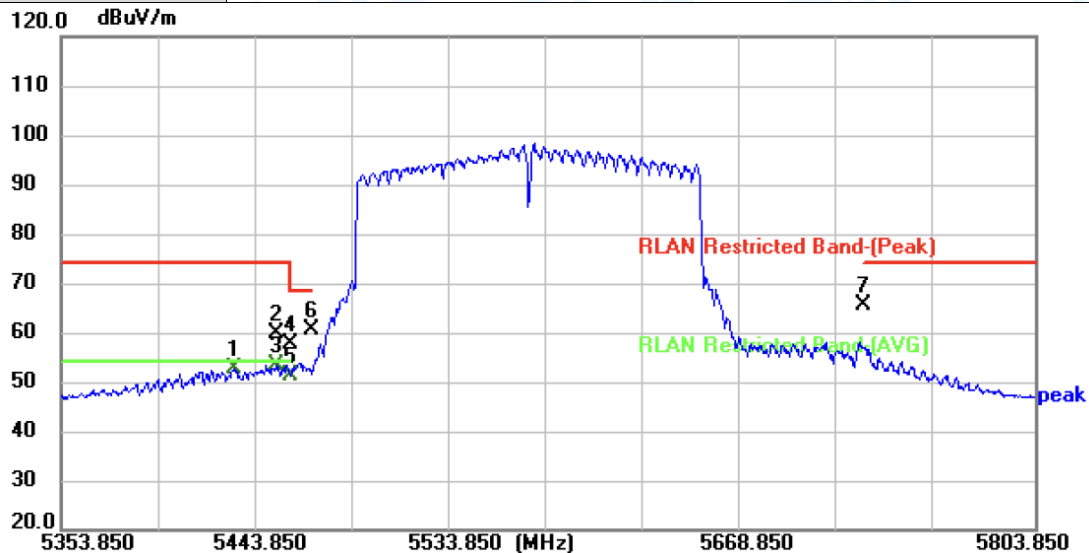


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5433.500        | 42.71          | 10.09         | 52.80          | 54.00          | -1.20       | AVG      | P   |
| 2   | 5453.700        | 49.78          | 10.16         | 59.94          | 74.00          | -14.06      | peak     | P   |
| 3 * | 5453.750        | 43.33          | 10.16         | 53.49          | 54.00          | -0.51       | AVG      | P   |
| 4   | 5460.000        | 47.44          | 10.12         | 57.56          | 68.30          | -10.74      | peak     | P   |
| 5   | 5460.000        | 41.13          | 10.12         | 51.25          | 54.00          | -2.75       | AVG      | P   |
| 6   | 5470.000        | 50.36          | 10.07         | 60.43          | 68.30          | -7.87       | peak     | P   |
| 7   | 5725.000        | 53.93          | 11.59         | 65.52          | 74.00          | -8.48       | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                        |                    |     |
|---------------|----------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                 | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                           |                    |     |
| Ant. Pol.     | Horizontal                             |                    |     |
| Test Mode:    | TX 802.11a Mode 5745 MHz (U-NII-3)-CDD |                    |     |
| Remark:       |                                        |                    |     |

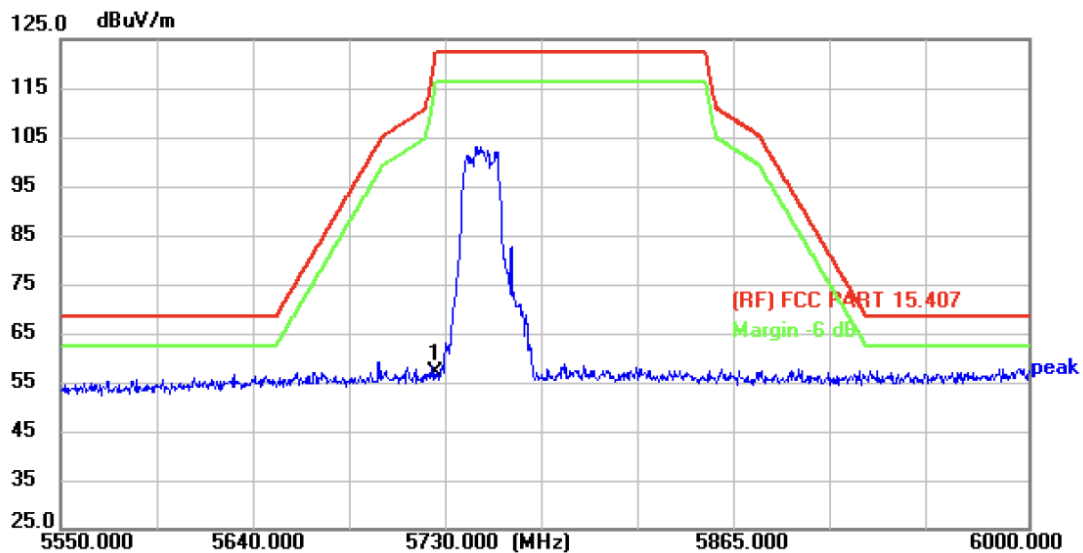


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 35.31          | 21.59         | 56.90          | 122.30         | -65.40      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                         |                    |     |
|---------------|-----------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                  | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                            |                    |     |
| Ant. Pol.     | Vertical                                |                    |     |
| Test Mode:    | TX 802.11a Mode 5745 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                         |                    |     |

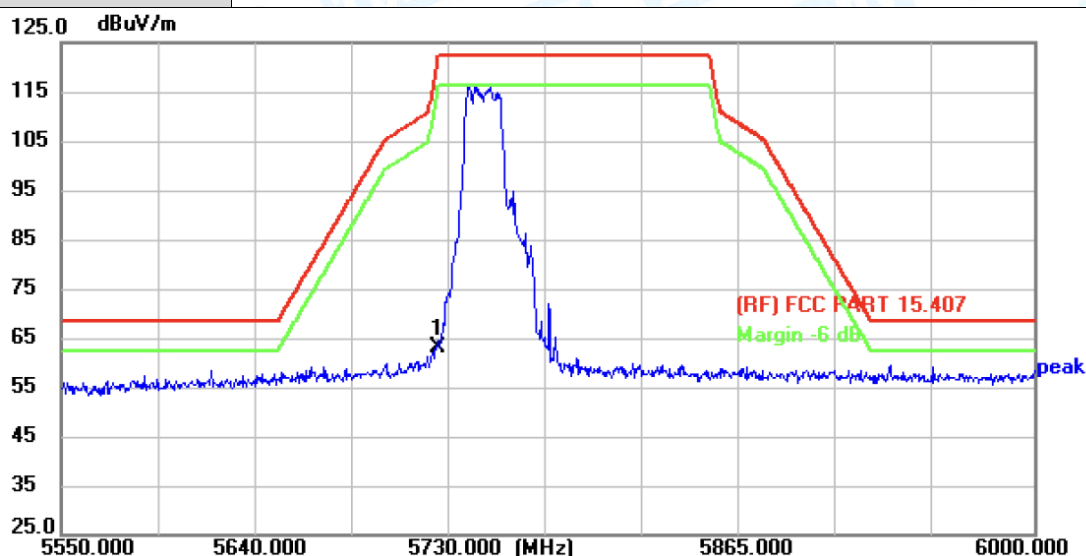


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 41.33          | 21.59         | 62.92          | 122.30         | -59.38      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                         |                    |     |
|---------------|-----------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                  | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                            |                    |     |
| Ant. Pol.     | Horizontal                              |                    |     |
| Test Mode:    | TX 802.11a Mode 5825 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                         |                    |     |

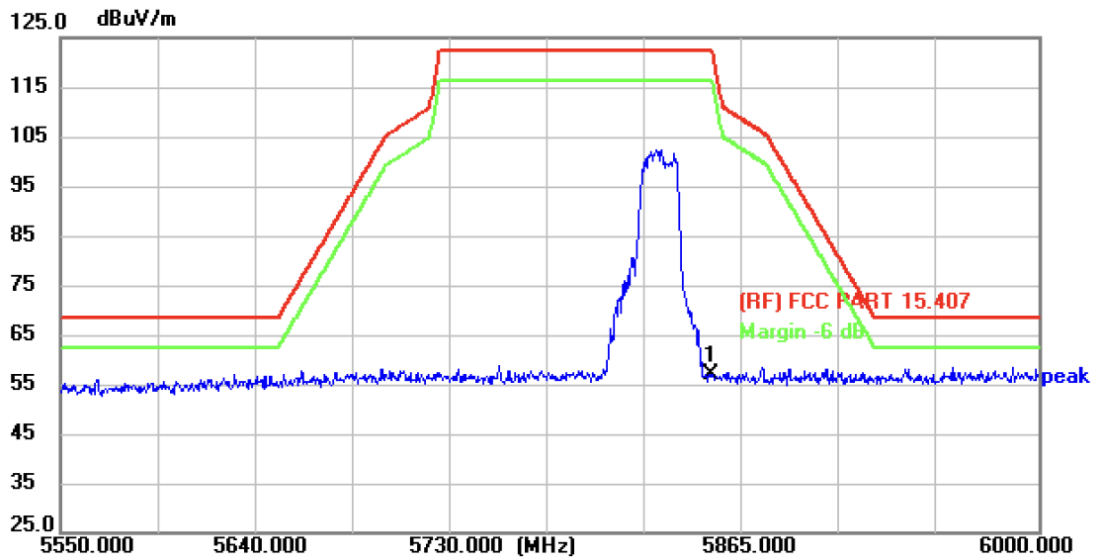


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 35.05          | 21.90         | 56.95          | 122.30         | -65.35      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                         |                    |     |
|---------------|-----------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                  | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                            |                    |     |
| Ant. Pol.     | Vertical                                |                    |     |
| Test Mode:    | TX 802.11a Mode 5825 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                         |                    |     |

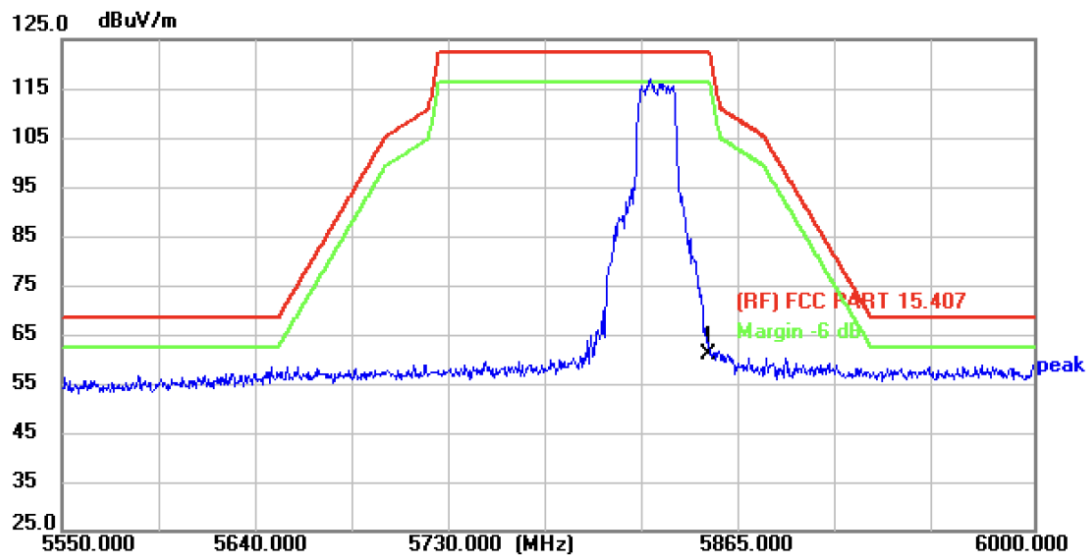


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 39.03          | 21.90         | 60.93          | 122.30         | -61.37      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                        | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                  |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                               |                    |     |

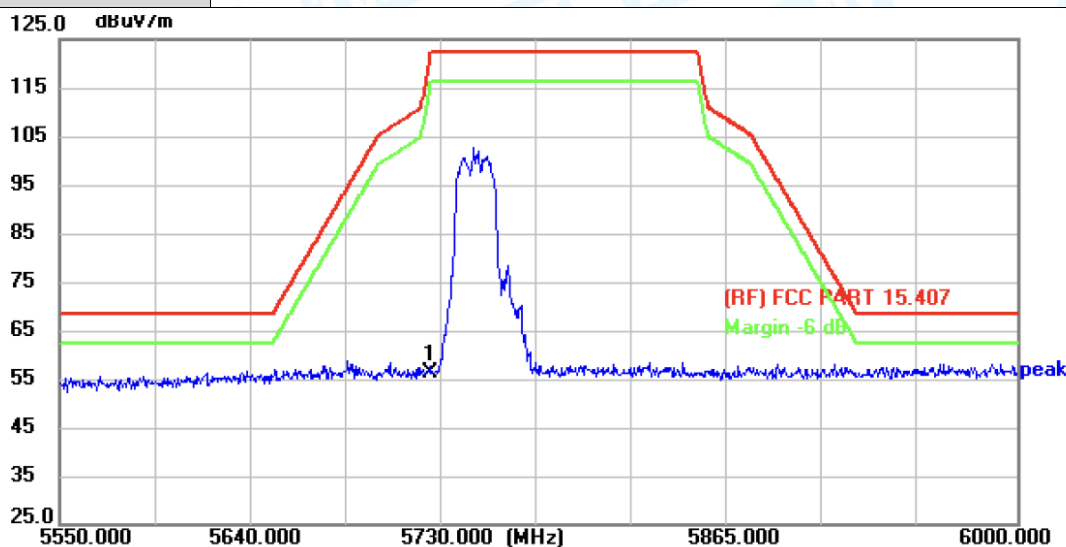


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 34.60          | 21.59         | 56.19          | 122.30         | -66.11      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                        | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                  |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                               |                    |     |

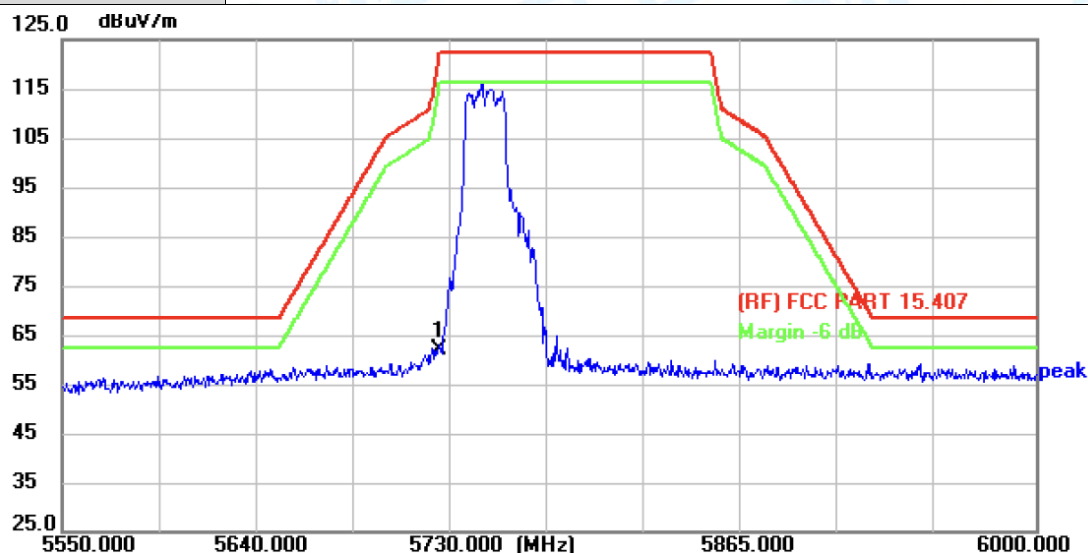


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 40.30          | 21.59         | 61.89          | 122.30         | -60.41      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                        | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                  |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                               |                    |     |

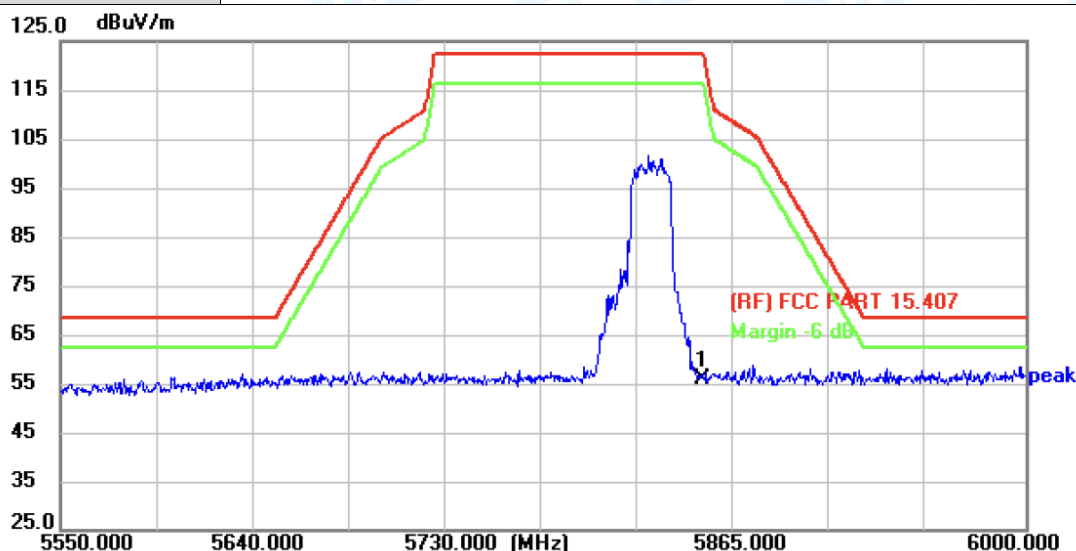


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                        | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                  |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                               |                    |     |

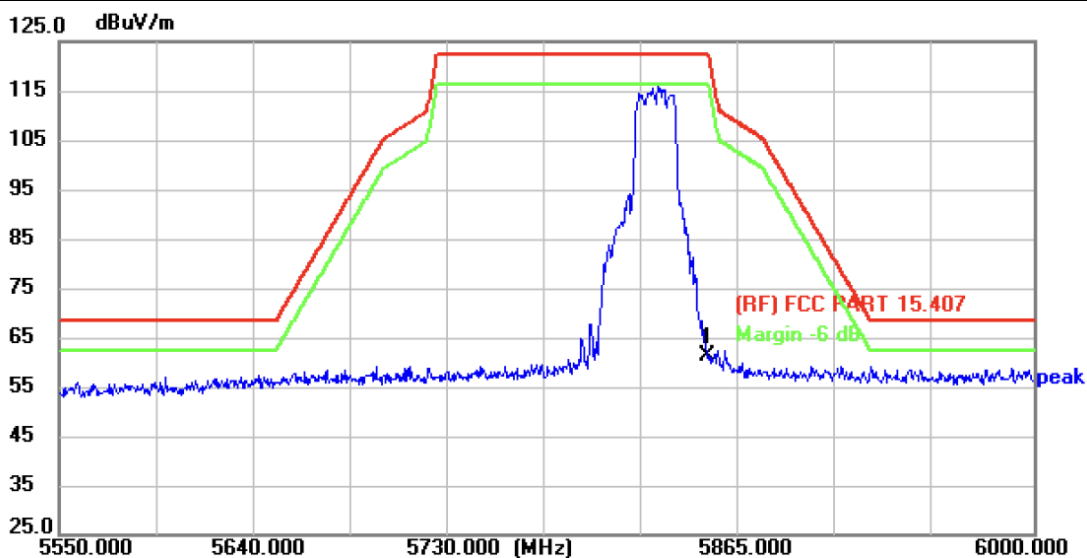


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 39.50          | 21.90         | 61.40          | 122.30         | -60.90      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Horizontal                                      |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

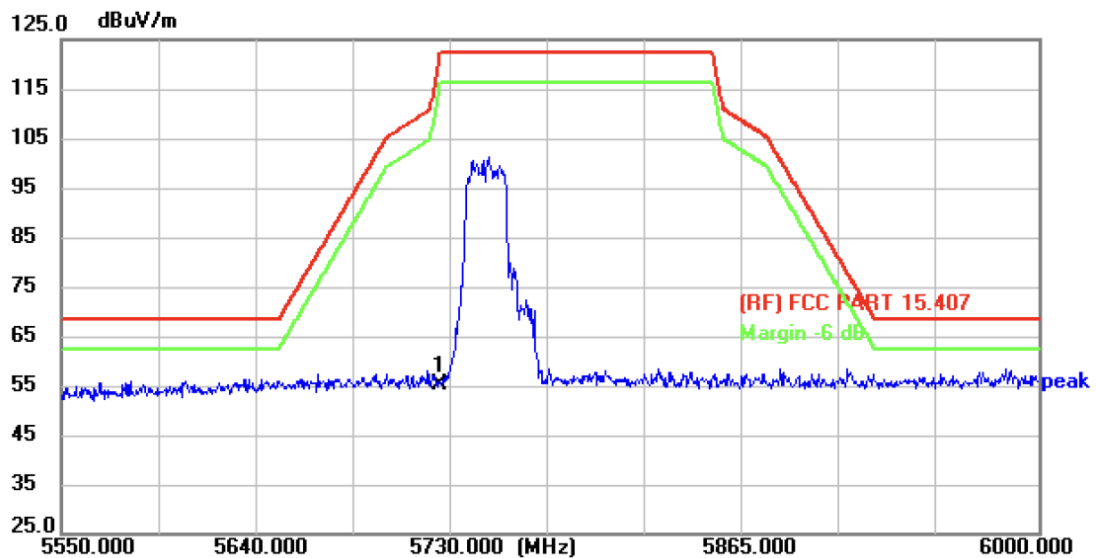


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 33.72          | 21.59         | 55.31          | 122.30         | -66.99      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Vertical                                        |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

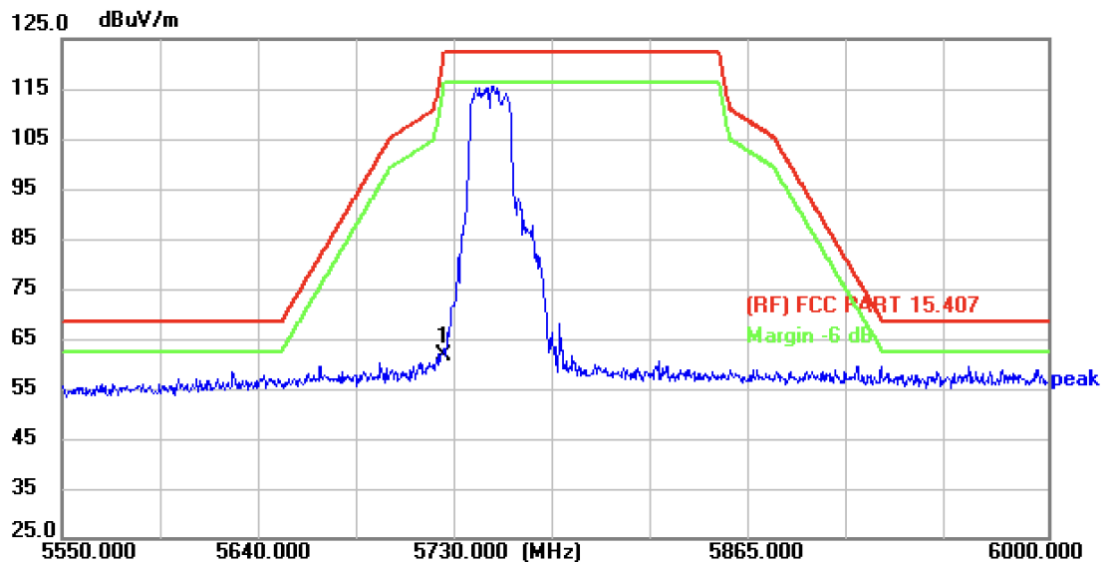


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 40.15          | 21.59         | 61.74          | 122.30         | -60.56      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Horizontal                                      |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

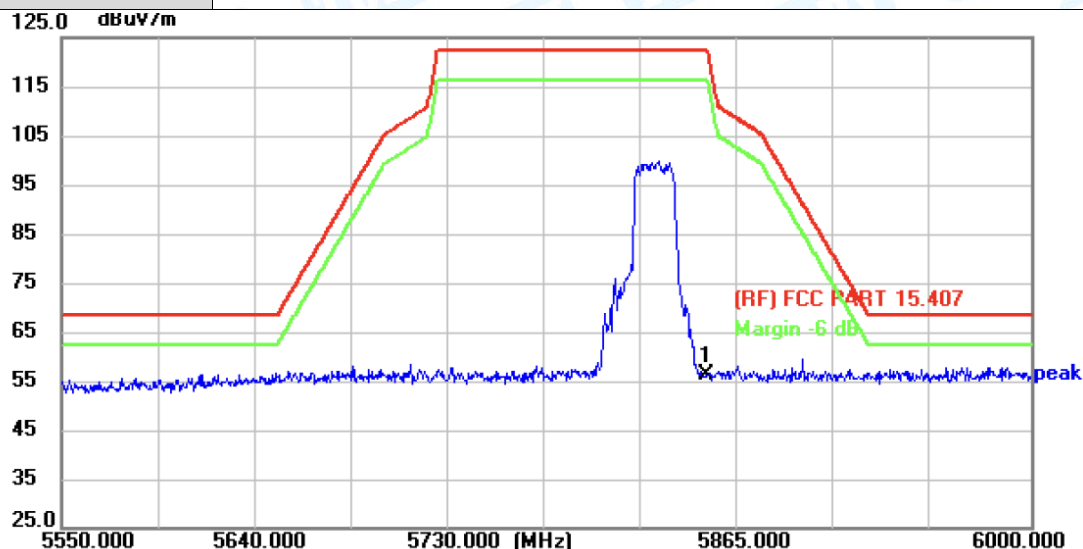


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 34.43          | 21.90         | 56.33          | 122.30         | -65.97      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Vertical                                        |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

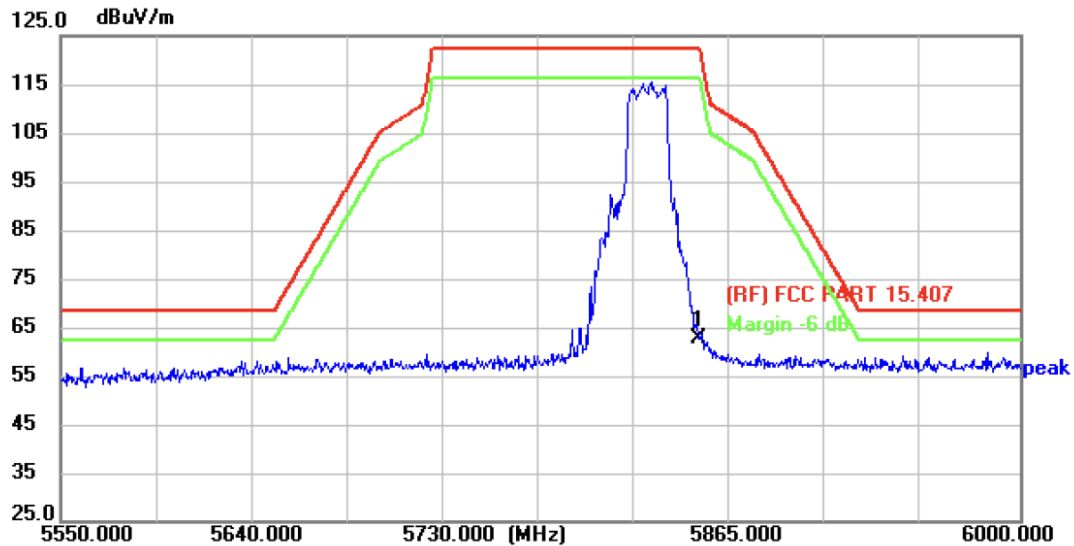


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 40.69          | 21.90         | 62.59          | 122.30         | -59.71      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                         | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Horizontal                                     |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                |                    |     |

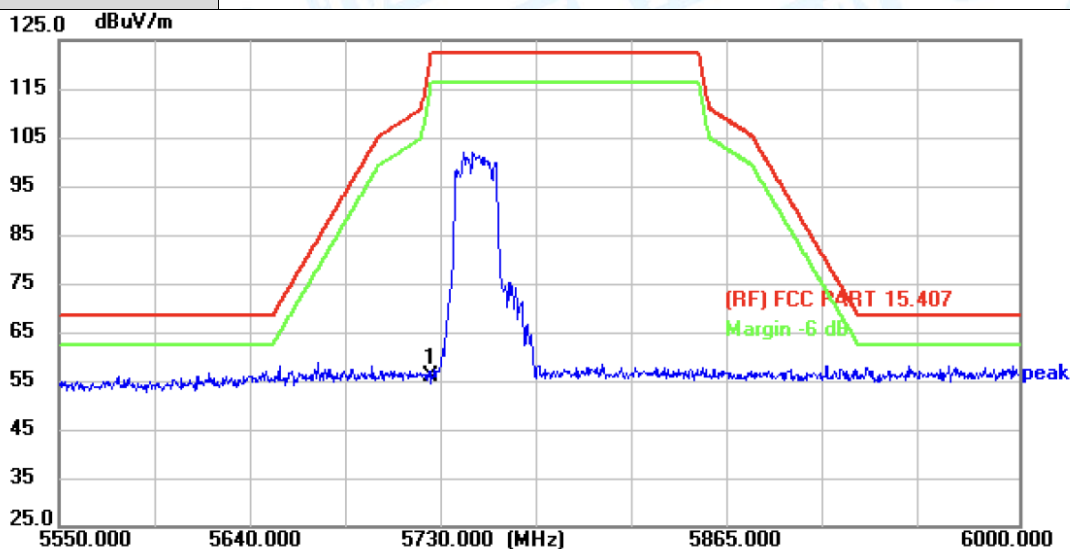


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 34.46          | 21.59         | 56.05          | 122.30         | -66.25      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                         | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                |                    |     |

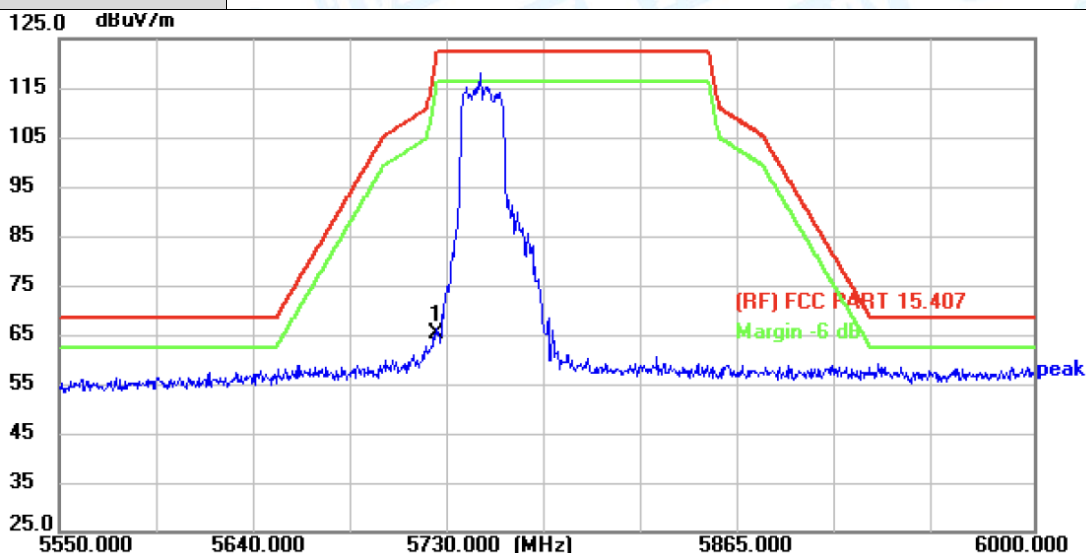


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 43.48          | 21.59         | 65.07          | 122.30         | -57.23      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                         | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Horizontal                                     |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                |                    |     |

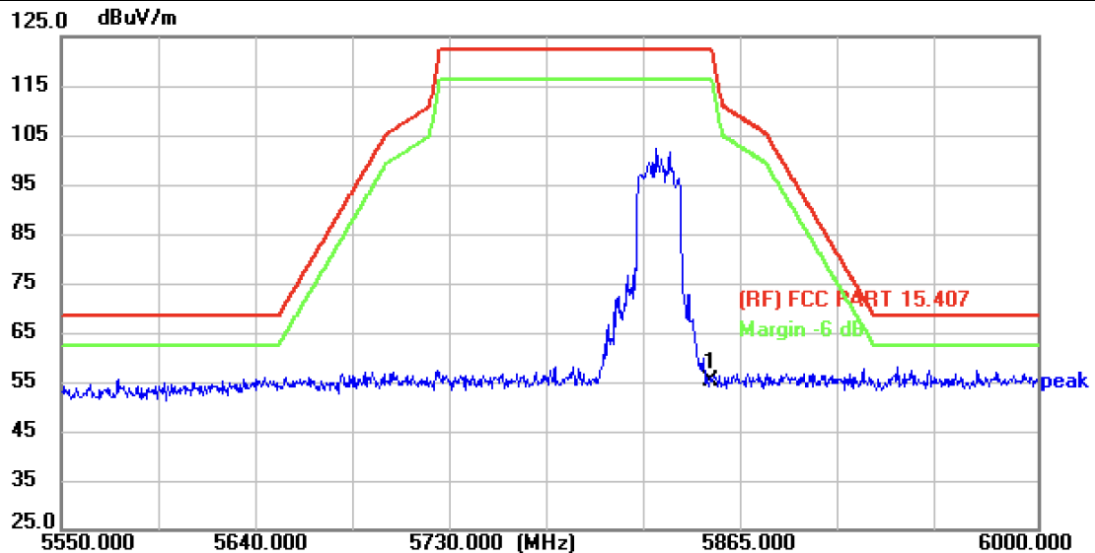


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 33.20          | 21.90         | 55.10          | 122.30         | -67.20      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                         | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                |                    |     |

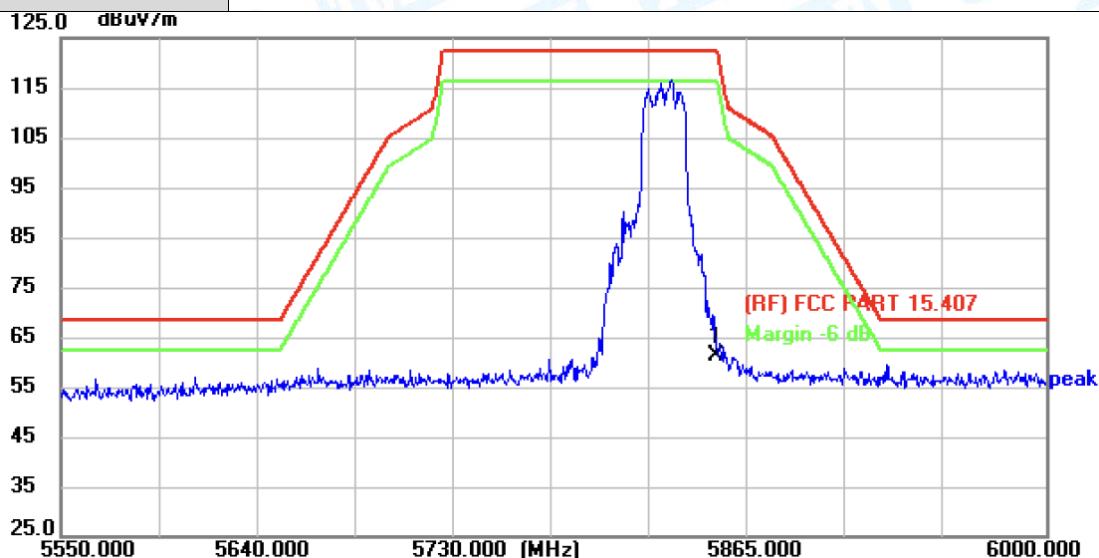


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 39.51          | 21.90         | 61.41          | 122.30         | -60.89      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV/m)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                        | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                  |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                               |                    |     |

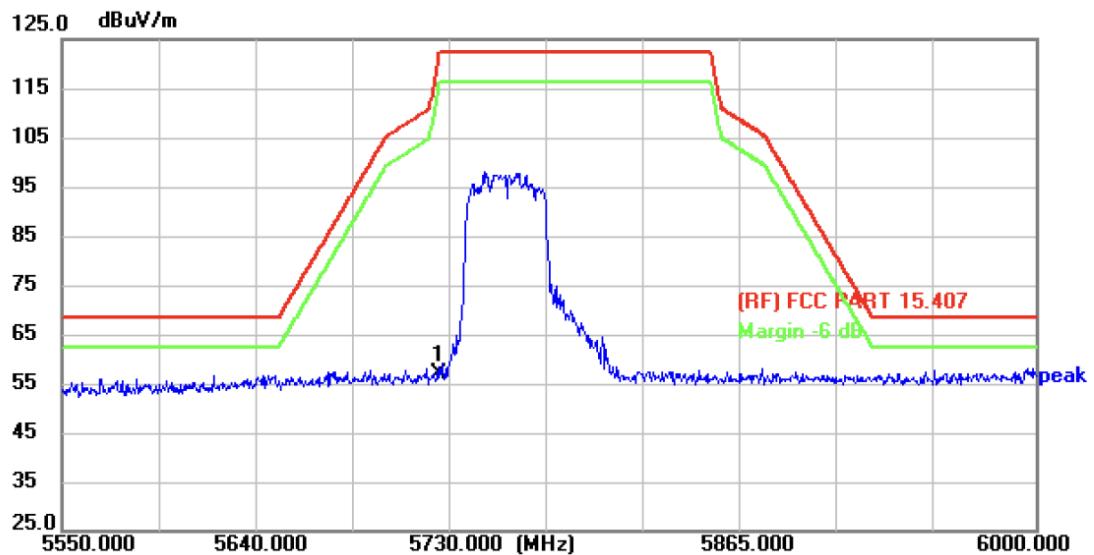


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 35.40          | 21.59         | 56.99          | 122.30         | -65.31      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                        | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                  |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                               |                    |     |

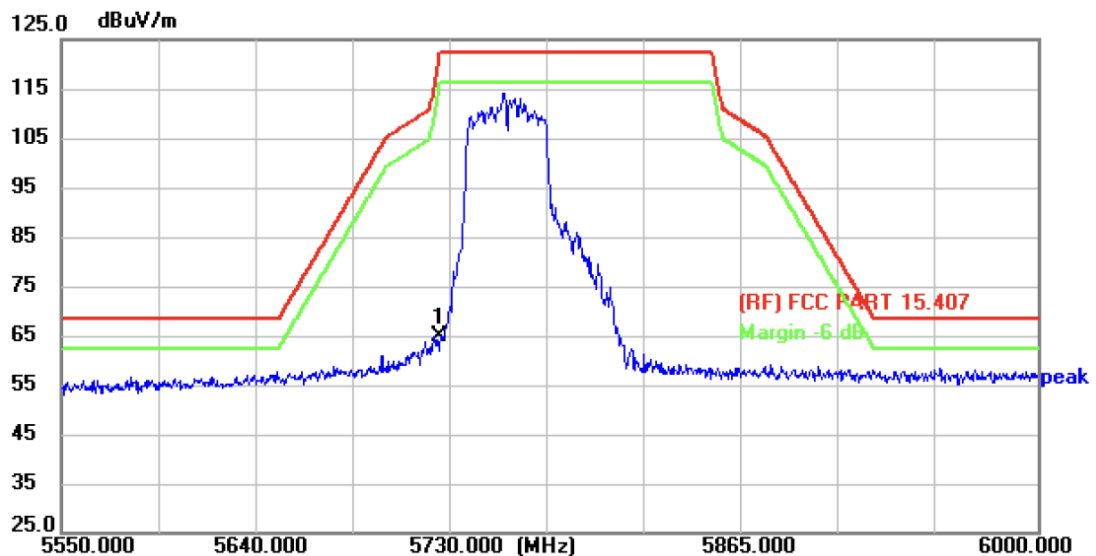


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 43.23          | 21.59         | 64.82          | 122.30         | -57.48      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                        | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                  |                    |     |
| Ant. Pol.     | Horizontal                                    |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                               |                    |     |

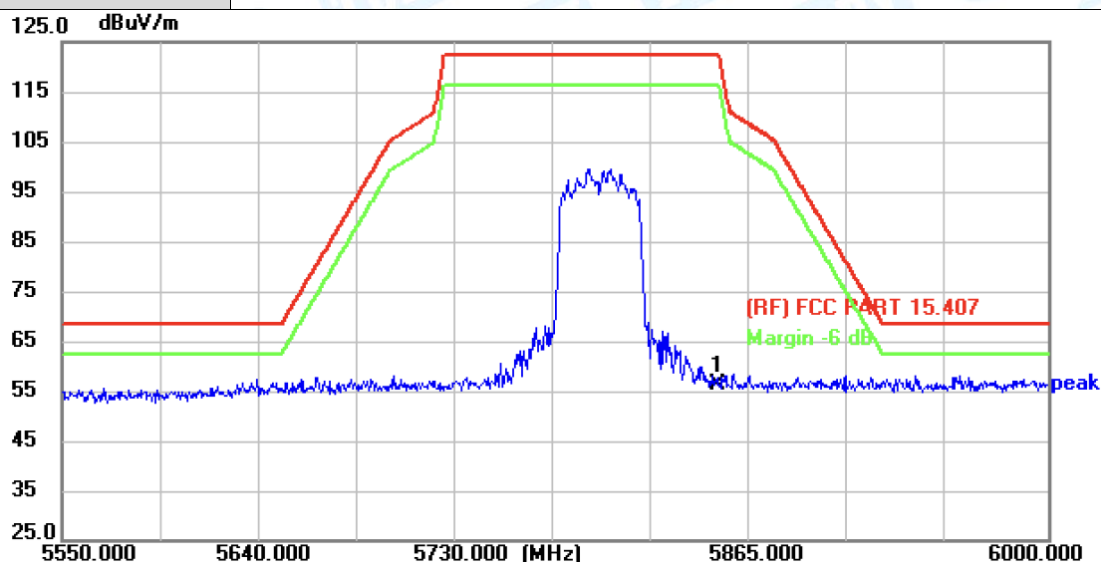


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 34.47          | 21.90         | 56.37          | 122.30         | -65.93      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                               |                    |     |
|---------------|-----------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                        | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                  |                    |     |
| Ant. Pol.     | Vertical                                      |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                               |                    |     |

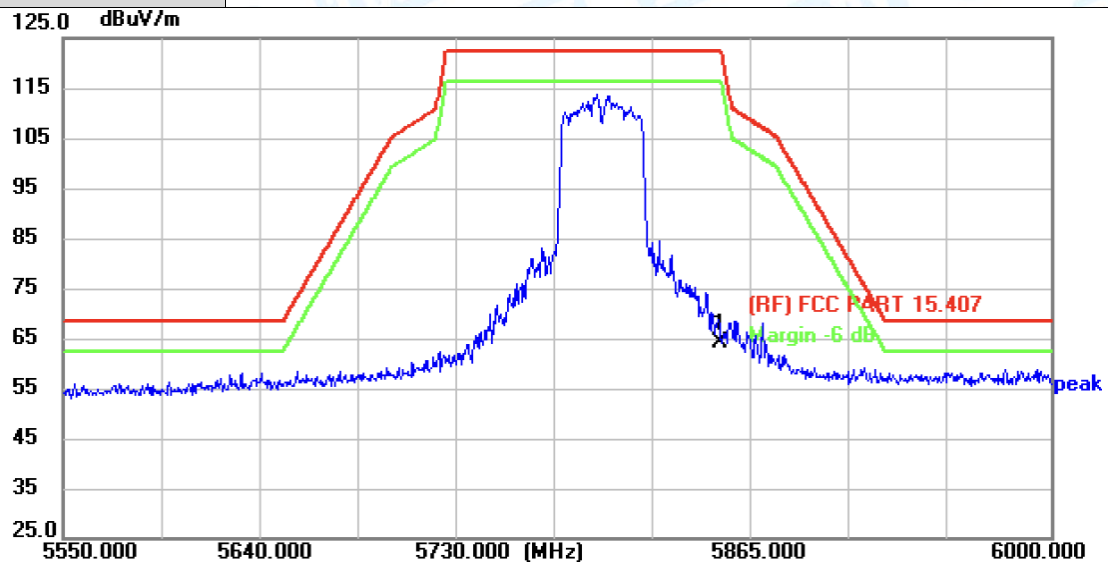


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 42.31          | 21.90         | 64.21          | 122.30         | -58.09      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Horizontal                                      |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

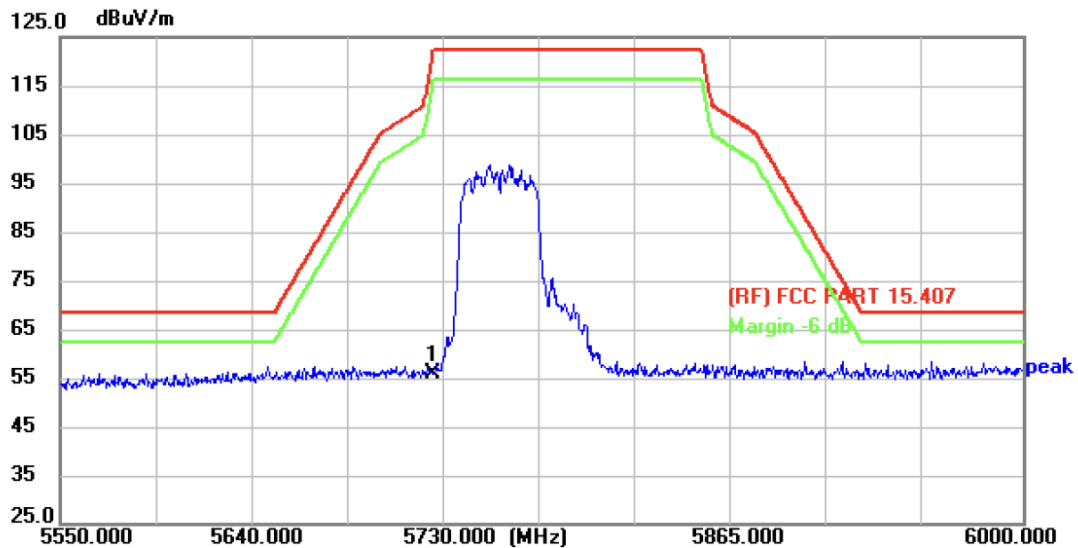


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 34.46          | 21.59         | 56.05          | 122.30         | -66.25      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Vertical                                        |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

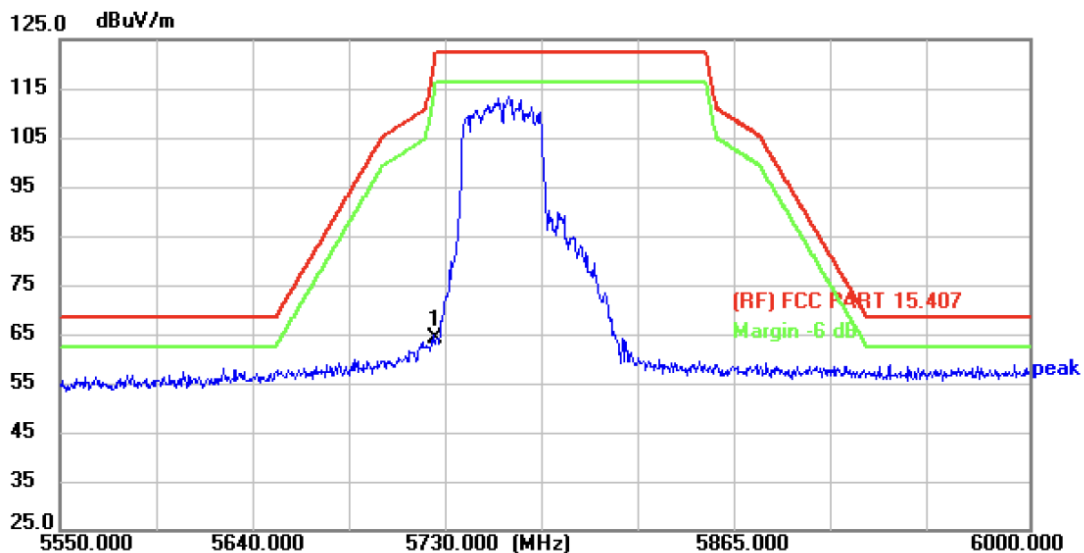


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 42.40          | 21.59         | 63.99          | 122.30         | -58.31      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Horizontal                                      |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

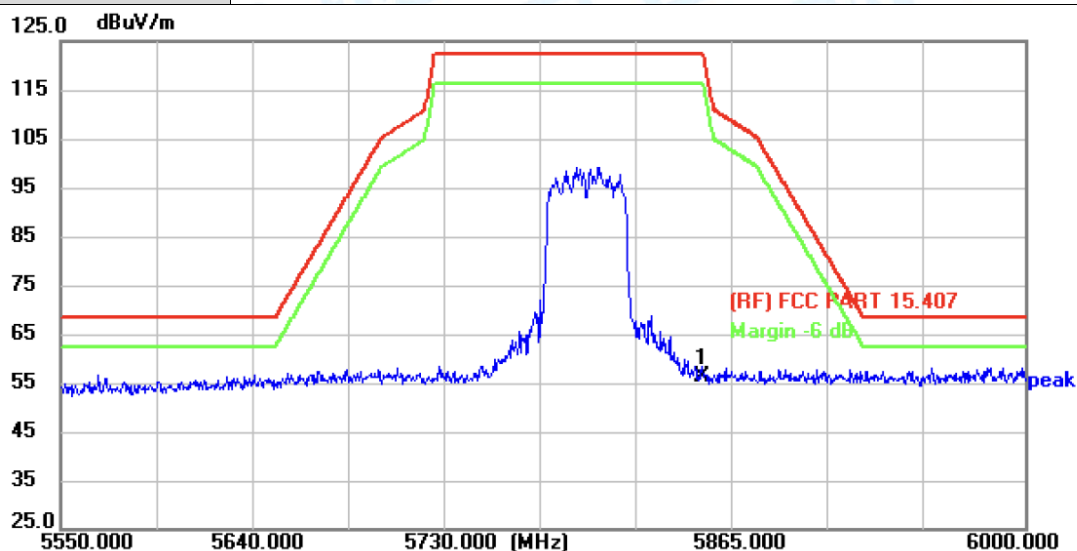


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 34.23          | 21.90         | 56.13          | 122.30         | -66.17      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Vertical                                        |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

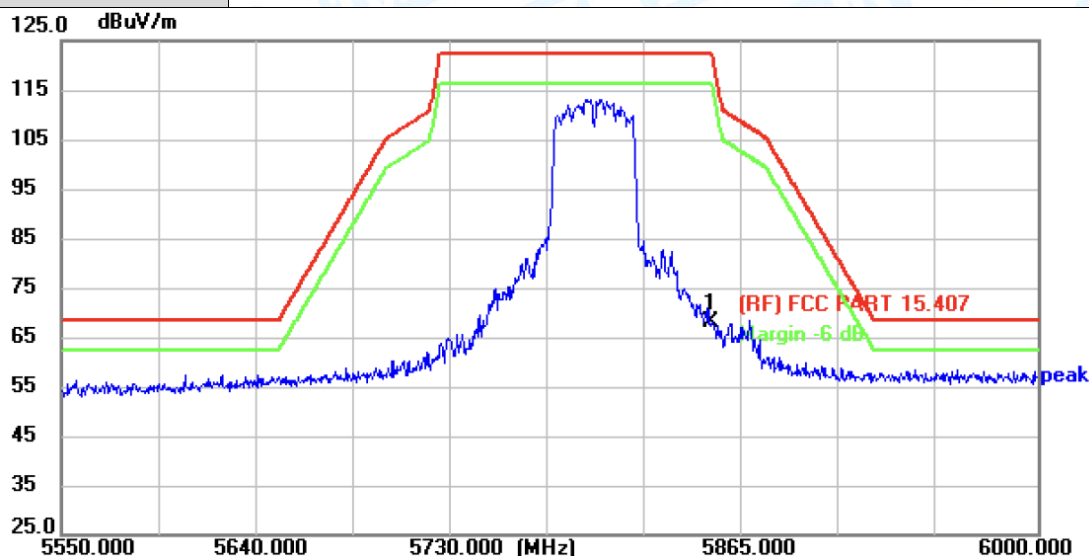


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 46.20          | 21.90         | 68.10          | 122.30         | -54.20      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                         | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Horizontal                                     |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5755 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                |                    |     |

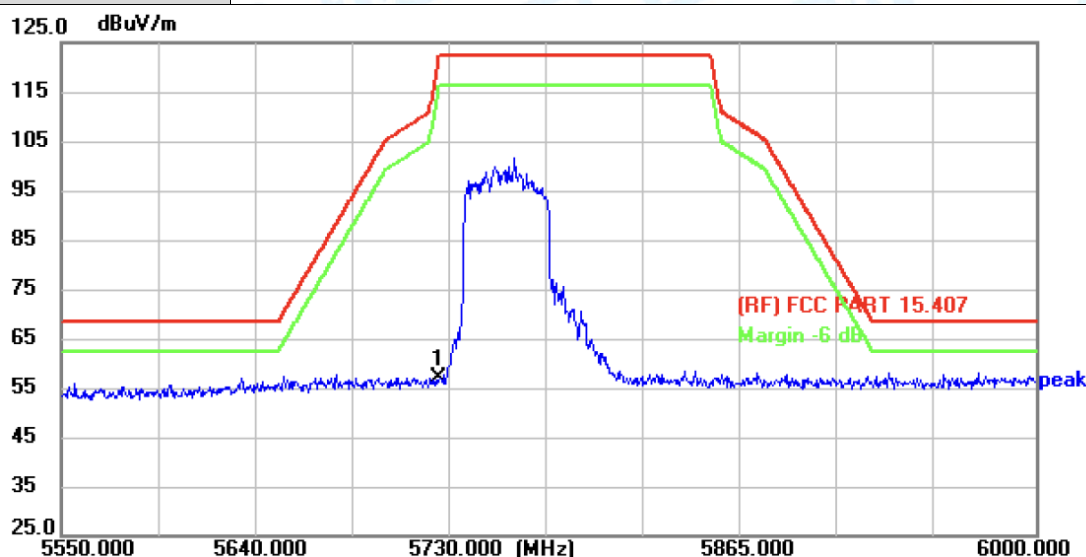


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 35.25          | 21.59         | 56.84          | 122.30         | -65.46      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                         | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5755 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                |                    |     |

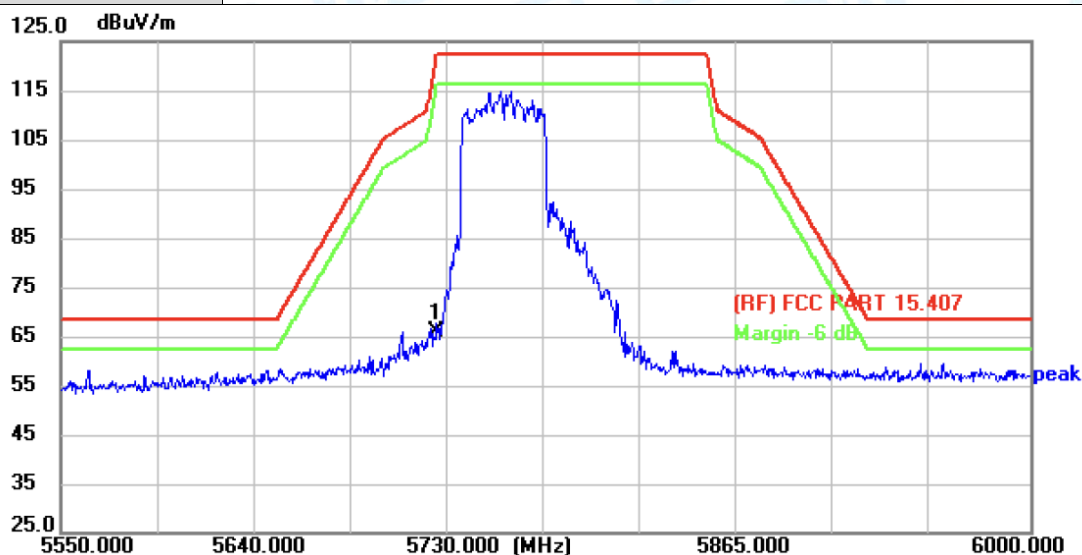


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 44.37          | 21.59         | 65.96          | 122.30         | -56.34      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                         | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Horizontal                                     |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5795 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                |                    |     |

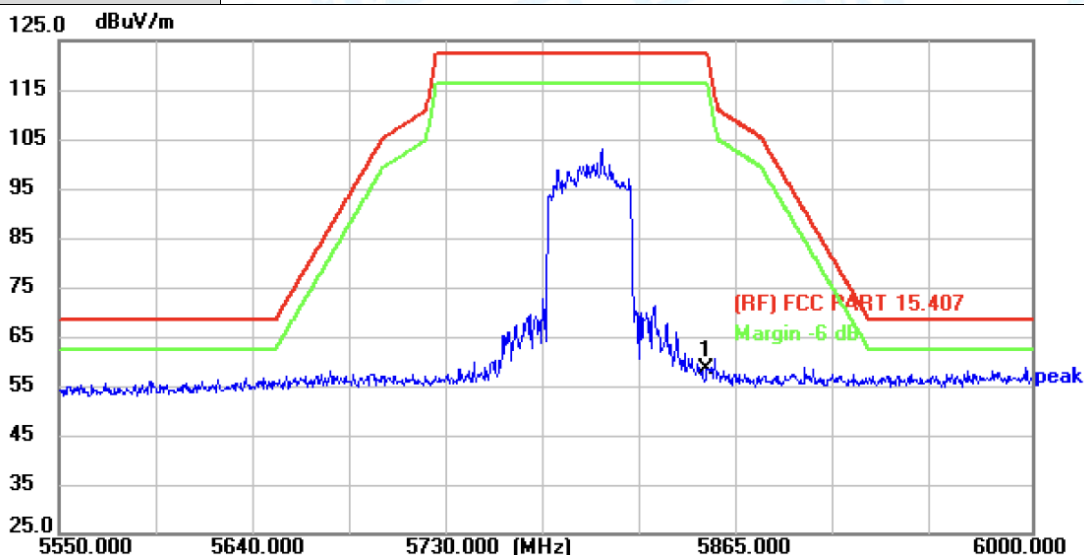


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 36.34          | 21.90         | 58.24          | 122.30         | -64.06      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                         | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5795 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                |                    |     |

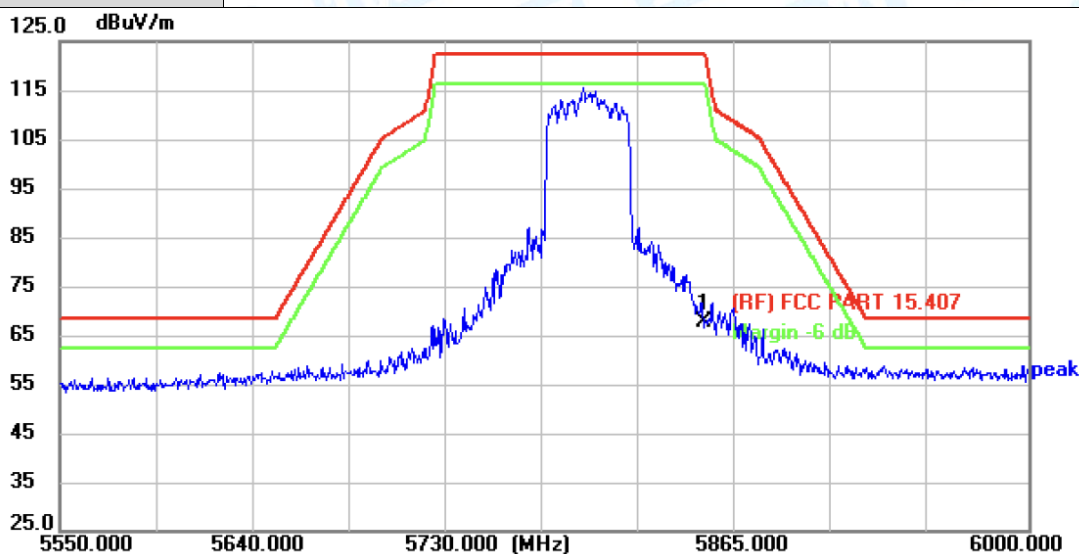


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 45.76          | 21.90         | 67.66          | 122.30         | -54.64      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Horizontal                                      |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

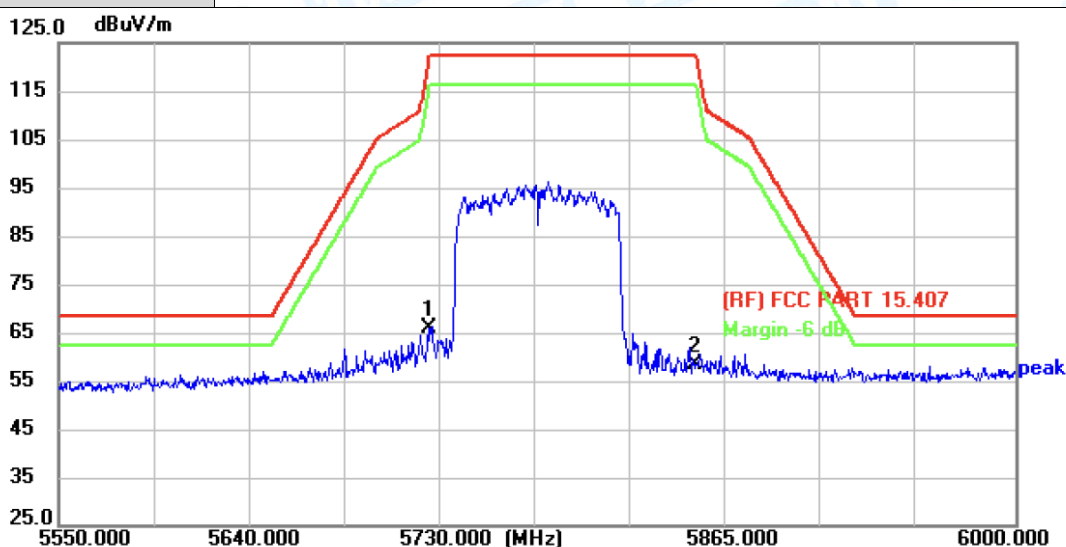


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 44.46          | 21.59         | 66.05          | 122.30         | -56.25      | peak     | P   |
| 2   | 5850.000        | 36.57          | 21.90         | 58.47          | 122.30         | -63.83      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                 |                    |     |
|---------------|-------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                          | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                    |                    |     |
| Ant. Pol.     | Vertical                                        |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                 |                    |     |

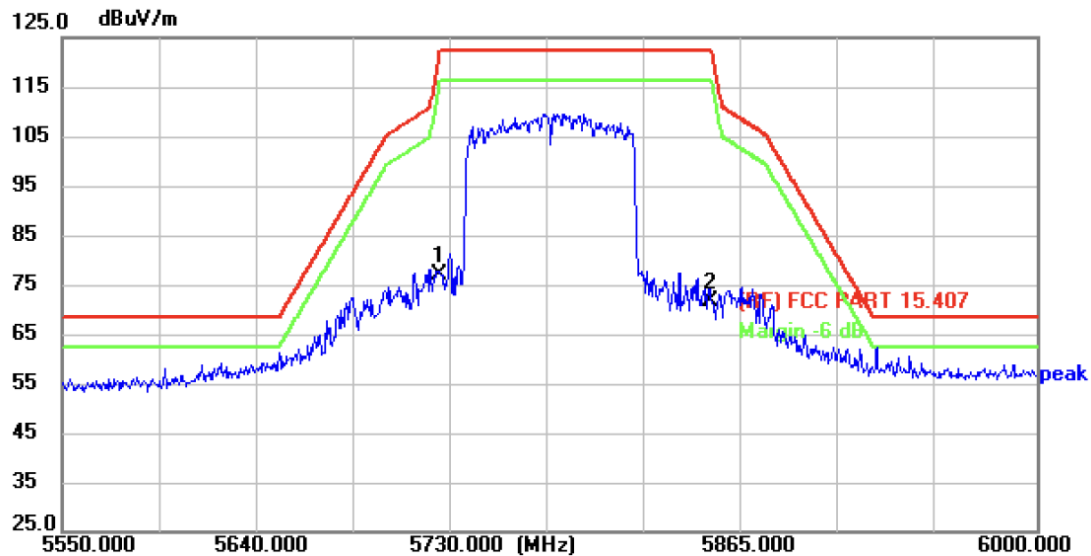


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 55.49          | 21.59         | 77.08          | 122.30         | -45.22      | peak     | P   |
| 2   | 5850.000        | 49.88          | 21.90         | 71.78          | 122.30         | -50.52      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                         | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Horizontal                                     |                    |     |
| Test Mode:    | TX 802.11ax(HE80) Mode 5775 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                |                    |     |

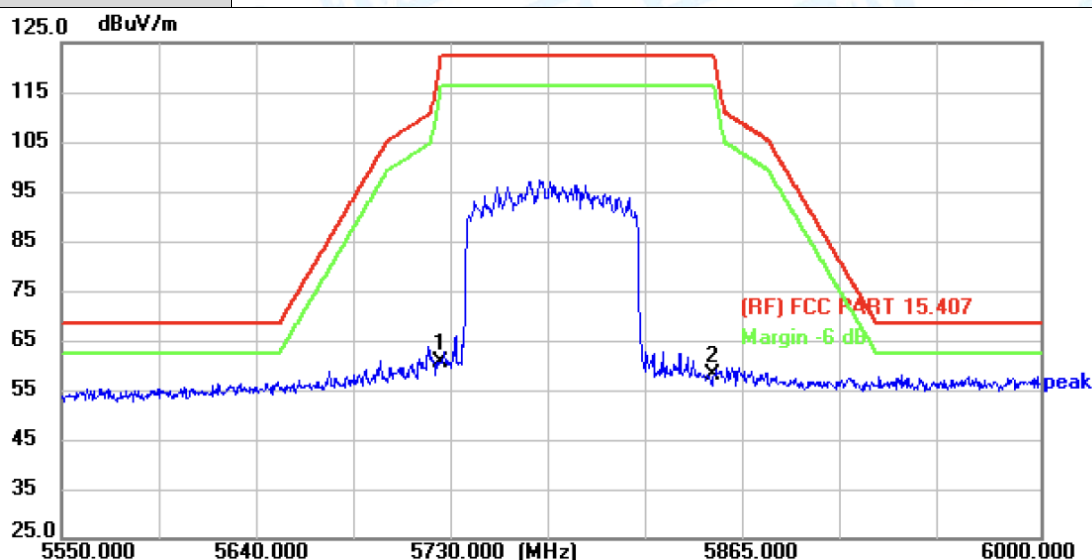


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 38.97          | 21.59         | 60.56          | 122.30         | -61.74      | peak     | P   |
| 2   | 5850.000        | 36.16          | 21.90         | 58.06          | 122.30         | -64.24      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                                |                    |     |
|---------------|------------------------------------------------|--------------------|-----|
| Temperature:  | 24.3°C                                         | Relative Humidity: | 47% |
| Test Voltage: | AC 120V/60Hz                                   |                    |     |
| Ant. Pol.     | Vertical                                       |                    |     |
| Test Mode:    | TX 802.11ax(HE80) Mode 5775 MHz (U-NII-3) -CDD |                    |     |
| Remark:       |                                                |                    |     |

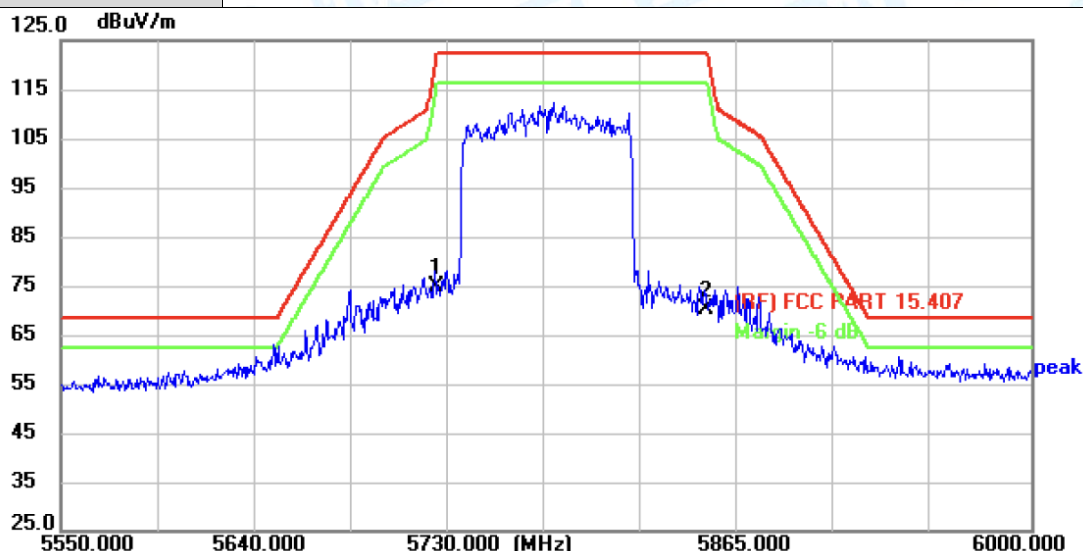

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 53.27          | 21.59         | 74.86          | 122.30         | -47.44      | peak     | P   |
| 2   | 5850.000        | 48.11          | 21.90         | 70.01          | 122.30         | -52.29      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

-----END OF REPORT-----

