

# MPE REPORT

3-in-1 Foldabe Wireless Charging Desktop Stand

Model No.: 2E553

FCC ID: 2AW73-2E553

Report No.: NCT24008092-2

Issue Date: 2024-02-26

*Prepared for*

Shenzhen Xiangdangwen Technology Co., Ltd.

106, 1/F, No.313-4 Building, Huachang Road, Langkou Community, Dalang Street,  
Longhua District, Shenzhen, China

*Prepared by*

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,  
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

**TABLE OF CONTENT**

Test Report Description	Page
<b>1. SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. DESCRIPTION OF DEVICE (EUT).....	5
2.2. DESCRIPTION OF SUPPORT UNITS.....	5
2.3. TEST SETUP.....	6
2.4. DESCRIPTION OF TEST FACILITY .....	6
2.5. MEASUREMENT UNCERTAINTY .....	7
<b>3. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>8</b>
3.1. FOR MPE MEASUREMENT .....	8
<b>4. RF EXPOSURE .....</b>	<b>9</b>
4.1. MEASURING STANDARD.....	9
4.2. REQUIMENTS .....	9
4.3. TEST CONFIGURATION .....	10
4.4. LIMITS .....	11
4.5. MEASURING RESULTS .....	13
<b>5. Test PHOTOGRAPHS and eut PHOTOGRAPHS.....</b>	<b>16</b>

**TEST REPORT DESCRIPTION**

Applicant : Shenzhen Xiangdangwen Technology Co., Ltd.  
Address : 106, 1/F, No.313-4 Building, Huachang Road, Langkou Community, Dalang Street, Longhua District, Shenzhen, China  
Manufacturer : Huizhou Yimai Electronics Technology Co., Ltd.  
Address : 3rd Floor, Building B, Huakai High-tech Industrial Park, Electronic City Road, Longxi Street, Boluo Country  
EUT : 3-in-1 Foldabe Wireless Charging Desktop Stand  
Model Name : 2E553  
Trademark : INVERSUM

**Measurement Procedure Used:**

FCC Part 1(1.1310) and Part 2(2.1091)  
KDB 680106 D01 Wireless Power Transfer v04

The device described above is tested by Shenzhen NCT Testing Technology Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen NCT Testing Technology Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen NCT Testing Technology Co., Ltd.

Test Engineer:



Keven Wu / Engineer

Technical Manager:



Henry Wang / Manager



**1. SUMMARY OF TEST RESULT**

<b>EMISSION</b>		
Description of Test Item	Standard & Limits	Results
MPE	FCC Part 1(1.1310) and Part 2(2.1091) KDB 680106 D01 Wireless Power Transfer v04	Pass
Note: N/A is an abbreviation for Not Applicable.		

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT	:	3-in-1 Foldabe Wireless Charging Desktop Stand
Model Number	:	2E553
Serial Number	:	N/A
Mode difference	:	N/A
Power Rating	:	Input:DC5V/3A,9V/3A.12V/3A WirelessOutput:Phone:5W/7.5W/10W/15W,Watch:2.5W,Earphone:3W
Operation Frequency for WPT	:	Coil 1 (Phone): 115-205kHz Coil 2 (Earphone): 115-205kHz Coil 3 (Watch): 300-350kHz
Modulation	:	ASK
Antenna Type:	:	Coil Antenna
Date of Received	:	2023-12-22
Date of Test	:	2023-12-22 to 2024-01-08


### 2.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	HUAWEI QUICK CHARGE	HUAWEI	HW-200200ZP1	JN67LSN7N03451	Auxiliary
E-2	Smartphone	OPPO	Find X3	N/A	Auxiliary
E-3	Earphone	Xiaomi	N/A	N/A	Auxiliary
E-4	iWatch	Apple	S3	N/A	Auxiliary

Note: (1)The support equipment was authorized by Declaration of Confirmation.  
(2)For detachable type I/O cable should be specified the length in cm in 「Length」 column.

### 2.3. Test Setup

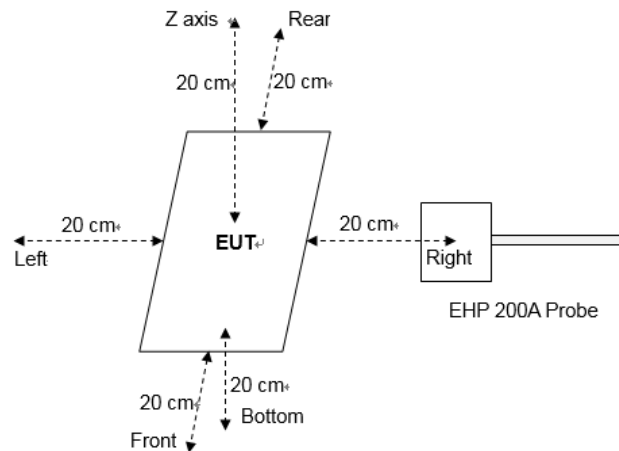

### 2.4. Description of Test Facility

#### Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27  
The certificate is valid until 2028.01.07  
The Laboratory has been assessed and proved to be in compliance with  
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)  
The Certificate Registration Number is L8251

Designation Number: CN1347  
Test Firm Registration Number: 894804  
Accredited by A2LA, June 14, 2023  
The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018  
The Conformity Assessment Body Identifier is CN0150  
Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.  
Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

## 2.5. Measurement Uncertainty

Parameter	Uncertainty
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
Magnetic field measurement (9kHz~30MHz)	$\pm 18.6\%$
Electric field measurements (9kHz~30MHz)	$\pm 18.6\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. For MPE Measurement

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input checked="" type="checkbox"/>	Exposure Level Tester(1Hz-400KHz)	Narda	EHP-200A	180ZX00634	2023.06.21	2024.06.20



## 4. RF EXPOSURE

### 4.1. Measuring Standard

FCC Part 1(1.1310) and Part 2(2.1091)

### 4.2. Requirments

Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

- o Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- o Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- o Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093). The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows:
  - Occupational/Controlled Exposure: In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.
  - General Population/Uncontrolled Exposure: The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

### 4.3. Test configuration

1. The RF exposure test was performed in anechoic chamber.
2. E and H-field measurements should be made with these devices considered to meet the § 2.1091-Mobile conditions (“generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and [the nearest person]”).
3. The highest emission level was recorded and compared with limit.
4. The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

#### 4.4.Limits

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

**Test Mode:**

No.	Emission test modes
Mode1	Wireless output(5W)+Earphone(3W)+Watch(2.5W)
Mode2	Wireless output(7.5W)+Earphone(3W)+Watch(2.5W)
Mode3	Wireless output(10W)+Earphone(3W)+Watch(2.5W)
Mode4	Wireless output(15W)+Earphone(3W)+Watch(2.5W)
Mode5	Wireless output(5W)+Earphone(3W)
Mode6	Wireless output(7.5W)+Earphone(3W)
Mode7	Wireless output(10W)+Earphone(3W)
Mode8	Wireless output(15W)+Earphone(3W)
Mode9	Wireless output(5W)+Watch(2.5W)
Mode10	Wireless output(7.5W)+Watch(2.5W)
Mode11	Wireless output(10W)+Watch(2.5W)
Mode12	Wireless output(15W)+Watch(2.5W)
Mode13	Earphone(3W)+Watch(2.5W)
Mode14	Wireless output(5W)
Mode15	Wireless output(7.5W)
Mode16	Wireless output(10W)
Mode17	Wireless output(15W)
Mode18	Watch(2.5W)
Mode19	Earphone(3W)
Mode20	stand by

### 4.5. Measuring Results

**Test condition 1: Mode 4 operating mode with client device (1 % battery status of client device)**

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.3075	614	0.21%	0.0851	1.63	5.32%
Left	0.6376			0.0553		
Right	1.1217			0.0604		
Front	0.900			0.0867		
Rear	0.5070			0.0488		
Bottom	0.8902			0.0764		

**Test condition 2: Mode 4 operating mode with client device (50 % battery status of client device)**

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	1.2893	614	0.21%	0.0843	1.63	5.17%
Left	0.6299			0.047		
Right	1.1025			0.0528		
Front	0.8894			0.0794		
Rear	0.4891			0.0406		
Bottom	0.8865			0.0732		

**Test condition 3: Mode 4 operating mode with client device (99 % battery status of client device)**

Probe Position	E -field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	1.2934	614	0.21%	0.0813	1.63	5.00%
Left	0.632			0.0502		
Right	1.1128			0.0566		
Front	0.8983			0.0815		
Rear	0.4989			0.0413		
bottom	0.8803			0.0691		

Remark: The device meets the mobile RF exposure limit at a 20cm separation distance as specified in §2.1091 of the FCC Rules. The maximum leakage fields at 20 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30% of the MPE limit.

**Equipment Approval Considerations**

Requirement	Device
1. Per section 3.2 of KDB 680106 D01 Wireless Power Transfer v04.	Yes. The operating frequencies is: Coil 1 (Phone): 115-205kHz Coil 2 (Earphone): 115-205kHz Coil 3 (Watch): 300-350kHz
2. Per section 3.1 of KDB 680106 D01 Wireless Power Transfer v04	Yes. The device is a typical desktop device, the device meets the §2.1091-Mobile conditions, the client device is placed directly in contact with the transmitter.

## 5. TEST PHOTOGRAPHS AND EUT PHOTOGRAPHS

Please the attachment for details.

-----The end-----