

# RF Exposure Evaluation

## Client Information:

Applicant: Shenzhen Xiangdangwen Technology Co.,Ltd  
Applicant add.: 106, 1/F, No.313-4 Building, Huachang Road, Langkou Community, Dalang Street, Longhua District Shenzhen,China  
Manufacturer: Huizhou Yimai Electronics Technology Co., Ltd.  
Manufacturer add.: 3rd Floor, Building B, Huakai High-tech Industrial Park, Electronic City Road, Longxi Street, Boluo Country

## Product Information:

Product Name: MAGNETIC WIRELESS CHARGER

Model No.: LISEN, AINOPE, VEICO

Brand Name: 2E7132

Test samples.: AiTSZ-240726002-1

FCC ID: 2AW73-2E7132

Applicable standards: FCC CFR 47 PART 1, § 1.1310  
KDB 680106 D01 Wireless Power Transfer v04

## Prepared By:

### Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

Date of Receipt: July 26, 2024

Date of Test: July 26, 2024 ~ July 30, 2024

Date of Issue: July 30, 2024

Test Result: Pass

This device described above has been tested by Guangdong Asia Hongke Test Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited, this document may be altered or revised by Guangdong Asia Hongke Test Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Leon Yi

Reviewed by: \_\_\_\_\_

Leon.yi

Sean She

Approved by: \_\_\_\_\_

Sean She



# 1 CONTENTS

| COVER PAGE                                 | Page |
|--------------------------------------------|------|
| 1 CONTENTS                                 | 2    |
| 2 TEST FACILITY                            | 4    |
| 2.1 Deviation from standard                | 4    |
| 2.2 Abnormalities from standard conditions | 4    |
| 2.3 Test Location                          | 4    |
| 3 GENERAL INFORMATION                      | 5    |
| 4 TEST METHODOLOGY                         | 6    |
| 4.1 Measuring Standard                     | 6    |
| 4.2 Requirements                           | 6    |
| 4.3 Limits                                 | 6    |
| 4.4 Test Setup                             | 7    |
| 4.5 Test Procedure                         | 7    |
| 5 Equipment Approval Considerations        | 8    |
| 5.1 Description of the test mode           | 9    |
| 5.2 Peripheral List                        | 9    |
| 5.3 Test Instruments list                  | 9    |
| 5.4 Duty Cycle                             | 10   |
| 5.5 Test Result                            | 11   |
| 1.1 Test Setup photo                       | 12   |



**Revision History**

| Revision | Issue Date    | Revisions     | Revised By |
|----------|---------------|---------------|------------|
| 00       | July 30, 2024 | Initial Issue | Sean She   |
|          |               |               |            |
|          |               |               |            |

## 2 TEST FACILITY

**The test facility is recognized, certified or accredited by the following organizations:**

**FCC-Registration No.: 251906 Designation Number: CN1376**

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

**IC —Registration No.: 31737 CAB identifier: CN0165**

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

**A2LA-Lab Cert. No.: 7133.01**

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 2.1 Deviation from standard

None

### 2.2 Abnormalities from standard conditions

None

### 2.3 Test Location

**Guangdong Asia Hongke Test Technology Limited**

Address: B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

### 3 GENERAL INFORMATION

|                        |                                                                                                                                                                              |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT Name:              | MAGNETIC WIRELESS CHARGER                                                                                                                                                    |
| Model No:              | 2E7132                                                                                                                                                                       |
| Serial Model:          | N/A                                                                                                                                                                          |
| Test sample(s) ID:     | AiTSZ-240726002-1                                                                                                                                                            |
| Sample(s) Status:      | Engineer sample                                                                                                                                                              |
| Operation frequency:   | 113kHz-205kHz                                                                                                                                                                |
| Modulation Technology: | ASK                                                                                                                                                                          |
| Antenna Type:          | Loop coil Antenna                                                                                                                                                            |
| Antenna gain:          | 0dBi                                                                                                                                                                         |
| Hardware version.:     | N/A                                                                                                                                                                          |
| Software version.:     | N/A                                                                                                                                                                          |
| Power supply:          | Input :<br>Type-C Port: 5V=3A 9V=2A 12V=1.5A Up to 18W<br>Output :<br>USB-C Port: 5V=3A 9V=2.22A 12V=1.67A Up to 20W<br>Wireless charging for mobile phones: 5W/7.5W/10W/15W |
| Model different:       | N/A                                                                                                                                                                          |
| Note:                  | For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.                                                            |

## 4 TEST METHODOLOGY

### 4.1 Measuring Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB680106 D01: KDB 680106 D01 Wireless Power Transfer v04.

### 4.2 Requirements

According to the item 3 of KDB 680106 D01v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- (1) Mobile Device and Portable Device Configurations
- (2) Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz
- (3) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the top surface.

### 4.3 Limits


The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

| Frequency range (MHz)                                          | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|----------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(A) Limits for Occupational/Controlled Exposures</b>        |                               |                               |                                     |                          |
| 0.3-3.0                                                        | 614                           | 1.63                          | *(100)                              | 6                        |
| 3.0-30                                                         | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | 6                        |
| 30-300                                                         | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300-1500                                                       | /                             | /                             | f/300                               | 6                        |
| 1500-100,000                                                   | /                             | /                             | 5                                   | 6                        |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34                                                       | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34-30                                                        | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30-300                                                         | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1500                                                       | /                             | /                             | f/1500                              | 30                       |
| 1500-100,000                                                   | /                             | /                             | 1.0                                 | 30                       |

F=frequency in MHz  
 \*=Plane-wave equivalent power density  
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

#### 4.4 Test Setup

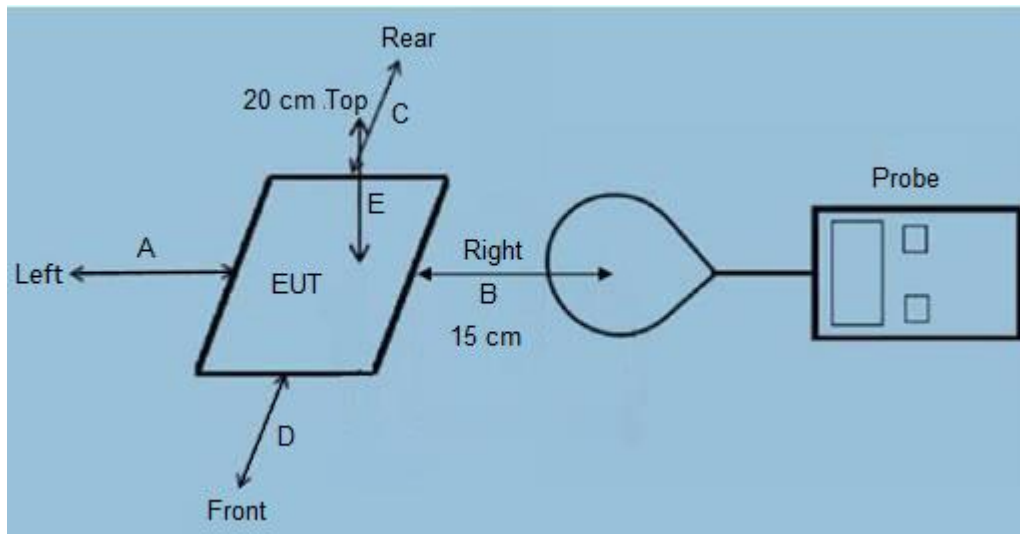

#### 4.5 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
  - 2) The measurement probe was placed at test distance (15 cm from all sides and 20 cm from the top) which is between the edge of the charger and the geometric center of probe.
  - 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
  - 4) The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.
- Remark: The EUT's test position A, B, C, D, E and F is valid for the E and H field measurements.

## 5 Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 as follow table.

| Requirements of section 5 of KDB 680106 D01                                                                                                                                          | Yes / No | Description                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------------------------------------------------------------------------------|
| Mobile Device and Portable Device Configurations                                                                                                                                     | Yes      | Mobile Device                                                                              |
| Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz                                                                                                  | Yes      | The device operate in the frequency range 113kHz-205kHz                                    |
| RF Exposure compliance may be ensured only for a minimum separation distance that is greater than 20 cm, while use conditions at smaller distances can still be considered unlikely. | Yes      | The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface. |

### 5.1 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

| Test Mode                                                                                    | Description                |            |
|----------------------------------------------------------------------------------------------|----------------------------|------------|
| Mode 1                                                                                       | AC Adapter + EUT + Phone   | Record     |
| Mode 2                                                                                       | Test the EUT in idle mode. | Pre-tested |
| Note: 1. All test modes were pre-tested, but we only recorded the worst case in this report. |                            |            |

### 5.2 Peripheral List


| No. | Equipment | Manufacturer | Model No. | Serial No. | Power cord | signal cable |
|-----|-----------|--------------|-----------|------------|------------|--------------|
| 1   | phone     | OSCAL        | PILOT2    | N/A        | N/A        | N/A          |
| 2   | Adapter   | HNT          | HNT-QC530 | N/A        | N/A        | N/A          |

### 5.3 Test Instruments list

| Test Equipment                               | Manufacturer | Model No.                           | SN.            | Cal.Date<br>(mm-dd-yy) | Cal.Due date<br>(mm-dd-yy) |
|----------------------------------------------|--------------|-------------------------------------|----------------|------------------------|----------------------------|
| Magnetic Amplitude and Gradient Probe System | SPEAG        | MAGPy-8H3D+E3D V2<br>& MAGPy-DAS V2 | 3107 &<br>3097 | 03.15.2024             | 03.14.2025                 |

## 5.4 Duty Cycle

| Mode                | ON Time(ms) | Period(ms) | Duty Cycle(%) |
|---------------------|-------------|------------|---------------|
| Operating(194.3kHz) | /           | /          | 100           |

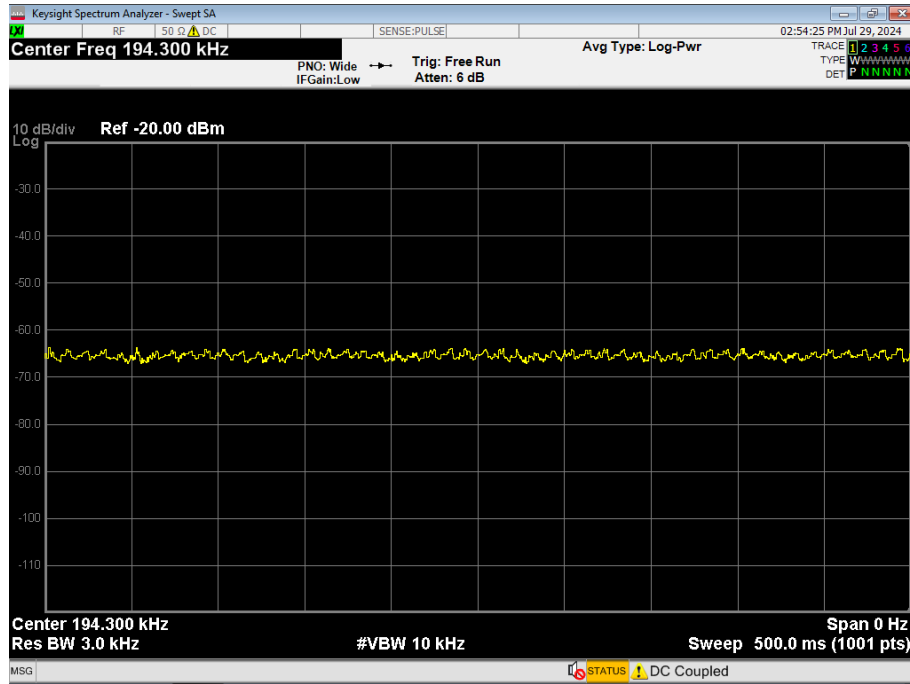

## 5.5 Test Result

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm             | < 1%           | Top                 | 14.08         | 0.69          |
| 15cm             | < 1%           | Top                 | 14.17         | 0.78          |
| 15cm             | < 1%           | Left                | 14.18         | 0.56          |
| 15cm             | < 1%           | Right               | 13.87         | 0.55          |
| 15cm             | < 1%           | Front               | 13.78         | 0.78          |
| 15cm             | < 1%           | Rear                | 13.92         | 0.75          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.31%         | 47.85%        |


| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm             | < 50%          | Top                 | 13.50         | 0.65          |
| 15cm             | < 50%          | Top                 | 12.50         | 0.59          |
| 15cm             | < 50%          | Left                | 13.31         | 0.62          |
| 15cm             | < 50%          | Right               | 13.20         | 0.70          |
| 15cm             | < 50%          | Front               | 13.24         | 0.74          |
| 15cm             | < 50%          | Rear                | 13.07         | 0.71          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.20%         | 45.40%        |

| MPE              |                |                     |               |               |
|------------------|----------------|---------------------|---------------|---------------|
| Test distance    | Battery levels | Probe from EUT Side | E-field (V/m) | H-field (A/m) |
| 20cm             | < 99%          | Top                 | 12.92         | 0.61          |
| 15cm             | < 99%          | Top                 | 11.83         | 0.46          |
| 15cm             | < 99%          | Left                | 12.60         | 0.53          |
| 15cm             | < 99%          | Right               | 12.37         | 0.57          |
| 15cm             | < 99%          | Front               | 12.20         | 0.68          |
| 15cm             | < 99%          | Rear                | 12.61         | 0.54          |
| Limit            |                |                     | 614           | 1.63          |
| Margin Limit (%) |                |                     | 2.10%         | 41.72%        |

Note: All test modes were pre-tested, but we only recorded the worst case in this report.

## 1.1 Test Setup photo

Front

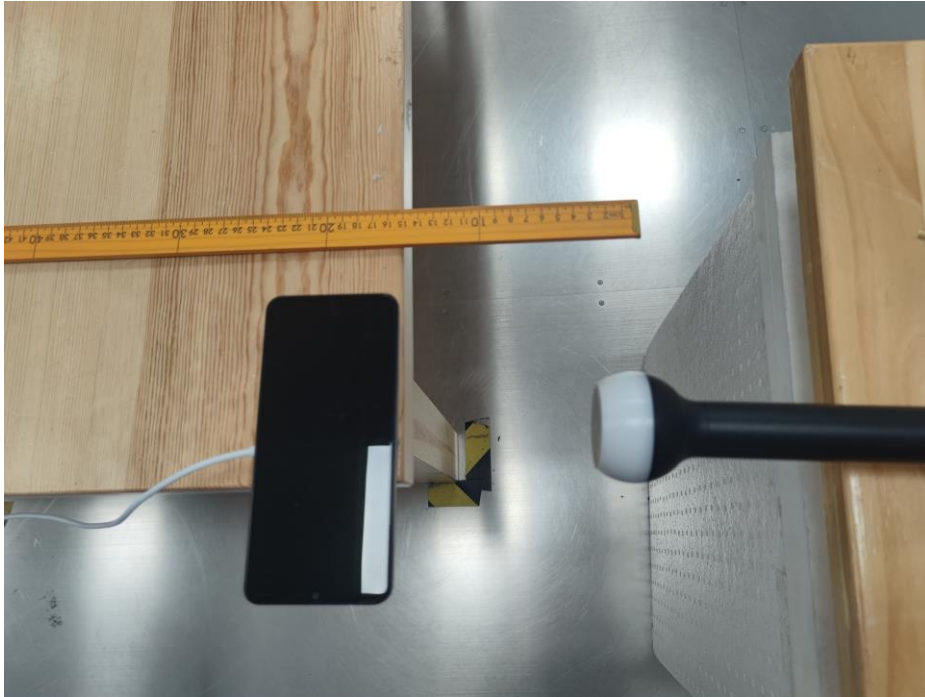

Left




Rear



Right



Top

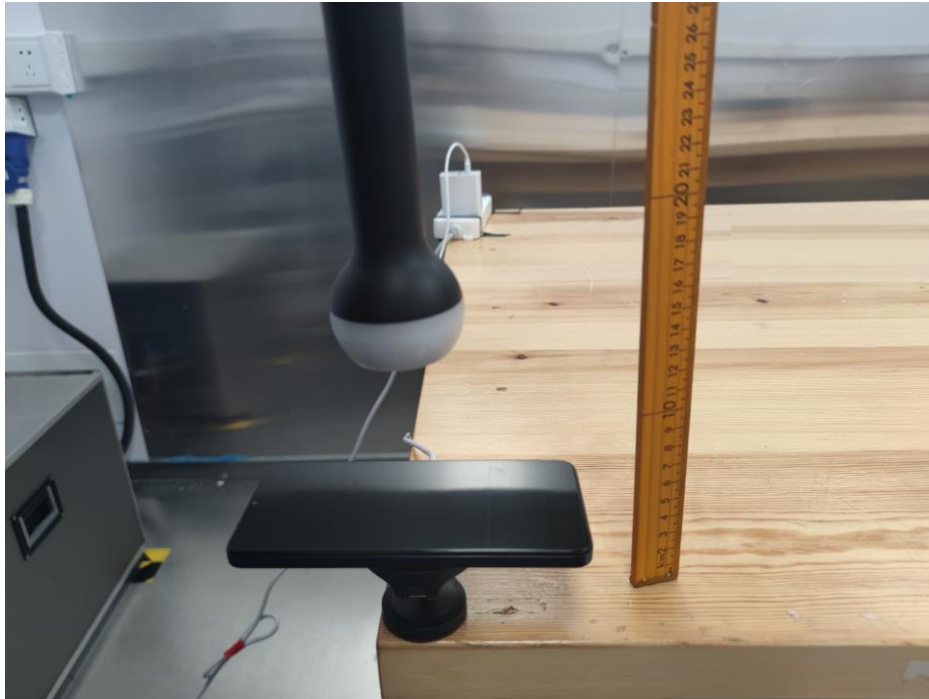

\*\*\*End of report\*\*\*