

承 认 书

客户名称: 瀚彩

客户料号:

我司型号: YZ-G25-2.5-7.6UH-3200GS-7MM -14.5M

送样日期: 2023 年 7 月 31 日

供应方: Dongguan Jireisi technology Co., LTD

绘 制	审 核	批 准
陆 琳	邓 祥 桂	茹 圣

客户承认:

合 格	不 合 格	承 认
备 注		

Dongguan Jireisi technology Co., LTD



Tel:

Fax: 86+13632701380

地址: No. 152, Guan Chang Road, Taigongling Village, Dalingshan Town, Dongguan City

客户名称	客户料号	我司型号	版 本	日 期
瀚彩		YZ-G25-2.5-7.6UH-3200GS-7MM-14.5M	A0	2023.7.31

一、平面结构图： 单位:MM

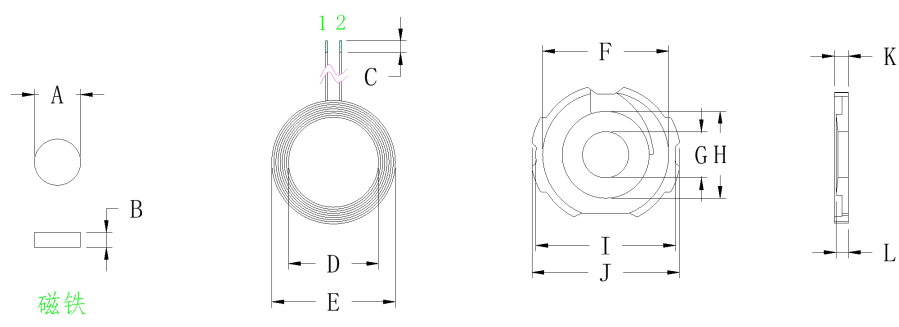

A	7.65 ± 0.05
B	2.0 ± 0.05
C	2 ± 1
D	15 ± 0.2
E	20.7 ± 0.3
F	21 ± 0.2
G	7.7 ± 0.05
H	14.5 ± 0.2
I	23.5 ± 0.3
J	25 ± 0.2
K	2.5 ± 0.15
L	2.4 ± 0.1 中柱高度
M	7 ± 1

二、产品参数:

脚 位	Wire diameter	Number of turns	备 注
1 -- 2	0.08*24	13	热风绞合线

三、technical requirements: (magnetic force of 3200 Gauss)

1. Secure the cable end to prevent loose cables
2. According to customer requirements, the long inlead is cut and tinned, and the tinning depth is 2 ± 1 MM
3. Point the appropriate white glue on the soft magnetic sheet, paste the coil, and ensure that the product surface is clean and tidy in the process
4. The soft magnetic sheet used is with round holes, without damage
5. Additional process (according to customer requirements) : Install 7.65x2.0mm magnet in the middle of the finished product round hole and in the finished product

背后加贴直径 14mm 的双面背胶，后包装

四、 electrical parameters:
1. Inductance value, Q value

$$\text{PIN } 1 - 2 = 7.6\mu\text{H} \pm 0.2\mu\text{H}$$

$$Q \text{ value} \geq 25$$

The above inductance values are based on Quanhua 1062A instrument, 10KHZ/0.3Vrms as the standard or equivalent instrument.

Q value is based on Quanhua 1062A instrument, 100KHZ/0.3Vrms as standard or equivalent instrument

五、材料清单:

序号	名称	材质	供应商	备 注
1	热风绞合线	0.08X24	维汉或等同	
2	磁 片	G25 压铸基材	天通或等同	
3	锡	高温环保	千岛或等同	
4	白 胶	BY882	宝月或等同	
5	强 磁	7.65*2(强 度 大 于 3200GS)	联胜或等同	附加工序,按客户要求
6	双 面 胶	513-14mm	鸿辉或同等	