



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Hong Kong Yunting Trading Co., Limited

Address: Unit D,16/F,One Capital Place,18 Luard Road,Wan Chai,Hong Kong,China

FCC ID: 2AW74-S4

Product Name: Robot Vacuum Cleaner

Standard(s): 47 CFR Part 15, Subpart C(15.247)

ANSI C63.10-2013

KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR221261877-00C

Date Of Issue: 2023/1/9

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	9
1.2.3 Support Cable List and Details	9
1.2.4 Block Diagram of Test Setup.....	10
1.3 MEASUREMENT UNCERTAINTY	12
2. SUMMARY OF TEST RESULTS	13
3. REQUIREMENTS AND TEST PROCEDURES	14
3.1 AC LINE CONDUCTED EMISSIONS.....	14
3.1.1 Applicable Standard.....	14
3.1.2 EUT Setup.....	15
3.1.3 EMI Test Receiver Setup	15
3.1.4 Test Procedure	16
3.1.5 Corrected Amplitude & Margin Calculation.....	16
3.2 RADIATION SPURIOUS EMISSIONS	17
3.2.1 Applicable Standard.....	17
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
3.2.4 Test Procedure	18
3.2.5 Corrected Amplitude & Margin Calculation.....	18
3.3 6 dB EMISSION BANDWIDTH:.....	19
3.3.1 Applicable Standard.....	19
3.3.2 EUT Setup.....	19
3.3.3 Test Procedure	19
3.4 MAXIMUM CONDUCTED OUTPUT POWER:.....	20
3.4.1 Applicable Standard.....	20
3.4.2 EUT Setup.....	20
3.4.3 Test Procedure	20
3.5 MAXIMUM POWER SPECTRAL DENSITY:	21
3.5.1 Applicable Standard.....	21
3.5.2 EUT Setup.....	21
3.5.3 Test Procedure	21
3.6 DUTY CYCLE:.....	22
3.6.1 EUT Setup.....	22
3.6.2 Test Procedure	22
3.7 ANTENNA REQUIREMENT.....	22

3.7.1 Applicable Standard.....	22
3.7.2 Judgment.....	22
4. Test DATA AND RESULTS.....	23
4.1 AC LINE CONDUCTED EMISSIONS.....	23
4.2 RADIATION SPURIOUS EMISSIONS.....	32
4.3 6 dB EMISSION BANDWIDTH:	45
4.4 99% OCCUPIED BANDWIDTH:	48
4.5 MAXIMUM CONDUCTED OUTPUT POWER:.....	51
4.5 MAXIMUM POWER SPECTRAL DENSITY:	52
4.6 100 KHz BANDWIDTH OF FREQUENCY BAND EDGE:	55
4.7 DUTY CYCLE:	58
5. RF EXPOSURE EVALUATION	60
5.1 APPLICABLE STANDARD.....	60
5.2 PROCEDURE.....	60
5.3 MEASUREMENT RESULT	60

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR221261877-00C	Original Report	2023/1/9

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Robot Vacuum Cleaner
EUT Model:	S4
Operation Frequency:	2402-2480MHz
Maximum Peak Output Power (Conducted):	4.5 dBm(BLE)
Modulation Type:	GFSK
Rated Input Voltage:	19Vdc charging from adapter or 14.4Vdc from battery
Serial Number:	1VS0-5
EUT Received Date:	2022/12/16
EUT Received Status:	Good

Operation Frequency Detail: For BLE:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
...	...	38	2478
19	2440	39	2480

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2402
Middle	2440
Highest	2480

Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
PCB	50	2.4~2.5GHz	1.82 dBi

The Method of §15.203 Compliance:

- ☒ Antenna must be permanently attached to the unit.
- ☐ Antenna must use a unique type of connector to attach to the EUT.
- ☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter 1	SHENZHEN KEYU POWER SUPPLY TECHNOLOGY CO.LTD	KA18D-1901000US
Adapter 2	Shenzhen CHANZHENHO Technology Co.,Limited	CZHO24190100USWM
Charging Dock	Hong Kong Yunting Trading Co.,Limited	Unknown
Remote control	Hong Kong Yunting Trading Co.,Limited	Unknown

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

For BLE:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:	No		
EUT Exercise Software:	EspRFTTestTool_v2.8_Manual.exe		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲：			
Test Modes	Power Level Setting		
	Lowest Channel	Middle Channel	Highest Channel
1Mbps	11	11	11
2Mbps	11	11	11

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/


1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	No	1.5	Adapter	Charging Dock
Power Cable	No	No	1.5	Adapter	EUT


1.2.4 Block Diagram of Test Setup

AC line conducted emissions:


Charging from charging dock:

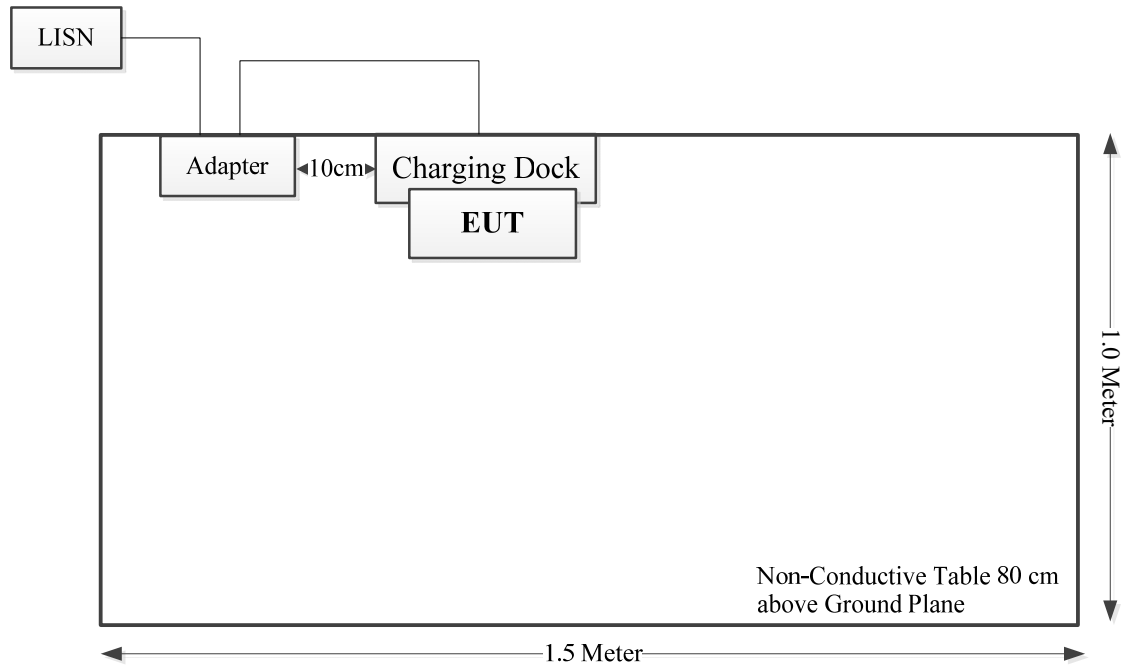

Charging from adapter:

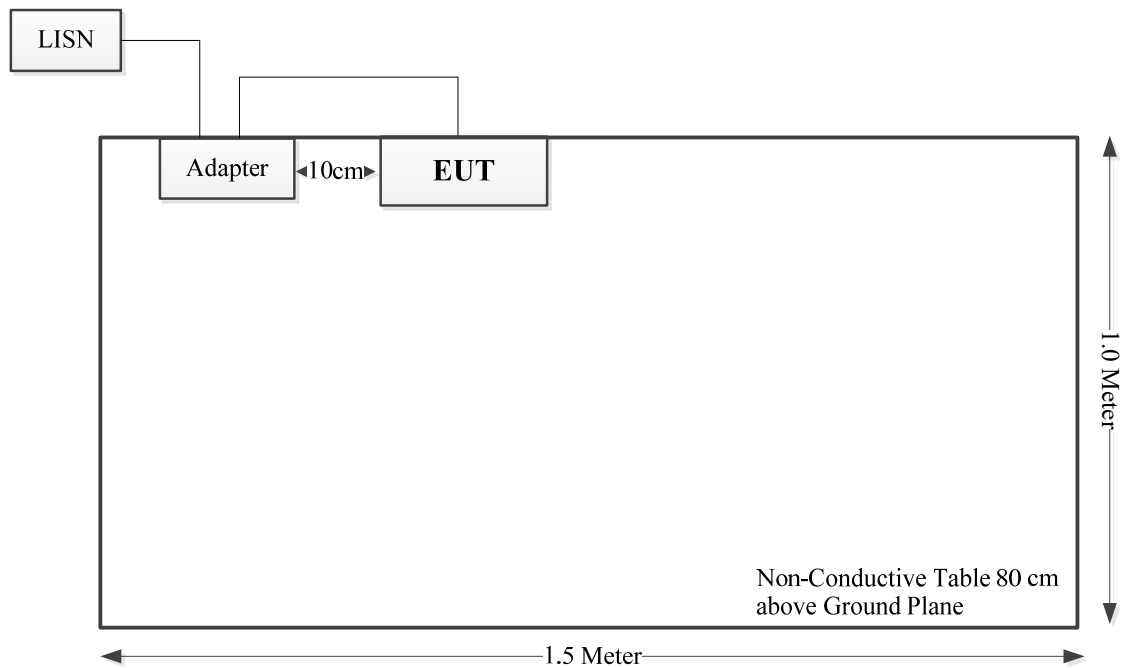

Spurious Emissions:
Charging from adapter:

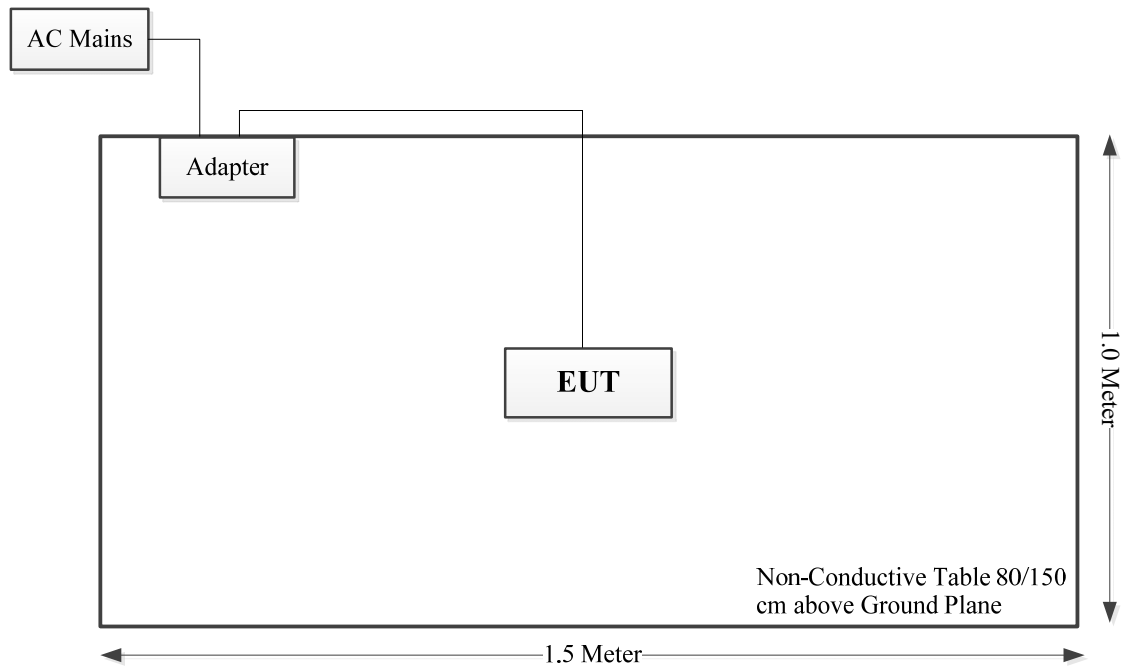

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant
FCC§15.247 (i) & §1.1307	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

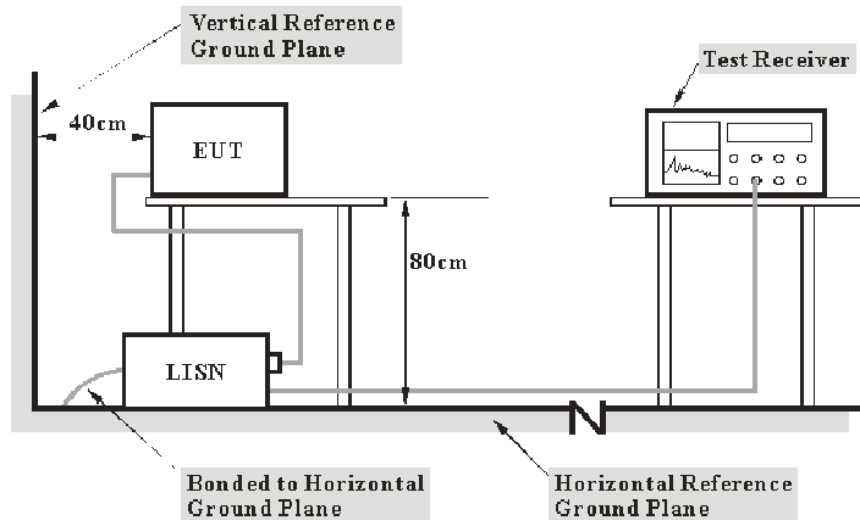

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup

Below 1GHz:

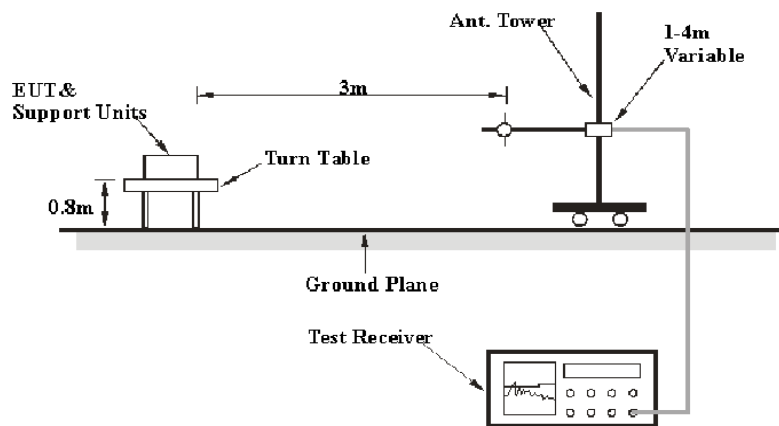

Above 1GHz:

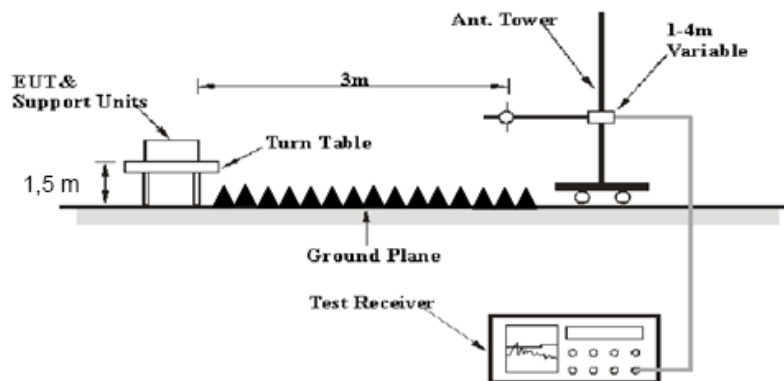

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 6 dB Emission Bandwidth:

3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

3.3.2 EUT Setup

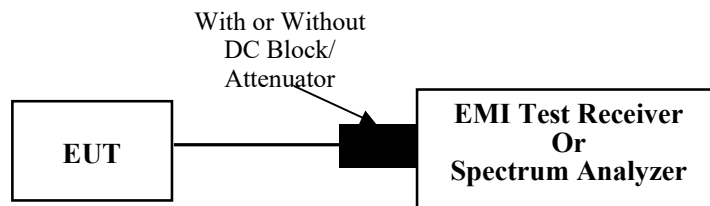

3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3.4 Maximum conducted output power:

3.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

3.4.2 EUT Setup

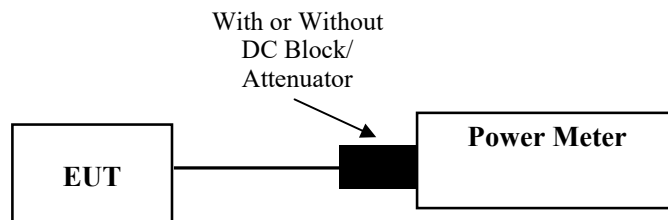

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.3

The maximum conducted output power may be measured using a broadband RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

- Set the EUT in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
- Add a correction factor to the display.
- Set the power meter to test output power, record the result.


3.5 Maximum power spectral density:

3.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.5.2 EUT Setup

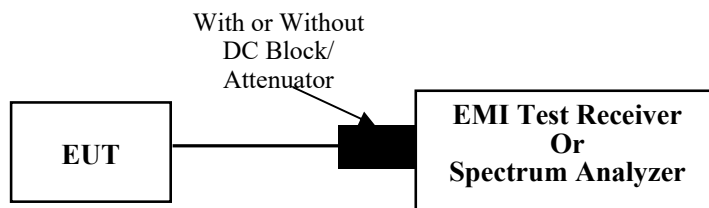


3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

3.6 Duty Cycle:

3.6.1 EUT Setup

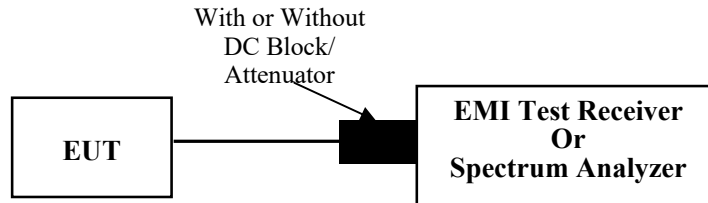

3.6.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.7 Antenna Requirement

3.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	1VS0-5	Test Date:	2022/12/26
Test Site:	CE	Test Mode:	Transmitting (BLE 1Mbps low channel was the worst)
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	19.7	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.4
----------------------	------	------------------------------	----	---------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022/04/01	2023/03/31
R&S	EMI Test Receiver	ESR3	102726	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022/08/07	2023/08/06
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Adapter 1 + Charging Dock:


Test Mode: Transmitting
Port: Line
Note:

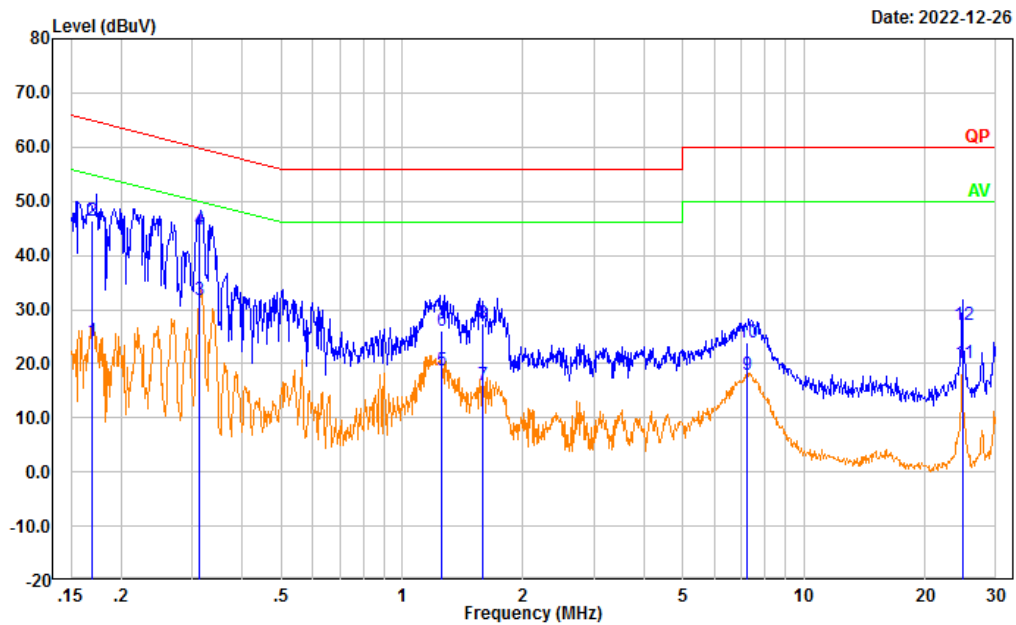

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
<hr/>							
1	0.169	14.64	9.61	24.25	55.00	30.75	Average
2	0.169	36.71	9.61	46.32	65.00	18.68	QP
3	0.313	22.17	9.61	31.78	49.90	18.12	Average
4	0.313	35.24	9.61	44.85	59.90	15.05	QP
5	1.249	9.25	9.62	18.87	46.00	27.13	Average
6	1.249	16.54	9.62	26.16	56.00	29.84	QP
7	1.590	6.38	9.63	16.01	46.00	29.99	Average
8	1.590	17.90	9.63	27.53	56.00	28.47	QP
9	7.206	8.25	9.66	17.91	50.00	32.09	Average
10	7.206	14.23	9.66	23.89	60.00	36.11	QP
11	24.893	10.37	9.81	20.18	50.00	29.82	Average
12	24.893	17.24	9.81	27.05	60.00	32.95	QP

Test Mode: Transmitting
Port: neutral
Note:

Date: 2022-12-26

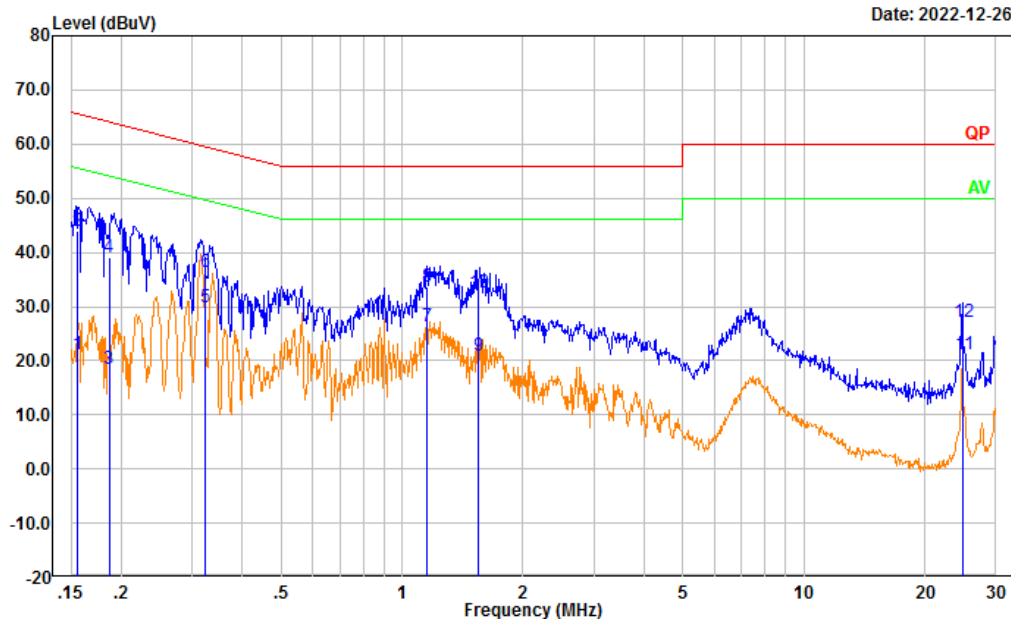


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
<hr/>							
1	0.155	11.72	9.61	21.33	55.72	34.39	Average
2	0.155	34.30	9.61	43.91	65.72	21.81	QP
3	0.187	8.92	9.61	18.53	54.19	35.66	Average
4	0.187	29.51	9.61	39.12	64.19	25.07	QP
5	0.323	20.30	9.61	29.91	49.64	19.73	Average
6	0.323	26.64	9.61	36.25	59.64	23.39	QP
7	1.156	16.68	9.62	26.30	46.00	19.70	Average
8	1.156	24.16	9.62	33.78	56.00	22.22	QP
9	1.554	11.37	9.63	21.00	46.00	25.00	Average
10	1.554	22.90	9.63	32.53	56.00	23.47	QP
11	24.905	11.56	9.76	21.32	50.00	28.68	Average
12	24.905	17.46	9.76	27.22	60.00	32.78	QP


Adapter 2 + Charging Dock:

Test Mode: Transmitting
Port: Line
Note:

Date: 2023-01-13

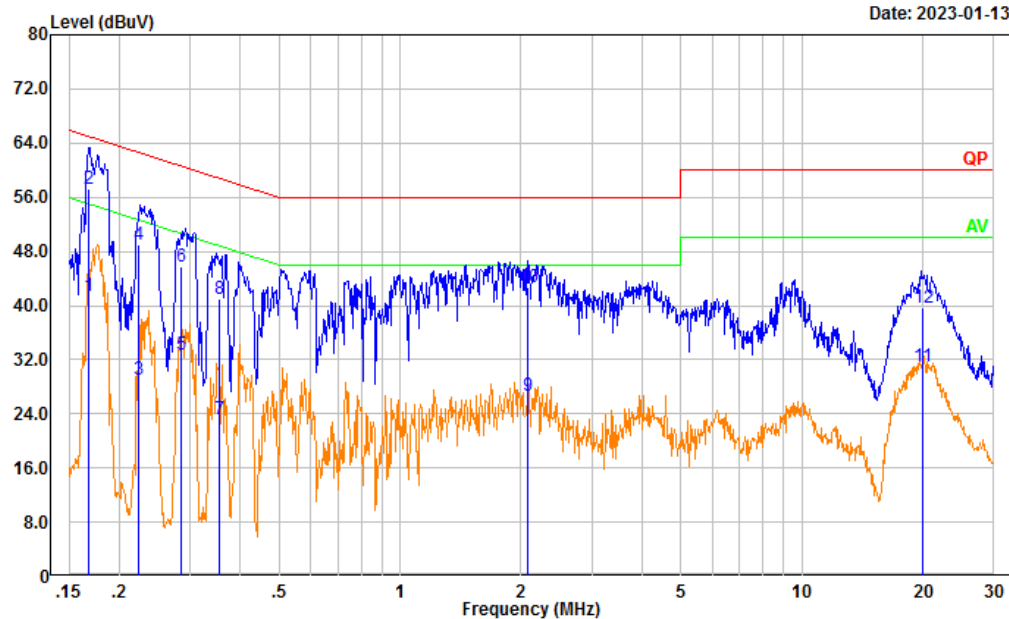


Test Mode: Transmitting
Port: neutral
Note:

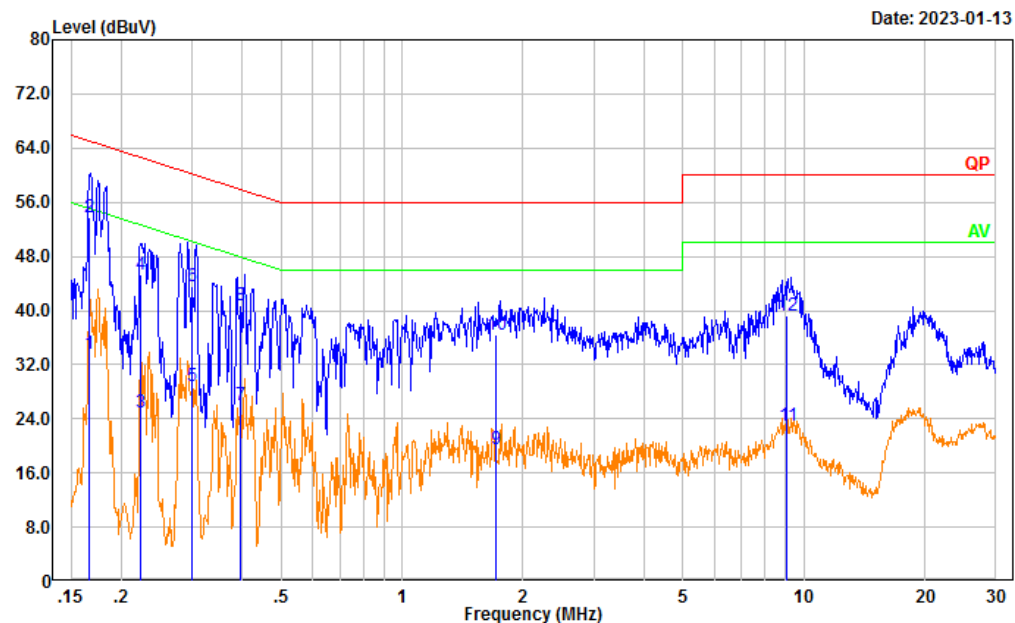

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.167	24.08	9.61	33.69	55.13	21.44	Average
2	0.167	44.06	9.61	53.67	65.13	11.46	QP
3	0.223	15.24	9.61	24.85	52.71	27.86	Average
4	0.223	35.66	9.61	45.27	62.71	17.44	QP
5	0.300	19.29	9.61	28.90	50.25	21.35	Average
6	0.300	33.99	9.61	43.60	60.25	16.65	QP
7	0.395	16.47	9.61	26.08	47.97	21.89	Average
8	0.395	31.14	9.61	40.75	57.97	17.22	QP
9	1.713	9.95	9.63	19.58	46.00	26.42	Average
10	1.713	26.86	9.63	36.49	56.00	19.51	QP
11	9.086	13.20	9.67	22.87	50.00	27.13	Average
12	9.086	29.52	9.67	39.19	60.00	20.81	QP


Adapter 1:

Test Mode: Transmitting
Port: Line
Note:

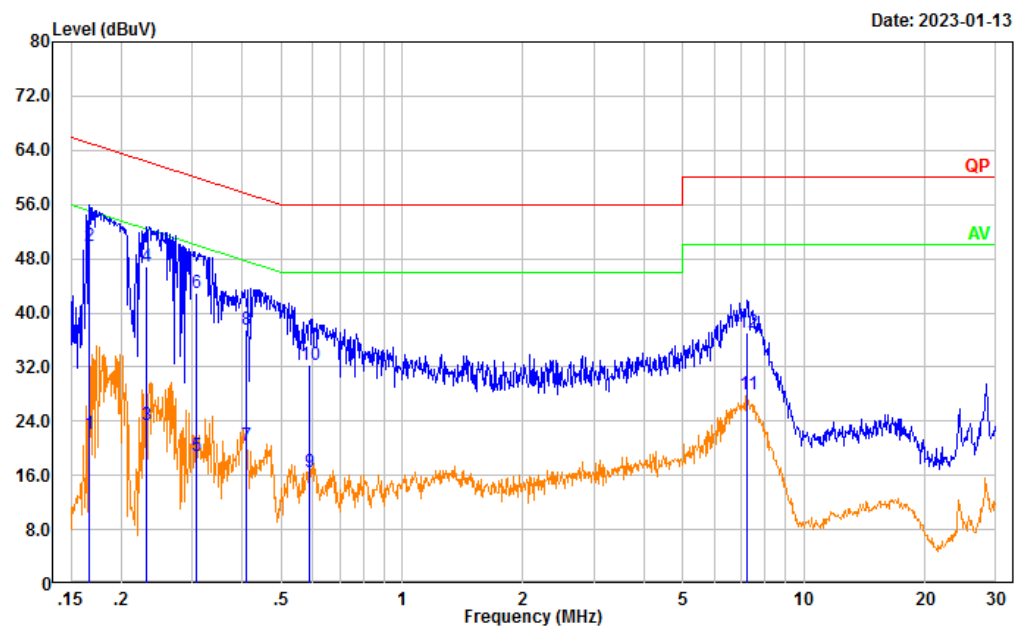

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.166	12.53	9.61	22.14	55.15	33.01	Average
2	0.166	40.20	9.61	49.81	65.15	15.34	QP
3	0.231	13.76	9.61	23.37	52.43	29.06	Average
4	0.231	37.16	9.61	46.77	62.43	15.66	QP
5	0.307	9.20	9.61	18.81	50.04	31.23	Average
6	0.307	33.22	9.61	42.83	60.04	17.21	QP
7	0.410	10.75	9.61	20.36	47.65	27.29	Average
8	0.410	27.97	9.61	37.58	57.65	20.07	QP
9	0.587	6.81	9.62	16.43	46.00	29.57	Average
10	0.587	22.70	9.62	32.32	56.00	23.68	QP
11	7.229	18.21	9.66	27.87	50.00	22.13	Average
12	7.229	27.31	9.66	36.97	60.00	23.03	QP


Test Mode: Transmitting
Port: Line
Note:

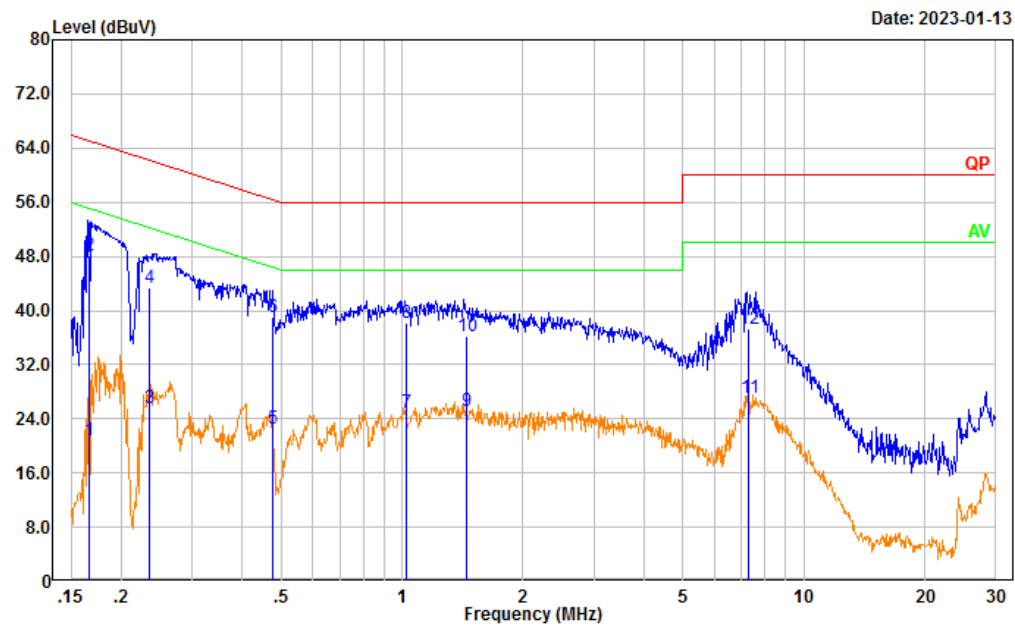

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
<hr/>							
1	0.166	11.24	9.61	20.85	55.14	34.29	Average
2	0.166	38.49	9.61	48.10	65.14	17.04	QP
3	0.235	16.04	9.61	25.65	52.27	26.62	Average
4	0.235	33.81	9.61	43.42	62.27	18.85	QP
5	0.476	12.85	9.61	22.46	46.41	23.95	Average
6	0.476	29.52	9.61	39.13	56.41	17.28	QP
7	1.021	15.40	9.62	25.02	46.00	20.98	Average
8	1.021	28.49	9.62	38.11	56.00	17.89	QP
9	1.444	15.46	9.62	25.08	46.00	20.92	Average
10	1.444	26.62	9.62	36.24	56.00	19.76	QP
11	7.288	17.50	9.66	27.16	50.00	22.84	Average
12	7.288	27.52	9.66	37.18	60.00	22.82	QP


Adapter 2:

Test Mode: Transmitting
Port: Line
Note:

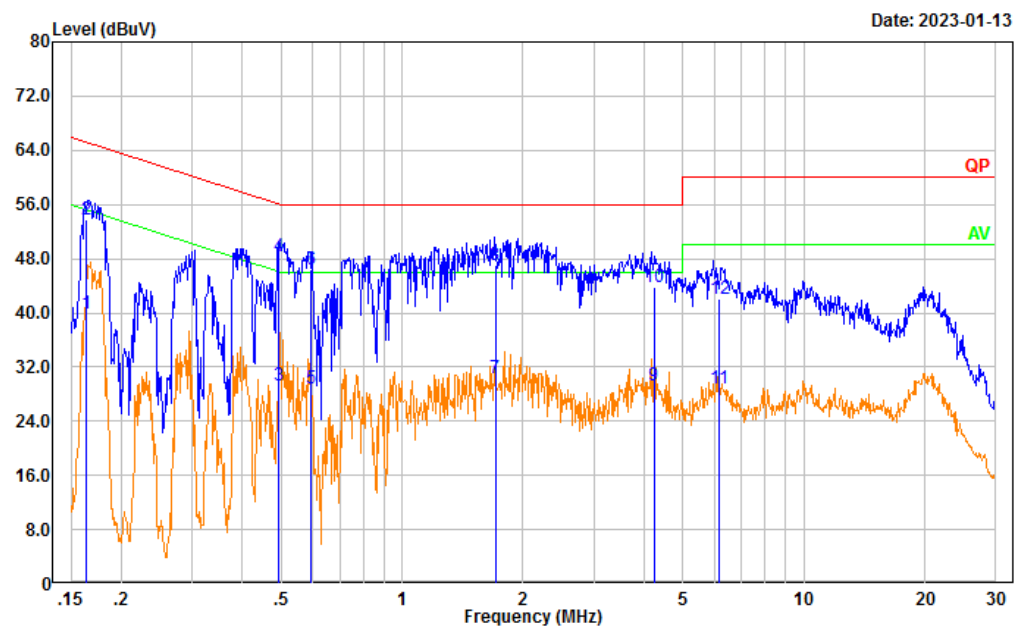

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.164	30.25	9.61	39.86	55.28	15.42	Average
2	0.164	44.18	9.61	53.79	65.28	11.49	QP
3	0.491	19.68	9.61	29.29	46.15	16.86	Average
4	0.491	38.71	9.61	48.32	56.15	7.83	QP
5	0.592	19.19	9.62	28.81	46.00	17.19	Average
6	0.592	36.87	9.62	46.49	56.00	9.51	QP
7	1.705	20.65	9.63	30.28	46.00	15.72	Average
8	1.705	37.43	9.63	47.06	56.00	8.94	QP
9	4.229	19.57	9.65	29.22	46.00	16.78	Average
10	4.229	34.24	9.65	43.89	56.00	12.11	QP
11	6.133	19.11	9.66	28.77	50.00	21.23	Average
12	6.133	32.33	9.66	41.99	60.00	18.01	QP

Test Mode: Transmitting
Port: neutral
Note:

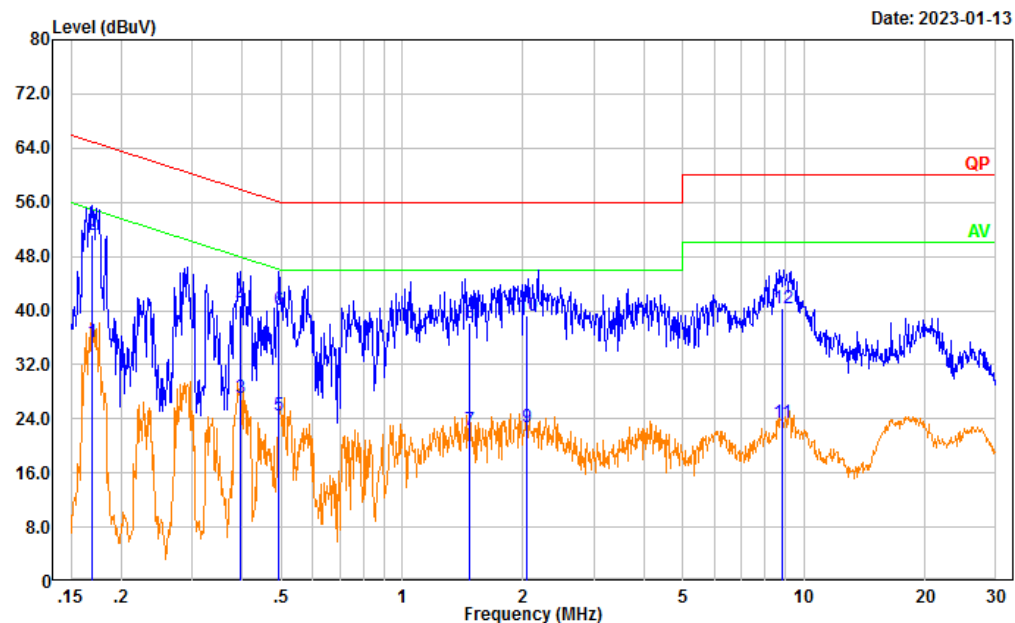

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.170	25.79	9.61	35.40	54.98	19.58	Average
2	0.170	41.63	9.61	51.24	64.98	13.74	QP
3	0.395	17.39	9.61	27.00	47.96	20.96	Average
4	0.395	31.06	9.61	40.67	57.96	17.29	QP
5	0.494	14.90	9.61	24.51	46.10	21.59	Average
6	0.494	30.47	9.61	40.08	56.10	16.02	QP
7	1.468	12.71	9.62	22.33	46.00	23.67	Average
8	1.468	28.51	9.62	38.13	56.00	17.87	QP
9	2.040	13.13	9.63	22.76	46.00	23.24	Average
10	2.040	29.52	9.63	39.15	56.00	16.85	QP
11	8.833	13.83	9.67	23.50	50.00	26.50	Average
12	8.833	30.70	9.67	40.37	60.00	19.63	QP

4.2 Radiation Spurious Emissions

Serial Number:	1VS0-5	Test Date:	2023/1/4~2023/1/13
Test Site:	966-1/966-2	Test Mode:	Transmitting
Tester:	coco Tian,Carl Xue	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	20.7~23.9	Relative Humidity: (%)	50~63	ATM Pressure: (kPa)	100.5~102.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
Sonoma	Amplifier	310N	186165	2022/07/17	2023/07/16
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
AH	Preamplifier	PAM-1840VH	190	2022/11/09	2023/11/08
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022/08/07	2023/08/06
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2022/08/07	2023/08/06
Mini Circuits	High Pass Filter	VHF-6010+	31119	2022/08/07	2023/08/06

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

1) 30MHz-1GHz(BLE 1Mbps low channel was the worst)


Adapter 1 + Charging Dock:

Test Mode: Transmitting
Polarization: horizontal
Note:

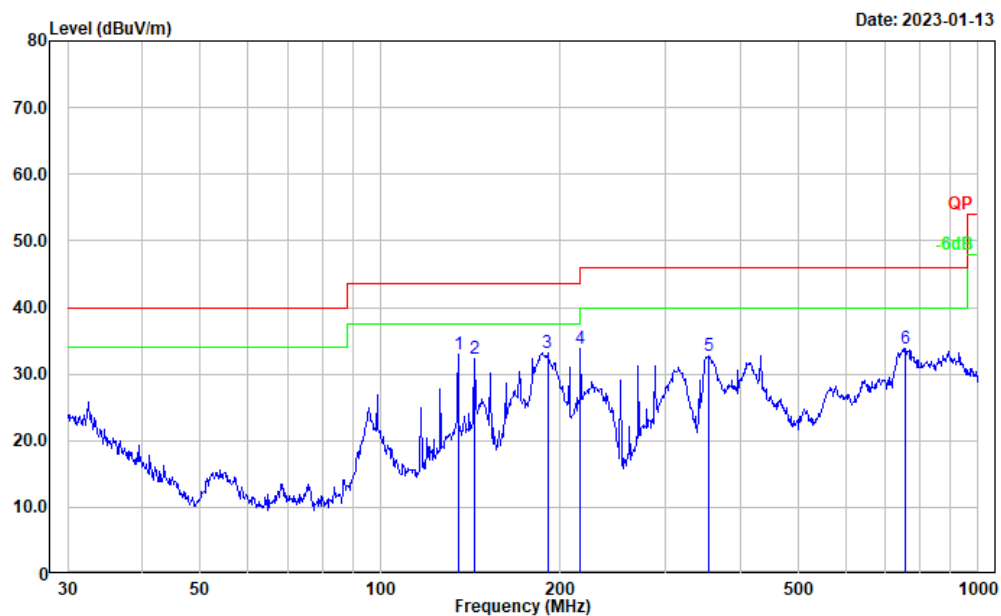

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	135.032	44.50	-11.60	32.90	43.50	10.60	Peak
2	143.830	44.19	-11.96	32.23	43.50	11.27	Peak
3	190.405	46.54	-13.41	33.13	43.50	10.37	Peak
4	216.024	46.45	-12.65	33.80	46.00	12.20	Peak
5	354.183	42.60	-9.94	32.66	46.00	13.34	Peak
6	755.387	36.90	-3.00	33.90	46.00	12.10	Peak


Test Mode: Transmitting
Polarization: vertical
Note:

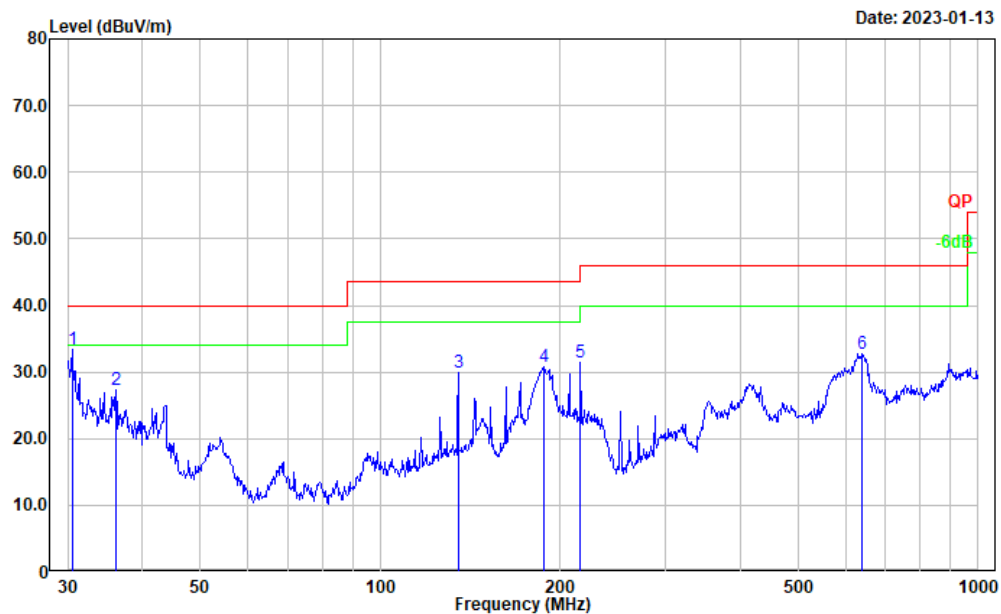

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	37.30	-4.00	33.30	40.00	6.70	Peak
2	36.127	35.58	-8.34	27.24	40.00	12.76	Peak
3	135.032	41.63	-11.60	30.03	43.50	13.47	Peak
4	187.753	44.36	-13.53	30.83	43.50	12.67	Peak
5	216.024	44.19	-12.65	31.54	46.00	14.46	Peak
6	638.369	37.20	-4.41	32.79	46.00	13.21	Peak


Adapter 2 + Charging Dock:

Test Mode: Transmitting
Polarization: horizontal
Note:

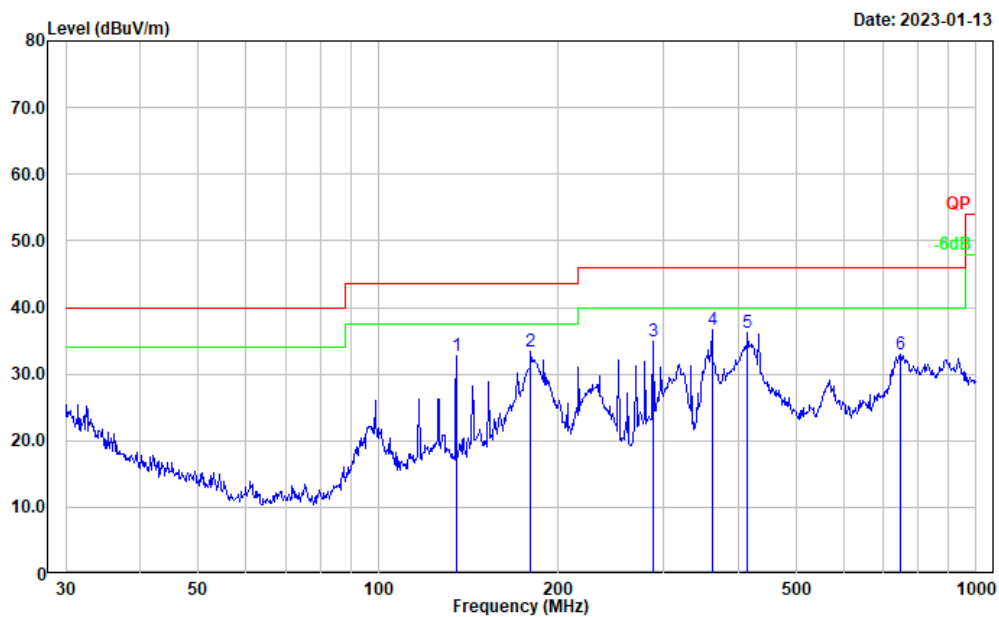

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	135.032	44.38	-11.60	32.78	43.50	10.72	Peak
2	180.017	47.00	-13.63	33.37	43.50	10.13	Peak
3	287.990	46.03	-11.16	34.87	46.00	11.13	Peak
4	361.714	46.53	-9.78	36.75	46.00	9.25	Peak
5	414.722	44.47	-8.16	36.31	46.00	9.69	Peak
6	747.483	35.90	-2.94	32.96	46.00	13.04	Peak


Test Mode: Transmitting
Polarization: vertical
Note:

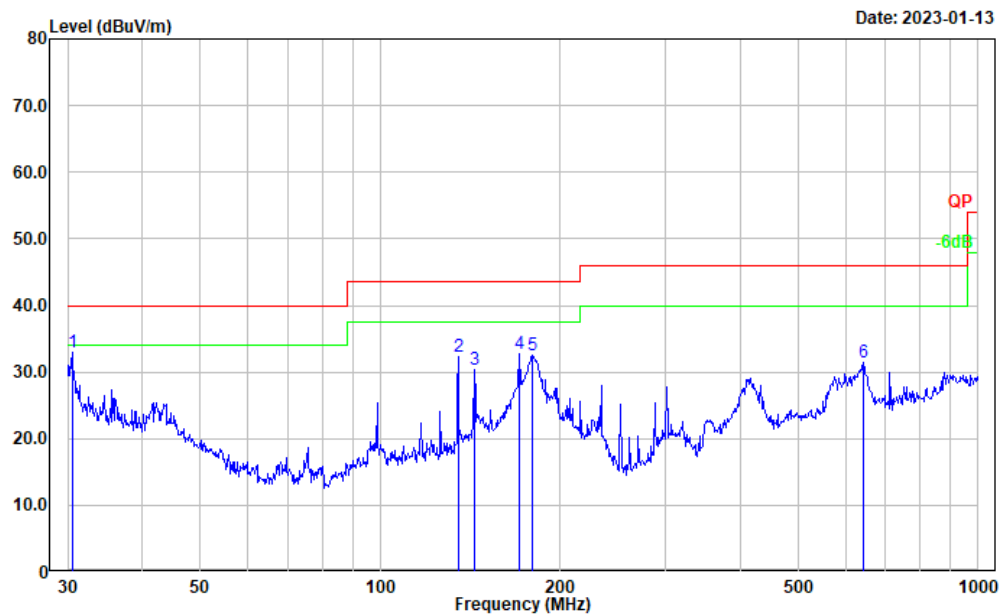

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.531	36.98	-4.00	32.98	40.00	7.02	Peak
2	135.032	43.88	-11.60	32.28	43.50	11.22	Peak
3	143.830	42.37	-11.96	30.41	43.50	13.09	Peak
4	170.793	45.78	-13.00	32.78	43.50	10.72	Peak
5	180.017	46.17	-13.63	32.54	43.50	10.96	Peak
6	642.861	35.75	-4.26	31.49	46.00	14.51	Peak


Adapter 1:

Test Mode: Transmitting
Polarization: horizontal
Note:

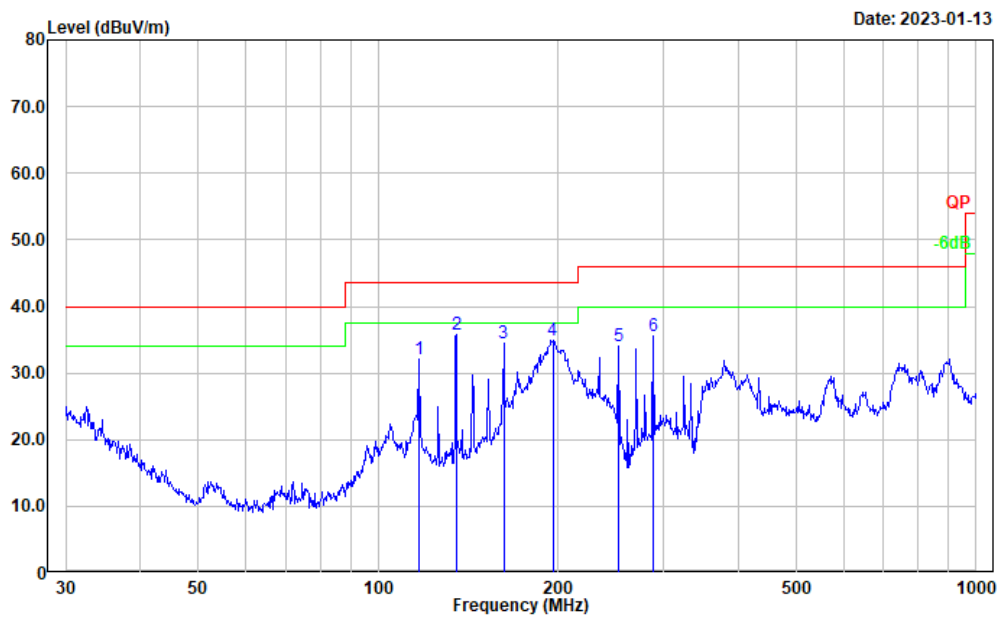

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	116.950	43.81	-11.68	32.13	43.50	11.37	Peak
2	135.032	47.29	-11.60	35.69	43.50	7.81	Peak
3	162.041	46.81	-12.25	34.56	43.50	8.94	Peak
4	195.822	47.60	-12.68	34.92	43.50	8.58	Peak
5	252.063	47.08	-12.98	34.10	46.00	11.90	Peak
6	287.990	46.79	-11.16	35.63	46.00	10.37	Peak


Test Mode: Transmitting
Polarization: vertical
Note:

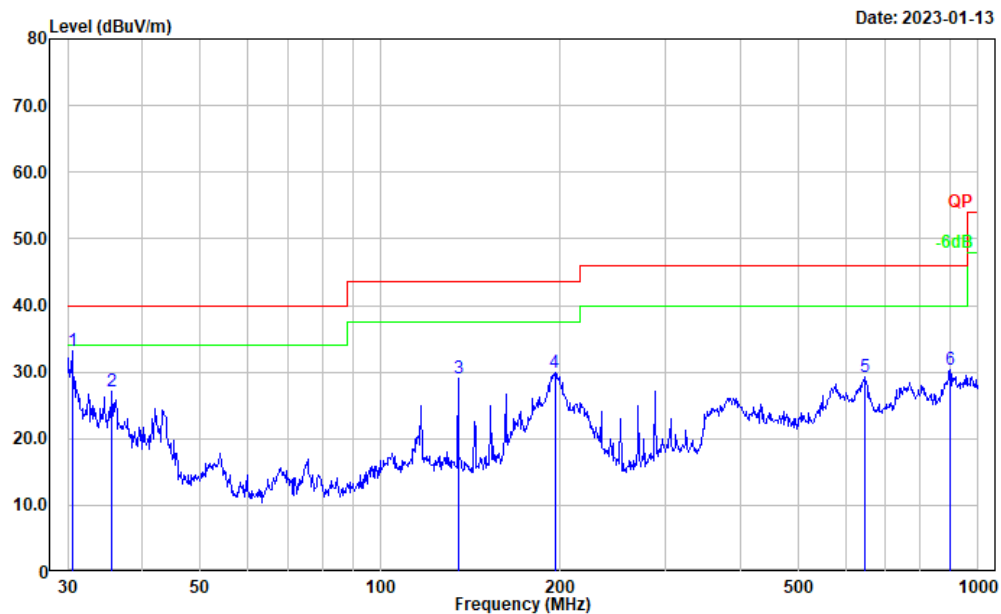

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.531	37.21	-4.00	33.21	40.00	6.79	Peak
2	35.624	34.98	-7.96	27.02	40.00	12.98	Peak
3	135.032	40.67	-11.60	29.07	43.50	14.43	Peak
4	195.822	42.65	-12.68	29.97	43.50	13.53	Peak
5	645.120	33.38	-4.20	29.18	46.00	16.82	Peak
6	896.997	31.32	-1.04	30.28	46.00	15.72	Peak

Adapter 2:


Test Mode: Transmitting
Polarization: horizontal
Note:

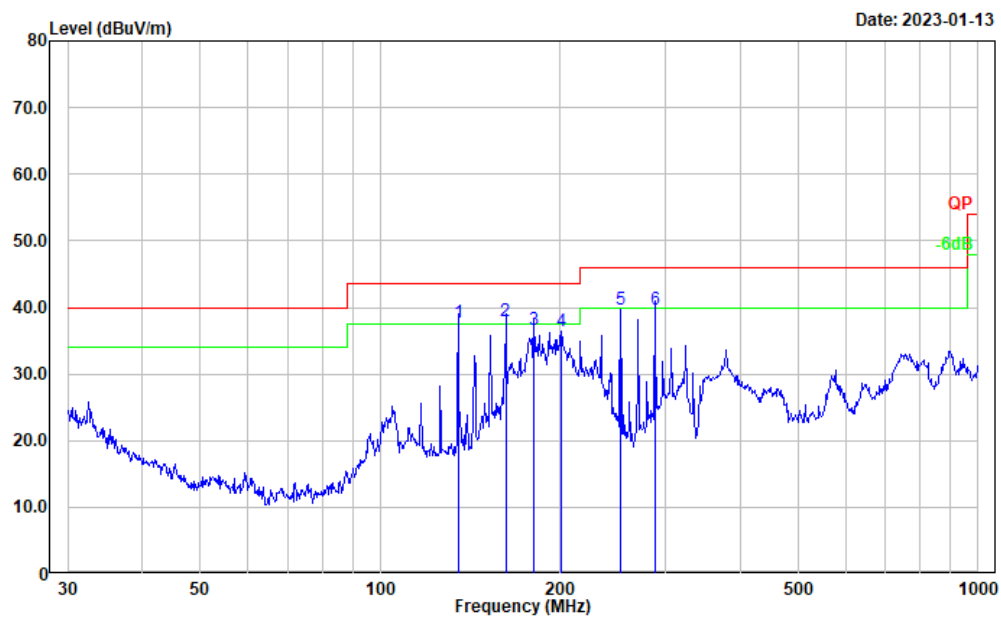

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	135.032	49.27	-11.60	37.67	43.50	5.83	QP
2	162.041	50.13	-12.25	37.88	43.50	5.62	QP
3	180.649	50.25	-13.65	36.60	43.50	6.90	QP
4	200.688	48.67	-12.23	36.44	43.50	7.06	Peak
5	252.063	52.60	-12.98	39.62	46.00	6.38	Peak
6	287.990	50.89	-11.16	39.73	46.00	6.27	QP

Test Mode: Transmitting
Polarization: vertical
Note:

Date: 2023-01-13

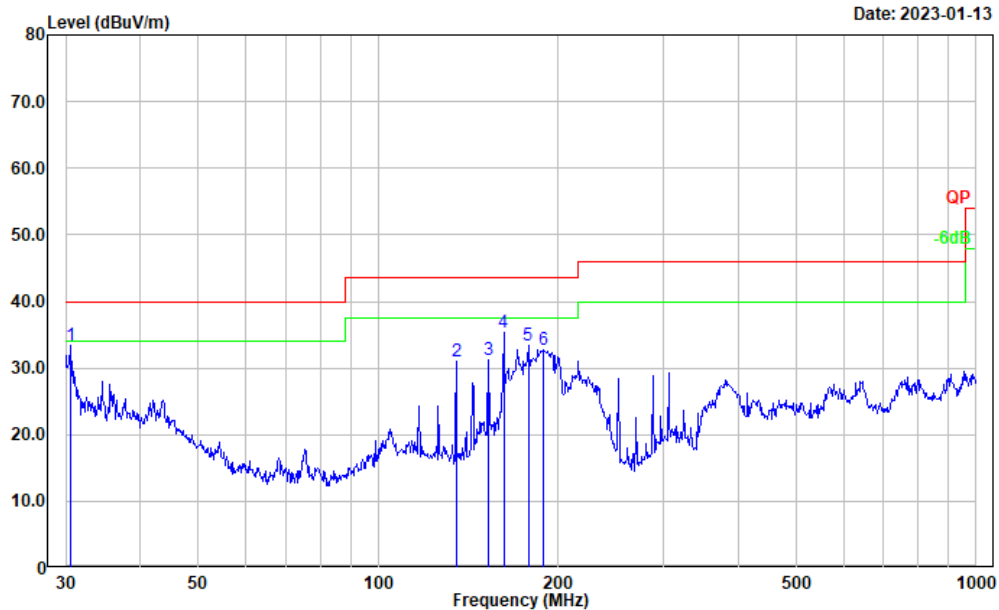

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	37.53	-4.09	33.44	40.00	6.56	Peak
2	135.032	42.59	-11.60	30.99	43.50	12.51	Peak
3	152.664	43.34	-12.02	31.32	43.50	12.18	Peak
4	162.041	47.62	-12.25	35.37	43.50	8.13	Peak
5	178.133	46.89	-13.50	33.39	43.50	10.11	Peak
6	188.413	46.15	-13.51	32.64	43.50	10.86	Peak


2) 1-25GHz(Adapter 2 was the worst):

BLE 1Mbps:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2402 MHz							
2402.000	67.71	PK	H	31.51	99.22	N/A	N/A
2402.000	63.11	AV	H	31.51	94.62	N/A	N/A
2402.000	66.66	PK	V	31.51	98.17	N/A	N/A
2402.000	62.01	AV	V	31.51	93.52	N/A	N/A
2390.000	27.67	PK	H	31.46	59.13	74.00	14.87
2390.000	13.92	AV	H	31.46	45.38	54.00	8.62
4804.000	52.71	PK	H	10.91	63.62	74.00	10.38
4804.000	42.06	AV	H	10.91	52.97	54.00	1.03
7206.000	34.67	PK	H	14.22	48.89	74.00	25.11
7206.000	21.71	AV	H	14.22	35.93	54.00	18.07
Middle Channel: 2440 MHz							
2440.000	67.92	PK	H	31.60	99.52	N/A	N/A
2440.000	63.57	AV	H	31.60	95.17	N/A	N/A
2440.000	66.79	PK	V	31.60	98.39	N/A	N/A
2440.000	62.38	AV	V	31.60	93.98	N/A	N/A
4880.000	51.74	PK	H	11.07	62.81	74.00	11.19
4880.000	41.32	AV	H	11.07	52.39	54.00	1.61
7320.000	34.25	PK	H	14.80	49.05	74.00	24.95
7320.000	21.37	AV	H	14.80	36.17	54.00	17.83
High Channel: 2480 MHz							
2480.000	68.71	PK	H	31.64	100.35	N/A	N/A
2480.000	64.01	AV	H	31.64	95.65	N/A	N/A
2480.000	67.55	PK	V	31.64	99.19	N/A	N/A
2480.000	63.64	AV	V	31.64	95.28	N/A	N/A
2483.500	27.78	PK	H	31.64	59.42	74.00	14.59
2483.500	14.34	AV	H	31.64	45.98	54.00	8.02
4960.000	50.20	PK	H	11.23	61.43	74.00	12.57
4960.000	40.18	AV	H	11.23	51.41	54.00	2.59
7440.000	34.26	PK	H	15.26	49.52	74.00	24.48
7440.000	21.34	AV	H	15.26	36.60	54.00	17.40


BLE 2Mbps:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2402 MHz							
2402.000	66.59	PK	H	31.51	98.10	N/A	N/A
2402.000	62.48	AV	H	31.51	93.99	N/A	N/A
2402.000	65.91	PK	V	31.51	97.42	N/A	N/A
2402.000	61.67	AV	V	31.51	93.18	N/A	N/A
2390.000	27.34	PK	H	31.46	58.80	74.00	15.20
2390.000	13.99	AV	H	31.46	45.45	54.00	8.55
4804.000	54.24	PK	H	10.91	65.15	74.00	8.85
4804.000	41.88	AV	H	10.91	52.79	54.00	1.21
7206.000	33.67	PK	H	14.22	47.89	74.00	26.11
7206.000	20.75	AV	H	14.22	34.97	54.00	19.03
Middle Channel: 2440 MHz							
2440.000	67.42	PK	H	31.60	99.02	N/A	N/A
2440.000	63.59	AV	H	31.60	95.19	N/A	N/A
2440.000	66.27	PK	V	31.60	97.87	N/A	N/A
2440.000	62.32	AV	V	31.60	93.92	N/A	N/A
4880.000	53.16	PK	H	11.07	64.23	74.00	9.77
4880.000	40.28	AV	H	11.07	51.35	54.00	2.65
7320.000	33.78	PK	H	14.80	48.58	74.00	25.42
7320.000	20.81	AV	H	14.80	35.61	54.00	18.39
High Channel: 2480 MHz							
2480.000	67.55	PK	H	31.64	99.19	N/A	N/A
2480.000	63.64	AV	H	31.64	95.28	N/A	N/A
2480.000	66.57	PK	V	31.64	98.21	N/A	N/A
2480.000	62.84	AV	V	31.64	94.48	N/A	N/A
2483.500	27.04	PK	H	31.64	58.68	74.00	15.32
2483.500	14.39	AV	H	31.64	46.03	54.00	7.97
4960.000	53.76	PK	H	11.23	64.99	74.00	9.01
4960.000	40.66	AV	H	11.23	51.89	54.00	2.11
7440.000	33.91	PK	H	15.26	49.17	74.00	24.83
7440.000	21.03	AV	H	15.26	36.29	54.00	17.71

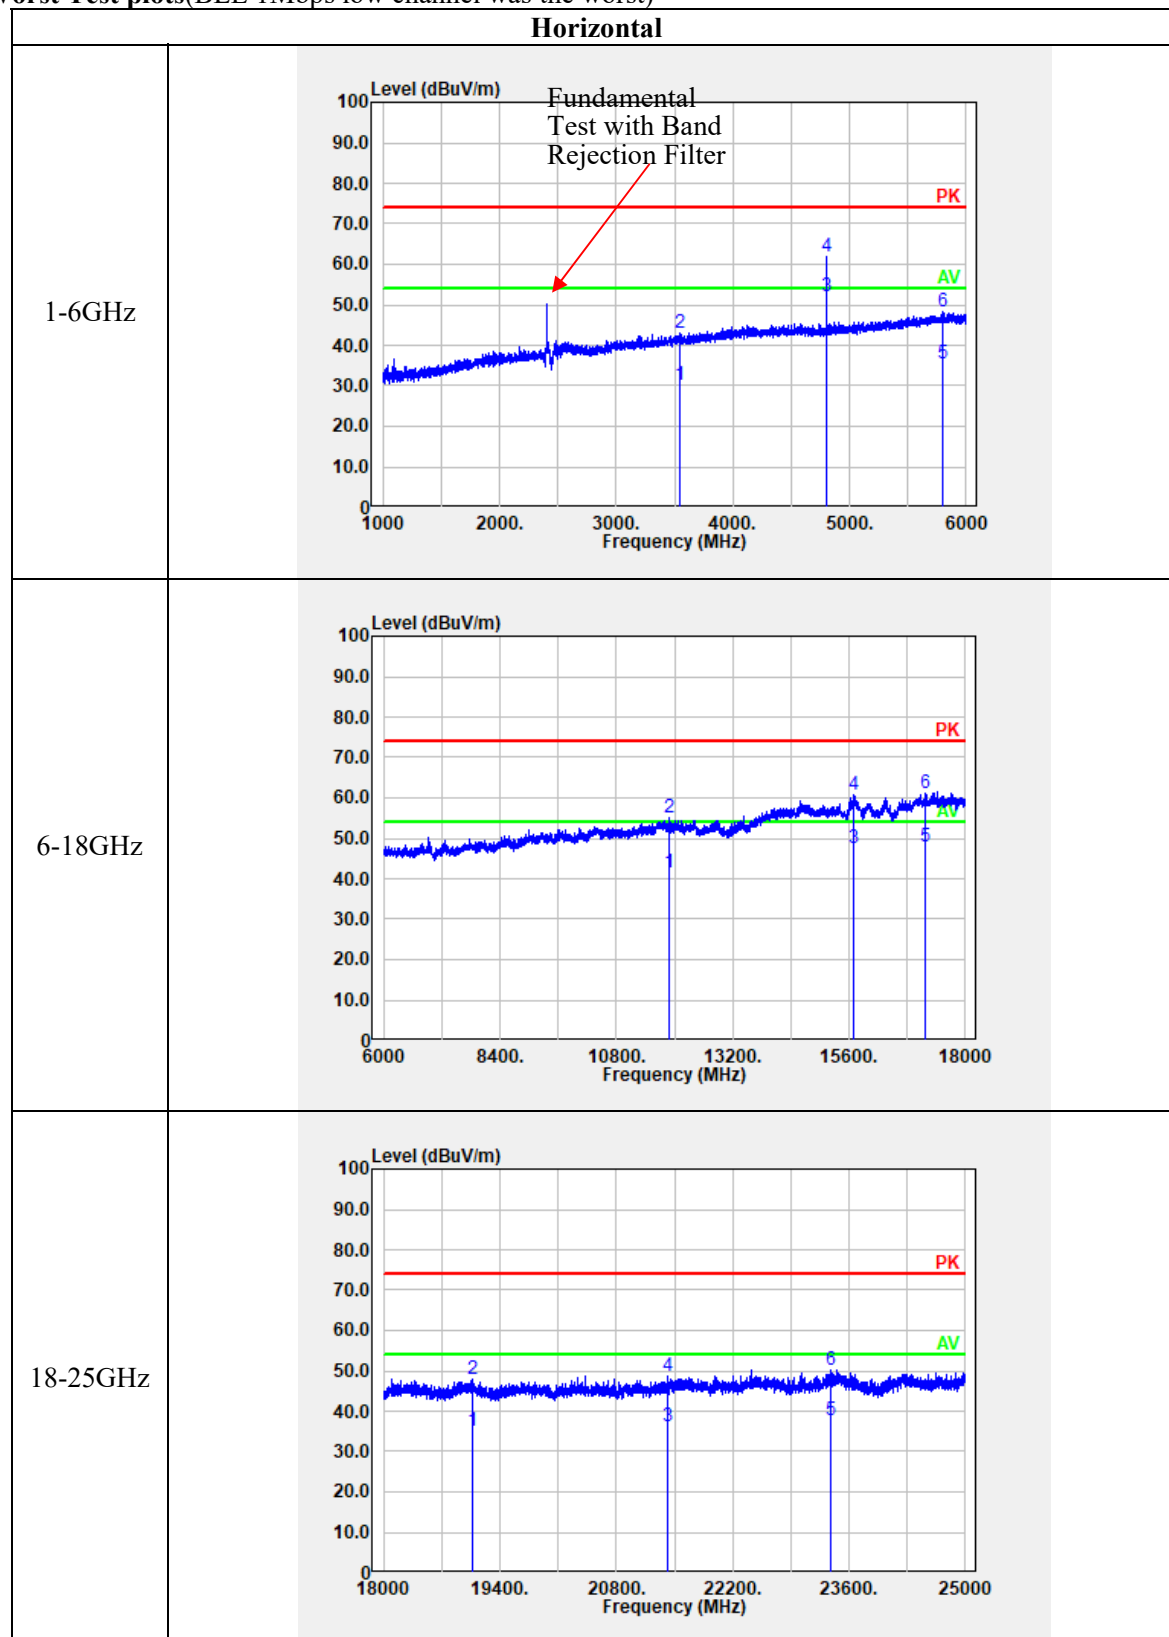
Worst Test plots(BLE 1Mbps low channel was the worst)

Vertical


1-6GHz

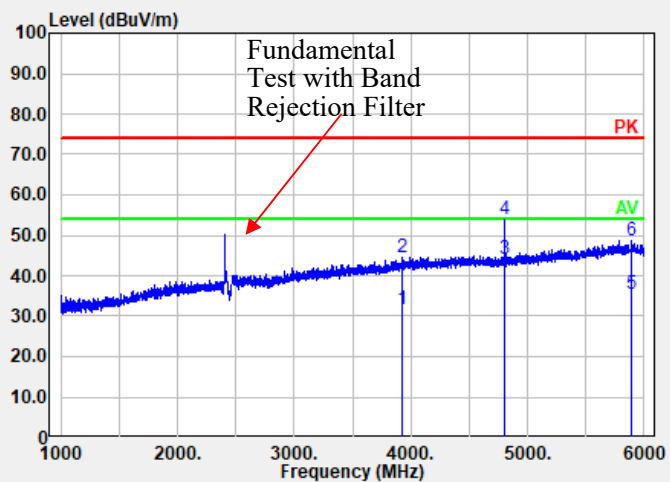

6-18GHz

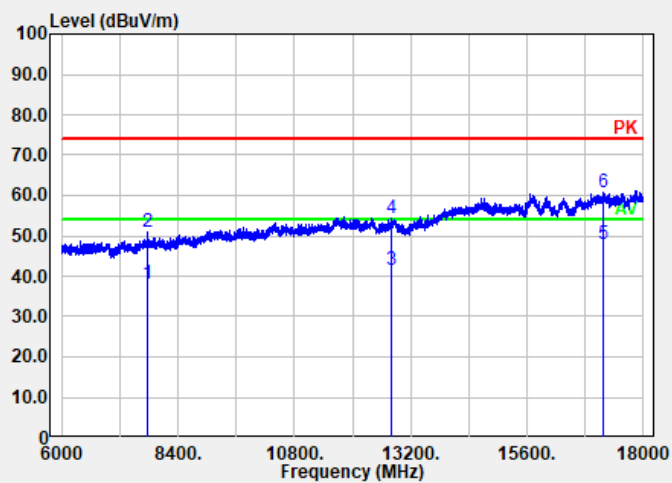

18-25GHz

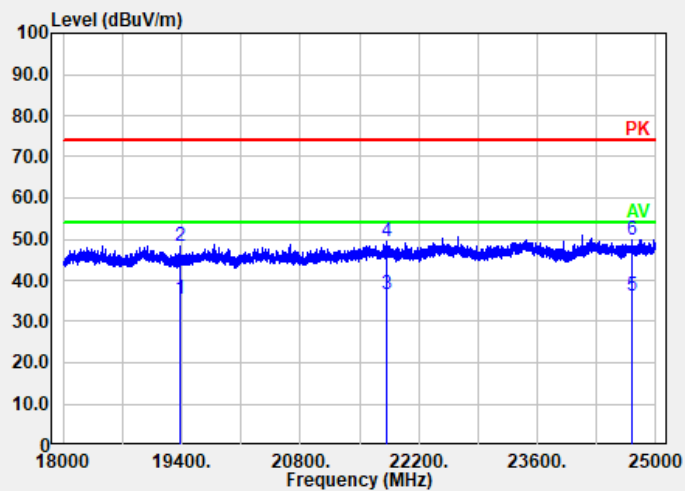

4.3 6 dB Emission Bandwidth:

Serial Number:	1VS0-5	Test Date:	2022/12/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Gary Ling	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.5	Relative Humidity: (%)	39	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
BLE 1Mbps	2402	0.644	0.5
	2440	0.644	0.5
	2480	0.648	0.5
BLE 2Mbps	2402	1.136	0.5
	2440	1.120	0.5
	2480	1.112	0.5


6dB Emission Bandwidth

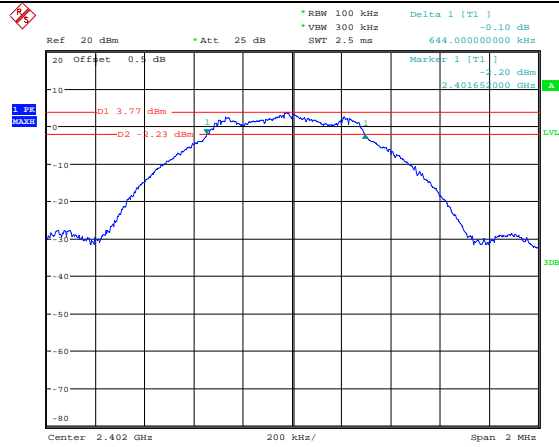BLE 1Mbps
Lowest Channel


Date: 31.DEC.2022 13:37:39

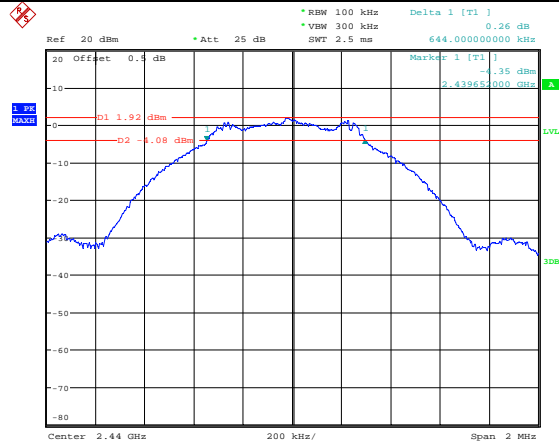BLE 1Mbps
Middle Channel

Date: 31.DEC.2022 13:39:12

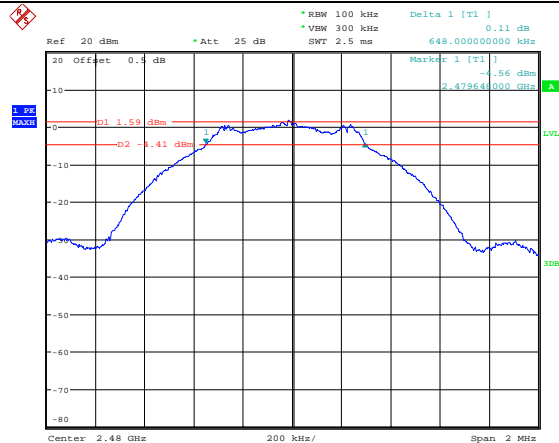BLE 1Mbps
Highest Channel

Date: 31.DEC.2022 13:53:27

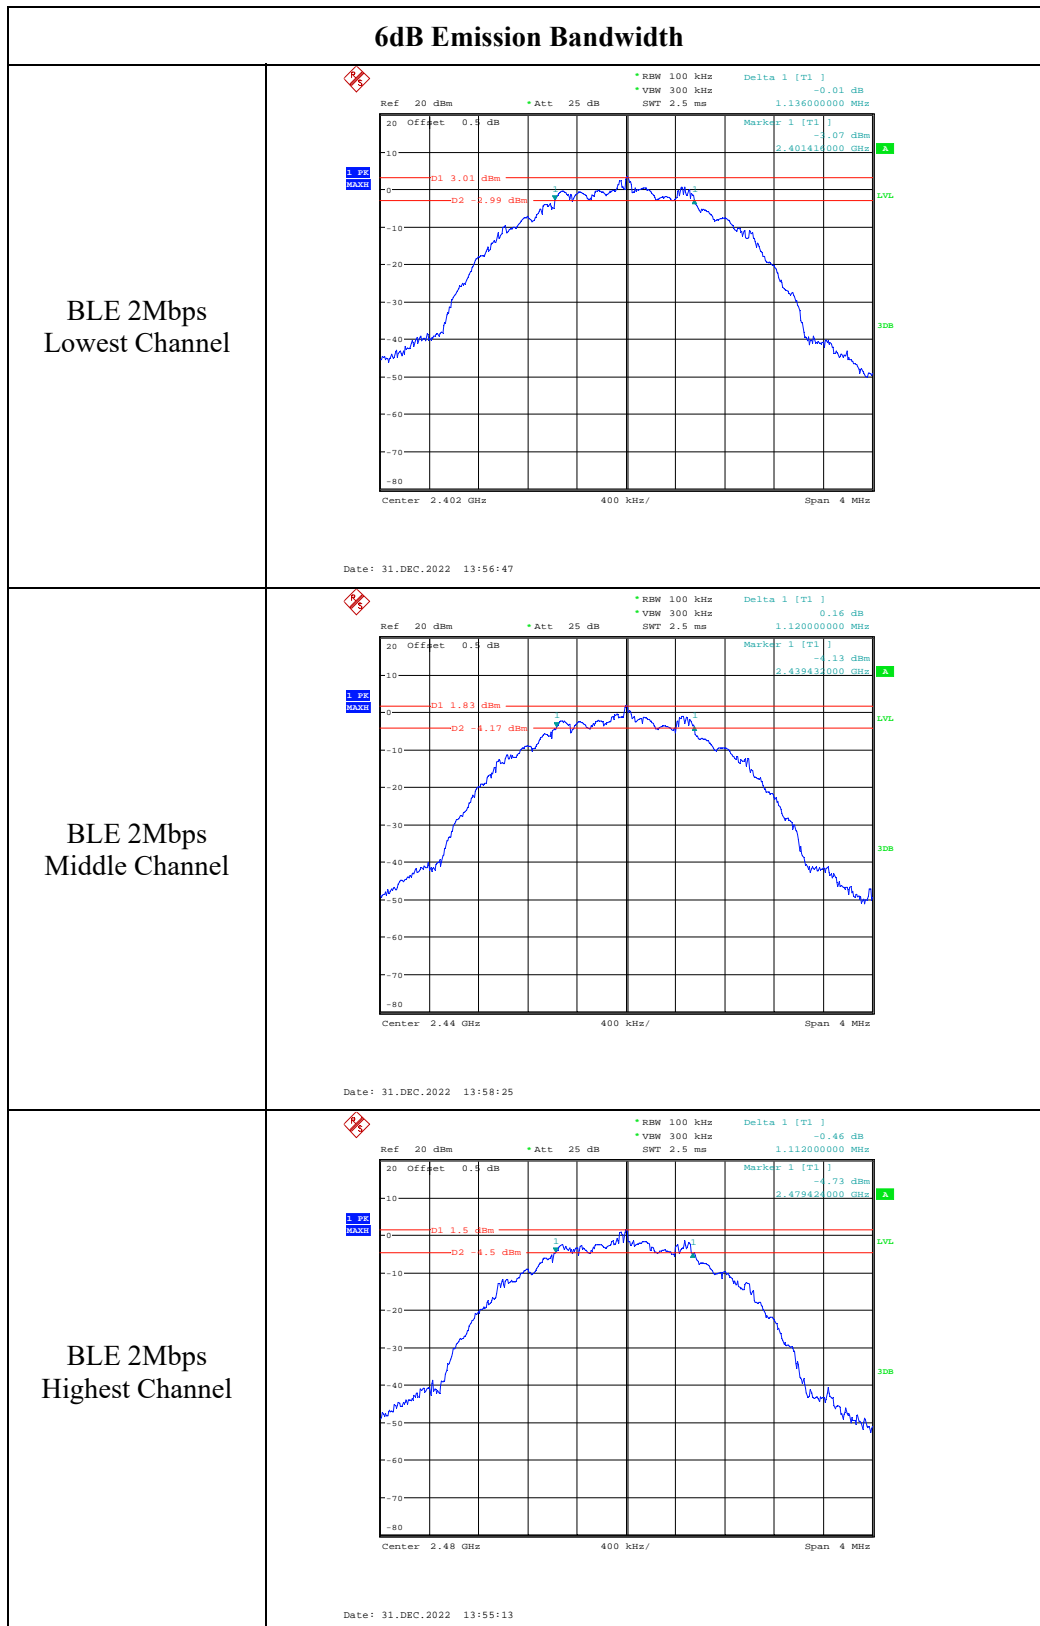

4.4 99% Occupied Bandwidth:

Serial Number:	1VS0-5	Test Date:	2022/12/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Gary Ling	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	22.5	Relative Humidity: (%)	39	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Test Modes	Test Channel	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)
BLE 1Mbps	Lowest	2402	1.036
	Middle	2440	1.036
	Highest	2480	1.032
BLE 2Mbps	Lowest	2402	2.032
	Middle	2440	2.032
	Highest	2480	2.032


99% Occupied Bandwidth

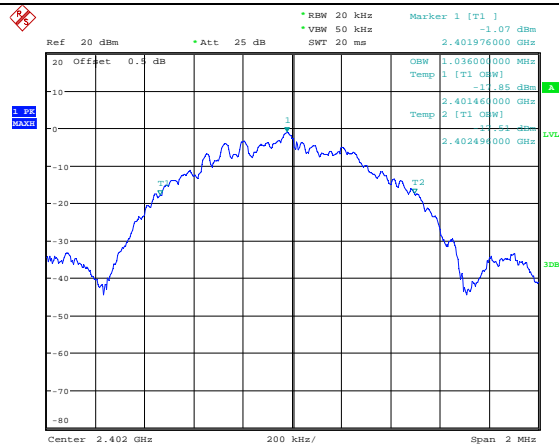BLE 1Mbps
Lowest Channel

Date: 31.DEC.2022 13:37:52

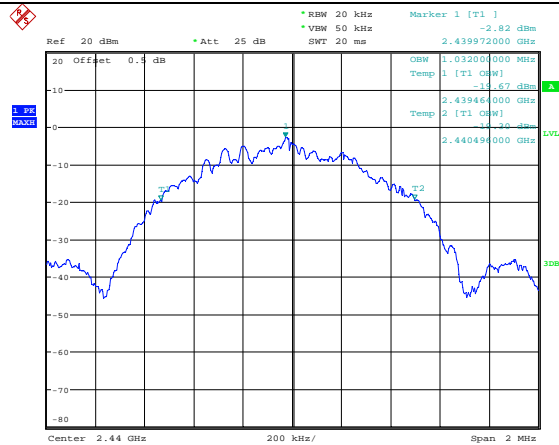
BLE 1Mbps
Middle Channel

Date: 31.DEC.2022 13:39:25

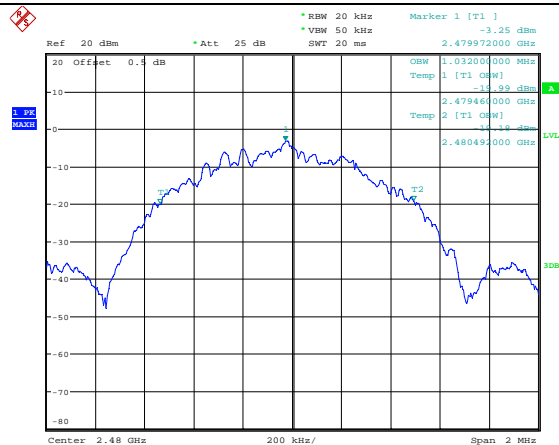
BLE 1Mbps
Highest Channel

Date: 31.DEC.2022 13:53:40


99% Occupied Bandwidth

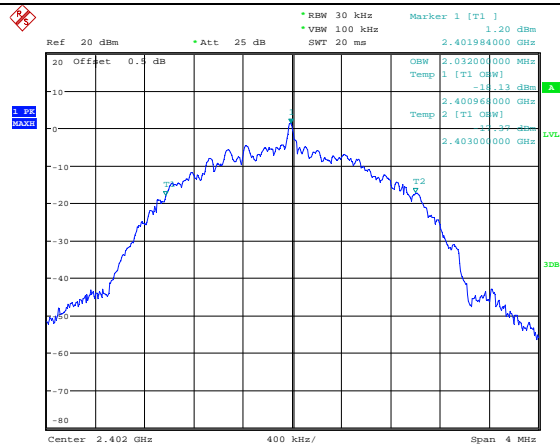BLE 2Mbps
Lowest Channel

Date: 31.DEC.2022 13:57:00

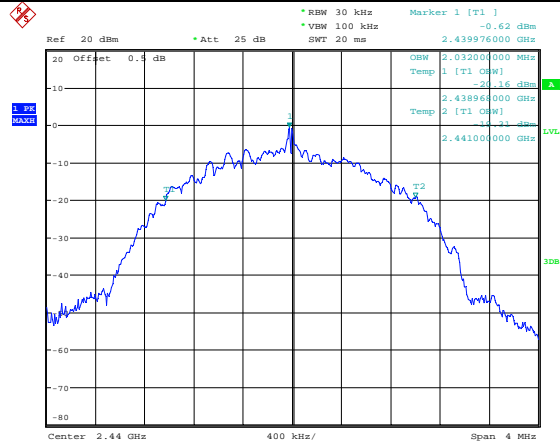BLE 2Mbps
Middle Channel

Date: 31.DEC.2022 13:58:39

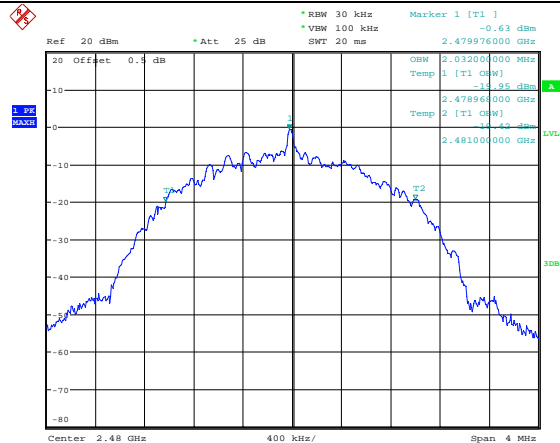BLE 2Mbps
Highest Channel

Date: 31.DEC.2022 13:55:30

4.5 Maximum conducted output power:

Serial Number:	1VS0-5	Test Date:	2022/12/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Gary Ling	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.5	Relative Humidity: (%)	39	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Modes	Test Channel	Test Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)
BLE 1Mbps	Lowest	2402	4.50	30
	Middle	2440	2.70	30
	Highest	2480	2.53	30
BLE 2Mbps	Lowest	2402	4.30	30
	Middle	2440	2.81	30
	Highest	2480	2.41	30

4.5 Maximum power spectral density:

Serial Number:	1VS0-5	Test Date:	2022/12/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Gary Ling	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.5	Relative Humidity: (%)	39	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Test Modes	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1Mbps	2402	-11.32	8.00
	2440	-13.19	8.00
	2480	-13.31	8.00
BLE 2Mbps	2402	-13.69	8.00
	2440	-15.08	8.00
	2480	-15.83	8.00


Maximum power spectral density

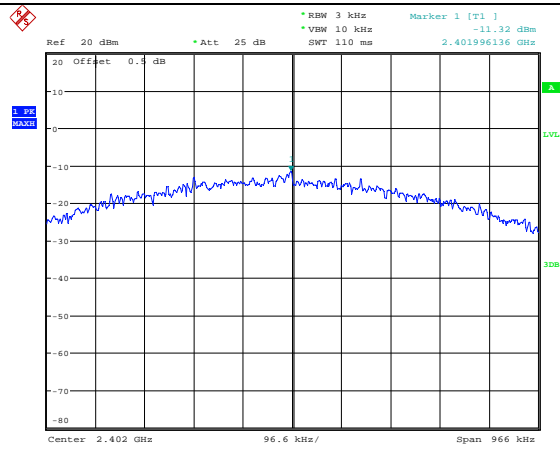BLE 1Mbps
Lowest Channel


Date: 31.DEC.2022 13:38:16

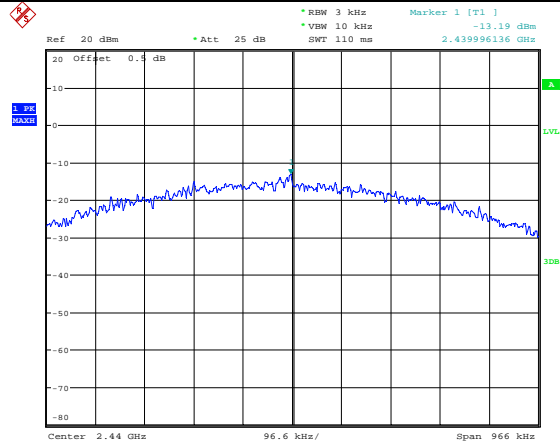BLE 1Mbps
Middle Channel


Date: 31.DEC.2022 13:39:49

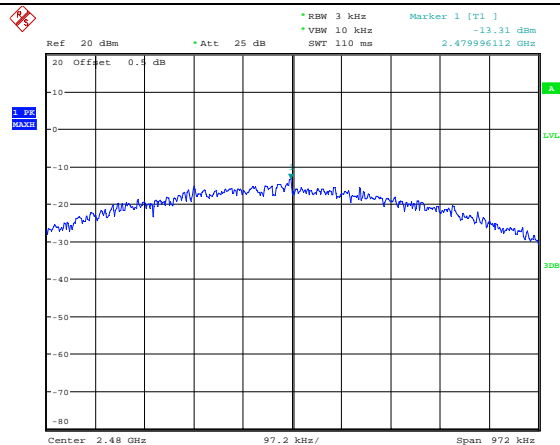BLE 1Mbps
Highest Channel


Date: 31.DEC.2022 13:54:03

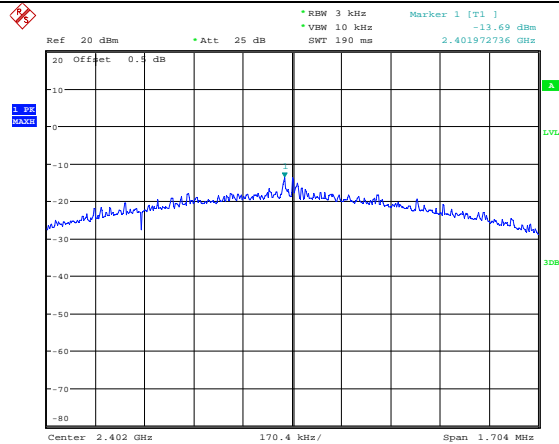Maximum power spectral densityBLE 2Mbps
Lowest Channel

Date: 31.DEC.2022 13:57:27

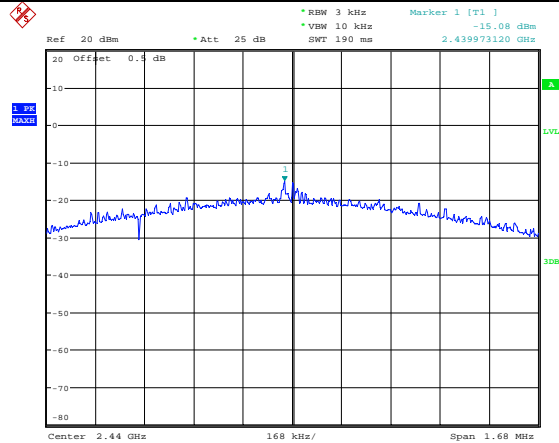BLE 2Mbps
Middle Channel

Date: 31.DEC.2022 13:59:05

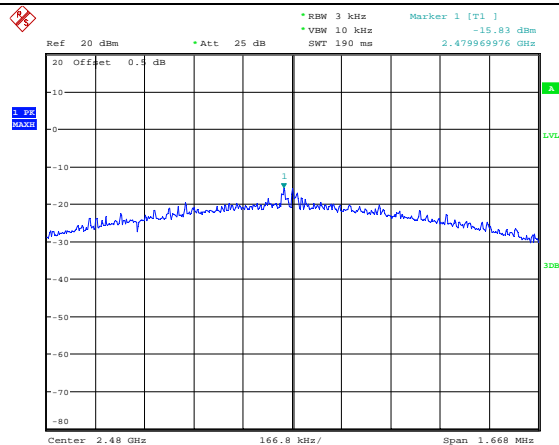BLE 2Mbps
Highest Channel

Date: 31.DEC.2022 13:55:57

4.6 100 kHz Bandwidth of Frequency Band Edge:

Serial Number:	1VS0-5	Test Date:	2022/12/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Gary Ling	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.5	Relative Humidity: (%)	39	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

100 kHz Bandwidth of Frequency Band Edge

BLE 1Mbps
Lowest Band edge

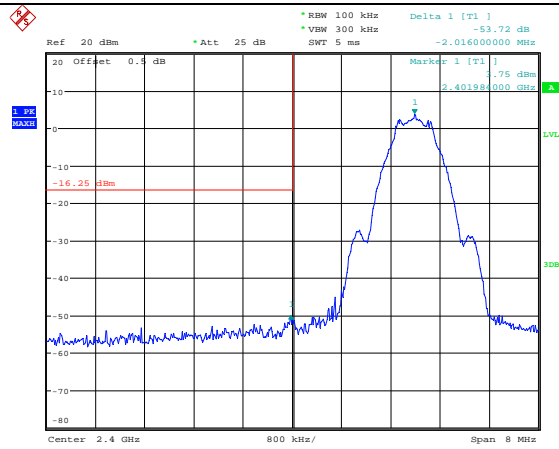


BLE 1Mbps
Highest Band edge

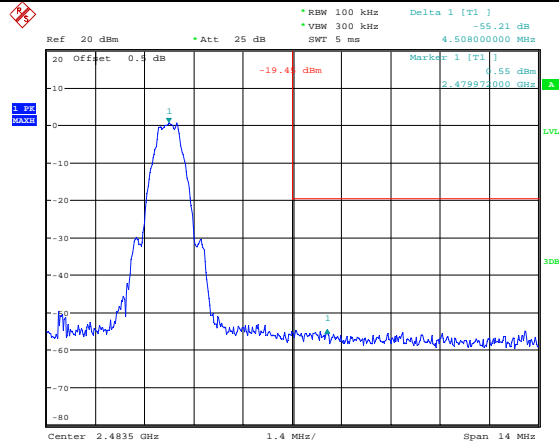


100 kHz Bandwidth of Frequency Band Edge

BLE 2Mbps
Lowest Band edge

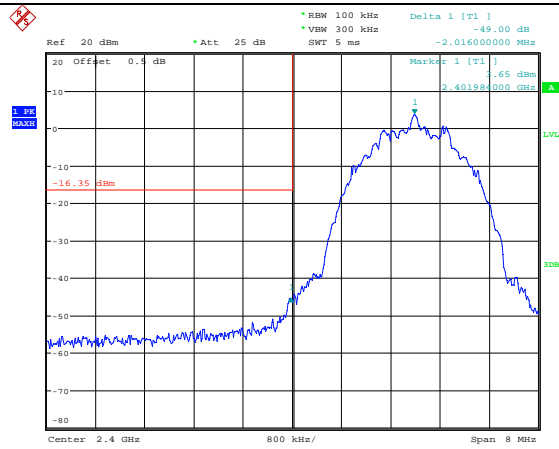

Date: 31.DEC.2022 13:57:40

BLE 2Mbps
Highest Band edge

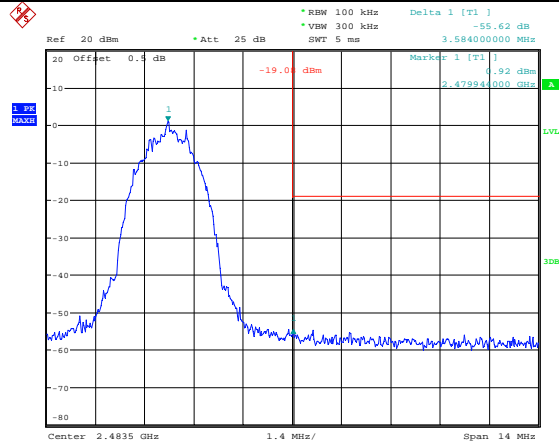

Date: 31.DEC.2022 13:56:10

4.7 Duty Cycle:

Serial Number:	1VS0-5	Test Date:	2022/12/31
Test Site:	RF	Test Mode:	Transmitting
Tester:	Gary Ling	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	22.5	Relative Humidity: (%)	39	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)
BLE 1Mbps	2.14	2.50	85.60	467
BLE 2Mbps	1.11	1.88	59.04	901

BLE 1Mbps

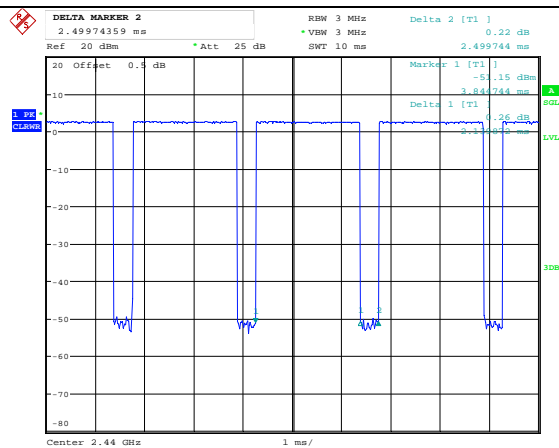

Date: 31.DEC.2022 14:06:56

BLE 2Mbps

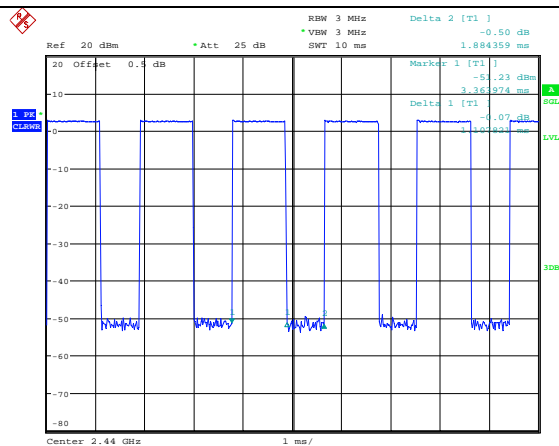

Date: 31.DEC.2022 14:05:32

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

FCC §15.247 (i)

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

5.2 Procedure

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

5.3 Measurement Result

Radio	Frequency (MHz)	$\lambda/2\pi$ (mm)	Distance (mm)	Exemption ERP (mW)	Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP		MPE-Based Exemption
							dBm	mW	
WiFi	2412-2462	19.80	200	768	9	1.82	8.67	7.36	Compliant
BLE	2402-2480	19.88	200	768	5	1.82	4.67	2.93	Compliant

Note:

The Value of Maximum Conducted Power including Tune-up Tolerance was declared by the customer.

The WiFi and BLE can not transmit simultaneously.

Result: The device compliant the MPE-Based Exemption at 20cm distances.

===== END OF REPORT =====