



## TEST REPORT

Product Name: Smart Neon Rope Light  
FCC ID: 2AW95LS6000162  
Trademark: Linkind  
Model Number: LS6000162  
Prepared For: SPRING SUNSHINE TECHNOLOGY CO., LIMITED  
Address: Room 2401-2404, 24/F., Fu Fai Commercial Centre 27 Hillier Street, Sheung Wan, Hong Kong  
Manufacturer: Leedarson IoT Technology Inc.  
Address: No.1511, 2nd Fanghu North Rd, Huli District, Xiamen, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Apr. 18, 2024  
Sample tested Date: Apr. 18, 2024 to May. 08, 2024  
Issue Date: May. 08, 2024  
Report No.: CTB240507096RFX  
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION.....</b>	<b>3</b>
<b>2. TEST SUMMARY .....</b>	<b>4</b>
<b>3. MEASUREMENT UNCERTAINTY .....</b>	<b>5</b>
<b>4. PRODUCT INFORMATION AND TEST SETUP .....</b>	<b>6</b>
4.1 Product Information .....	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List .....	7
4.5 Test Mode .....	7
4.6 Test Environment .....	7
<b>5. TEST FACILITY AND TEST INSTRUMENT USED .....</b>	<b>8</b>
5.1 Test Facility .....	8
5.2 Test Instrument Used.....	8
<b>6. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>10</b>
6.1 Block Diagram Of Test Setup.....	10
6.2 Limit.....	10
6.3 Test procedure .....	10
6.4 Test Result .....	12
<b>7. RADIATED SPURIOUS EMISSION .....</b>	<b>14</b>
7.1 Block Diagram Of Test Setup.....	14
7.2 Limit.....	14
7.3 Test procedure .....	15
7.4 Test Result .....	16
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>38</b>
8.1 Block Diagram Of Test Setup.....	38
8.2 Limit.....	38
8.3 Test procedure .....	38
8.4 Test Result .....	39
<b>9. CONDUCTED OUTPUT POWER .....</b>	<b>46</b>
9.1 Block Diagram Of Test Setup.....	46
9.2 Limit.....	46
9.3 Test procedure .....	46
9.4 Test Result .....	47
<b>10. 6DB OCCUPIED BANDWIDTH .....</b>	<b>48</b>
10.1 Block Diagram Of Test Setup.....	48
10.2 Limit.....	48
10.3 Test procedure .....	48
10.4 Test Result .....	49
<b>11. POWER SPECTRAL DENSITY .....</b>	<b>54</b>
11.1 Block Diagram Of Test Setup.....	54
11.2 Limit.....	54
11.3 Test procedure .....	54
11.4 Test Result .....	55
<b>12. ANTENNA REQUIREMENT .....</b>	<b>60</b>
<b>13. EUT TEST SETUP PHOTOGRAPHS.....</b>	<b>61</b>

*(Note: N/A means not applicable)*

1. VERSION

Report No.	Issue Date	Description	Approved
CTB240507096RFX	May. 08, 2024	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s): LS6000162

Model Description: N/A

Wi-Fi Specification: IEEE 802.11b/g/n

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel  
IEEE 802.11n 40: 2422-2452MHz/ 7 channel

Max. RF output power: WiFi (2.4G): 21.316dBm

Type of Modulation: WiFi: DSSS, OFDM

Antenna installation: WiFi: PCB antenna

Antenna Gain: WiFi (2.4G): 4.11dBi

Ratings: Adapter: Input: 100-240V~50/60Hz 1.4A  
Output: 24V=2A

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Class 2 Power Supply	/	BI48G-240200-AdU	/	/

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	24V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08



22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2024.07.05

**Continuous disturbance**


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

**Radiated emission**

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

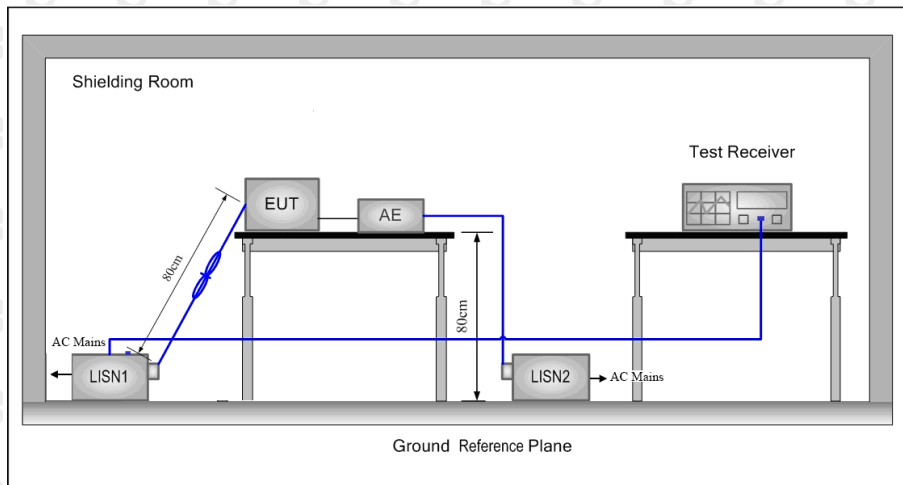

### 6.2 Limit

**Table 4 – AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency


### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

### 6.4 Test Result

Test Specification: Line  
 AC 120V 60Hz  
 the worst: 802.11b (low channel)

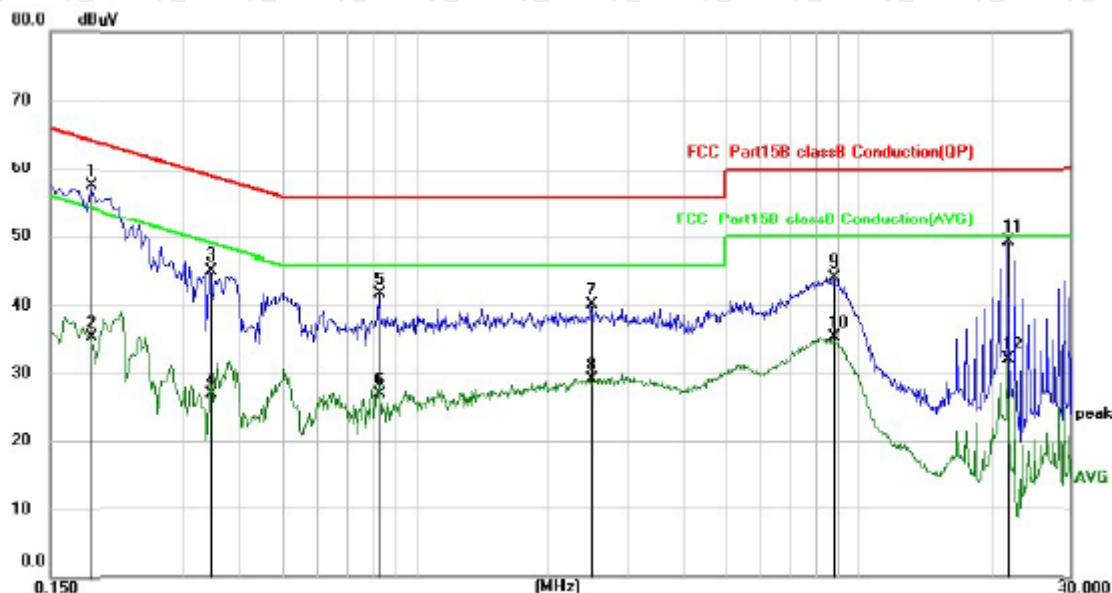


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1860	47.40	9.95	57.35	64.21	-6.86	QP
2		0.1860	25.33	9.95	35.28	54.21	-18.93	AVG
3		0.3460	35.12	9.97	45.09	59.06	-13.97	QP
4		0.3460	16.96	9.97	26.93	49.06	-22.13	AVG
5		0.8300	31.68	10.02	41.70	56.00	-14.30	QP
6		0.8300	16.87	10.02	26.89	46.00	-19.11	AVG
7		2.4980	30.04	10.14	40.18	56.00	-15.82	QP
8		2.4980	18.93	10.14	29.07	46.00	-16.93	AVG
9		8.7299	33.65	10.55	44.20	60.00	-15.80	QP
10		8.7299	24.67	10.55	35.22	50.00	-14.78	AVG
11		21.6660	38.28	10.88	49.16	60.00	-10.84	QP
12		21.6660	21.23	10.88	32.11	50.00	-17.89	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral  
 AC 120V 60Hz  
 the worst: 802.11b (low channel)

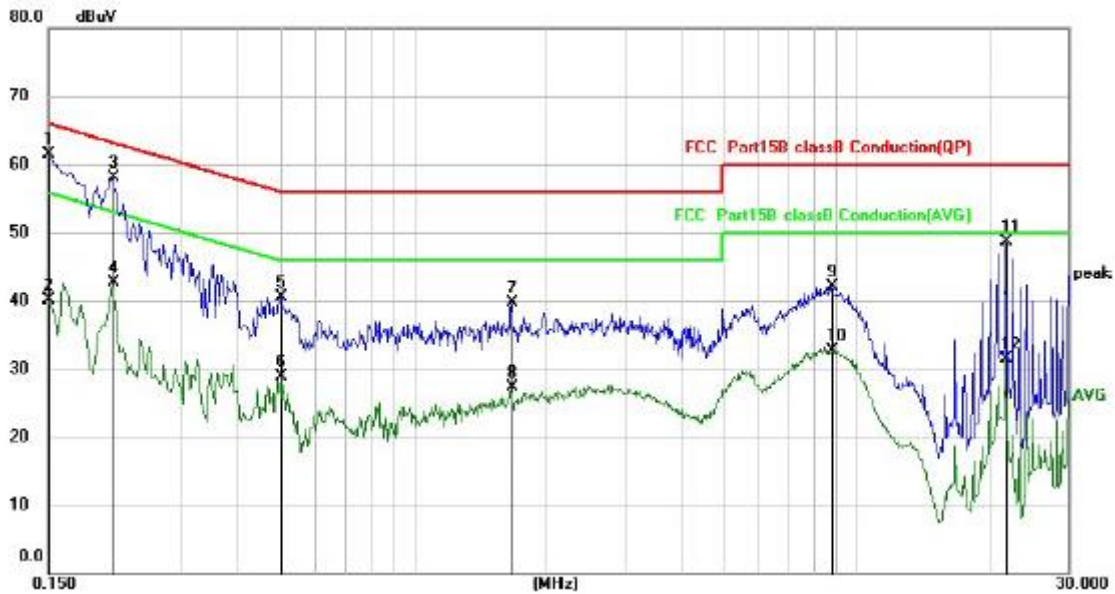

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	51.46	9.95	61.41	66.00	-4.59	QP
2		0.1500	30.22	9.95	40.17	56.00	-15.83	AVG
3		0.2100	48.18	9.95	58.13	63.21	-5.08	QP
4		0.2100	32.80	9.95	42.75	53.21	-10.46	AVG
5		0.5020	30.61	9.99	40.60	56.00	-15.40	QP
6		0.5020	18.87	9.99	28.86	46.00	-17.14	AVG
7		1.6660	29.67	10.06	39.73	56.00	-16.27	QP
8		1.6660	17.32	10.06	27.38	46.00	-18.62	AVG
9		8.7540	31.57	10.56	42.13	60.00	-17.87	QP
10		8.7540	22.20	10.56	32.76	50.00	-17.24	AVG
11		21.6620	37.88	10.88	48.76	60.00	-11.24	QP
12		21.6620	20.64	10.88	31.52	50.00	-18.48	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

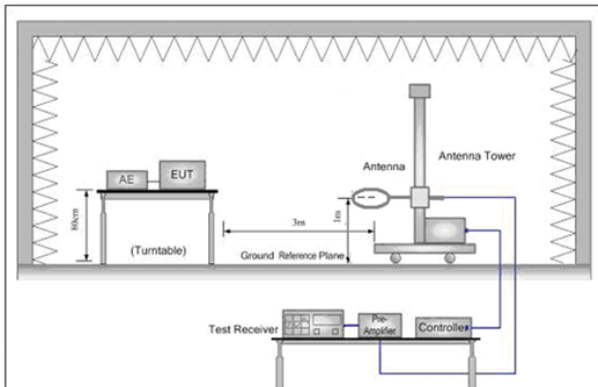


Figure 1. Below 30MHz

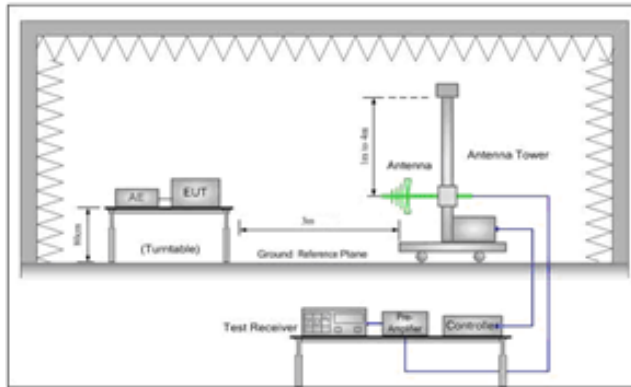


Figure 2. 30MHz to 1GHz

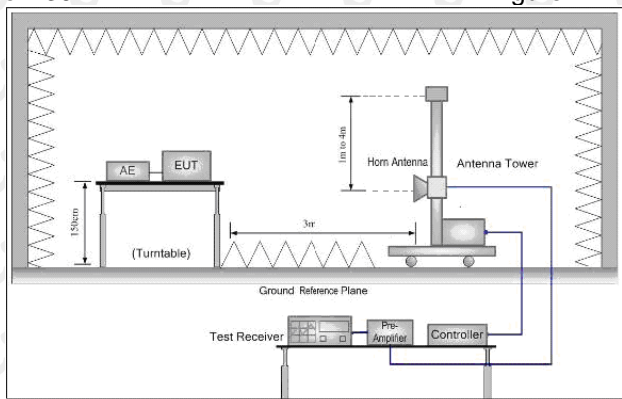


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:  
Antenna polarity: H

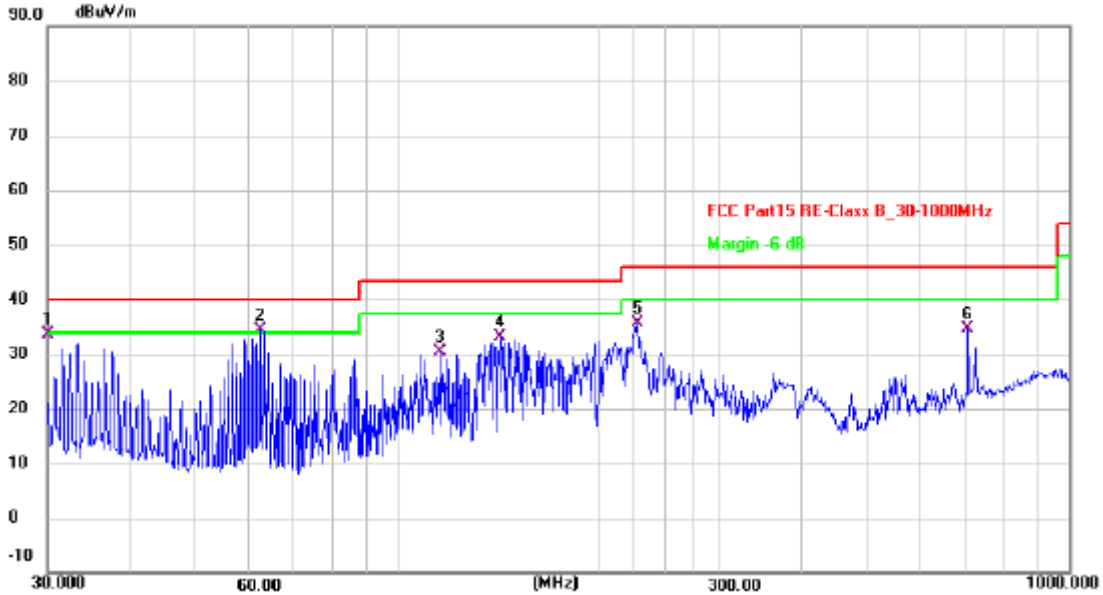


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.0000	47.70	-14.00	33.70	40.00	-6.30	QP
2 *	62.4313	50.23	-15.96	34.27	40.00	-5.73	QP
3	115.7256	46.19	-15.89	30.30	43.50	-13.20	QP
4	141.8262	46.64	-13.55	33.09	43.50	-10.41	QP
5	227.6906	51.50	-15.96	35.54	46.00	-10.46	QP
6	706.6998	38.45	-3.92	34.53	46.00	-11.47	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



Antenna polarity: V

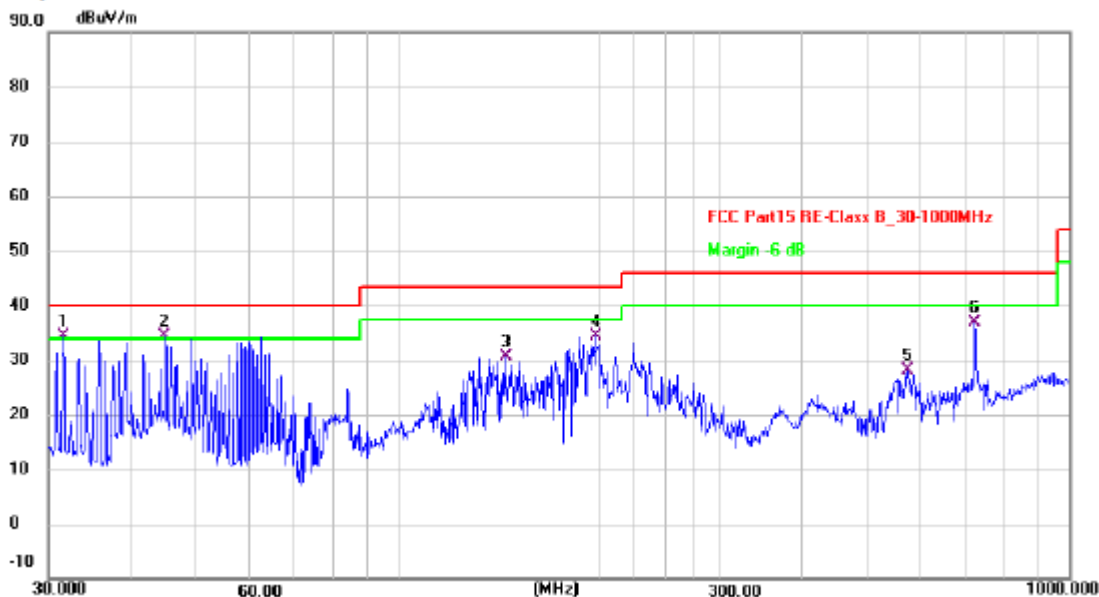

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	31.6201	48.48	-14.06	34.42	40.00	-5.58	QP
2 !	44.9004	48.78	-14.44	34.34	40.00	-5.66	QP
3	144.3345	43.92	-13.24	30.68	43.50	-12.82	QP
4	196.5098	50.78	-16.32	34.46	43.50	-9.04	QP
5	574.6258	34.19	-6.08	28.11	46.00	-17.89	QP
6	721.7258	40.28	-3.50	36.78	46.00	-9.22	QP

- Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level
1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
  2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
  3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

## Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	66.27	-3.64	62.63	74	-11.37	peak
4824	49.47	-3.64	45.83	54	-8.17	AVG
7236	58.95	-0.95	58.00	74	-16.00	peak
7236	44.57	-0.95	43.62	54	-10.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	65.12	-3.64	61.48	74	-12.52	peak
4824	49.64	-3.64	46.00	54	-8.00	AVG
7236	57.31	-0.95	56.36	74	-17.64	peak
7236	45.26	-0.95	44.31	54	-9.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	65.62	-3.51	62.11	74	-11.89	peak
4874	48.93	-3.51	45.42	54	-8.58	AVG
7311	60.40	-0.82	59.58	74	-14.42	peak
7311	44.37	-0.82	43.55	54	-10.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	64.73	-3.51	61.22	74	-12.78	peak
4874	49.01	-3.51	45.50	54	-8.50	AVG
7311	59.70	-0.82	58.88	74	-15.12	peak
7311	44.70	-0.82	43.88	54	-10.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	64.58	-3.43	61.15	74	-12.85	peak
4924	48.46	-3.43	45.03	54	-8.97	AVG
7386	57.34	-0.75	56.59	74	-17.41	peak
7386	43.74	-0.75	42.99	54	-11.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	65.33	-3.43	61.90	74	-12.10	peak
4924	48.11	-3.43	44.68	54	-9.32	AVG
7386	58.81	-0.75	58.06	74	-15.94	peak
7386	42.98	-0.75	42.23	54	-11.77	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.68	-3.64	60.04	74	-13.96	peak
4824	48.83	-3.64	45.19	54	-8.81	AVG
7236	57.54	-0.95	56.59	74	-17.41	peak
7236	44.86	-0.95	43.91	54	-10.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.37	-3.64	58.73	74	-15.27	peak
4824	47.40	-3.64	43.76	54	-10.24	AVG
7236	59.20	-0.95	58.25	74	-15.75	peak
7236	44.04	-0.95	43.09	54	-10.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.68	-3.51	60.17	74	-13.83	peak
4874	47.59	-3.51	44.08	54	-9.92	AVG
7311	59.94	-0.82	59.12	74	-14.88	peak
7311	45.23	-0.82	44.41	54	-9.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.08	-3.51	60.57	74	-13.43	peak
4874	48.26	-3.51	44.75	54	-9.25	AVG
7311	57.56	-0.82	56.74	74	-17.26	peak
7311	42.14	-0.82	41.32	54	-12.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	65.10	-3.43	61.67	74	-12.33	peak
4924	50.17	-3.43	46.74	54	-7.26	AVG
7386	58.68	-0.75	57.93	74	-16.07	peak
7386	41.84	-0.75	41.09	54	-12.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.48	-3.43	60.05	74	-13.95	peak
4924	46.76	-3.43	43.33	54	-10.67	AVG
7386	57.88	-0.75	57.13	74	-16.87	peak
7386	41.56	-0.75	40.81	54	-13.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.71	-3.64	60.07	74	-13.93	peak
4824	47.51	-3.64	43.87	54	-10.13	AVG
7236	57.49	-0.95	56.54	74	-17.46	peak
7236	44.15	-0.95	43.20	54	-10.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.49	-3.64	60.85	74	-13.15	peak
4824	48.84	-3.64	45.20	54	-8.80	AVG
7236	56.74	-0.95	55.79	74	-18.21	peak
7236	42.64	-0.95	41.69	54	-12.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	65.39	-3.51	61.88	74.00	-12.12	peak
4874.00	47.34	-3.51	43.83	54.00	-10.17	AVG
7311.00	56.56	-0.82	55.74	74.00	-18.26	peak
7311.00	44.15	-0.82	43.33	54.00	-10.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.93	-3.51	59.42	74.00	-14.58	peak
4874.00	45.86	-3.51	42.35	54.00	-11.65	AVG
7311.00	59.17	-0.82	58.35	74.00	-15.65	peak
7311.00	42.04	-0.82	41.22	54.00	-12.78	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.85	-3.43	59.42	74	-14.58	peak
4924	45.93	-3.43	42.50	54	-11.50	AVG
7386	58.03	-0.75	57.28	74	-16.72	peak
7386	42.69	-0.75	41.94	54	-12.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.69	-3.43	61.26	74	-12.74	peak
4924	45.45	-3.43	42.02	54	-11.98	AVG
7386	58.11	-0.75	57.36	74	-16.64	peak
7386	43.02	-0.75	42.27	54	-11.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	63.17	-3.63	59.54	74	-14.46	peak
4844	47.71	-3.63	44.08	54	-9.92	AVG
7266	59.41	-0.94	58.47	74	-15.53	peak
7266	45.02	-0.94	44.08	54	-9.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.46	-3.63	61.83	74	-12.17	peak
4844	49.33	-3.63	45.70	54	-8.30	AVG
7266	59.48	-0.94	58.54	74	-15.46	peak
7266	45.70	-0.94	44.76	54	-9.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.21	-3.51	59.70	74	-14.30	peak
4874	49.20	-3.51	45.69	54	-8.31	AVG
7311	60.62	-0.82	59.80	74	-14.20	peak
7311	46.03	-0.82	45.21	54	-8.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.30	-3.51	58.79	74	-15.21	peak
4874	46.44	-3.51	42.93	54	-11.07	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4904	62.61	-3.43	59.18	74	-14.82	peak
4904	48.91	-3.43	45.48	54	-8.52	AVG
7356	58.23	-0.75	57.48	74	-16.52	peak
7356	41.71	-0.75	40.96	54	-13.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4904	63.81	-3.43	60.38	74	-13.62	peak
4904	47.45	-3.43	44.02	54	-9.98	AVG
7356	58.67	-0.75	57.92	74	-16.08	peak
7356	43.37	-0.75	42.62	54	-11.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

### Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.83	-5.81	52.02	74	-21.98	peak
2390	/	-5.81	/	54	/	AVG
2399	65.19	-5.84	59.35	74	-14.65	peak
2399	48.03	-5.84	42.19	54	-11.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.57	-5.81	51.76	74	-22.24	peak
2390	/	-5.81	/	54	/	AVG
2399	62.46	-5.84	56.62	74	-17.38	peak
2399	46.93	-5.84	41.09	54	-12.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.02	-5.65	51.37	74	-22.63	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.11	-5.65	50.46	74	-23.54	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	58.59	-5.81	52.78	74	-21.22	peak
2390	/	-5.81	/	54	/	AVG
2399	62.53	-5.84	56.69	74	-17.31	peak
2399	47.53	-5.84	41.69	54	-12.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	57.48	-5.81	51.67	74	-22.33	peak
2390	/	-5.81	/	54	/	AVG
2399	61.46	-5.84	55.62	74	-18.38	peak
2399	46.38	-5.84	40.54	54	-13.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.25	-5.65	51.60	74	-22.40	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.96	-5.65	52.31	74	-21.69	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	57.59	-5.81	51.78	74	-22.22	peak
2390	/	-5.81	/	54	/	AVG
2399	63.09	-5.84	57.25	74	-16.75	peak
2399	46.93	-5.84	41.09	54	-12.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	57.05	-5.81	51.24	74	-22.76	peak
2390	/	-5.81	/	54	/	AVG
2399	61.65	-5.84	55.81	74	-18.19	peak
2399	46.59	-5.84	40.75	54	-13.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.67	-5.65	51.02	74	-22.98	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.41	-5.65	49.76	74	-24.24	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.42	-5.81	51.61	74	-22.39	peak
2390	/	-5.81	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.67	-5.81	51.86	74	-22.14	peak
2390	/	-5.81	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.25	-5.65	52.60	74	-21.40	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.52	-5.65	50.87	74	-23.13	peak
2483.5	/	-5.65	/	54	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

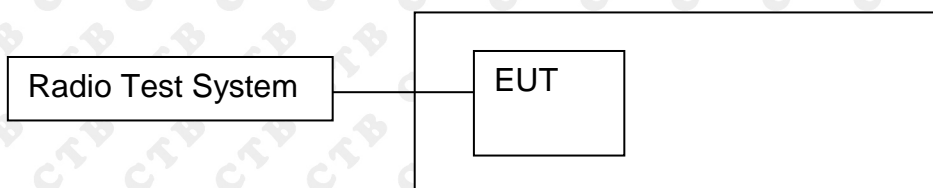


### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - Below 30MHz:
    - RBW = 100kHz, VBW = 300kHz, Sweep = auto
    - Detector function = peak, Trace = max hold
  - Above 30MHz:
    - RBW = 100KHz, VBW = 300KHz, Sweep = auto
    - Detector function = peak, Trace = max hold

8.4 Test Result

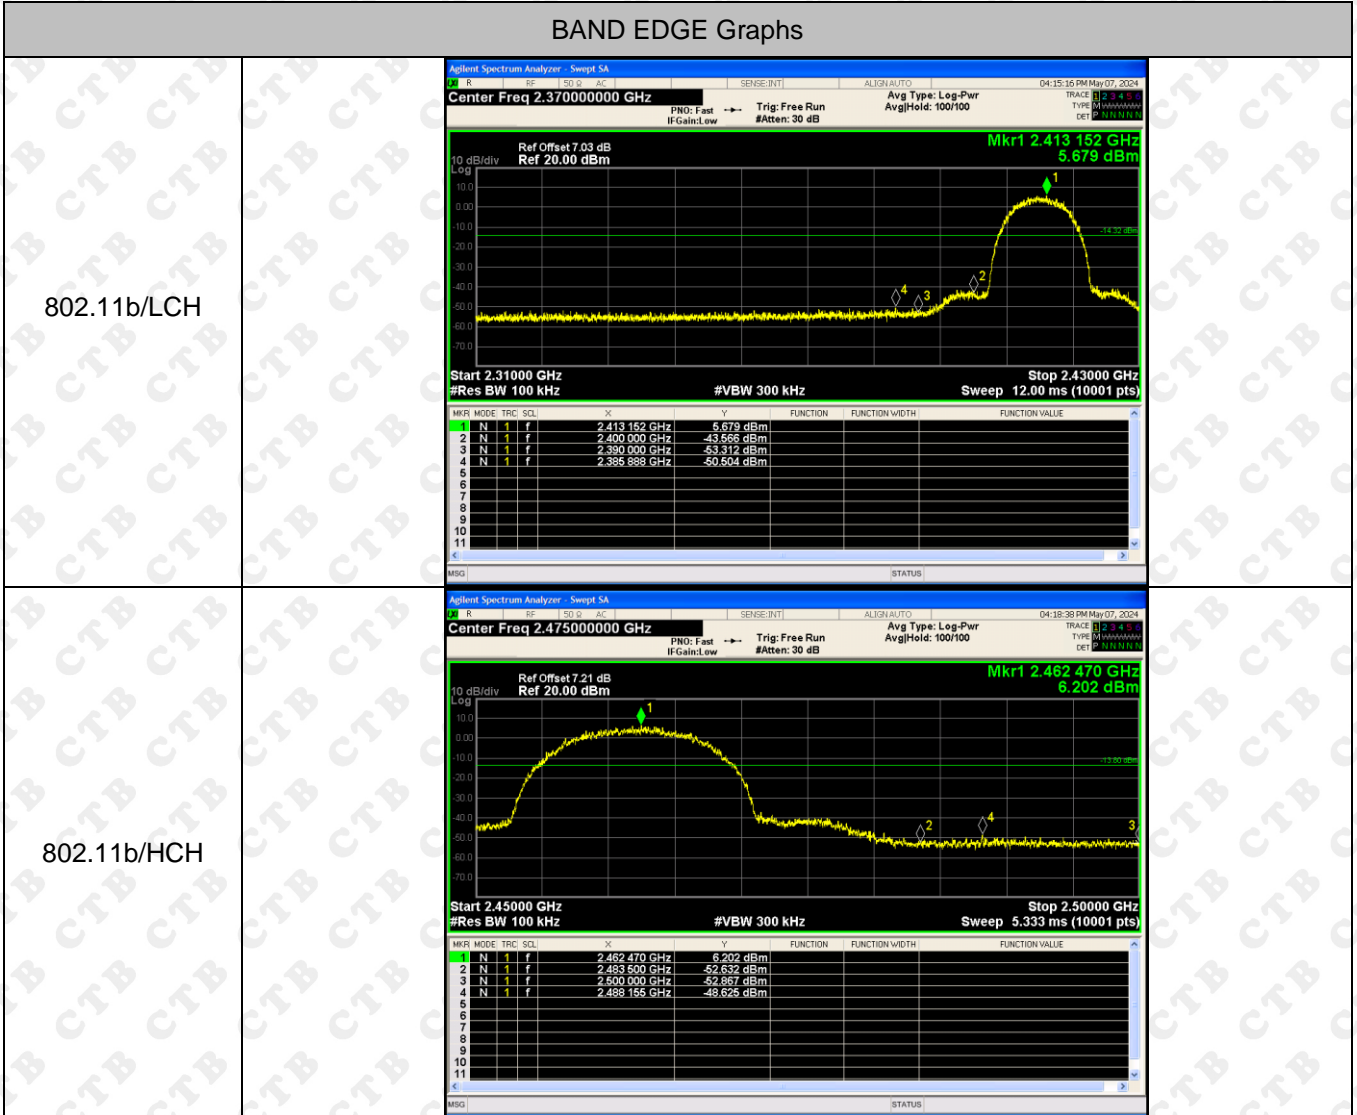


## BAND EDGE Graphs


802.11g/LCH

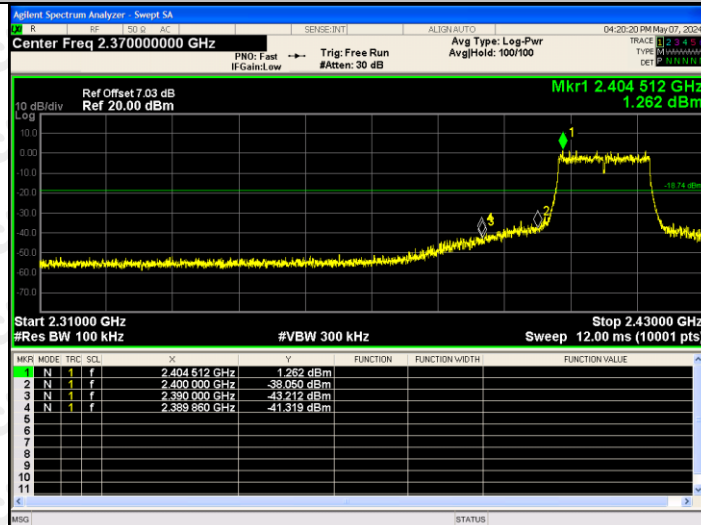

802.11g/HCH

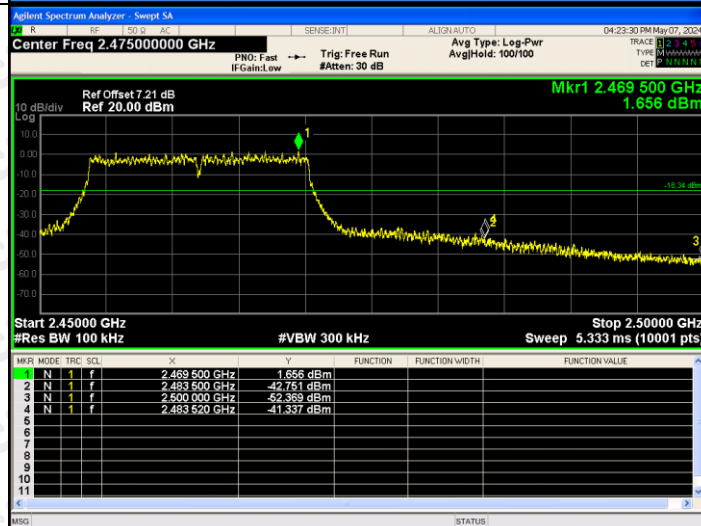


802.11n(HT20)/L  
CH

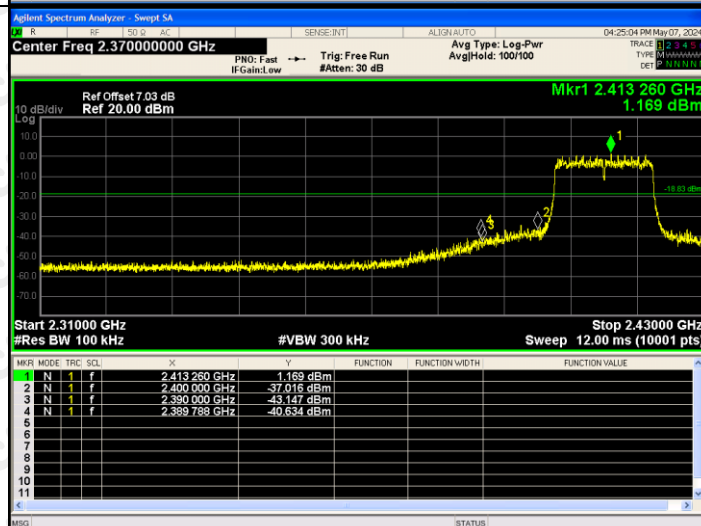





802.11n(HT20)/H  
CH

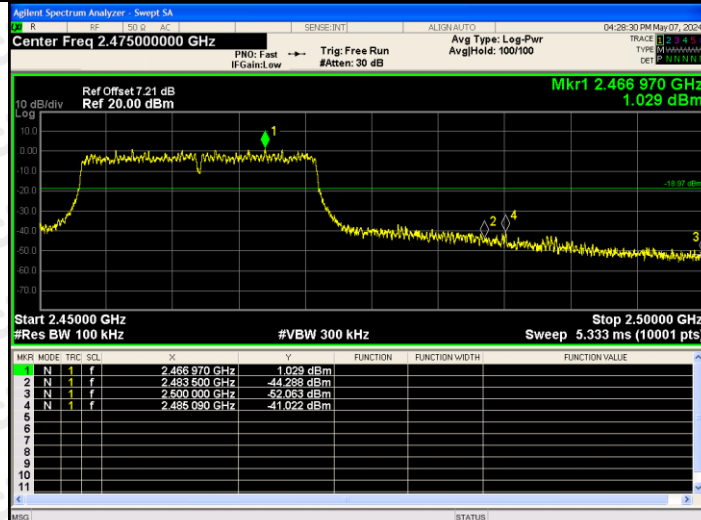

802.11n(HT40)/L  
CH

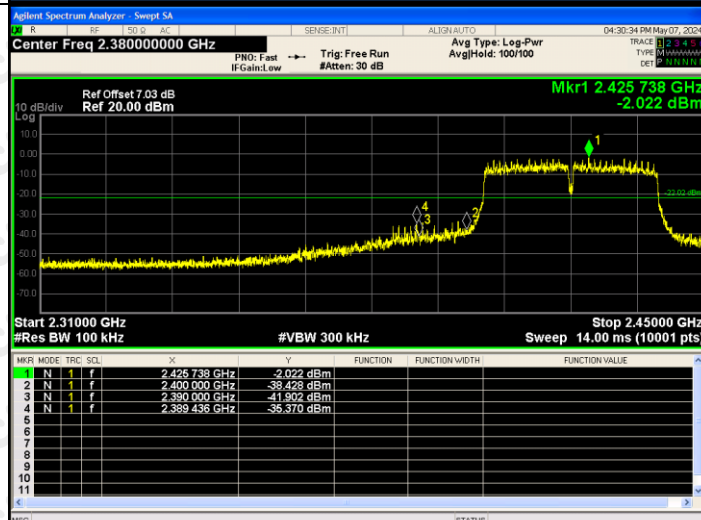


802.11n(HT40)/H  
CH

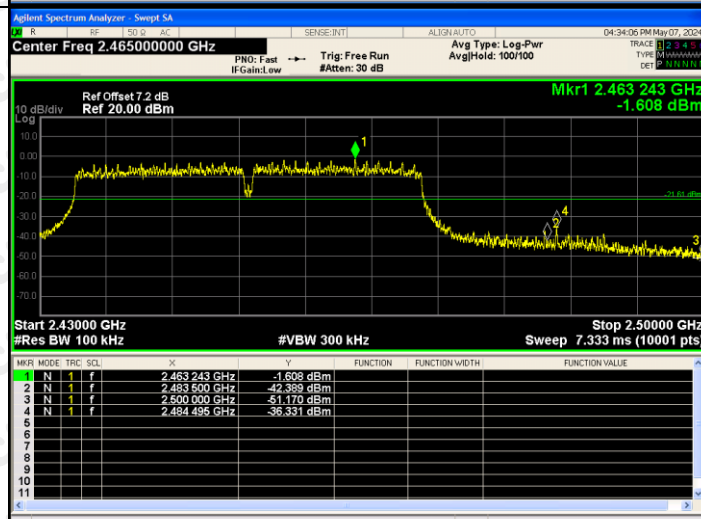


RF Conducted Spurious Emissions Graphs


802.11b/LCH

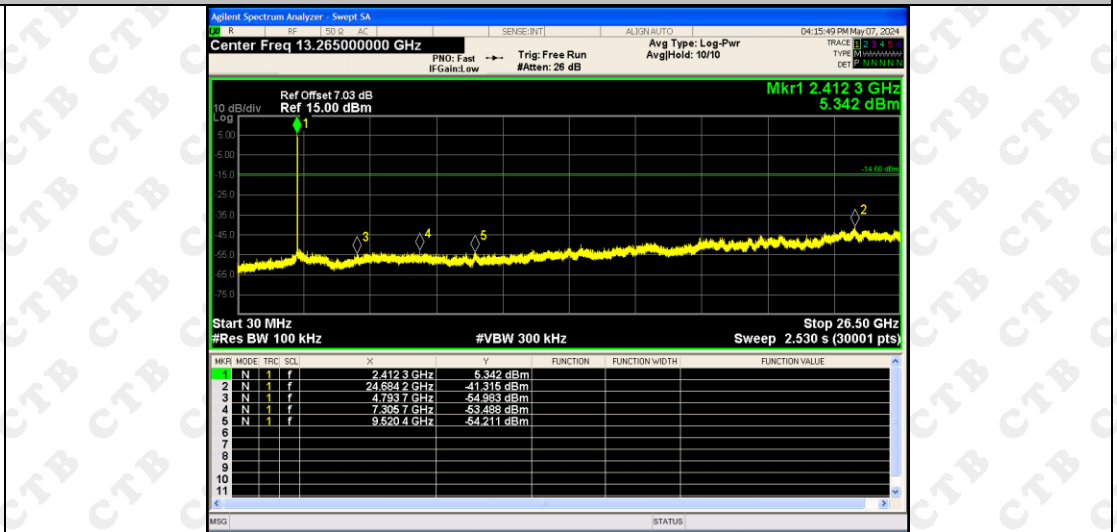

802.11b/MCH

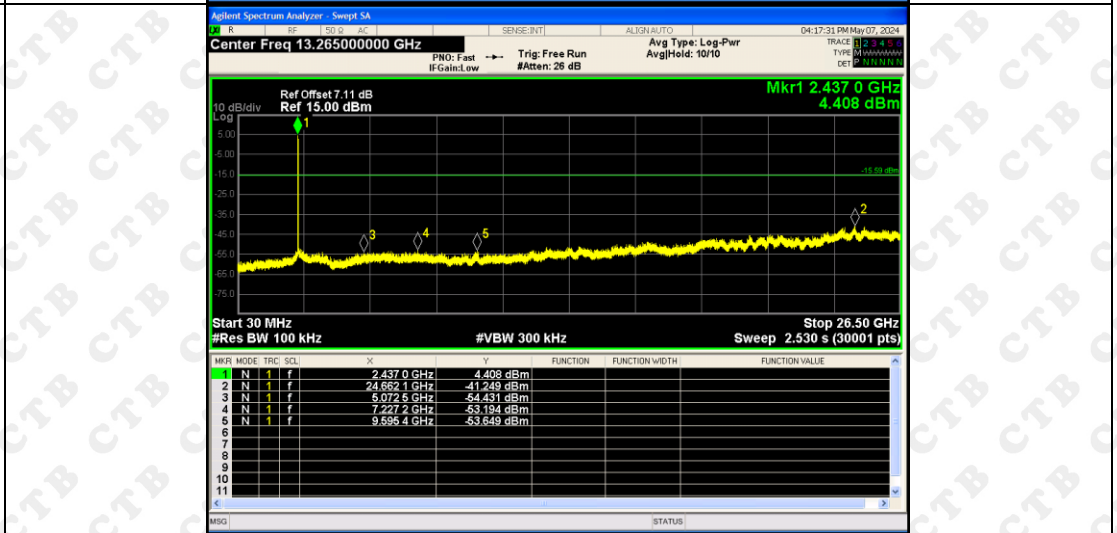


802.11b/HCH

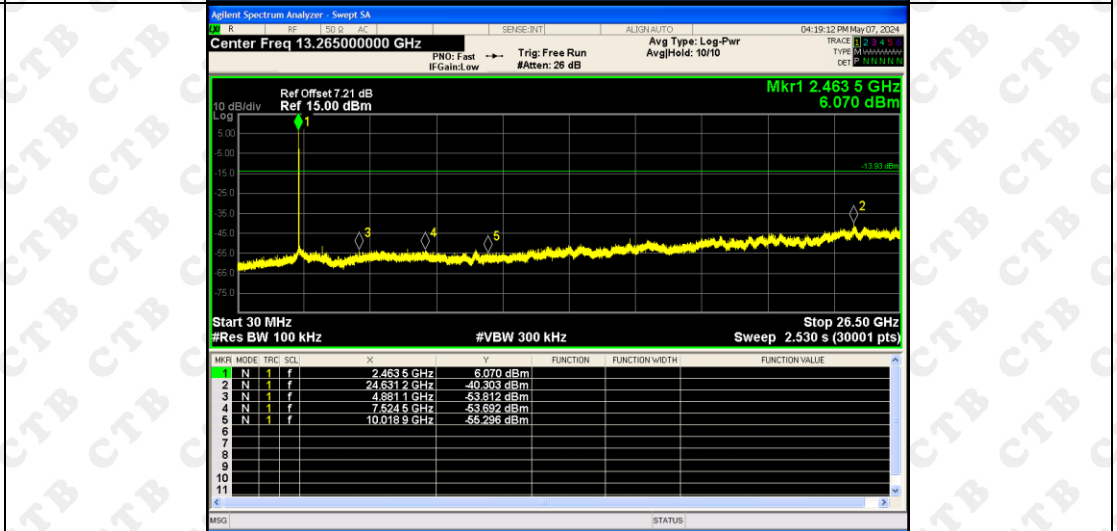


RF Conducted Spurious Emissions Graphs


802.11g/LCH

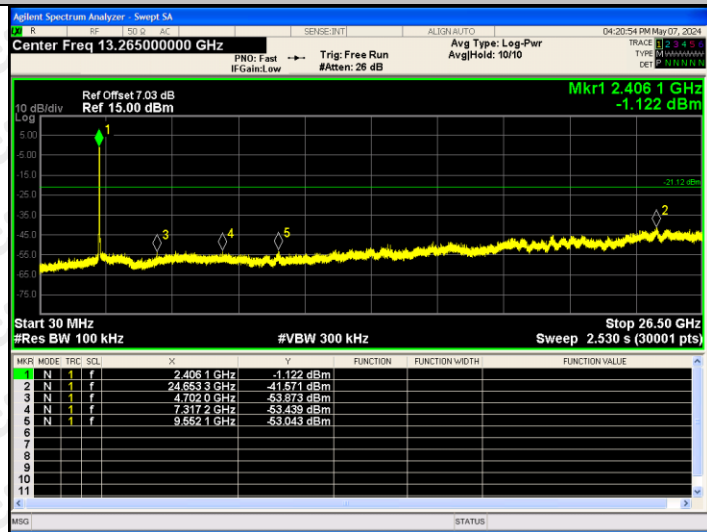

802.11g/MCH

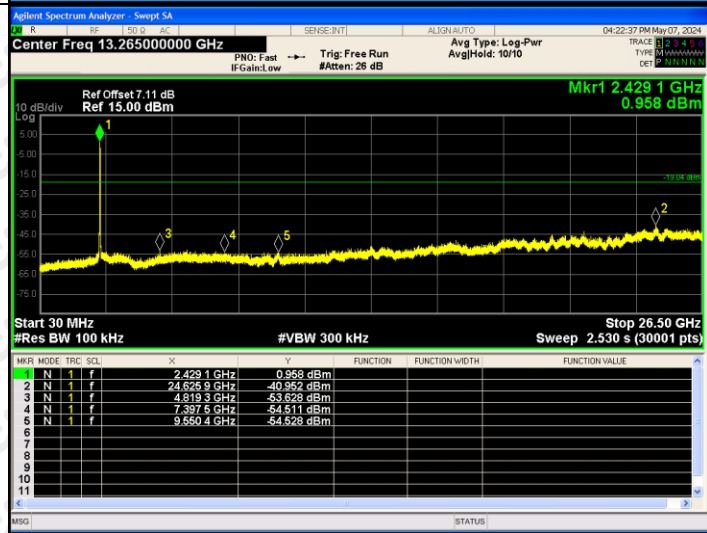


802.11g/HCH

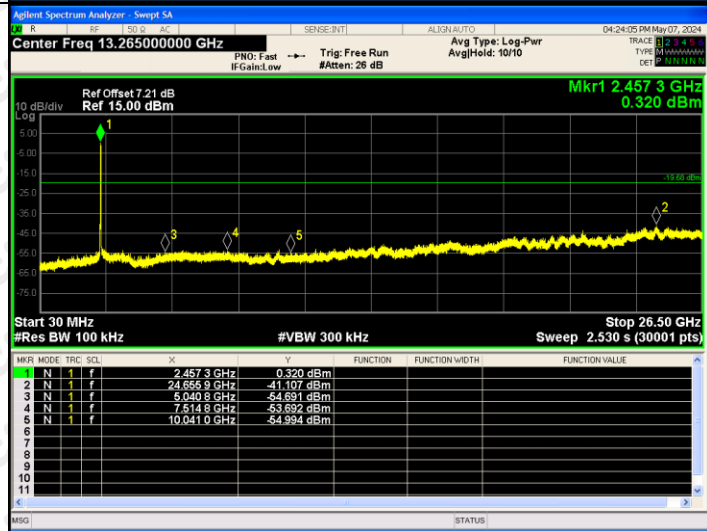


## RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

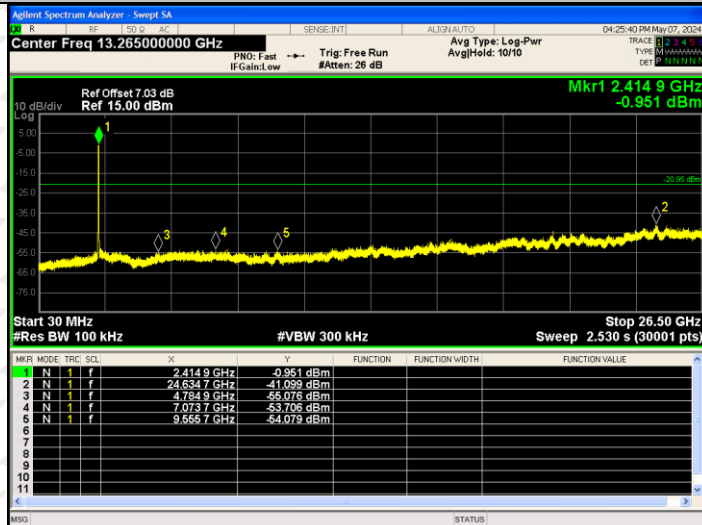

802.11 n(HT20)/MCH

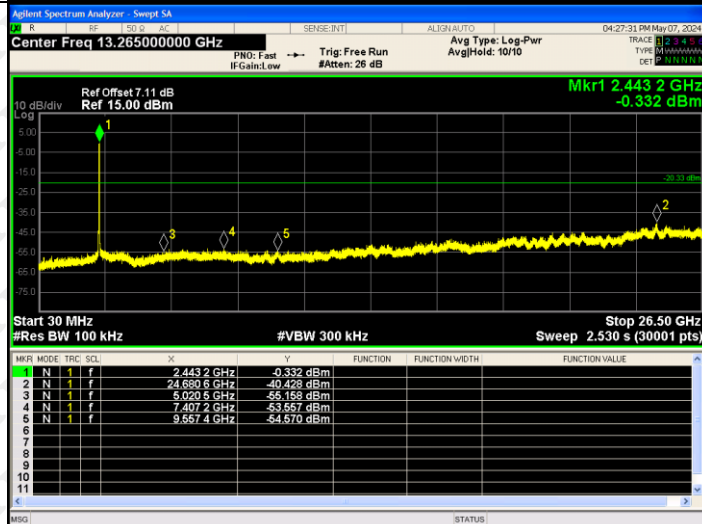

802.11 n(HT20)/HCH

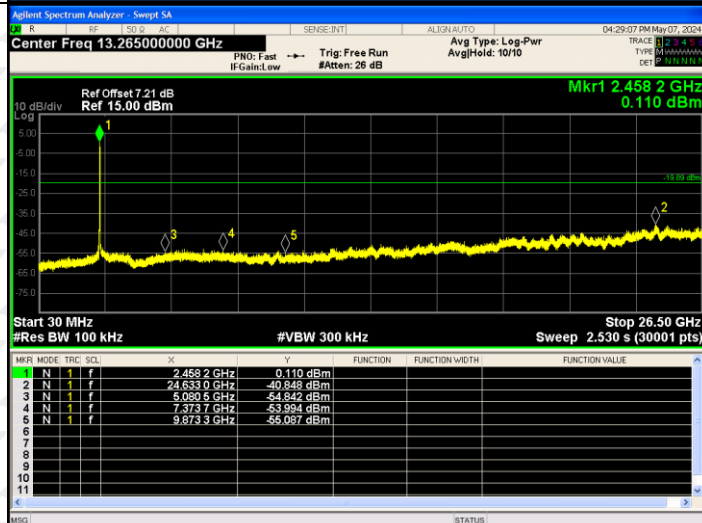

<p>802.11n(HT40)/LCH</p>	<table border="1"> <thead> <tr> <th>MWR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.425 5 GHz</td><td>-2.541 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.675 3 GHz</td><td>-40.375 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.725 4 GHz</td><td>-54.892 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.133 7 GHz</td><td>-53.880 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.534 5 GHz</td><td>-53.523 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MWR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.425 5 GHz	-2.541 dBm				2	N	1	f	24.675 3 GHz	-40.375 dBm				3	N	1	f	4.725 4 GHz	-54.892 dBm				4	N	1	f	7.133 7 GHz	-53.880 dBm				5	N	1	f	9.534 5 GHz	-53.523 dBm			
MWR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.425 5 GHz	-2.541 dBm																																																		
2	N	1	f	24.675 3 GHz	-40.375 dBm																																																		
3	N	1	f	4.725 4 GHz	-54.892 dBm																																																		
4	N	1	f	7.133 7 GHz	-53.880 dBm																																																		
5	N	1	f	9.534 5 GHz	-53.523 dBm																																																		
<p>802.11 n(HT40)/MCH</p>	<table border="1"> <thead> <tr> <th>MWR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 7 GHz</td><td>-3.049 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.299 7 GHz</td><td>-41.703 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.057 5 GHz</td><td>-54.657 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.253 4 GHz</td><td>-53.843 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.575 1 GHz</td><td>-54.093 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MWR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 7 GHz	-3.049 dBm				2	N	1	f	26.299 7 GHz	-41.703 dBm				3	N	1	f	5.057 5 GHz	-54.657 dBm				4	N	1	f	7.253 4 GHz	-53.843 dBm				5	N	1	f	9.575 1 GHz	-54.093 dBm			
MWR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.439 7 GHz	-3.049 dBm																																																		
2	N	1	f	26.299 7 GHz	-41.703 dBm																																																		
3	N	1	f	5.057 5 GHz	-54.657 dBm																																																		
4	N	1	f	7.253 4 GHz	-53.843 dBm																																																		
5	N	1	f	9.575 1 GHz	-54.093 dBm																																																		
<p>802.11 n(HT40)/HCH</p>	<table border="1"> <thead> <tr> <th>MWR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.460 8 GHz</td><td>-2.525 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.630 3 GHz</td><td>-40.929 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.076 1 GHz</td><td>-54.673 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.415 1 GHz</td><td>-53.904 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.851 3 GHz</td><td>-55.153 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MWR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 8 GHz	-2.525 dBm				2	N	1	f	24.630 3 GHz	-40.929 dBm				3	N	1	f	5.076 1 GHz	-54.673 dBm				4	N	1	f	7.415 1 GHz	-53.904 dBm				5	N	1	f	9.851 3 GHz	-55.153 dBm			
MWR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.460 8 GHz	-2.525 dBm																																																		
2	N	1	f	24.630 3 GHz	-40.929 dBm																																																		
3	N	1	f	5.076 1 GHz	-54.673 dBm																																																		
4	N	1	f	7.415 1 GHz	-53.904 dBm																																																		
5	N	1	f	9.851 3 GHz	-55.153 dBm																																																		

## 9. COUDUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup



### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 9.3 Test procedure


1. The EUT was directly connected to the Power meter

## 9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	21.316	30	PASS
	MCH	20.779	30	PASS
	HCH	21.269	30	PASS
802.11g	LCH	20.327	30	PASS
	MCH	20.019	30	PASS
	HCH	20.519	30	PASS
802.11n(HT20)	LCH	19.778	30	PASS
	MCH	19.340	30	PASS
	HCH	19.936	30	PASS
802.11n(HT40)	LCH	19.229	30	PASS
	MCH	18.736	30	PASS
	HCH	19.335	30	PASS

### 10. 6DB OCCUPIED BANDWIDTH

#### 10.1 Block Diagram Of Test Setup

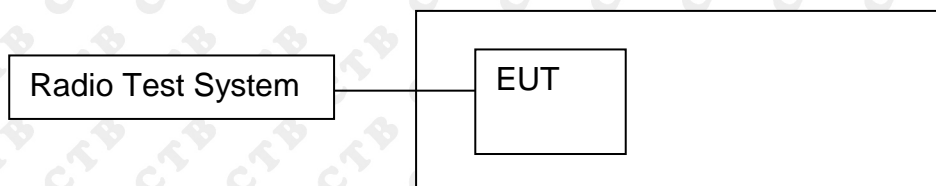

#### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

#### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



## 10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.957	500	PASS
	MCH	9.348	500	PASS
	HCH	9.508	500	PASS
802.11g	LCH	16.477	500	PASS
	MCH	16.480	500	PASS
	HCH	16.507	500	PASS
802.11n(HT20)	LCH	17.62	500	PASS
	MCH	17.545	500	PASS
	HCH	17.582	500	PASS
802.11n(HT40)	LCH	35.498	500	PASS
	MCH	35.552	500	PASS
	HCH	35.502	500	PASS

Test Graph:




<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.420211 GHz</p> <p>-5.6810 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.415 MHz</p> <p>Total Power 19.7 dBm</p> <p>Transmit Freq Error -27.422 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.48 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.445219 GHz</p> <p>-5.2544 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.426 MHz</p> <p>Total Power 19.4 dBm</p> <p>Transmit Freq Error -21.055 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.48 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB</p> <p>Ref: 27.21 dBm</p> <p>Mkr3 2.470244 GHz</p> <p>-5.0361 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.438 MHz</p> <p>Total Power 19.9 dBm</p> <p>Transmit Freq Error -8.986 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.51 MHz</p> <p>x dB -6.00 dB</p>

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.420791 GHz</p> <p>-5.3778 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.521 MHz</p> <p>Total Power 19.3 dBm</p> <p>Transmit Freq Error -19.516 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.62 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.445752 GHz</p> <p>-5.4903 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.503 MHz</p> <p>Total Power 18.9 dBm</p> <p>Transmit Freq Error -20.098 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.54 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB</p> <p>Ref: 27.21 dBm</p> <p>Mkr3 2.470783 GHz</p> <p>-4.8298 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.507 MHz</p> <p>Total Power 19.5 dBm</p> <p>Transmit Freq Error -8.260 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.58 MHz</p> <p>x dB -6.00 dB</p>

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.439698 GHz</p> <p>-10.147 dBm</p> <p>Center: 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>19.1 dBm</td> </tr> <tr> <td>35.958 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-50.679 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>35.50 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	19.1 dBm	35.958 MHz			Transmit Freq Error	OBW Power	99.00 %	-50.679 kHz	x dB	-6.00 dB	x dB Bandwidth			35.50 MHz		
Occupied Bandwidth	Total Power	19.1 dBm																	
35.958 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-50.679 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.50 MHz																			
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.454759 GHz</p> <p>-9.3241 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>18.8 dBm</td> </tr> <tr> <td>36.006 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-17.191 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>35.55 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	18.8 dBm	36.006 MHz			Transmit Freq Error	OBW Power	99.00 %	-17.191 kHz	x dB	-6.00 dB	x dB Bandwidth			35.55 MHz		
Occupied Bandwidth	Total Power	18.8 dBm																	
36.006 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-17.191 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.55 MHz																			
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.2 dB</p> <p>Ref: 27.20 dBm</p> <p>Mkr3 2.469781 GHz</p> <p>-8.1606 dBm</p> <p>Center: 2.452 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>19.2 dBm</td> </tr> <tr> <td>36.017 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>29.554 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>35.50 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	19.2 dBm	36.017 MHz			Transmit Freq Error	OBW Power	99.00 %	29.554 kHz	x dB	-6.00 dB	x dB Bandwidth			35.50 MHz		
Occupied Bandwidth	Total Power	19.2 dBm																	
36.017 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
29.554 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.50 MHz																			

## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

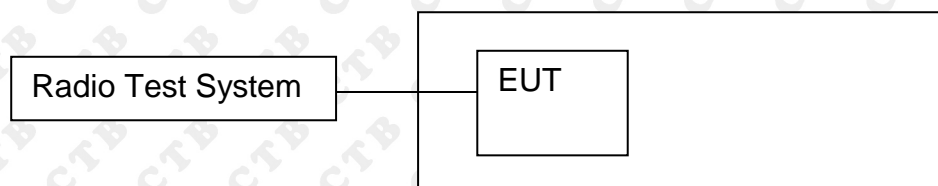

### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


### 11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result




Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-6.196	8	PASS
	MCH	-8.351	8	PASS
	HCH	-7.185	8	PASS
802.11g	LCH	-13.208	8	PASS
	MCH	-13.356	8	PASS
	HCH	-13.184	8	PASS
802.11n(H T20)	LCH	-13.170	8	PASS
	MCH	-12.935	8	PASS
	HCH	-13.171	8	PASS
802.11n(H T40)	LCH	-16.851	8	PASS
	MCH	-16.775	8	PASS
	HCH	-17.653	8	PASS

Test Graph

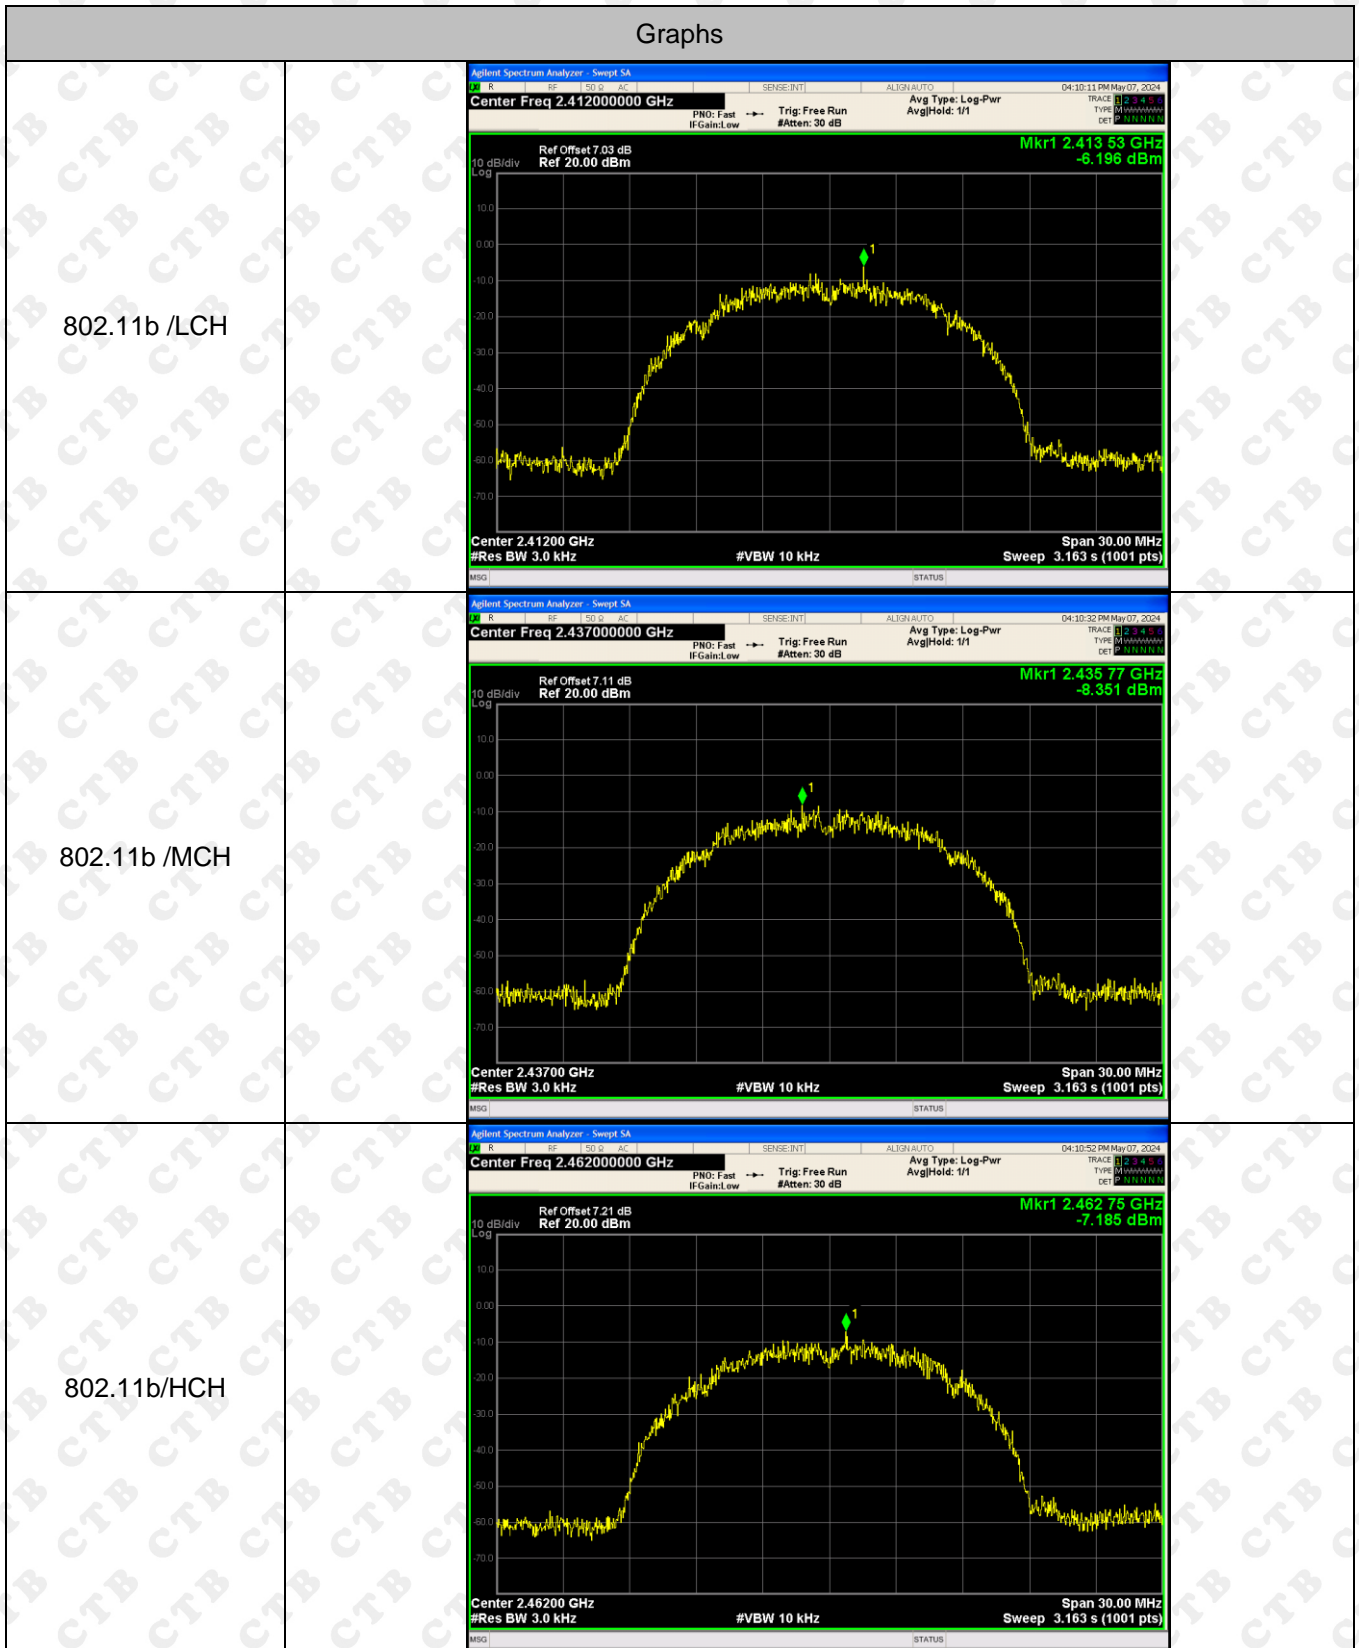

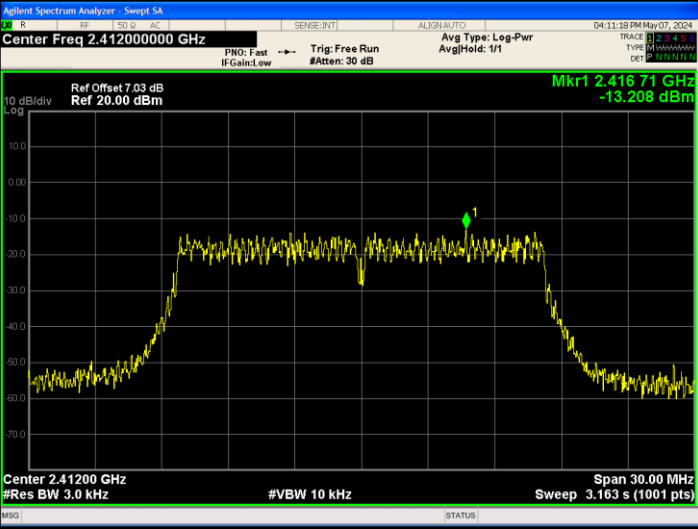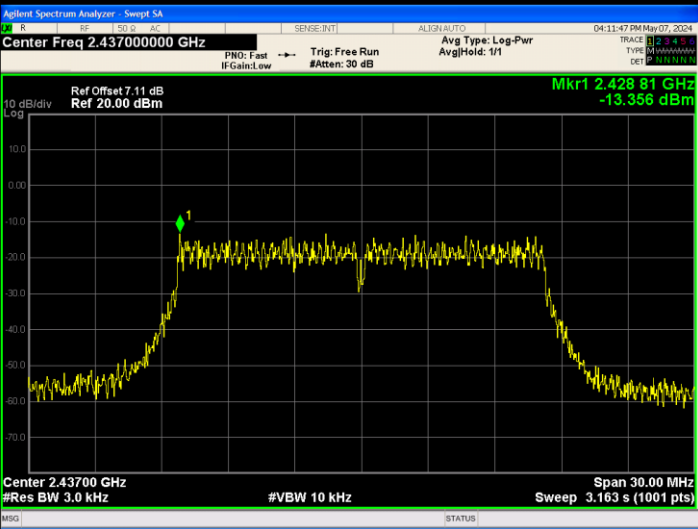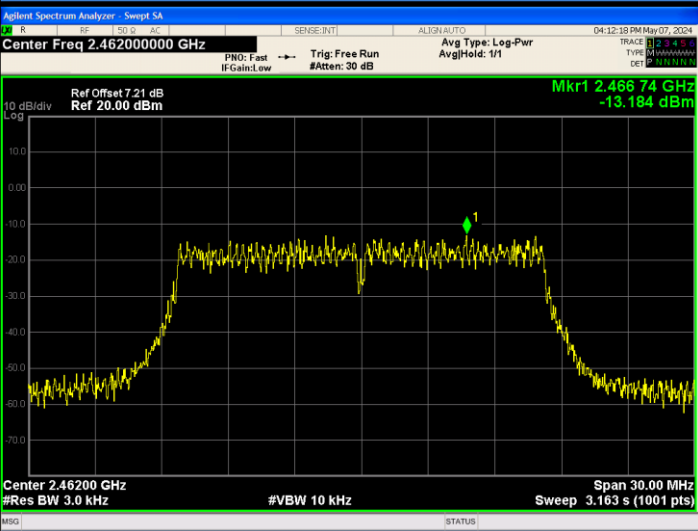

<p>802.11g/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.41200000 GHz          Ref Offset: 7.03 dB          Ref 20.00 dBm          Mkr1 2.41671 GHz          -13.208 dBm          Center 2.41200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset: 7.11 dB          Ref 20.00 dBm          Mkr1 2.42881 GHz          -13.356 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.46200000 GHz          Ref Offset: 7.21 dB          Ref 20.00 dBm          Mkr1 2.46674 GHz          -13.184 dBm          Center 2.46200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
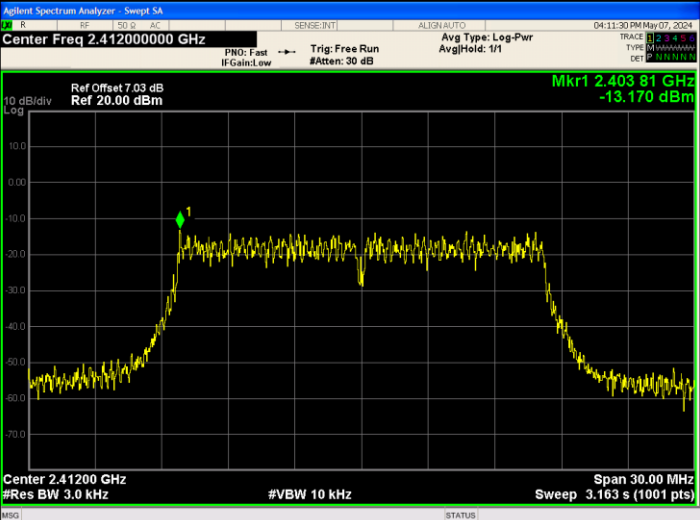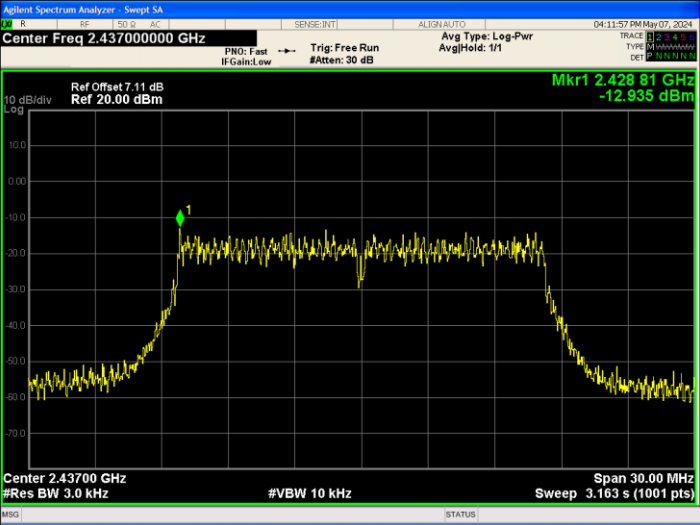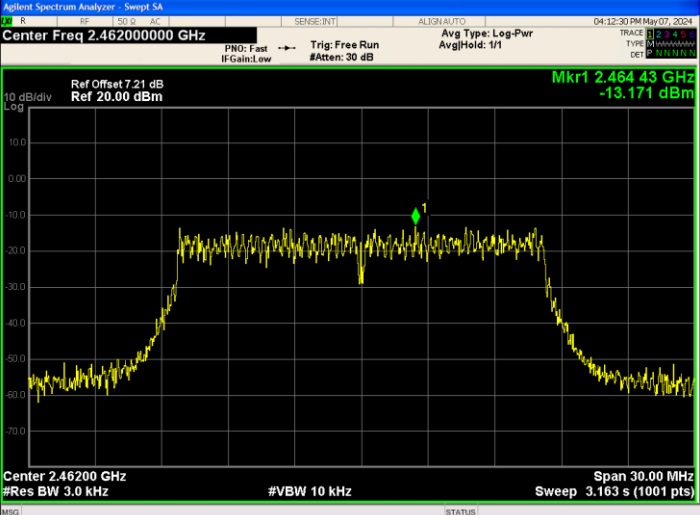
<p>802.11n(HT20)/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.41200000 GHz          Ref Offset: 7.03 dB          Ref 20.00 dBm          Mkr1 2.40381 GHz          -13.170 dBm          Center 2.41200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset: 7.11 dB          Ref 20.00 dBm          Mkr1 2.42881 GHz          -12.935 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.46200000 GHz          Ref Offset: 7.21 dB          Ref 20.00 dBm          Mkr1 2.46443 GHz          -13.171 dBm          Center 2.46200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.42200000 GHz          Ref Offset: 7.03 dB          Ref 20.00 dBm          Mkr1 2.411 32 GHz          -16.851 dBm          Center 2.42200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.43700000 GHz          Ref Offset: 7.11 dB          Ref 20.00 dBm          Mkr1 2.433 28 GHz          -16.775 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.45200000 GHz          Ref Offset: 7.2 dB          Ref 20.00 dBm          Mkr1 2.448 28 GHz          -17.653 dBm          Center 2.45200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>

## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### EUT Antenna:

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is 4.11dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

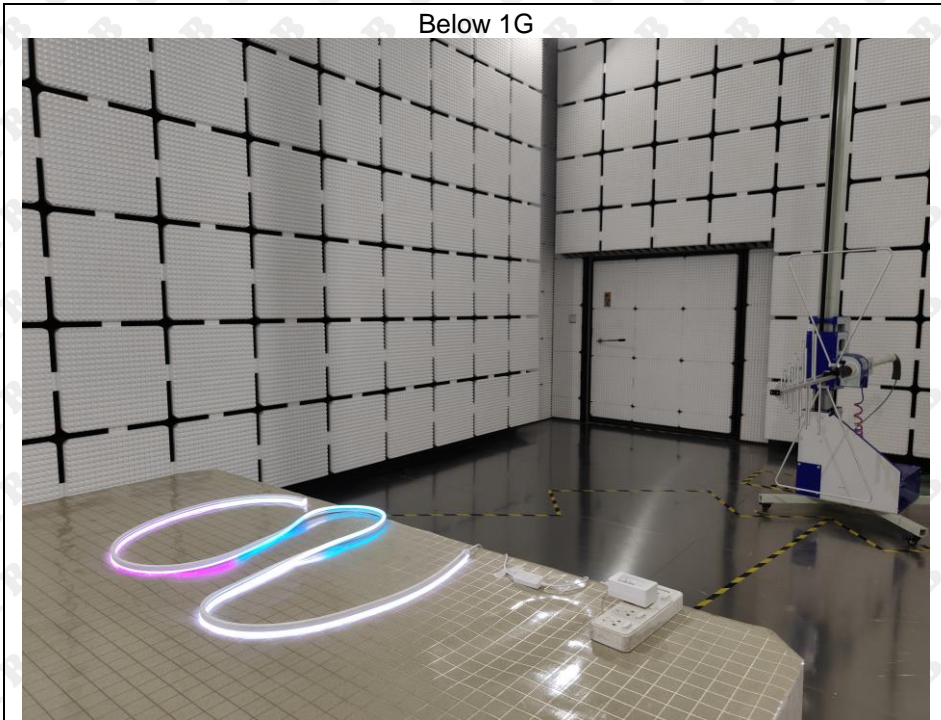

Above 1G



Conducted Emission

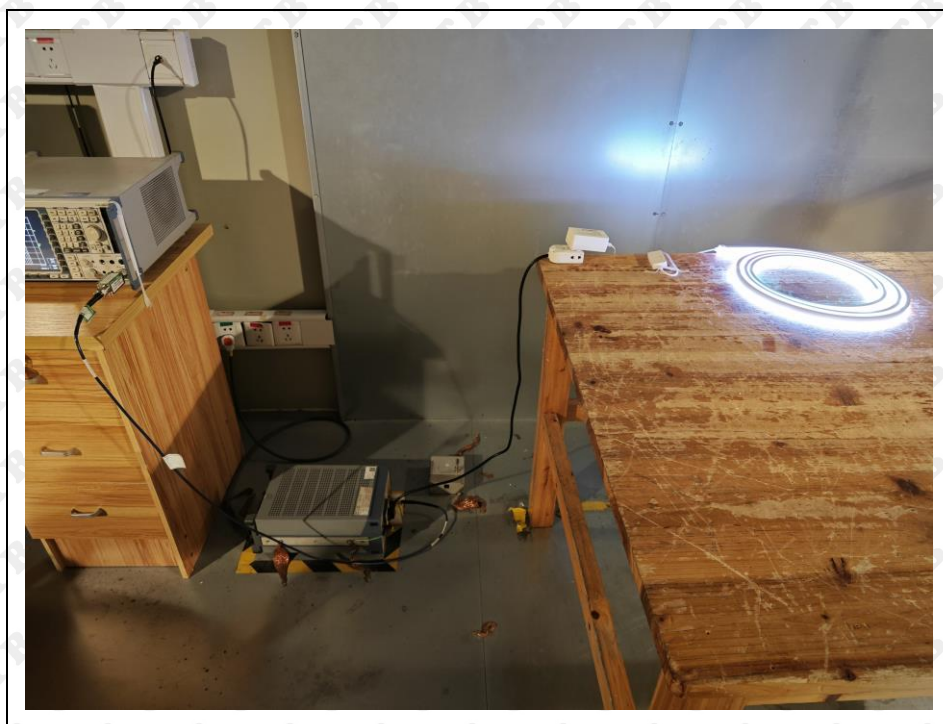

※※※※ END OF REPORT ※※※※