



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No. CTC20220917E01
FCC ID 2AWAA-C25
Applicant ZHEJIANG DALI TECHNOLOGY CO., LTD
Address NO639 Binkang Road, Hangzhou, P.R.CHINA 310053
Manufacturer ZHEJIANG DALI TECHNOLOGY CO., LTD
Address NO639 Binkang Road, Hangzhou, P.R.CHINA 310053
Product Name Thermal Imaging Camera
Trade Mark /
Model/Type reference C25
Listed Model(s) C16, C16-M, C25-M, P25
Standard FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of receipt of test sample May. 09, 2022
Date of testing May. 09, 2022 ~ May. 12, 2022
Date of issue May. 13, 2022
Result PASS

Compiled by:
(Printed name+signature) Terry Su

Supervised by:
(Printed name+signature) Eric Zhang

Approved by:
(Printed name+signature) Totti Zhao

Testing Laboratory Name CTC Laboratories, Inc.
Address 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park,
Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

**Table of Contents**

	Page
1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY.....	5
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT.....	8
2.3. ACCESSORY EQUIPMENT INFORMATION	9
2.4. OPERATION STATE.....	10
2.5. MEASUREMENT INSTRUMENTS LIST	11
3. TEST ITEM AND RESULTS	12
3.1. CONDUCTED EMISSION.....	12
3.2. RADIATED EMISSION	15
3.3. BAND EDGE EMISSIONS (RADIATED)	37
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)	50
3.5. DTS BANDWIDTH.....	64
3.6. PEAK OUTPUT POWER	69
3.7. POWER SPECTRAL DENSITY	71
3.8. DUTY CYCLE	76
3.9. ANTENNA REQUIREMENT	81



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS 247 Issue 2](#): Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSSs) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	May. 13, 2022	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS 247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Alicia Liu
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Eva Feng
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS 247 5.5	Pass	Alicia Liu
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS 247 5.5	Pass	Alicia Liu
6dB Bandwidth	15.247(a)(2)	RSS 247 5.2 (a)	Pass	Alicia Liu
Conducted Max Output Power	15.247(b)(3)	RSS 247 5.4 (d)	Pass	Alicia Liu
Power Spectral Density	15.247(e)	RSS 247 5.2 (b)	Pass	Alicia Liu
Transmitter Radiated Spurious	15.209&15.247(d)	RSS 247 5.5&RSS-Gen 8.9	Pass	Alicia Liu

Note: The measurement uncertainty is not included in the test result.



1.4. Test Facility

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation. Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.08 dB	(1)
Radiated Emissions 30~1000MHz	4.51 dB	(1)
Radiated Emissions 1~18GHz	5.84 dB	(1)
Radiated Emissions 18~40GHz	6.12 dB	(1)
Occupied Bandwidth	-----	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	21°C ~ 27°C
Relative Humidity:	40% ~ 60%
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	ZHEJIANG DALI TECHNOLOGY CO., LTD
Address:	NO639 Binkang Road, Hangzhou, P.R.CHINA 310053
Manufacturer:	ZHEJIANG DALI TECHNOLOGY CO., LTD
Address:	NO639 Binkang Road, Hangzhou, P.R.CHINA 310053



2.2. General Description of EUT

Product Name:	Thermal Imaging Camera
Trade Mark:	/
Model/Type reference:	C25
Listed Model(s):	C16, C16-M, C25-M, P25
Model Different:	All these models are identical in the same PCB, layout and electrical circuit, The only difference is optical lens.
Power supply:	5Vdc from USB Cable 3.8Vdc from 2900mAh Li-ion Battery
Adapter Model:	NRT-DY035 Input: 100-240V~ 50/60Hz 0.5A Max Output: 5Vdc/2.4A
Hardware version:	/
Software version:	/
WIFI 802.11b/ g/ n(HT20)	
Modulation:	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n: OFDM(BPSK, QPSK, 16QAM, 64QAM)
Operation frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz
Channel number:	802.11b/g/n(HT20): 11 Channels
Channel separation:	5MHz
Antenna type:	FPC Antenna
Antenna gain:	2.5dBi

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



2.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkBook 14G3 ACL	MP246QDR	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	With	Without	1M
Test Software Information			
Name	Software version	/	/
/	/	/	/

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



2.4. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20)

Data Rated

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Mode	Data rate (worst mode)
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	HT-MCS0

Test mode

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.



2.5. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 23, 2022
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Mar. 15, 2023
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 23, 2022
4	Signal Generator	Agilent	E8257D	MY46521908	Dec. 23, 2022
5	Power Sensor	Agilent	U2021XA	MY5365004	Mar. 15, 2023
6	Power Sensor	Agilent	U2021XA	MY5365006	Mar. 15, 2023
7	High and low temperature box	ESPEC	MT3035	N/A	Dec. 23, 2022
8	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	102414	Dec. 23, 2022
9	300328 v2.2.2 test system	TONSCEND	v2.6	/	/

Radiated emission(3m chamber 2)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-1013	Jan. 12, 2023
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 23, 2022
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 23, 2022
4	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 15, 2023
5	Pre-Amplifier	SONOMA	310	186194	Dec. 23, 2022
6	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 23, 2022
7	Test Receiver	R&S	ESCI7	100967	Dec. 23, 2022

Radiated emission(3m chamber 3)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-759	Nov. 09, 2022
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 23, 2022
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 23, 2022
4	Broadband Premplifier	SCHWARZBECK	BBV9743B	259	Dec. 23, 2022
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 23, 2022

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 23, 2022
2	LISN	R&S	ENV216	101113	Dec. 23, 2022
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 23, 2022

Note:1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS - Gen 8.8:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

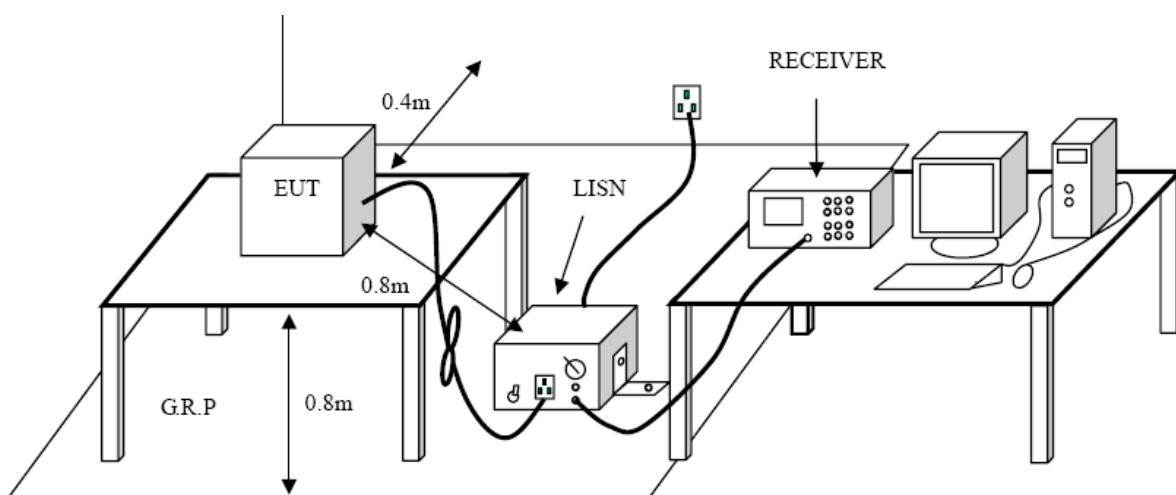


Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

**Test Mode:**

Please refer to the clause 2.4.

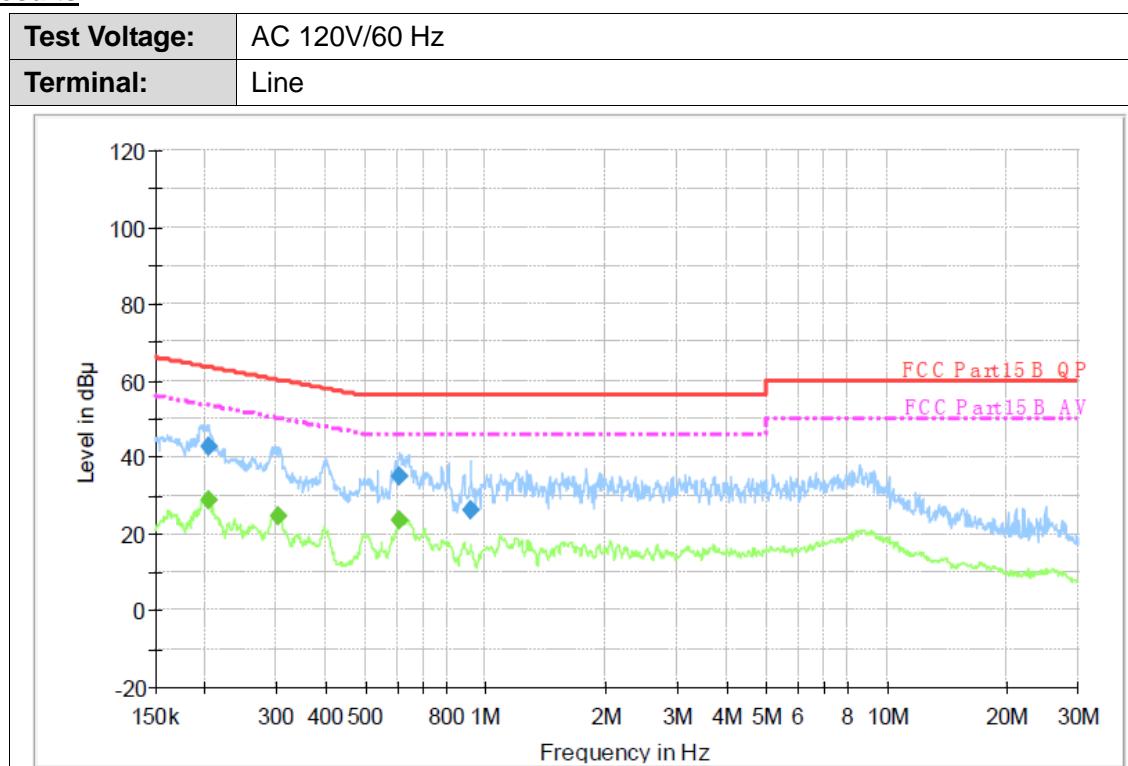
Test Results**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.203980	42.8	1000.00	9.000	On	L1	9.7	20.6	63.4	
0.609010	34.8	1000.00	9.000	On	L1	9.7	21.2	56.0	
0.918750	26.0	1000.00	9.000	On	L1	9.7	30.0	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.203170	28.8	1000.00	9.000	On	L1	9.7	24.7	53.5	
0.304060	24.5	1000.00	9.000	On	L1	9.7	25.6	50.1	
0.611450	23.8	1000.00	9.000	On	L1	9.7	22.2	46.0	

Emission Level= Read Level+ Correct Factor

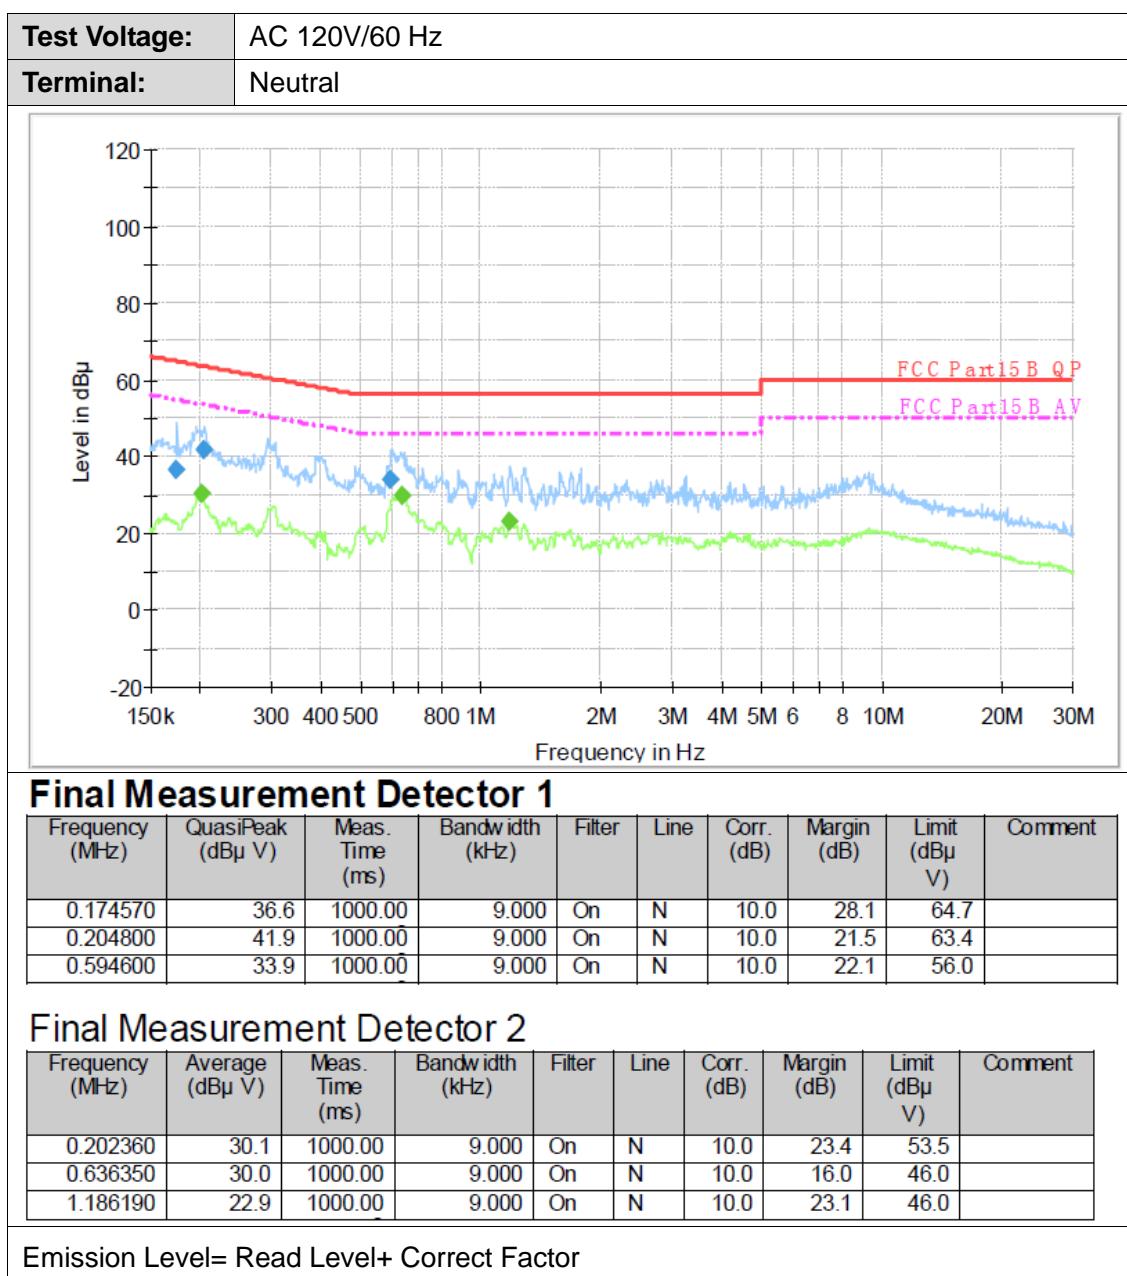

3.2. Radiated Emission

Limit


FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9:

Frequency	Limit (dBuV/m @ 3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).

Test Configuration

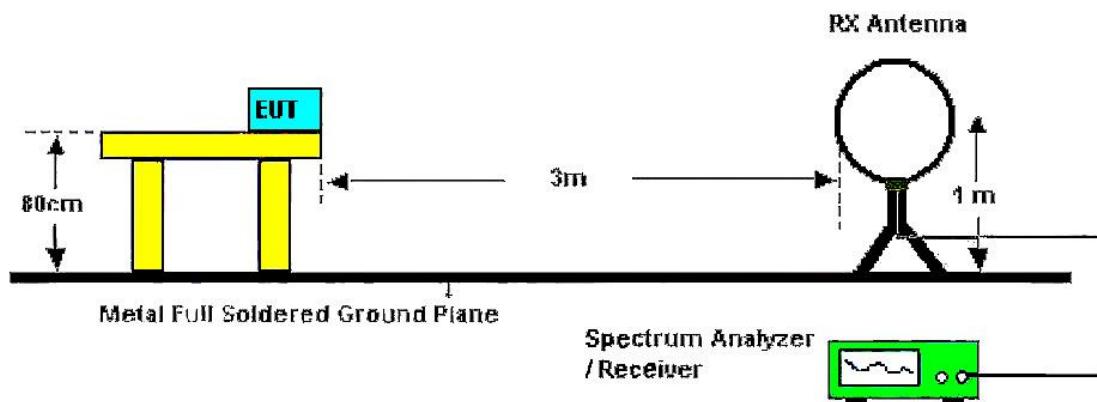

Below 30MHz Test Setup

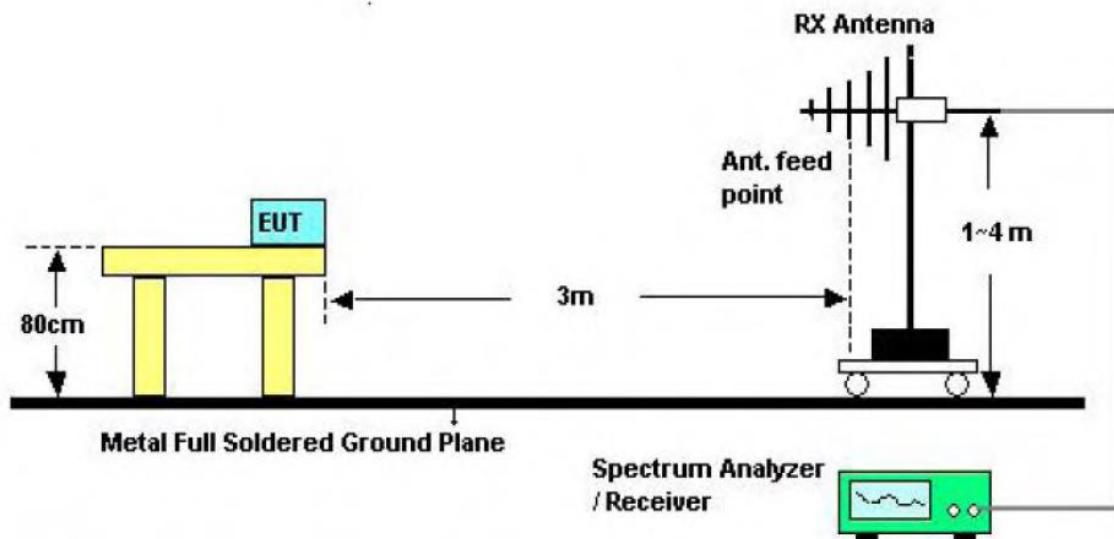


Below 1000MHz Test Setup

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

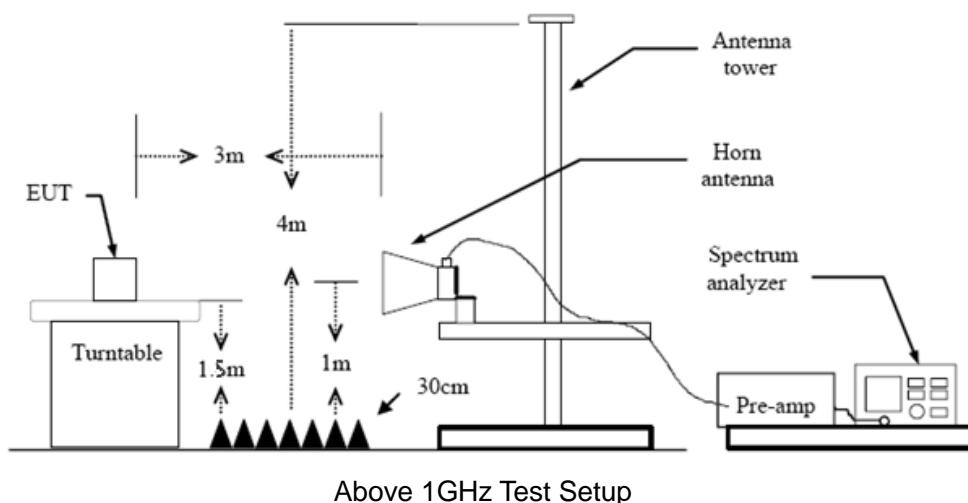

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW \geq 1/T Peak detector for Average value.

Note 1: For the 1/T& Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result


9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




30MHz-1GHz

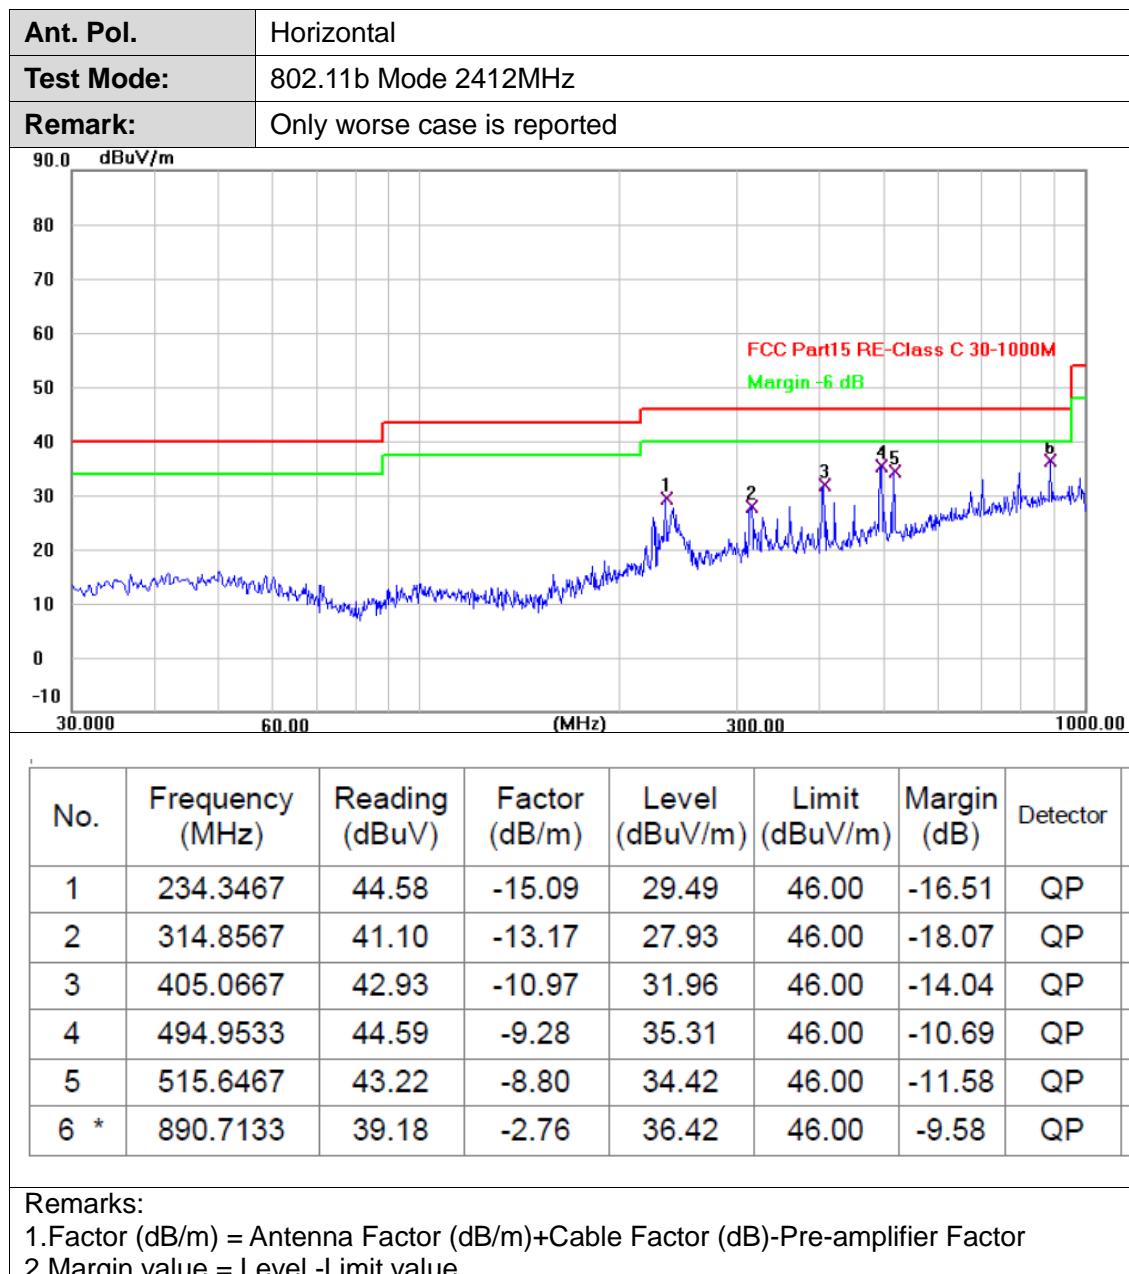



Ant. Pol.	Vertical
Test Mode:	802.11b Mode 2412MHz
Remark:	Only worse case is reported

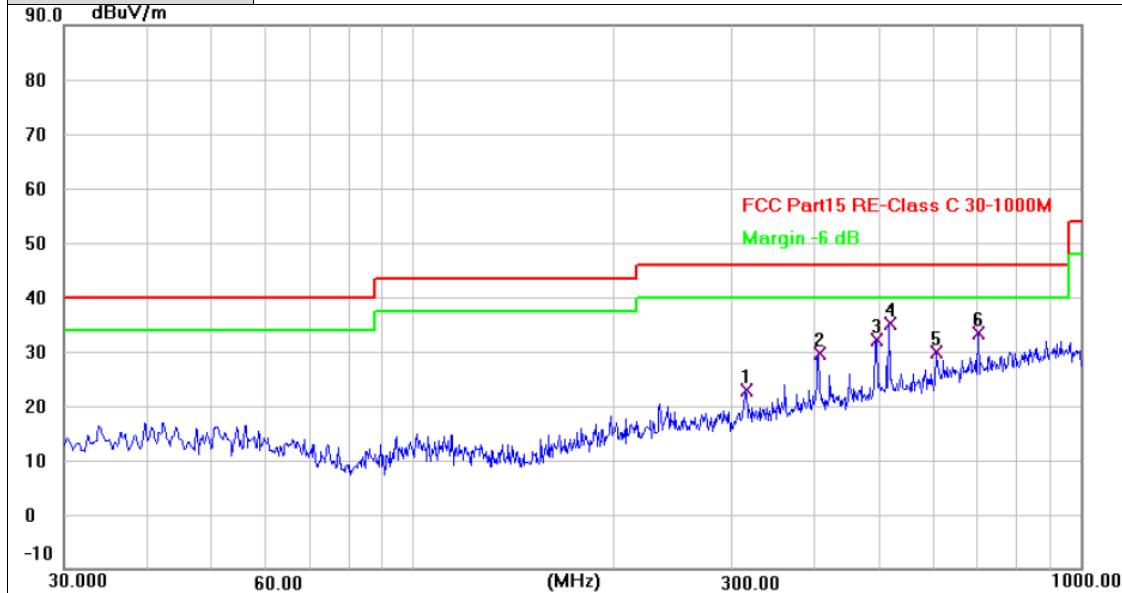

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	314.8567	36.06	-13.17	22.89	46.00	-23.11	QP
2	405.0667	40.67	-10.97	29.70	46.00	-16.30	QP
3	494.9533	41.35	-9.28	32.07	46.00	-13.93	QP
4 *	515.6467	43.94	-8.80	35.14	46.00	-10.86	QP
5	609.4133	36.45	-6.58	29.87	46.00	-16.13	QP
6	703.1800	38.92	-5.50	33.42	46.00	-12.58	QP


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Adobe 1GHz

Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11b Mode 2412MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4823.179</td><td>28.04</td><td>2.20</td><td>30.24</td><td>54.00</td><td>-23.76</td><td>AVG</td></tr><tr><td>2</td><td>4824.073</td><td>38.72</td><td>2.20</td><td>40.92</td><td>74.00</td><td>-33.08</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4823.179	28.04	2.20	30.24	54.00	-23.76	AVG	2	4824.073	38.72	2.20	40.92	74.00	-33.08	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4823.179	28.04	2.20	30.24	54.00	-23.76	AVG																									
2	4824.073	38.72	2.20	40.92	74.00	-33.08	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

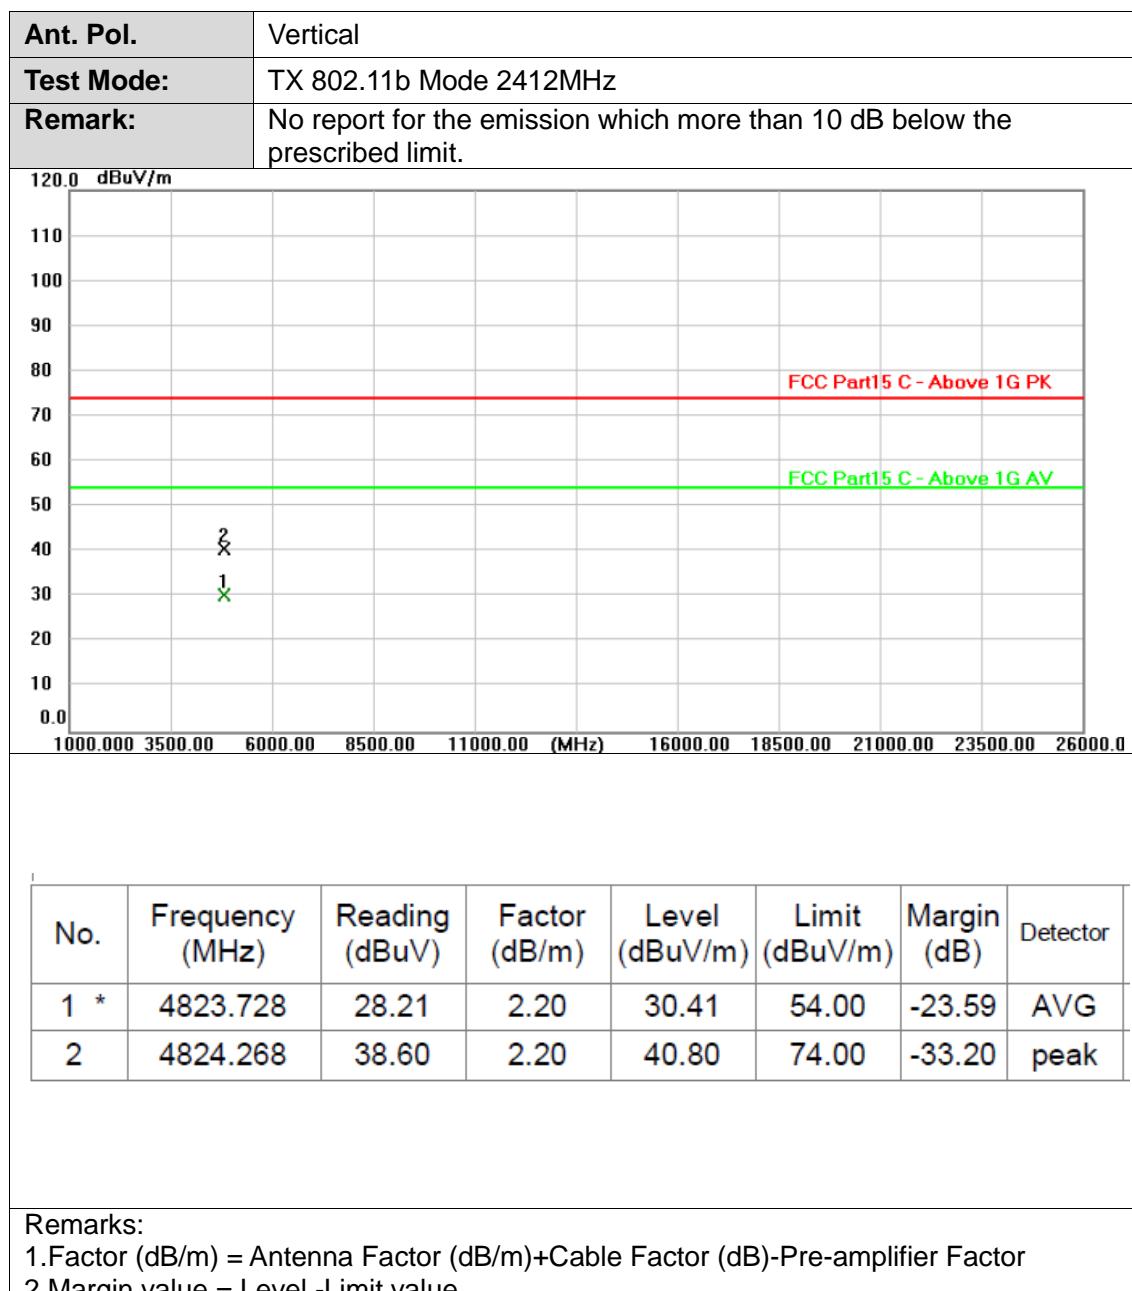



Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11b Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4873.131</td><td>39.33</td><td>2.30</td><td>41.63</td><td>74.00</td><td>-32.37</td><td>peak</td></tr><tr><td>2 *</td><td>4873.755</td><td>28.16</td><td>2.30</td><td>30.46</td><td>54.00</td><td>-23.54</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4873.131	39.33	2.30	41.63	74.00	-32.37	peak	2 *	4873.755	28.16	2.30	30.46	54.00	-23.54	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4873.131	39.33	2.30	41.63	74.00	-32.37	peak																								
2 *	4873.755	28.16	2.30	30.46	54.00	-23.54	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															



Ant. Pol.	Vertical																														
Test Mode:	TX 802.11b Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4873.626</td><td>39.26</td><td>2.30</td><td>41.56</td><td>74.00</td><td>-32.44</td><td>peak</td></tr><tr><td>2 *</td><td>4874.344</td><td>27.84</td><td>2.30</td><td>30.14</td><td>54.00</td><td>-23.86</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4873.626	39.26	2.30	41.56	74.00	-32.44	peak	2 *	4874.344	27.84	2.30	30.14	54.00	-23.86	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4873.626	39.26	2.30	41.56	74.00	-32.44	peak																								
2 *	4874.344	27.84	2.30	30.14	54.00	-23.86	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															



Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11b Mode 2462MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4923.396</td><td>38.54</td><td>2.41</td><td>40.95</td><td>74.00</td><td>-33.05</td><td>peak</td></tr><tr><td>2 *</td><td>4923.433</td><td>27.04</td><td>2.41</td><td>29.45</td><td>54.00</td><td>-24.55</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4923.396	38.54	2.41	40.95	74.00	-33.05	peak	2 *	4923.433	27.04	2.41	29.45	54.00	-24.55	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4923.396	38.54	2.41	40.95	74.00	-33.05	peak																									
2 *	4923.433	27.04	2.41	29.45	54.00	-24.55	AVG																									
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																																



Ant. Pol.	Vertical																															
Test Mode:	TX 802.11b Mode 2462MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
 120.0 dBuV/m 110 100 90 80 70 60 50 40 30 20 10 0.0 FCC Part15 C - Above 1G PK FCC Part15 C - Above 1G AV 2 1 1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4923.263</td><td>27.26</td><td>2.41</td><td>29.67</td><td>54.00</td><td>-24.33</td><td>AVG</td></tr><tr><td>2</td><td>4924.947</td><td>37.78</td><td>2.41</td><td>40.19</td><td>74.00</td><td>-33.81</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4923.263	27.26	2.41	29.67	54.00	-24.33	AVG	2	4924.947	37.78	2.41	40.19	74.00	-33.81	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4923.263	27.26	2.41	29.67	54.00	-24.33	AVG																									
2	4924.947	37.78	2.41	40.19	74.00	-33.81	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level - Limit value</p>																																



Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11g Mode 2412MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4823.437</td><td>28.15</td><td>2.20</td><td>30.35</td><td>54.00</td><td>-23.65</td><td>AVG</td></tr><tr><td>2</td><td>4823.873</td><td>38.98</td><td>2.20</td><td>41.18</td><td>74.00</td><td>-32.82</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4823.437	28.15	2.20	30.35	54.00	-23.65	AVG	2	4823.873	38.98	2.20	41.18	74.00	-32.82	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4823.437	28.15	2.20	30.35	54.00	-23.65	AVG																									
2	4823.873	38.98	2.20	41.18	74.00	-32.82	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Vertical																															
Test Mode:	TX 802.11g Mode 2412MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4823.170</td><td>28.24</td><td>2.20</td><td>30.44</td><td>54.00</td><td>-23.56</td><td>AVG</td></tr><tr><td>2</td><td>4823.694</td><td>39.07</td><td>2.20</td><td>41.27</td><td>74.00</td><td>-32.73</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4823.170	28.24	2.20	30.44	54.00	-23.56	AVG	2	4823.694	39.07	2.20	41.27	74.00	-32.73	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4823.170	28.24	2.20	30.44	54.00	-23.56	AVG																									
2	4823.694	39.07	2.20	41.27	74.00	-32.73	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11g Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4873.541</td><td>28.06</td><td>2.30</td><td>30.36</td><td>54.00</td><td>-23.64</td><td>AVG</td></tr><tr><td>2</td><td>4874.632</td><td>38.81</td><td>2.30</td><td>41.11</td><td>74.00</td><td>-32.89</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4873.541	28.06	2.30	30.36	54.00	-23.64	AVG	2	4874.632	38.81	2.30	41.11	74.00	-32.89	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4873.541	28.06	2.30	30.36	54.00	-23.64	AVG																								
2	4874.632	38.81	2.30	41.11	74.00	-32.89	peak																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															



Ant. Pol.	Vertical																														
Test Mode:	TX 802.11g Mode 2437MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4873.835</td><td>27.94</td><td>2.30</td><td>30.24</td><td>54.00</td><td>-23.76</td><td>AVG</td></tr><tr><td>2</td><td>4874.211</td><td>39.08</td><td>2.30</td><td>41.38</td><td>74.00</td><td>-32.62</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4873.835	27.94	2.30	30.24	54.00	-23.76	AVG	2	4874.211	39.08	2.30	41.38	74.00	-32.62	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4873.835	27.94	2.30	30.24	54.00	-23.76	AVG																								
2	4874.211	39.08	2.30	41.38	74.00	-32.62	peak																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p>																															




Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11g Mode 2462MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4924.269</td><td>37.78</td><td>2.41</td><td>40.19</td><td>74.00</td><td>-33.81</td><td>peak</td></tr><tr><td>2 *</td><td>4924.500</td><td>26.95</td><td>2.41</td><td>29.36</td><td>54.00</td><td>-24.64</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4924.269	37.78	2.41	40.19	74.00	-33.81	peak	2 *	4924.500	26.95	2.41	29.36	54.00	-24.64	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4924.269	37.78	2.41	40.19	74.00	-33.81	peak																									
2 *	4924.500	26.95	2.41	29.36	54.00	-24.64	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level - Limit value</p>																																



Ant. Pol.	Vertical																															
Test Mode:	TX 802.11g Mode 2462MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4923.530</td><td>27.03</td><td>2.41</td><td>29.44</td><td>54.00</td><td>-24.56</td><td>AVG</td></tr><tr><td>2</td><td>4924.816</td><td>39.02</td><td>2.41</td><td>41.43</td><td>74.00</td><td>-32.57</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4923.530	27.03	2.41	29.44	54.00	-24.56	AVG	2	4924.816	39.02	2.41	41.43	74.00	-32.57	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4923.530	27.03	2.41	29.44	54.00	-24.56	AVG																									
2	4924.816	39.02	2.41	41.43	74.00	-32.57	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11n(HT20) Mode 2412MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4823.410</td><td>28.01</td><td>2.20</td><td>30.21</td><td>54.00</td><td>-23.79</td><td>AVG</td></tr><tr><td>2</td><td>4823.623</td><td>39.30</td><td>2.20</td><td>41.50</td><td>74.00</td><td>-32.50</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4823.410	28.01	2.20	30.21	54.00	-23.79	AVG	2	4823.623	39.30	2.20	41.50	74.00	-32.50	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4823.410	28.01	2.20	30.21	54.00	-23.79	AVG																								
2	4823.623	39.30	2.20	41.50	74.00	-32.50	peak																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															

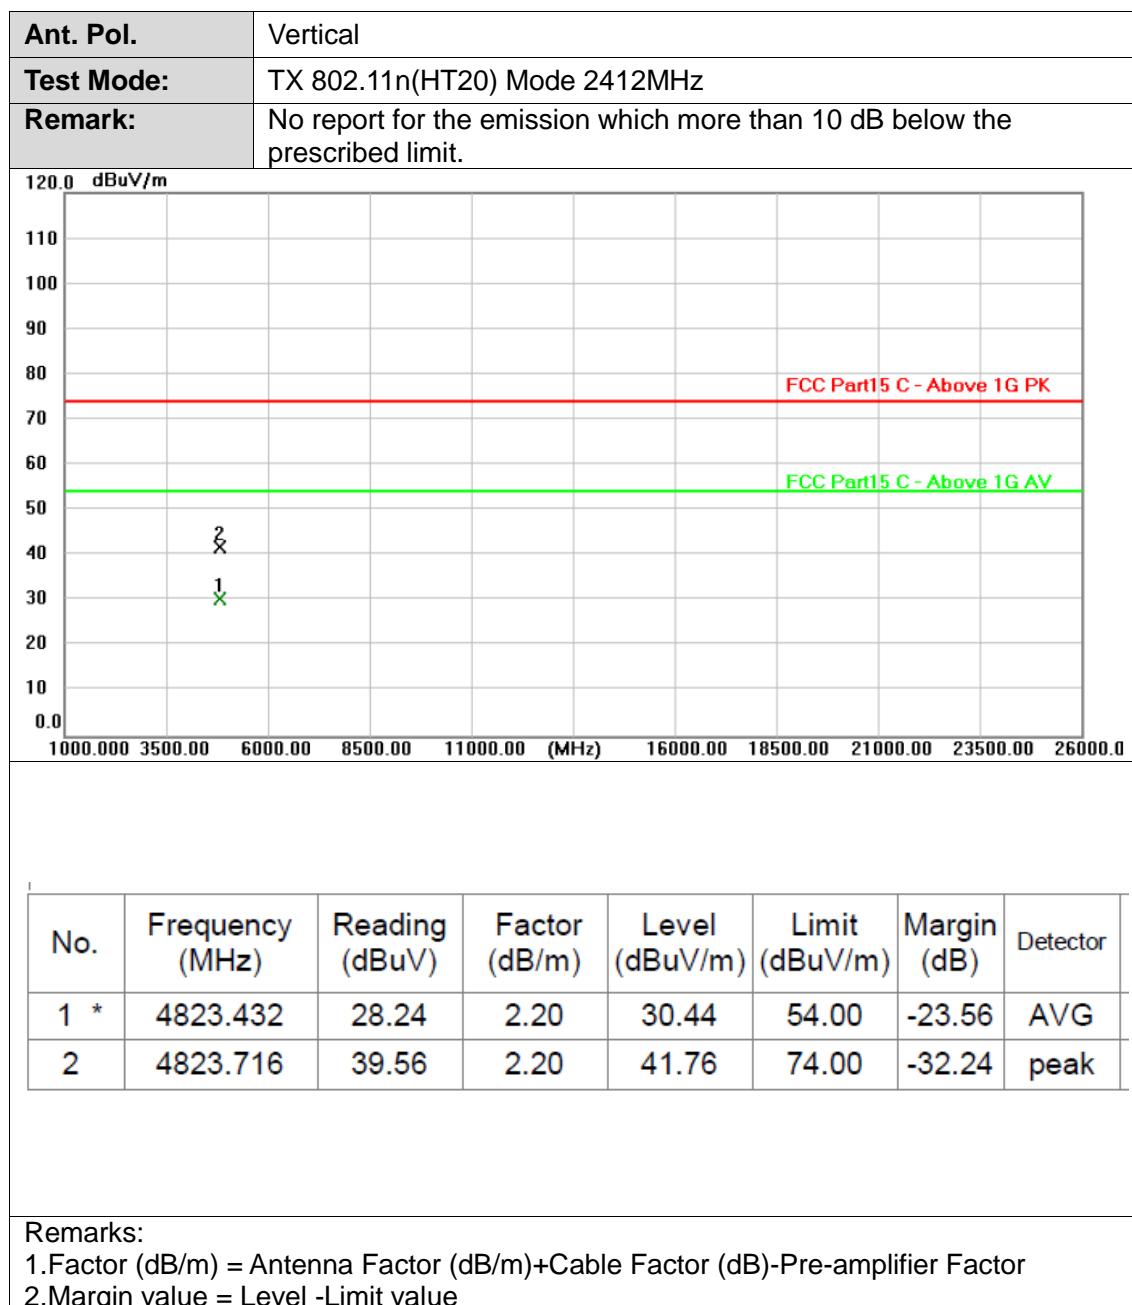



Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11n(HT20) Mode 2437MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
<p>1 X</p> <p>2 X</p>																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4873.306</td><td>39.70</td><td>2.30</td><td>42.00</td><td>74.00</td><td>-32.00</td><td>peak</td></tr><tr><td>2 *</td><td>4874.121</td><td>28.00</td><td>2.30</td><td>30.30</td><td>54.00</td><td>-23.70</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4873.306	39.70	2.30	42.00	74.00	-32.00	peak	2 *	4874.121	28.00	2.30	30.30	54.00	-23.70	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4873.306	39.70	2.30	42.00	74.00	-32.00	peak																									
2 *	4874.121	28.00	2.30	30.30	54.00	-23.70	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Vertical																															
Test Mode:	TX 802.11n(HT20) Mode 2437MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4873.131</td><td>27.90</td><td>2.30</td><td>30.20</td><td>54.00</td><td>-23.80</td><td>AVG</td></tr><tr><td>2</td><td>4873.137</td><td>37.01</td><td>2.30</td><td>39.31</td><td>74.00</td><td>-34.69</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4873.131	27.90	2.30	30.20	54.00	-23.80	AVG	2	4873.137	37.01	2.30	39.31	74.00	-34.69	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4873.131	27.90	2.30	30.20	54.00	-23.80	AVG																									
2	4873.137	37.01	2.30	39.31	74.00	-34.69	peak																									
<p>Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11n(HT20) Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4924.143</td><td>26.94</td><td>2.41</td><td>29.35</td><td>54.00</td><td>-24.65</td><td>AVG</td></tr><tr><td>2</td><td>4924.475</td><td>37.81</td><td>2.41</td><td>40.22</td><td>74.00</td><td>-33.78</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4924.143	26.94	2.41	29.35	54.00	-24.65	AVG	2	4924.475	37.81	2.41	40.22	74.00	-33.78	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4924.143	26.94	2.41	29.35	54.00	-24.65	AVG																								
2	4924.475	37.81	2.41	40.22	74.00	-33.78	peak																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															



Ant. Pol.	Vertical																														
Test Mode:	TX 802.11n(HT20) Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4923.789</td><td>27.13</td><td>2.41</td><td>29.54</td><td>54.00</td><td>-24.46</td><td>AVG</td></tr><tr><td>2</td><td>4924.155</td><td>37.94</td><td>2.41</td><td>40.35</td><td>74.00</td><td>-33.65</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4923.789	27.13	2.41	29.54	54.00	-24.46	AVG	2	4924.155	37.94	2.41	40.35	74.00	-33.65	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4923.789	27.13	2.41	29.54	54.00	-24.46	AVG																								
2	4924.155	37.94	2.41	40.35	74.00	-33.65	peak																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)/ RSS 247 5.5:

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Test Configuration

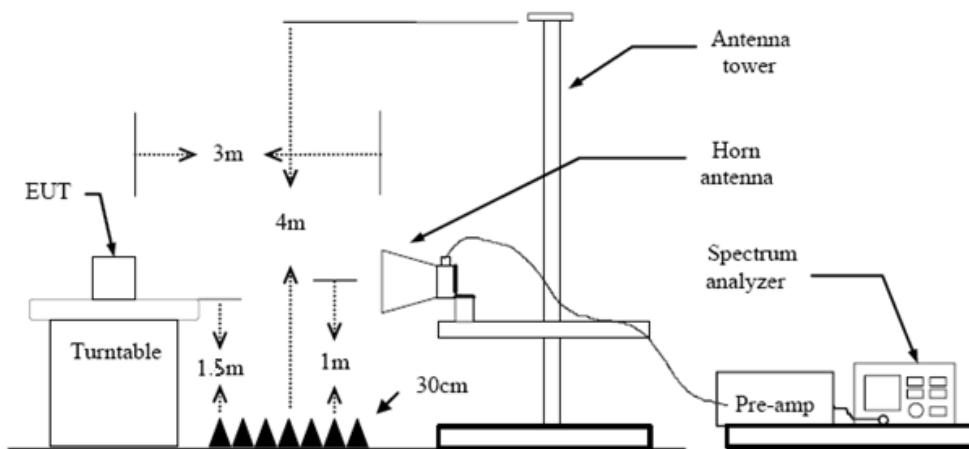


Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


Test Mode


Please refer to the clause 2.4.

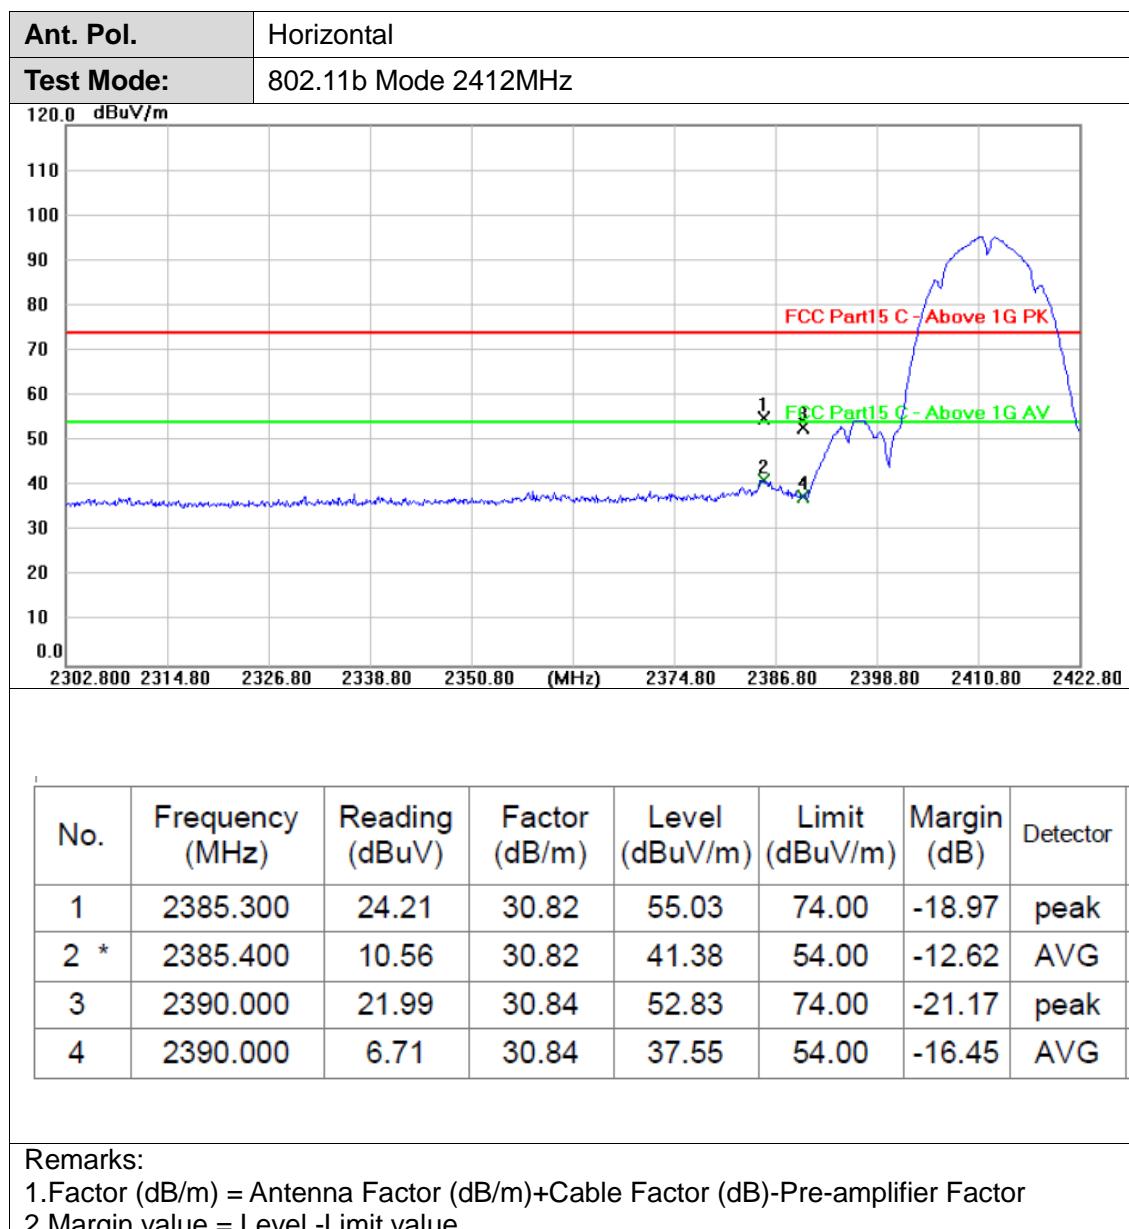
**Test Results**

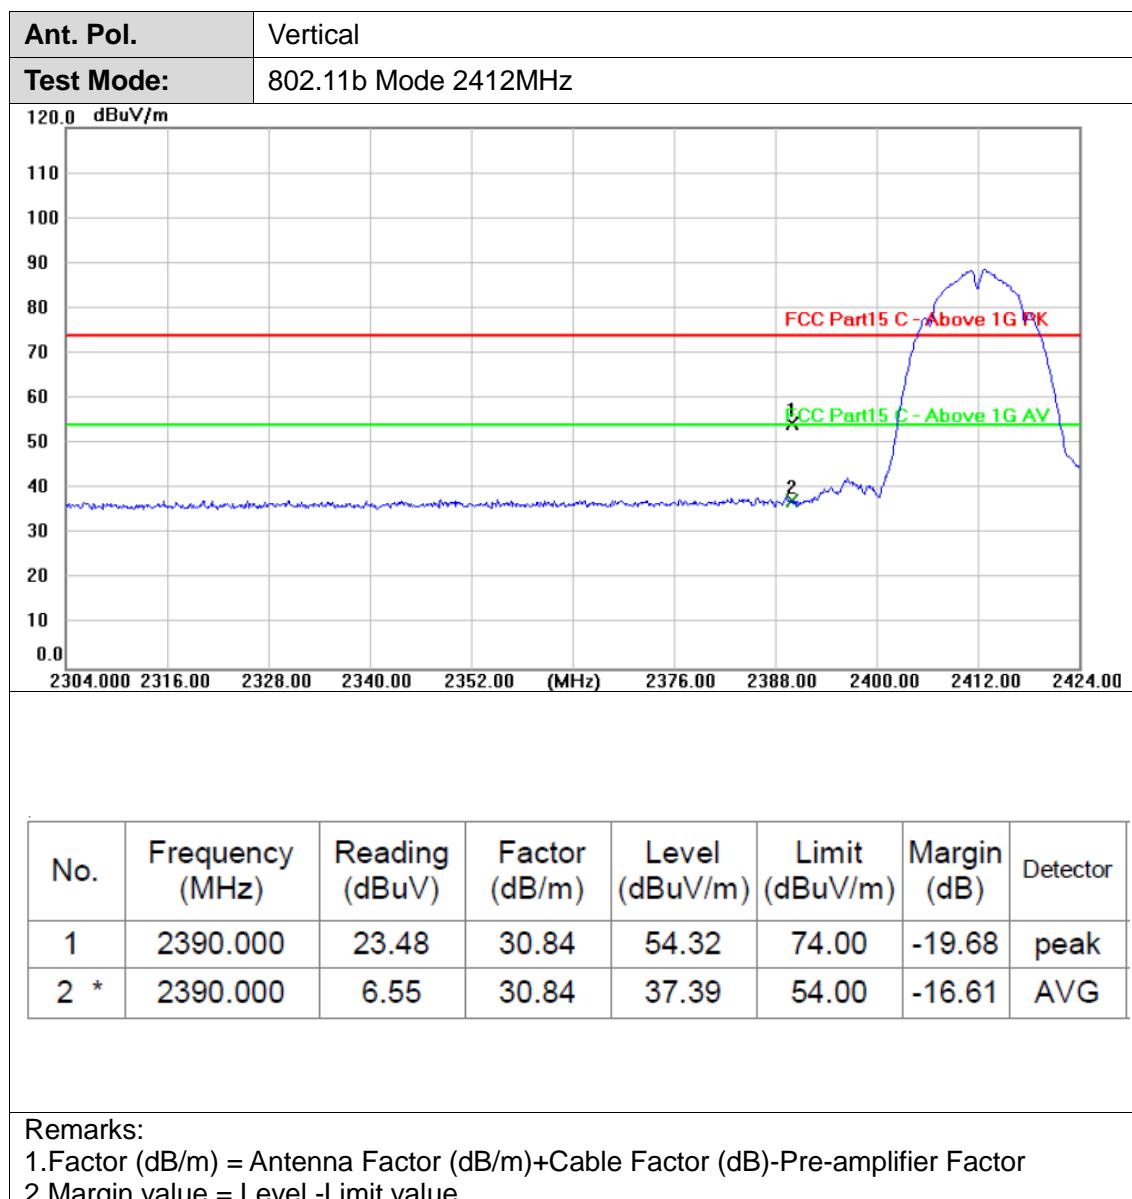


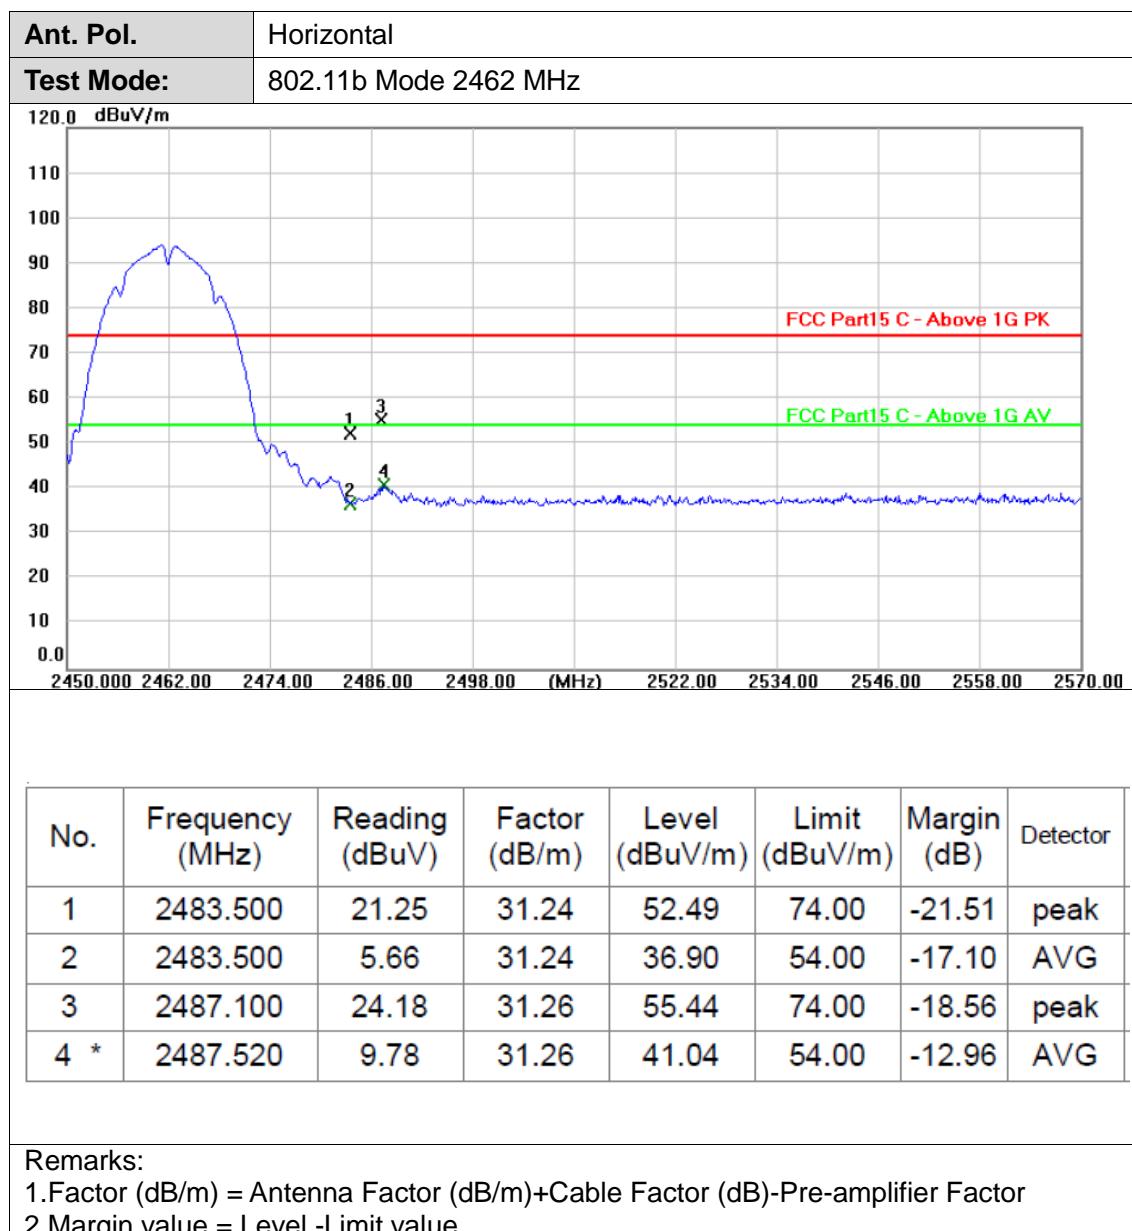


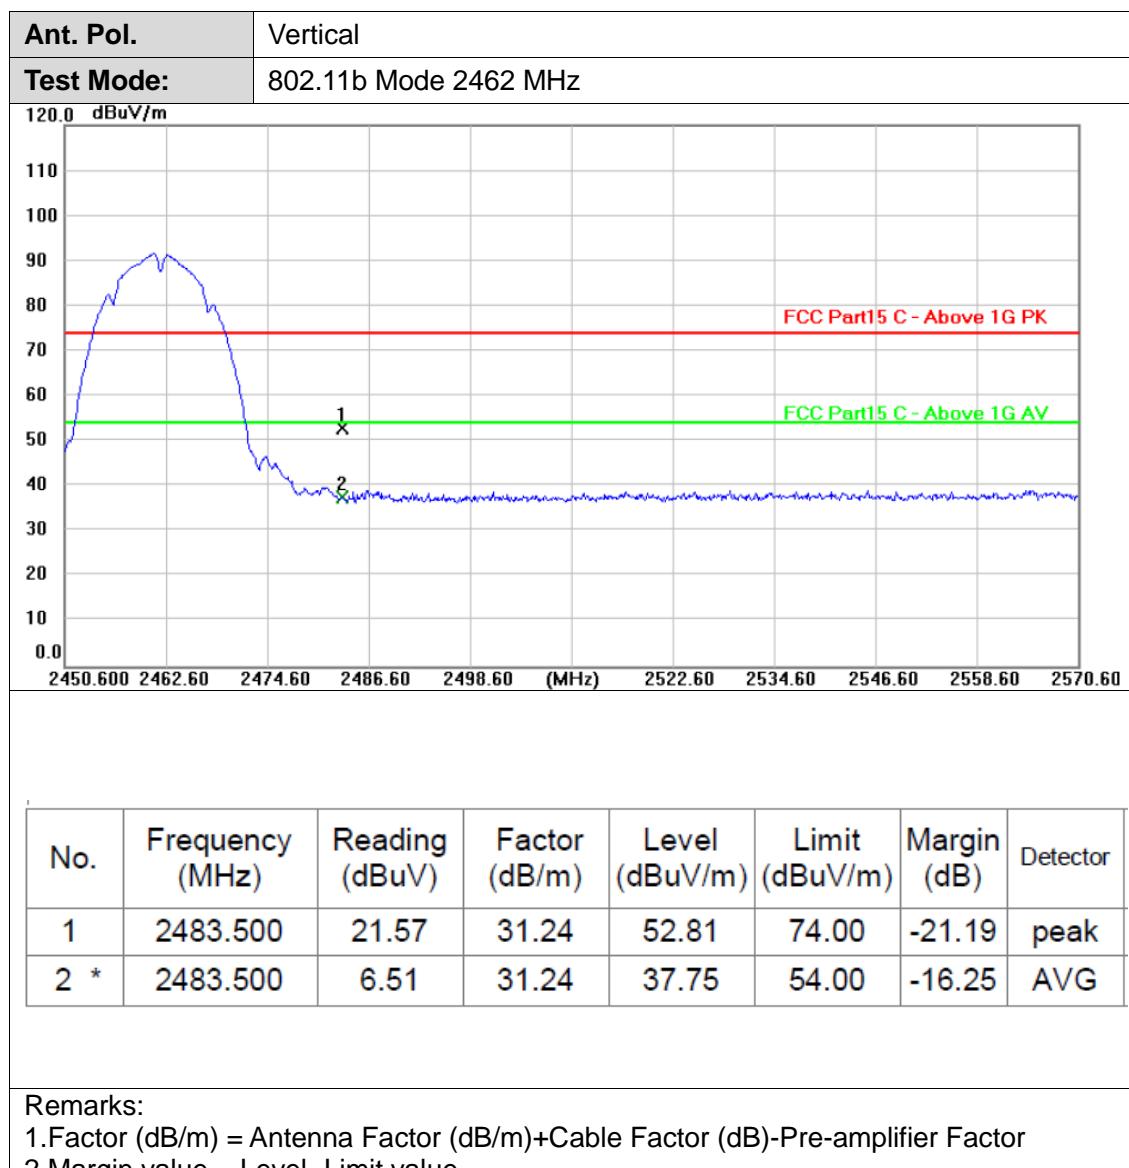


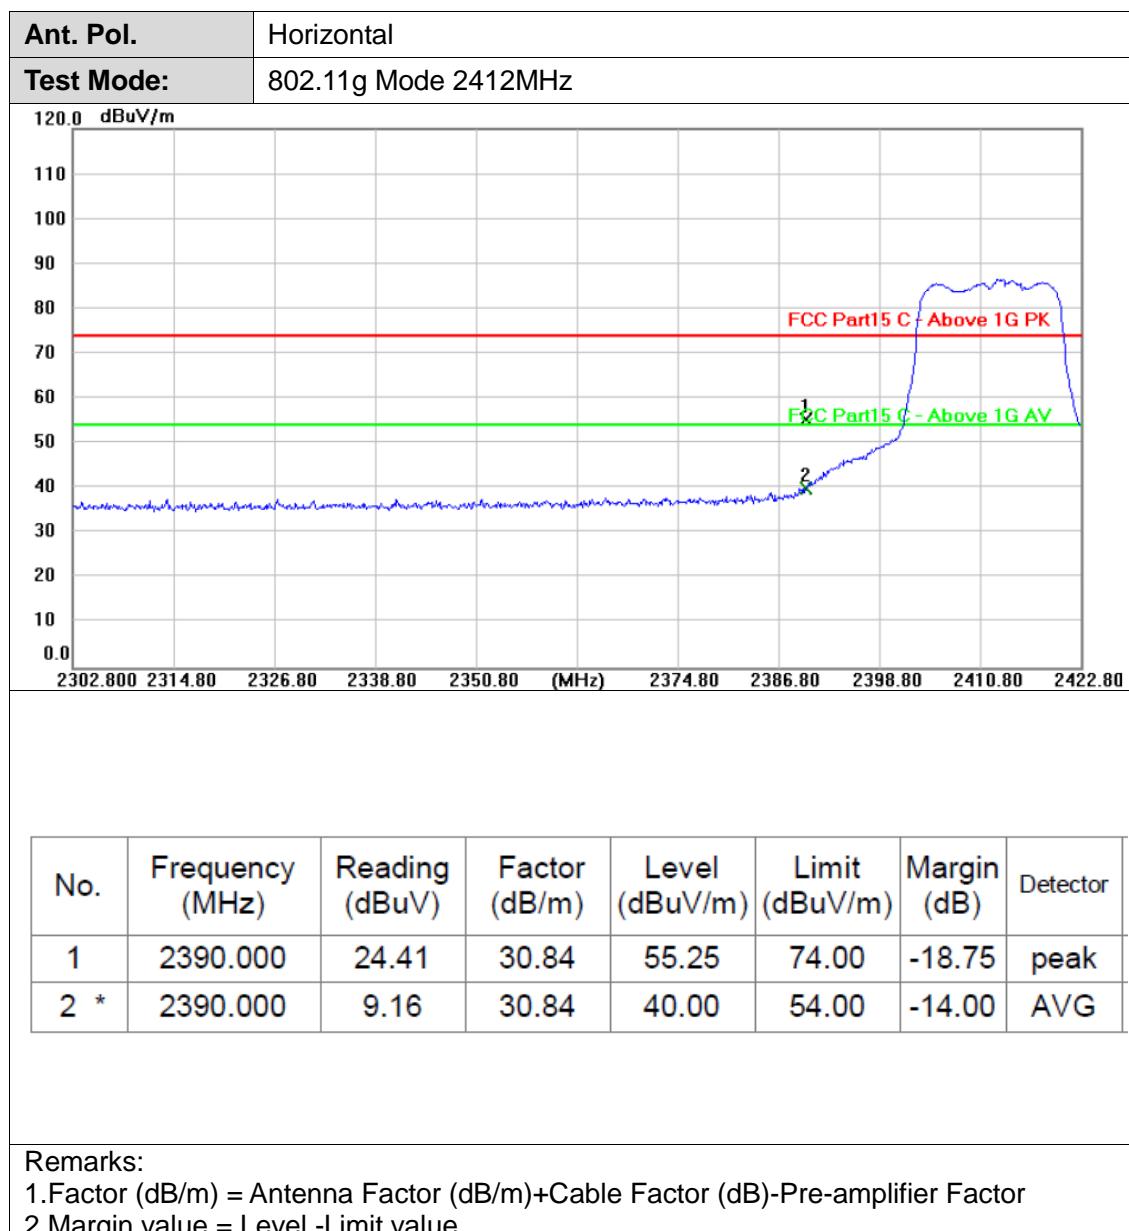


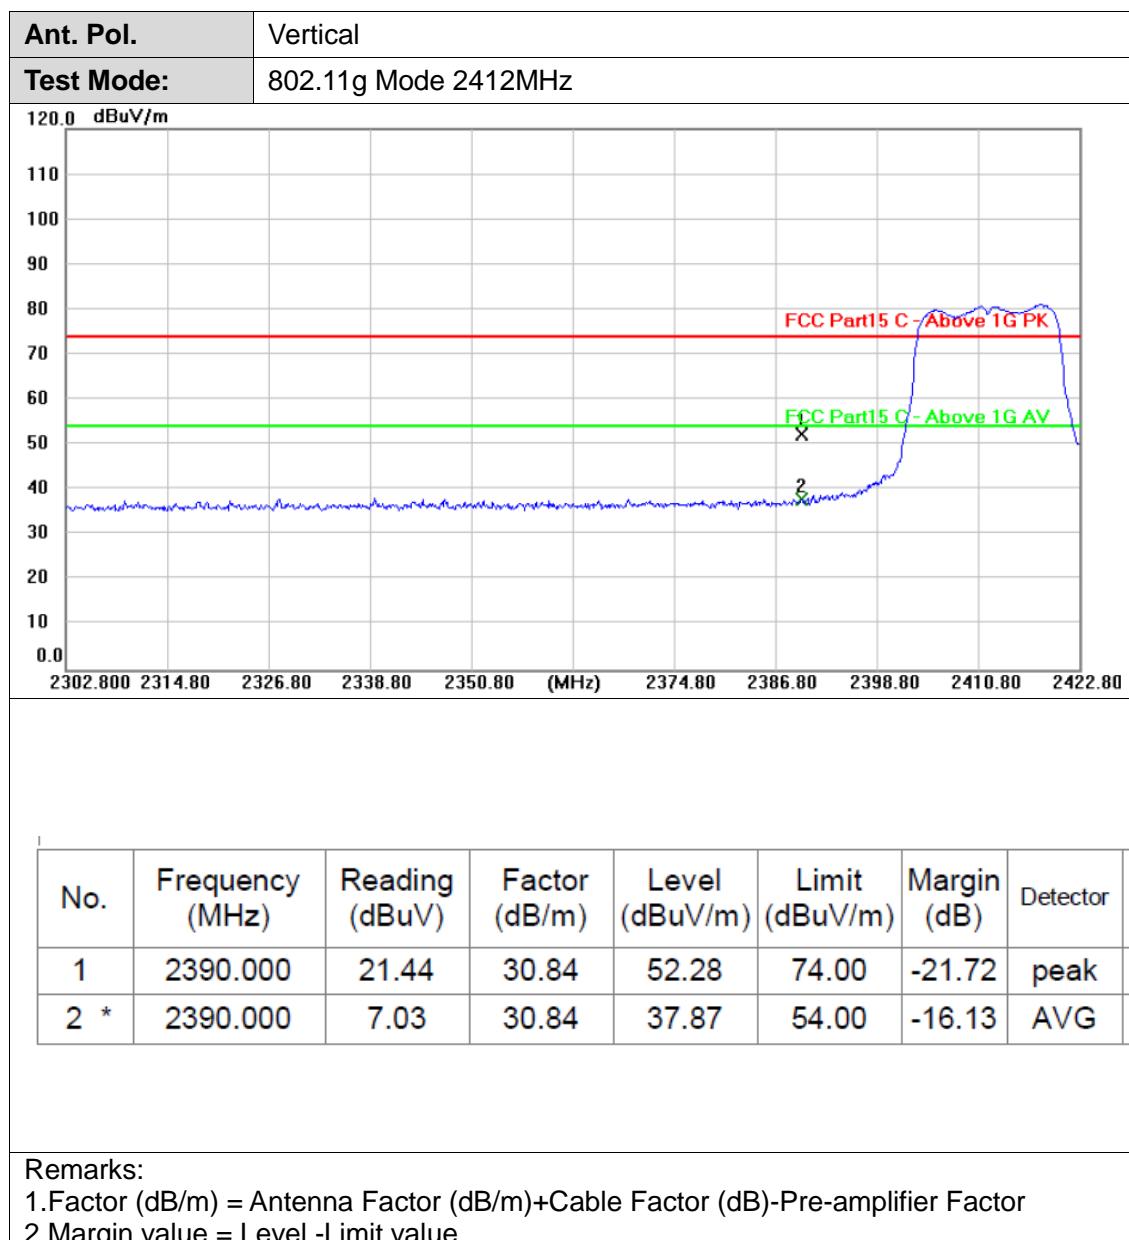


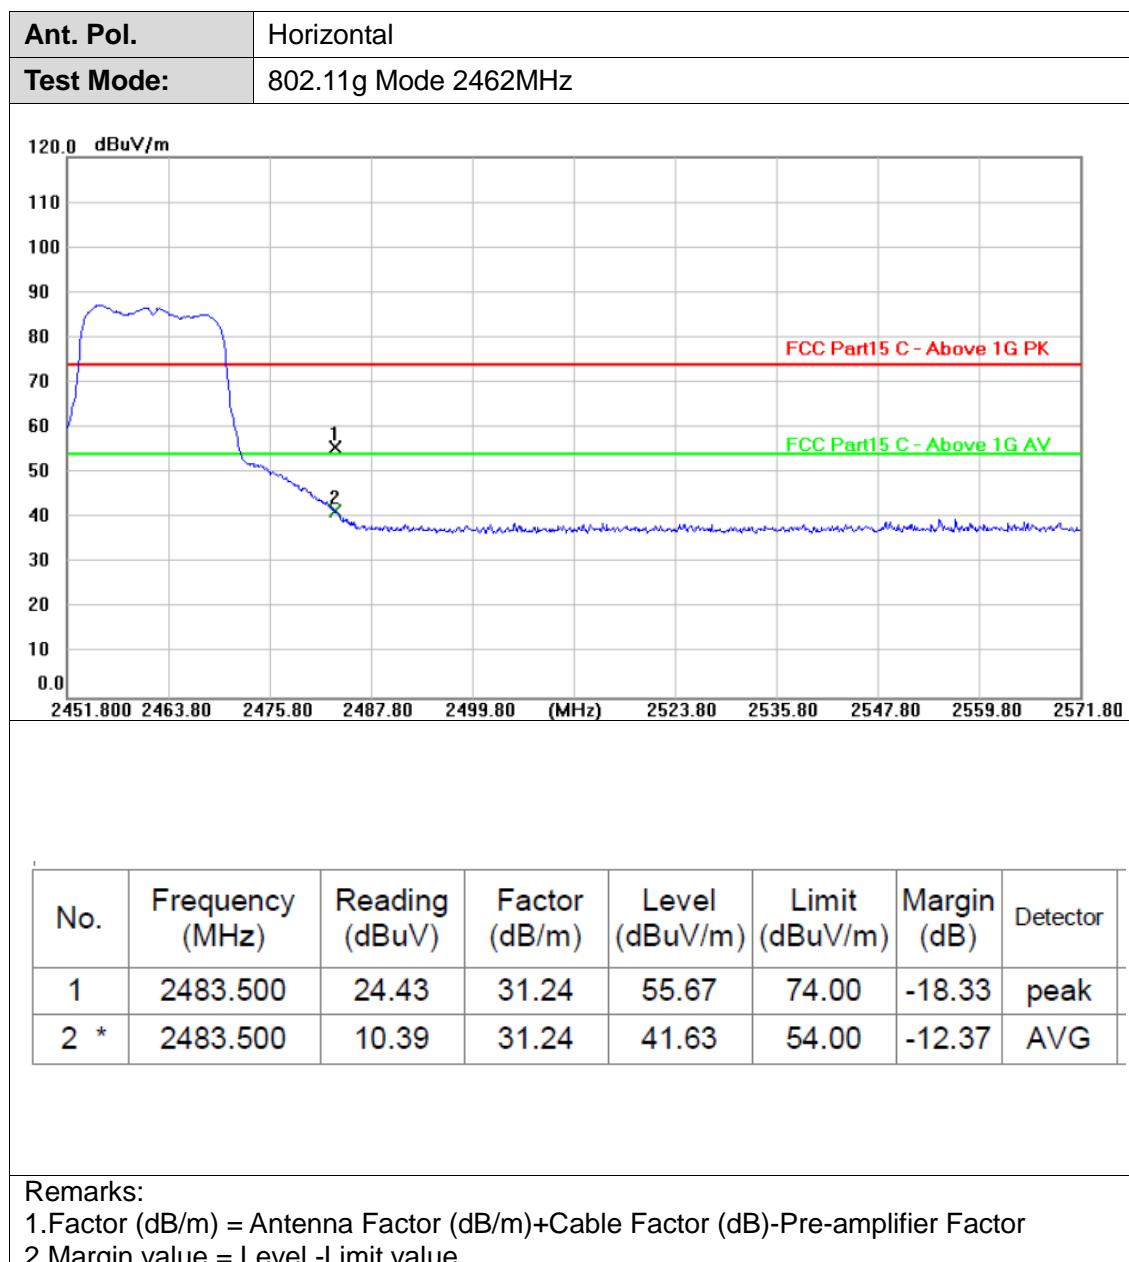


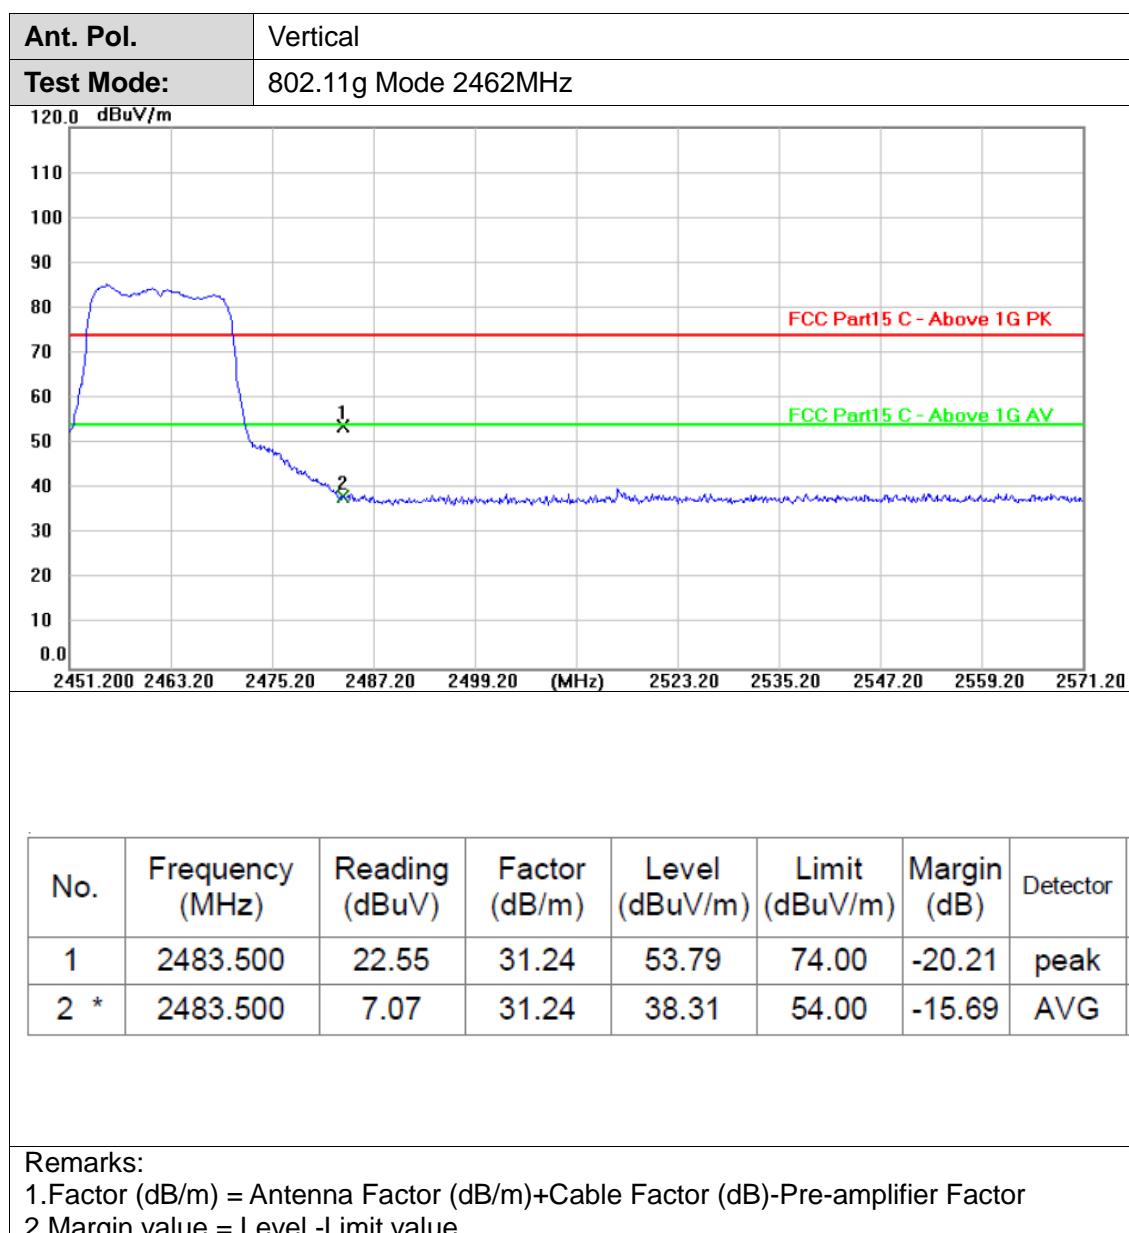

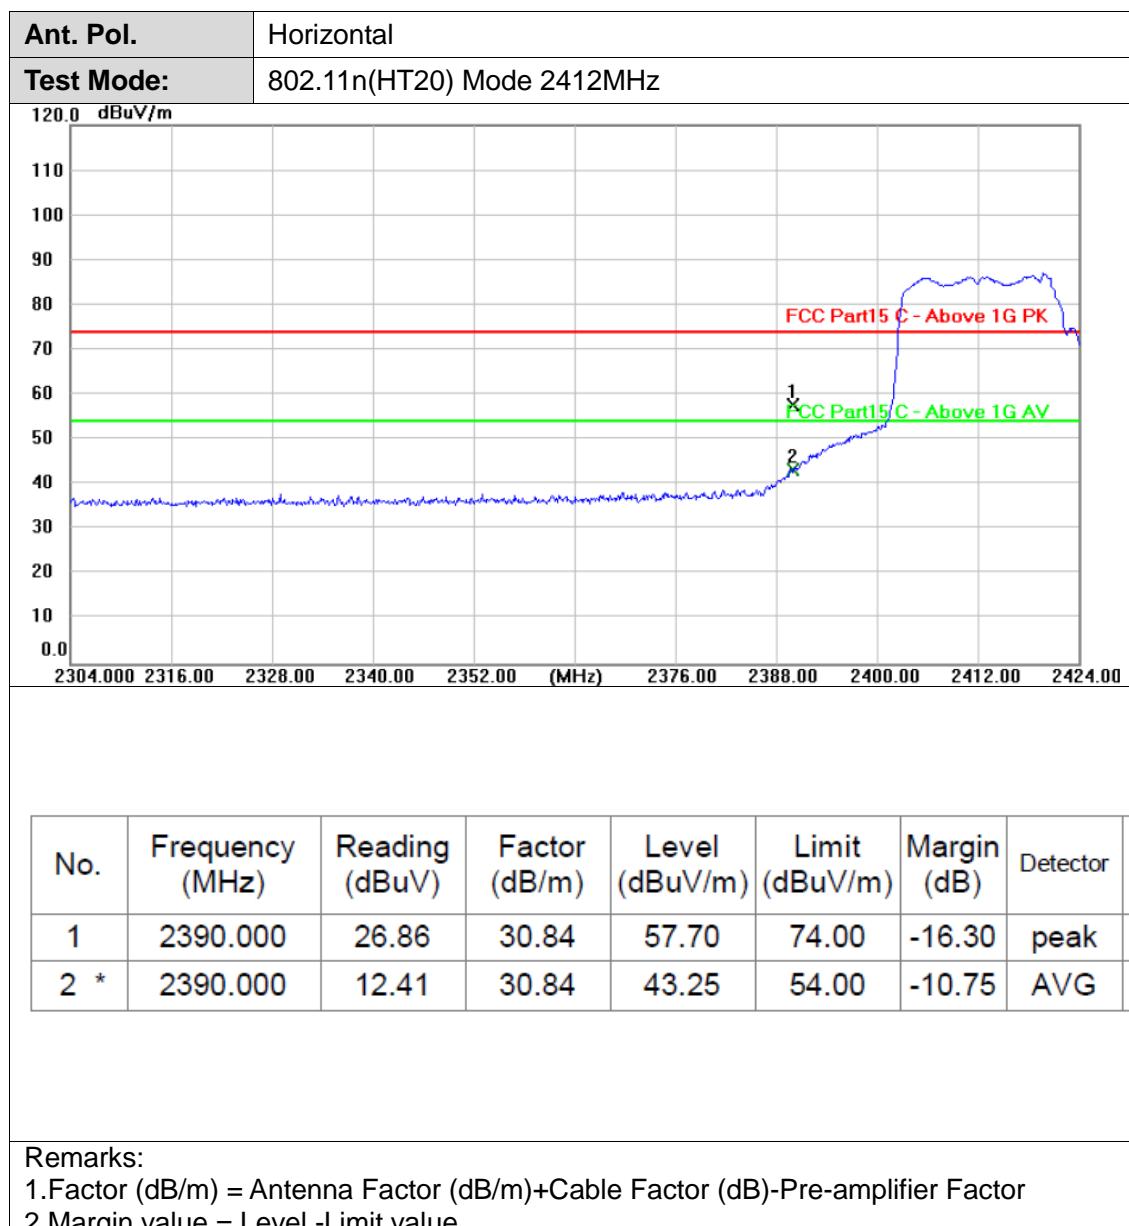

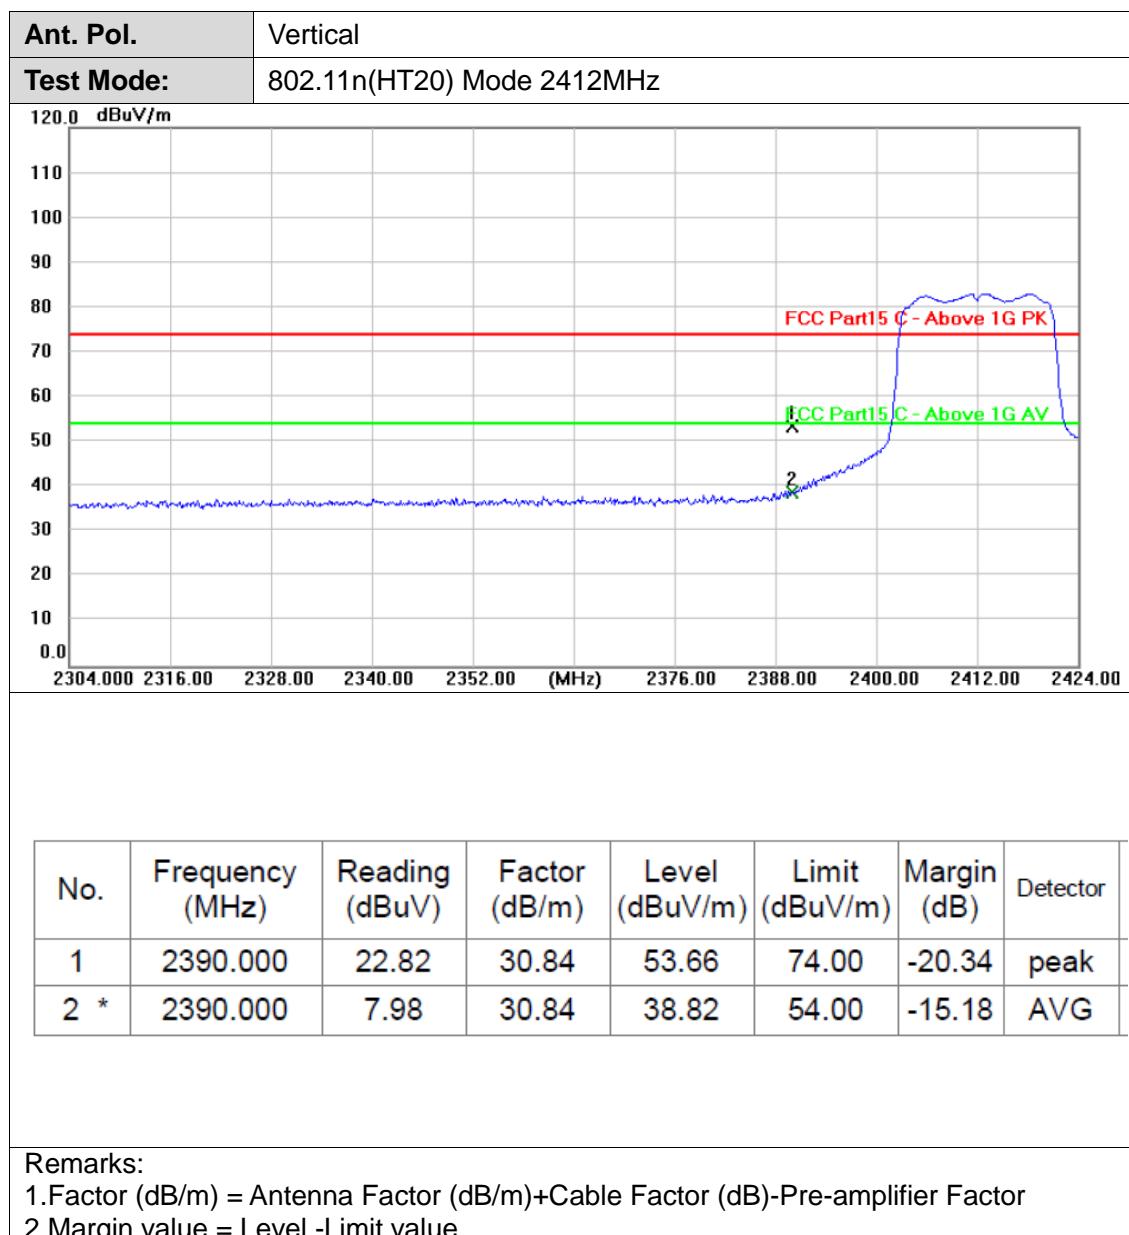

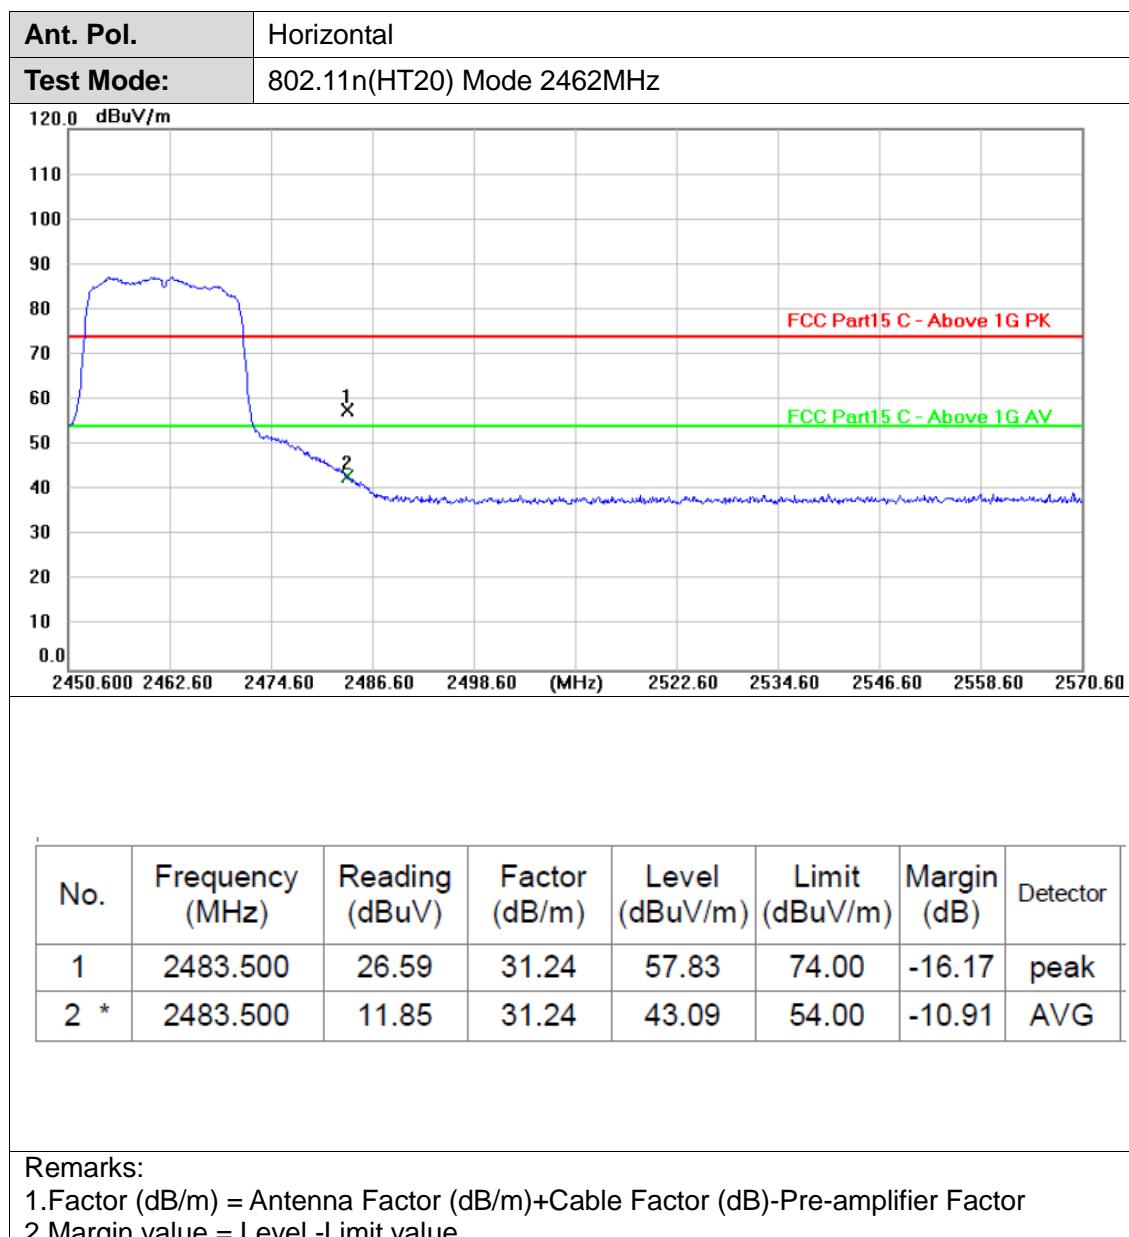

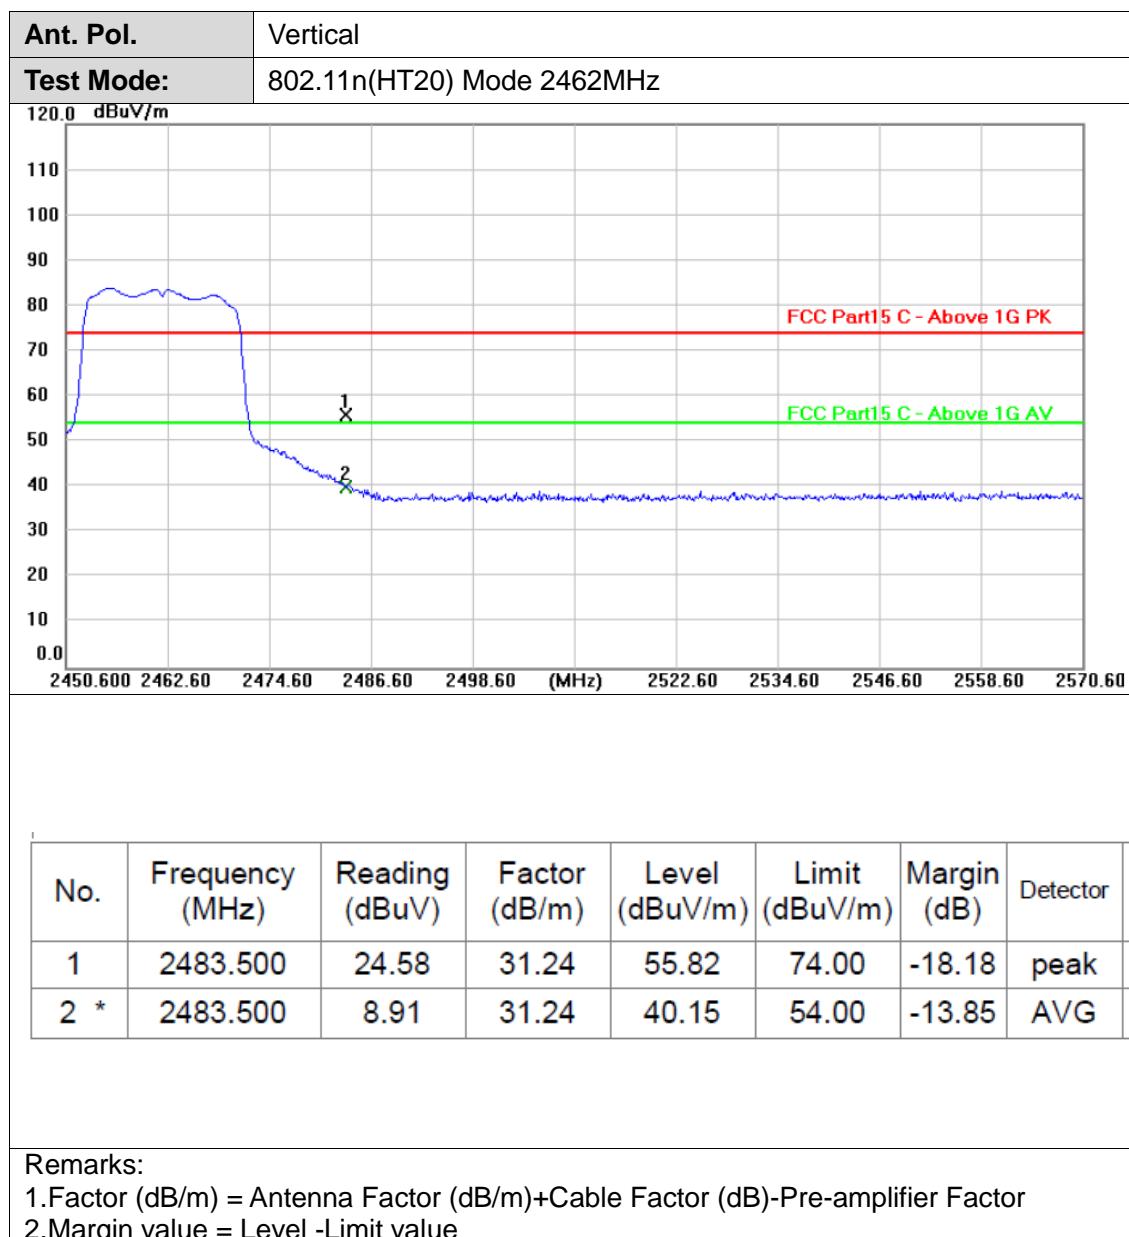




3.4. Band edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.


Test Results

(1) Band edge Conducted Test


Test Mode	Frequency[MHz]	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
802.11b	2412	6.27	-36.10	\leq -13.73	PASS
	2462	7.27	-48.44	\leq -12.73	PASS
802.11g	2412	-2.54	-32.27	\leq -22.54	PASS
	2462	0.35	-39.74	\leq -19.65	PASS
802.11n(HT20)	2412	0.96	-32.25	\leq -19.04	PASS
	2462	0.98	-39.42	\leq -19.02	PASS




802.11b_Low_2412

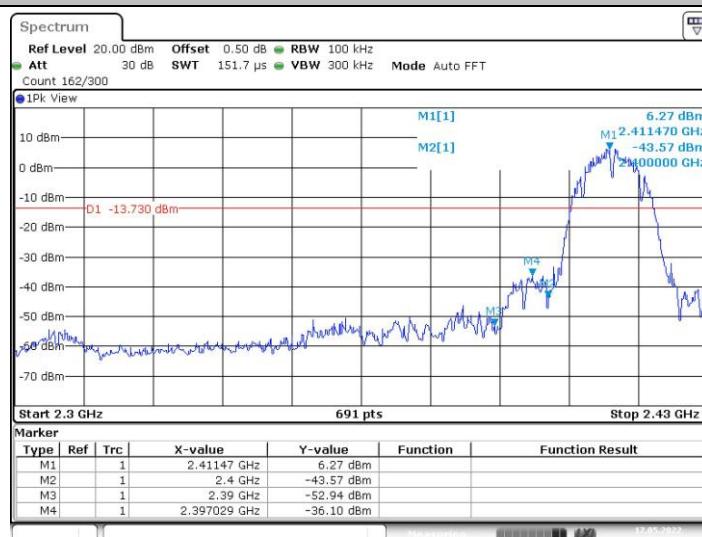

802.11b_High_2462

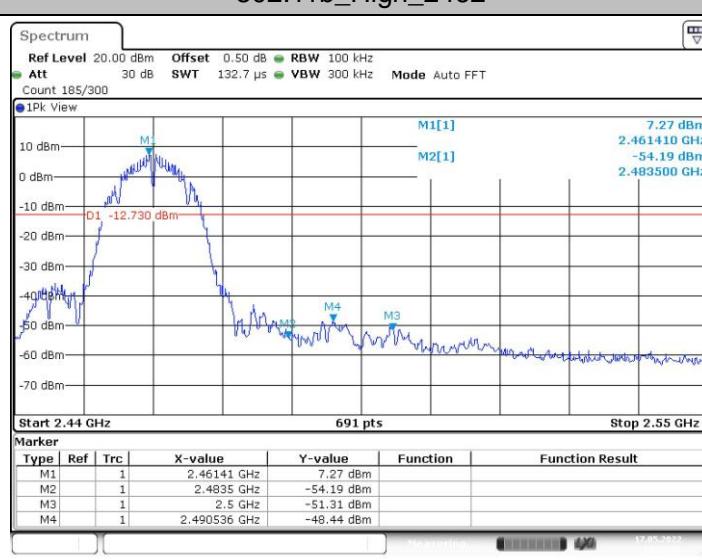

802.11g_Low_2412

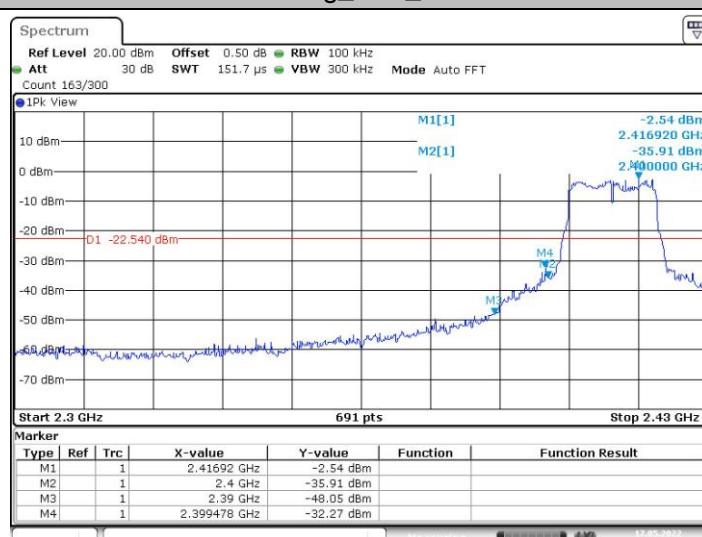


CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11g_High_2462

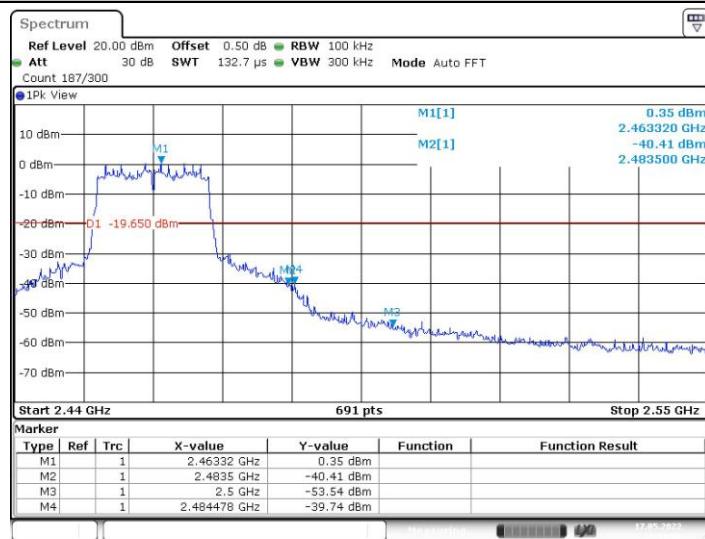

802.11n(HT20)_Low_2412

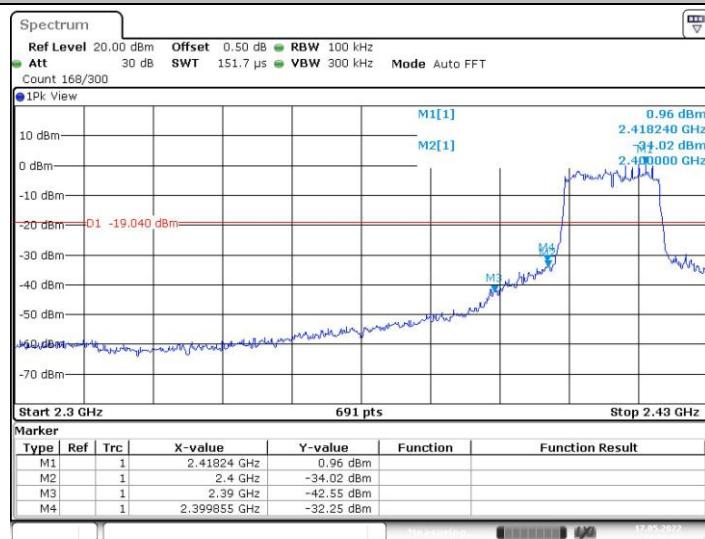

802.11n(HT20)_High_2462

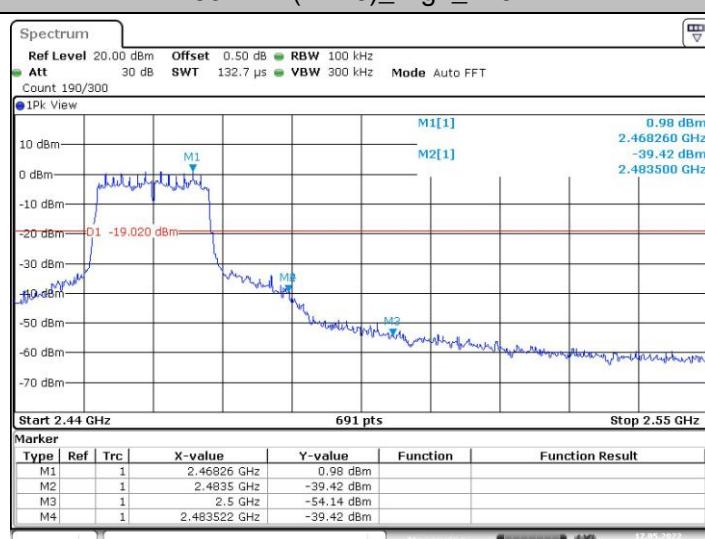

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




(2) Conducted Spurious Emissions Test

Test Mode	Frequency[MHz]	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
802.11b	2412	Reference	7.90	7.90	---	PASS
		30~1000	7.90	-69	≤-12.1	PASS
		1000~26500	7.90	-43.63	≤-12.1	PASS
	2437	Reference	8.18	8.18	---	PASS
		30~1000	8.18	-61.41	≤-11.82	PASS
		1000~26500	8.18	-43.97	≤-11.82	PASS
	2462	Reference	8.61	8.61	---	PASS
		30~1000	8.61	-68.75	≤-11.39	PASS
		1000~26500	8.61	-43.81	≤-11.39	PASS
802.11g	2412	Reference	1.88	1.88	---	PASS
		30~1000	1.88	-61.39	≤-18.12	PASS
		1000~26500	1.88	-45.91	≤-18.12	PASS
	2437	Reference	1.86	1.86	---	PASS
		30~1000	1.86	-68.52	≤-18.14	PASS
		1000~26500	1.86	-45.71	≤-18.14	PASS
	2462	Reference	2.44	2.44	---	PASS
		30~1000	2.44	-67.66	≤-17.56	PASS
		1000~26500	2.44	-46.06	≤-17.56	PASS
802.11n(HT20)	2412	Reference	2.77	2.77	---	PASS
		30~1000	2.77	-69.02	≤-17.23	PASS
		1000~26500	2.77	-45.41	≤-17.23	PASS
	2437	Reference	2.80	2.80	---	PASS
		30~1000	2.80	-68.68	≤-17.2	PASS
		1000~26500	2.80	-45.64	≤-17.2	PASS
	2462	Reference	3.70	3.70	---	PASS
		30~1000	3.70	-68.86	≤-16.3	PASS
		1000~26500	3.70	-45.47	≤-16.3	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

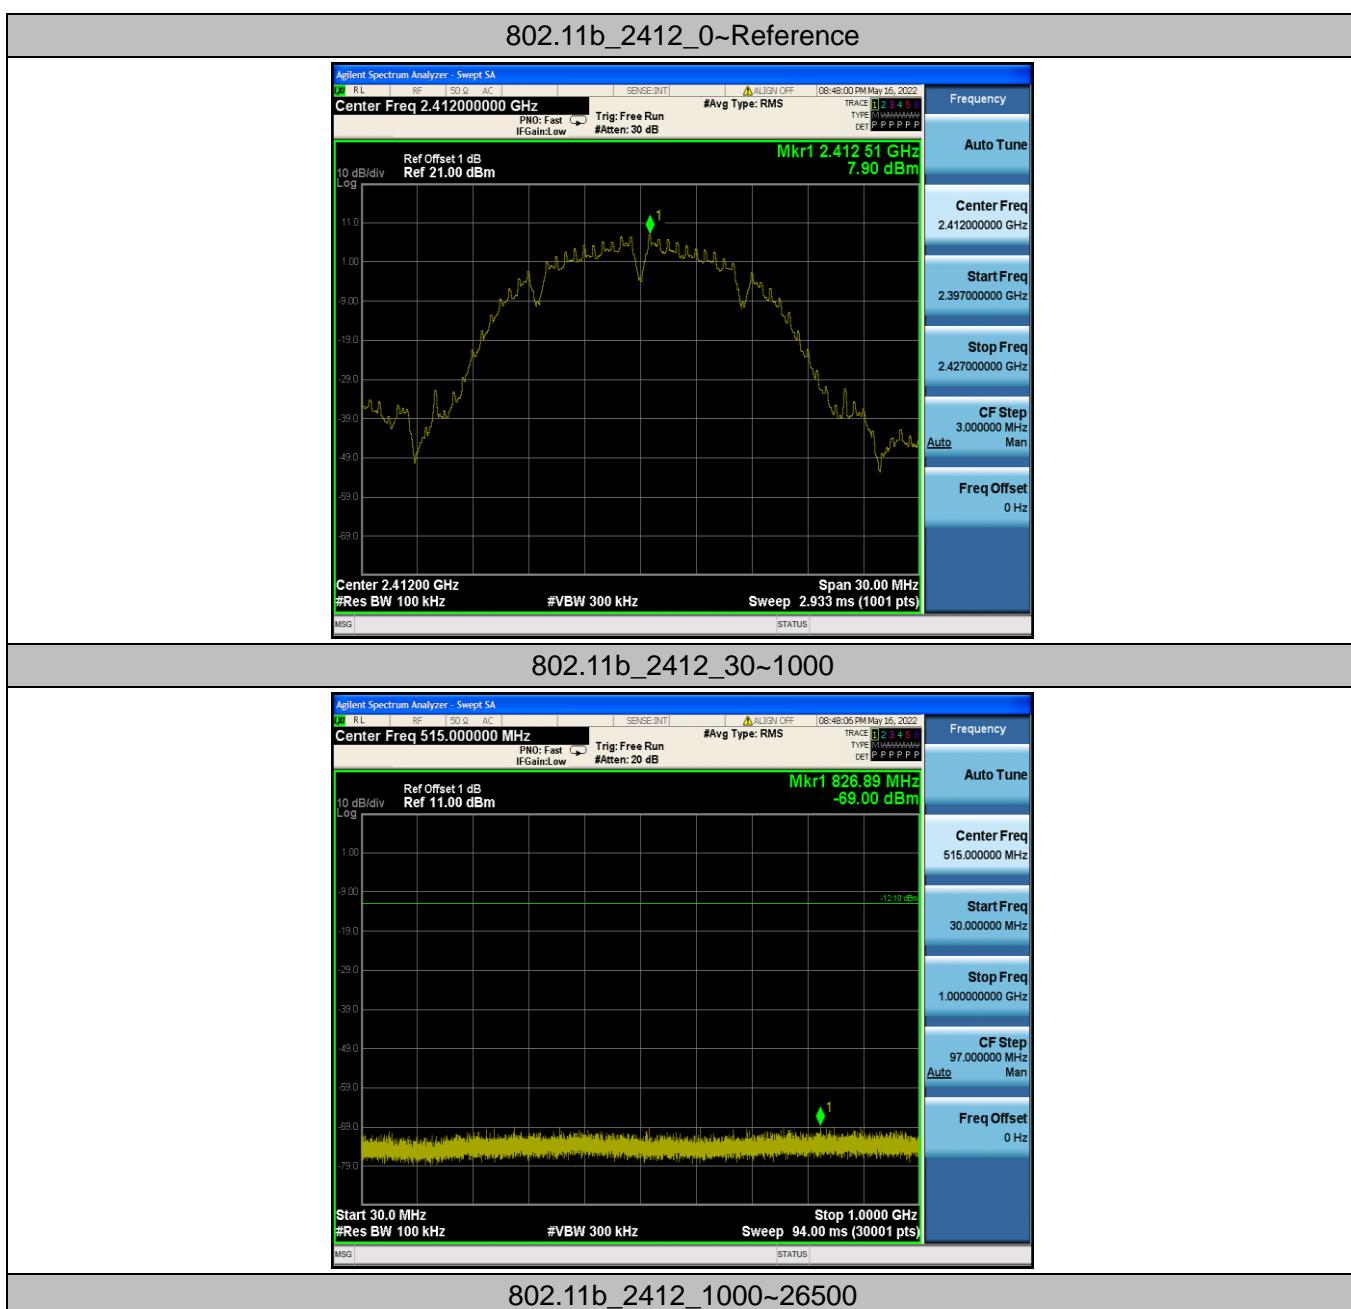


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

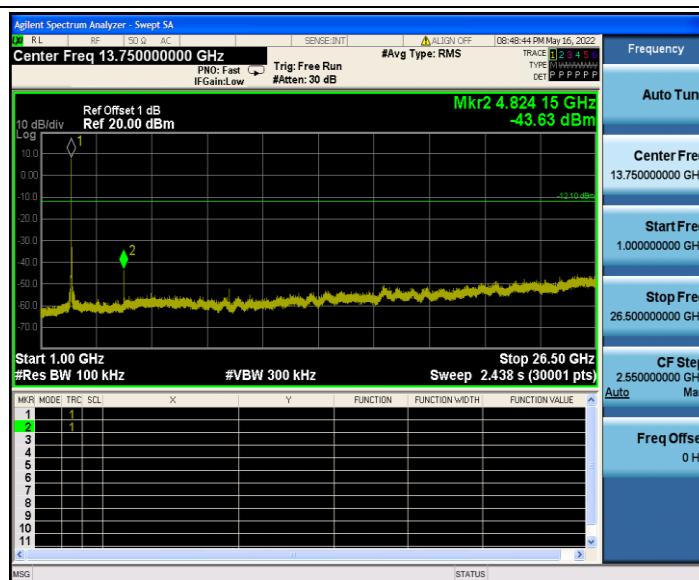

802.11b_2437_0~Reference



802.11b_2437_30~1000

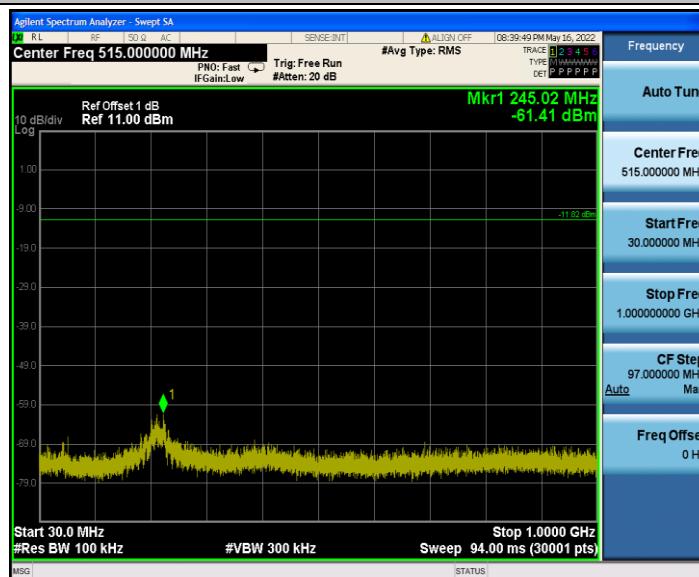

802.11b_2437_1000~26500