


802.11b_2462_0~Reference




802.11b_2462_30~1000

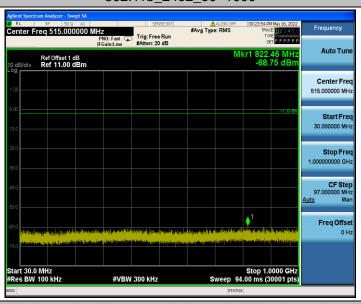

802.11b_2462_1000~26500




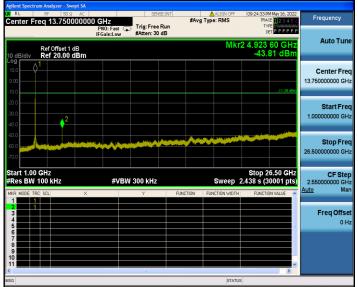

802.11g_2412_0~Reference




802.11g_2412_30~1000

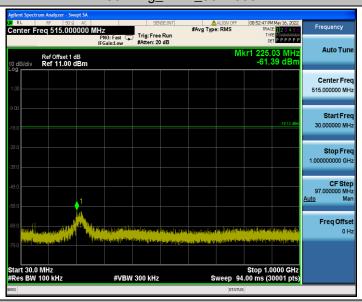

802.11g_2412_1000~26500



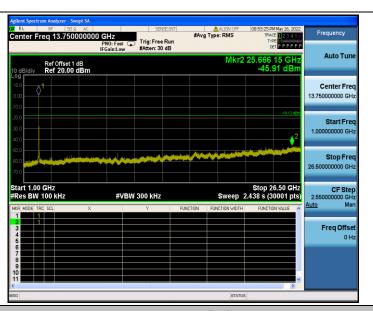


Page 58 of 81

802.11g_2437_0~Reference




802.11g_2437_30~1000

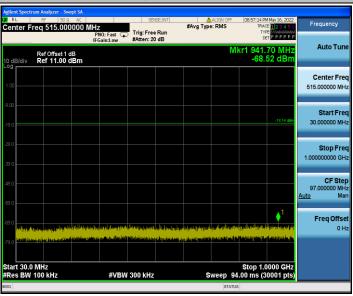

802.11g_2437_1000~26500




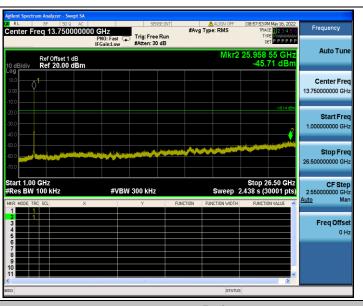

802.11g_2462_0~Reference




802.11g_2462_30~1000

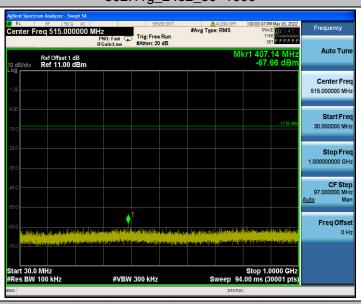

802.11g_2462_1000~26500





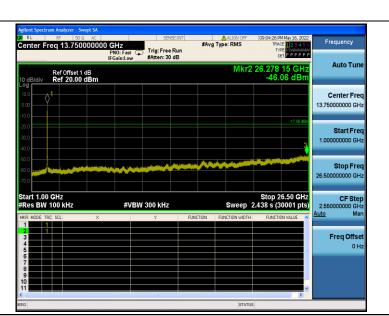


Page 60 of 81

802.11n(HT20)_2412_0~Reference




802.11n(HT20)_2412_30~1000

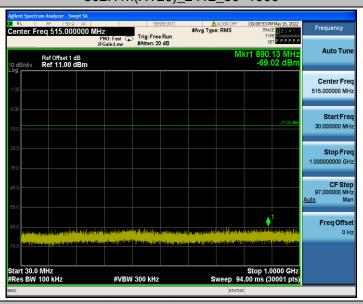

802.11n(HT20)_2412_1000~26500




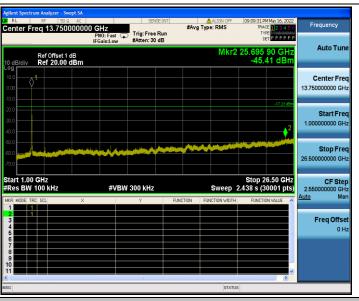

802.11n(HT20)_2437_0~Reference




802.11n(HT20)_2437_30~1000

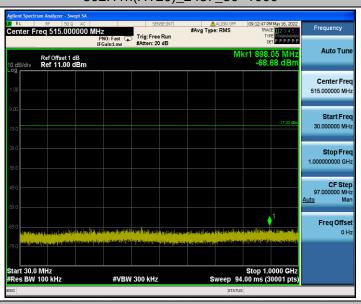

802.11n(HT20)_2437_1000~26500



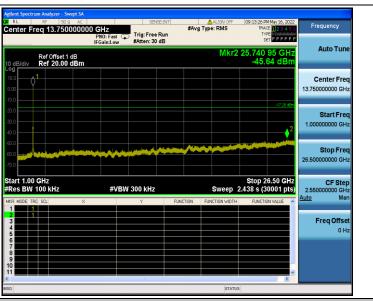


Page 62 of 81

802.11n(HT20)_2462_0~Reference




802.11n(HT20)_2462_30~1000

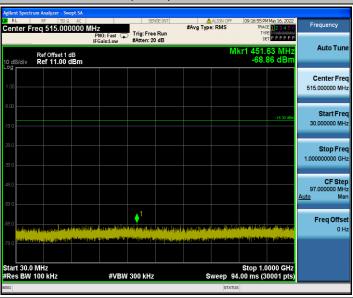


802.11n(HT20)_2462_1000~26500

CTC Laboratories, Inc.

中国国家认证认可监督管理委员会





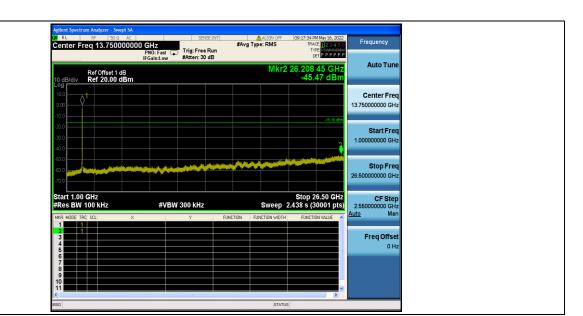



3.5. DTS Bandwidth


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2)/ RSS-247 5.2 a:

Test Item	Limit	Frequency Range(MHz)
DTS Bandwidth	>=500 KHz (6dB bandwidth)	2400~2483.5

Report No.: CTC20220917E01

Test Configuration



Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 6. DTS Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.
 - OCB Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.4.







Test Results

Test Mode	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
	2412	9.000	>=0.5	PASS
802.11b	2437	9.000	>=0.5	PASS
	2462	9.000	>=0.5	PASS
802.11g	2412	15.720	>=0.5	PASS
	2437	15.880	>=0.5	PASS
	2462	15.800	>=0.5	PASS
	2412	17.160	>=0.5	PASS
802.11n(HT20)	2437	17.560	>=0.5	PASS
	2462	17.160	>=0.5	PASS

Report No.: CTC20220917E01







802.11b_2437



802.11b_2462







802.11g_2437




802.11g_2462



802.11n(HT20)_2412



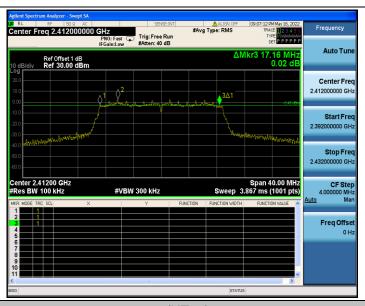

802.11n(HT20)_2437



802.11n(HT20)_2462





3.6. Peak Output Power


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3)/ RSS-247 5.4:

Section	Test Item	Limit	Frequency Range(MHz)
CFR 47 FCC 15.247(b)(3)	Maximum conducted output power	1 Watt or 30dBm	2400~2483.5
ISED RSS-247 5.4 d	EIRP	4 Watt or 36dBm	2400~2483.5

Report No.: CTC20220917E01

Test Configuration



Test Procedure

- 1. The maximum conducted output power may be measured using a broadband Peak RF power meter.
- 2. Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
- 3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
- 4. Record the measurement data.

Test Mode

Please refer to the clause 2.4.

Test Result



Page 70 of 81 Report No.: CTC20220917E01

Test Mode	Frequency[MHz]	Result [dBm]	Limit[dBm]	Verdict
	2412	15.89	<=30	PASS
802.11b	2437	15.99	<=30	PASS
	2462	16.53	<=30	PASS
802.11g	2412	12.13	<=30	PASS
	2437	12.30	<=30	PASS
	2462	12.63	<=30	PASS
	2412	12.72	<=30	PASS
802.11n(HT20)	2437	12.99	<=30	PASS
	2462	13.27	<=30	PASS

Note: Test results increased RF cable loss by 0.5dB.

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn





3.7. Power Spectral Density

<u>Limit</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e)/ RSS-247 5.2 b:

Test Item	Limit	Frequency Range(MHz)	
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5	

Report No.: CTC20220917E01

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- Spectrum Setting:

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz Set the VBW to: 10 kHz

Detector: PK Sweep time: Auto

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn





Test Result

Test Mode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
	2412	-4.57	<=8	PASS
802.11b	2437	-5.13	<=8	PASS
	2462	-6.96	<=8	PASS
802.11g	2412	-22.58	<=8	PASS
	2437	-12.28	<=8	PASS
	2462	-22.31	<=8	PASS
802.11n(HT20)	2412	-12.49	<=8	PASS
	2437	-12.43	<=8	PASS
	2462	-13.09	<=8	PASS


Report No.: CTC20220917E01

Accreditation Administration of the People's Republic of China: yz.cnca.cn








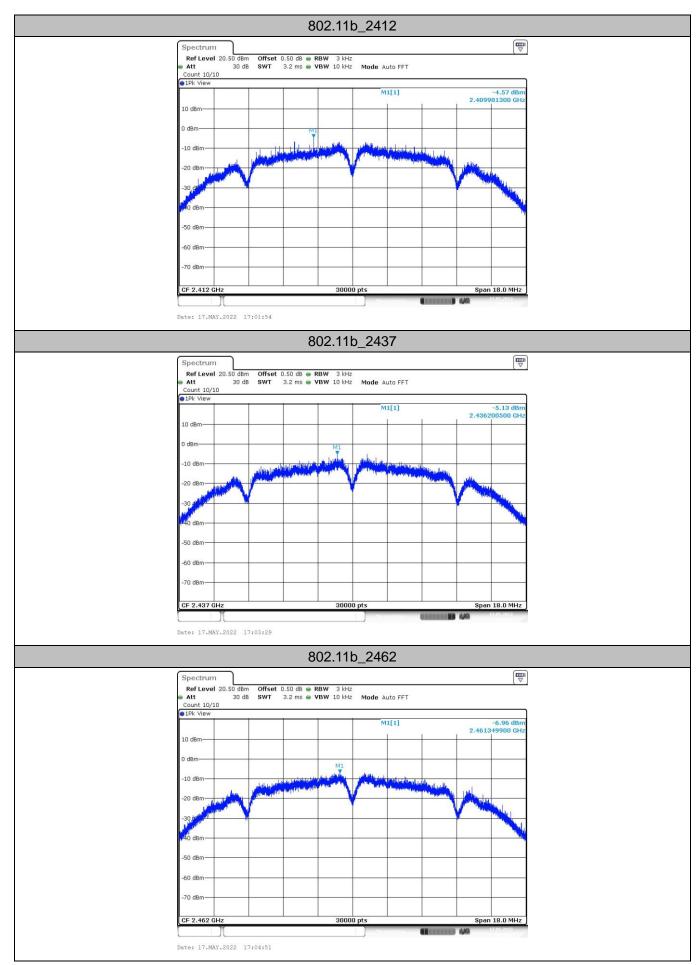








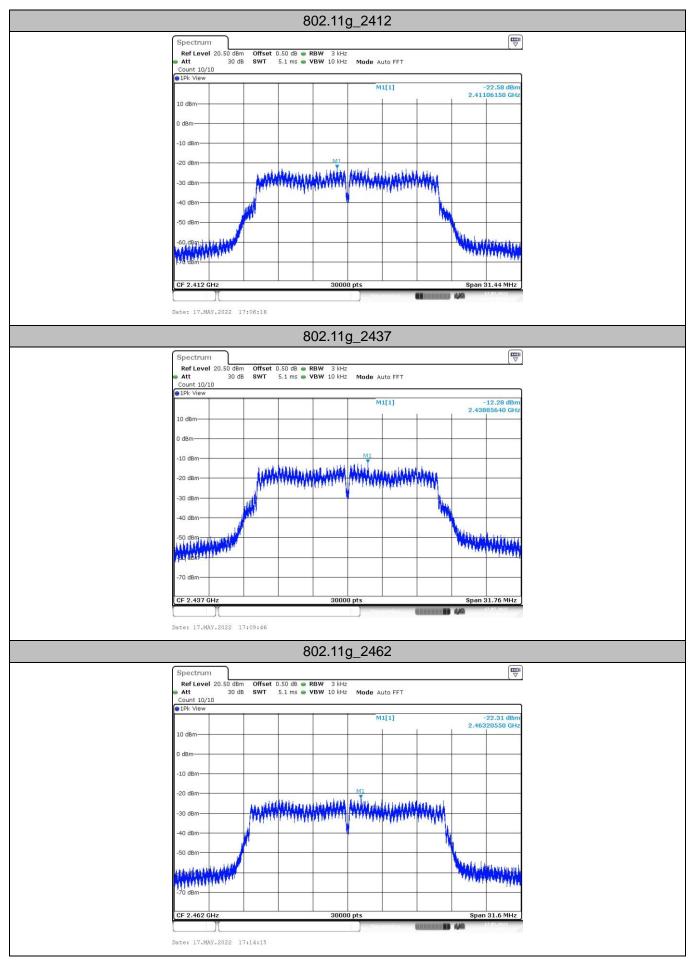



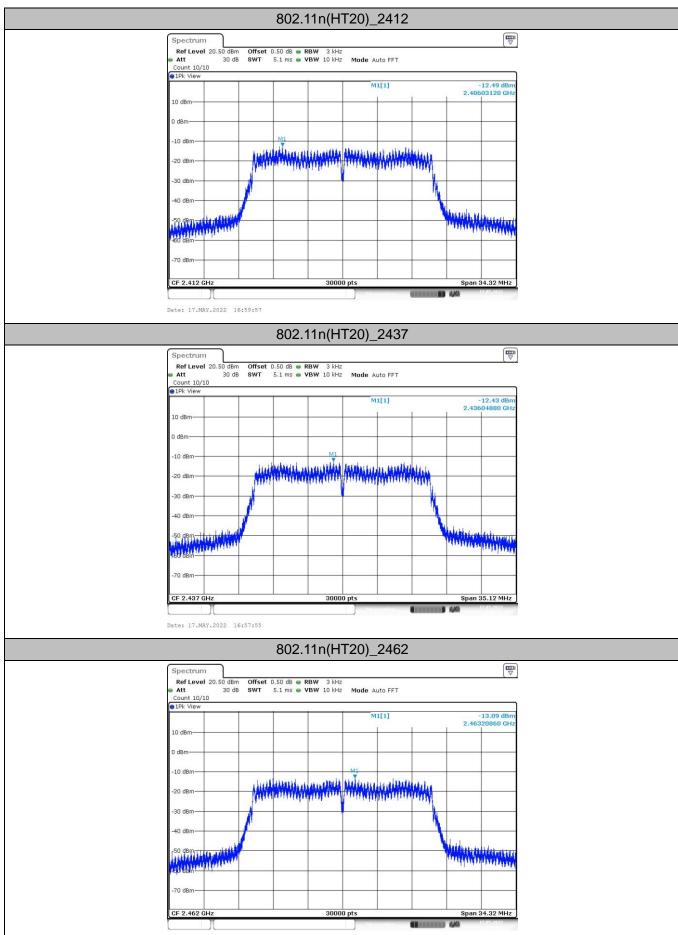

Date: 17.MAY.2022 16:49:17





3.8. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Report No.: CTC20220917E01

Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- 3. Spectrum Setting:

Set analyzer center frequency to DTS channel center frequency.

Set the span to 0Hz Set the RBW to 10MHz Set the VBW to 10MHz

Detector: peak Sweep time: auto

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.

Test Result






Test Mode	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
802.11b	2412	8.41	8.51	98.82	0.12	1
	2437	8.42	8.52	98.83	0.12	1
	2462	8.42	8.52	98.83	0.12	1
802.11g	2412	1.39	1.50	92.67	0.72	1
	2437	1.39	1.49	93.29	0.72	1
	2462	1.40	1.50	93.33	0.71	1
802.11n(HT20)	2412	1.31	1.41	92.91	0.76	1
	2437	1.31	1.41	92.91	0.76	1
	2462	1.31	1.41	92.91	0.76	1







802.11b_2412

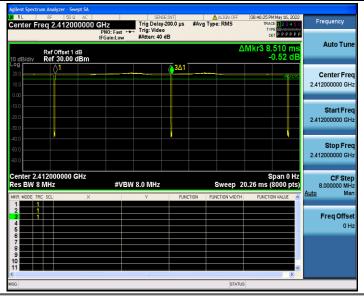

802.11b_2437

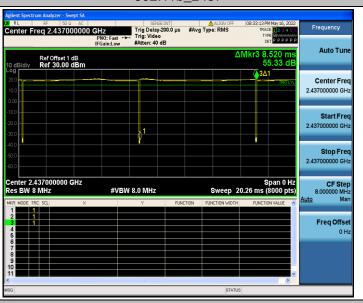


802.11b_2462

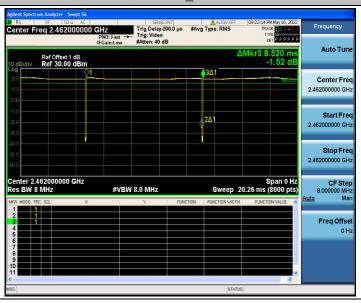





802.11g_2412

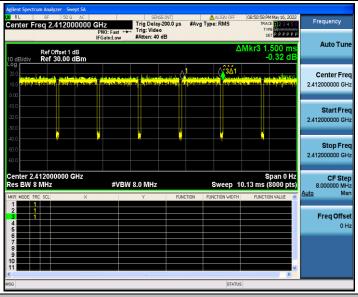


802.11g_2437

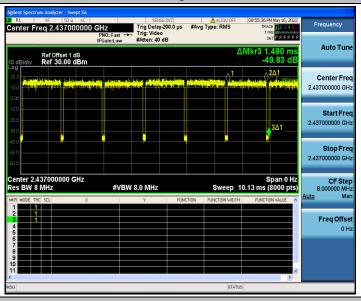


802.11g_2462

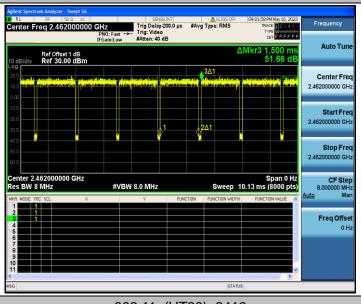


802.11n(HT20)_2412

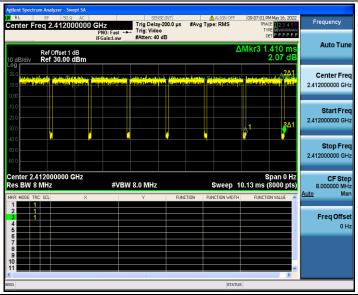


802.11n(HT20)_2437

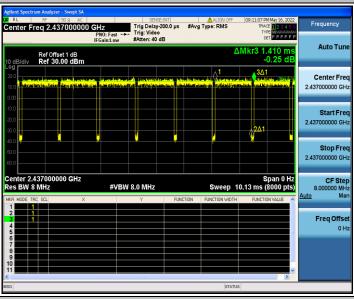

802.11n(HT20)_2462

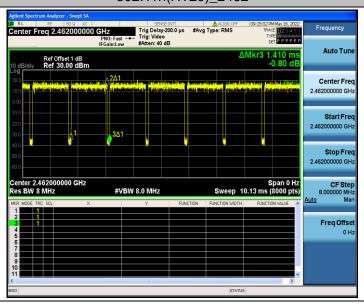





3.9. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: CTC20220917E01

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.



