

TEST REPORT

Product : Thermal Imager
Trade mark : N/A
Model/Type reference : S236; S236E; S236P; S263; S263H; S266
Series Model : N/A
Report Number : EED39N81175501
FCC ID : 2AWAA-S236
Date of Issue : Jan 28, 2022

Test Standards	Results
<input checked="" type="checkbox"/> 47 CFR Part 15 Subpart C	PASS

Prepared for:
ZHEJIANG DALI TECHNOLOGY CO.,LTD
NO639 Binkang Road, Hangzhou,P.R.CHINA 310053

Prepared by:
Centre Testing International (Suzhou) CO., LTD.
Building 18, Zhihui New Town Ecological Industrial Park, No. 1206, Jinyang
East Road, Lujia Town, Kunshan, Jiangsu, China
TEL: +86-0512-5015 8288

检验检测专用章
Inspection & Testing Services

Compiled by: Jenny Yu

Reviewed by: Lily Wang

Approved by: Jeff Fang

Date: Jan 28, 2022

Jeff Fang

Check No.: 4400101121

Authorized Signatory

Modification Record

No.	Last Report No.	Modification Description
1	EED39N81175501	First report

TABLE OF CONTENTS

1. Test Summary.....	4
2. Test Requirement.....	5
2.1. Test Environment.....	5
2.2. Test Condition.....	5
3. General Information.....	6
3.1. Client Information.....	6
3.2. General Description of EUT.....	6
3.3. Product Specification subjective to this standard.....	6
3.4. Description of Support Units.....	6
3.5. Test Location.....	7
3.6. Test Facility.....	7
3.7. Deviation from Standards.....	7
3.8. Abnormalities from Standard Conditions.....	7
3.9. Other Information Requested by the Customer.....	7
3.10. Measurement Uncertainty (95% confidence levels, k=2).....	7
4. Equipment List.....	8
5. Radio Technical Requirements Specification.....	9
5.1. Reference Documents for Testing.....	9
5.2. Test Results List.....	9
Appendix A): Maximum conducted output power.....	10
Appendix B): DTS Bandwidth.....	16
Appendix C): Band-edge for RF Conducted Emissions.....	22
Appendix D): RF Conducted Spurious Emissions.....	26
Appendix E): Maximum Power Spectral Density.....	42
Appendix F): Duty cycle.....	48
Appendix G): Antenna Requirement.....	54
Appendix H): AC Power Line Conducted Emission.....	55
Appendix I): Restricted Bands around Fundamental Frequency (Radiated).....	60
Appendix J): Radiated Spurious Emissions.....	73

1. Test Summary

Test item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Duty cycle	47 CFR Part 15 Subpart C Section 15.35(c)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

2. Test Requirement

2.1. Test Environment

Operating Environment:	
Temperature:	20.9 °C
Humidity:	45.0 % RH
Atmospheric Pressure:	1024mbar

2.2. Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel 11
		2412 MHz	2437 MHz	2462 MHz
TX mode:	The EUT transmitted the continuous signal at the specific channel(s).			

Note: Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; MCS0 of rate is the worst case of 802.11n(HT20).

3. General Information

3.1. Client Information

Applicant:	ZHEJIANG DALI TECHNOLOGY CO.,LTD
Address of Applicant:	NO639 Binkang Road, Hangzhou,P.R.CHINA 310053
Manufacturer:	ZHEJIANG DALI TECHNOLOGY CO.,LTD
Address of Manufacturer:	NO639 Binkang Road, Hangzhou,P.R.CHINA 310053
Factory:	ZHEJIANG DALI TECHNOLOGY CO.,LTD
Address of Factory:	NO639 Binkang Road, Hangzhou,P.R.CHINA 310053

3.2. General Description of EUT

Product Name:	Thermal Imager	
Model No.(EUT):	S236; S236E; S236P; S263; S263H; S266	
Series Model:	N/A	
Model differences:	They are only different in resolution and optical lenses.	
Trade Mark:	N/A	
EUT Supports Radios application:	IEEE802.11b/g/n(20MHz), 2412MHz-2462MHz	
Power Supply :	Adapter:	N/A
	Battery:	Model: SNLB-688A Rated voltage:3.6V Rated capacity:5000mAh
Sample Received Date:	2021.12.02	
Sample tested Date:	2021.12.02 to 2021.12.26 and 2022.01.28	

3.3. Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz				
Channel Numbers:	11				
Channel Separation:	5MHz				
Type of Modulation:	IEEE for 802.11b:DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g:OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20): OFDM (64QAM, 16QAM,QPSK,BPSK)				
Test Software of EUT:	N/A(manufacturer declare)				
Antenna Type:	PCB antenna				
Antenna Gain ^① :	2.60 dBi				
Test Voltage:	AC 120V 60Hz/DC 3.6V				
Operation Frequency each of channel					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	6	2437MHz	11	2462MHz

Note: 1 The antenna gain is provided by the client and we Centre Testing International (Suzhou) CO., LTD. test lab is not responsible for the accuracy of the antenna gain information.

3.4. Description of Support Units

The EUT has been tested independently.

3.5. Test Location

All test facilities used to collect the test data are located at Building 18, Zhihui New Town Ecological Industrial Park, No. 1206, Jinyang East Road, Lujia Town, Kunshan, Jiangsu, China.

3.6. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No. 5734.01

Centre Testing International (Suzhou) CO., LTD. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration. Laboratories and any additional program requirements in the identified field of testing.

FCC-Designation No.:CN1290

Centre Testing International Group Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The American association for Centre Testing International Group Co., Ltd. EMC laboratory accreditation Designation No.:CN1290

3.7. Deviation from Standards

None.

3.8. Abnormalities from Standard Conditions

None.

3.9. Other Information Requested by the Customer

None.

3.10. Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Occupied Bandwidth	0.56%
2	RF Power conducted	0.59 dB
3	Power Spectral Density, conducted	2.37 dB
4	Unwanted Emission, conducted	2.68 dB
5	All Emission, radiated	4.41 dB(30MHz-1GHz)
		4.99 dB(1GHz-18GHz)
		5.307 dB(18GHz-40GHz)
6	Temperature test	0.54°C
7	Humidity test	1.62%
8	DC and low frequency voltages test	1.14%

4. Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
Spectrum Analyzer	R&S	FSV40	101588	2021-10-23	2022-10-22
Vector signal generator	R&S	SMBV100B	101985	2021-10-23	2022-10-22
Temperature/Humidity Indicator	testo	608-H1	1945222595	2021-11-09	2022-11-08
Switch Automatic control	R&S	OSP-B157W8	101111	2021-10-23	2022-10-22
Automatic test software	Shenzhen JS TONSCEND	/	V2.6.77.0518	/	/

966 Semi-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
Receiver	R&S	ESU8	100537	2021-12-09	2022-12-08
Spectrum analyzer	R&S	FSV40	101185	2021-12-09	2022-12-08
Preamplifier (30MHz~1GHz)	R&S	SCU-08	393347	2021-5-25	2022-5-24
Preamplifier (1GHz~18GHz)	R&S	SCU-18D	1987397	2021-12-09	2022-12-08
Preamplifier (18GHz~40GHz)	/	MTLNA1804003 0235	12009007	2021-10-22	2022-10-21
Loop Antenna (9kHz~30MHz)	TESEQ	HLA6121	54575	2021-02-27	2022-02-26
Antenna (30MHz~1GHz)	SCHWARZBEC K	VULB9163	9163-965	2021-10-15	2022-10-14
Antenna (1GHz~18GHz)	R&S	HF907	102524	2021-12-14	2022-12-13
Antenna (18GHz~40GHz)	R&S	BBHA9170	1032	2021-10-23	2022-10-22
Band rejection filter	Xi'an xingbo	XBLBQ-DZA81	200827-1-02	/	/

Conducted Emission Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
Receiver	R&S	ESR3	102043	2020-12-10	2021-12-09
Receiver	R&S	ESR3	102043	2021-12-09	2022-12-08
LISN	R&S	ENV216	102058	2020-12-10	2021-12-09
LISN	R&S	ENV216	102058	2021-12-09	2022-12-08

5. Radio Technical Requirements Specification

5.1. Reference Documents for Testing

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

5.2. Test Results List

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI 63.10 (L,M,H CH)	Maximum conducted output power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI 63.10 (L,M,H CH)	DTS Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI 63.10 (L, H CH)	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI 63.10(L,M,H CH)	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI 63.10 (L,M,H CH)	Maximum Power Spectral Density	PASS	Appendix E)
Part15C Section 15.35 (c)	ANSI 63.10 (L or M or H CH)	Duty cycle	PASS	Appendix F)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix G)
Part15C Section 15.207	ANSI 63.10Transmitter mode	AC Power Line Conducted Emission	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI 63.10 (L,M, H CH)	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix I)
Part15C Section 15.205/15.209	ANSI 63.10 (L,M,H CH)	Radiated Spurious Emissions	PASS	Appendix J)


Appendix A): Maximum conducted output power


Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 2013
Test Setup:	
Test Procedure:	<p>1. PKPM1 Peak power meter measurement The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.</p> <p>2. Method AVGPM-G Average power measurement Method AVGPM-G is a measurement using a gated RF average power meter. Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.</p>
Limit:	30 dBm
Test Mode:	Refer to clause 2.2
Test Results:	Pass


Result Table:

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	16.35	<=30	PASS
	Ant1	2437	16.71	<=30	PASS
	Ant1	2462	16.55	<=30	PASS
11G	Ant1	2412	15.87	<=30	PASS
	Ant1	2437	16.43	<=30	PASS
	Ant1	2462	16.50	<=30	PASS
11N20	Ant1	2412	15.18	<=30	PASS
	Ant1	2437	14.77	<=30	PASS
	Ant1	2462	15.13	<=30	PASS


Test Graph:

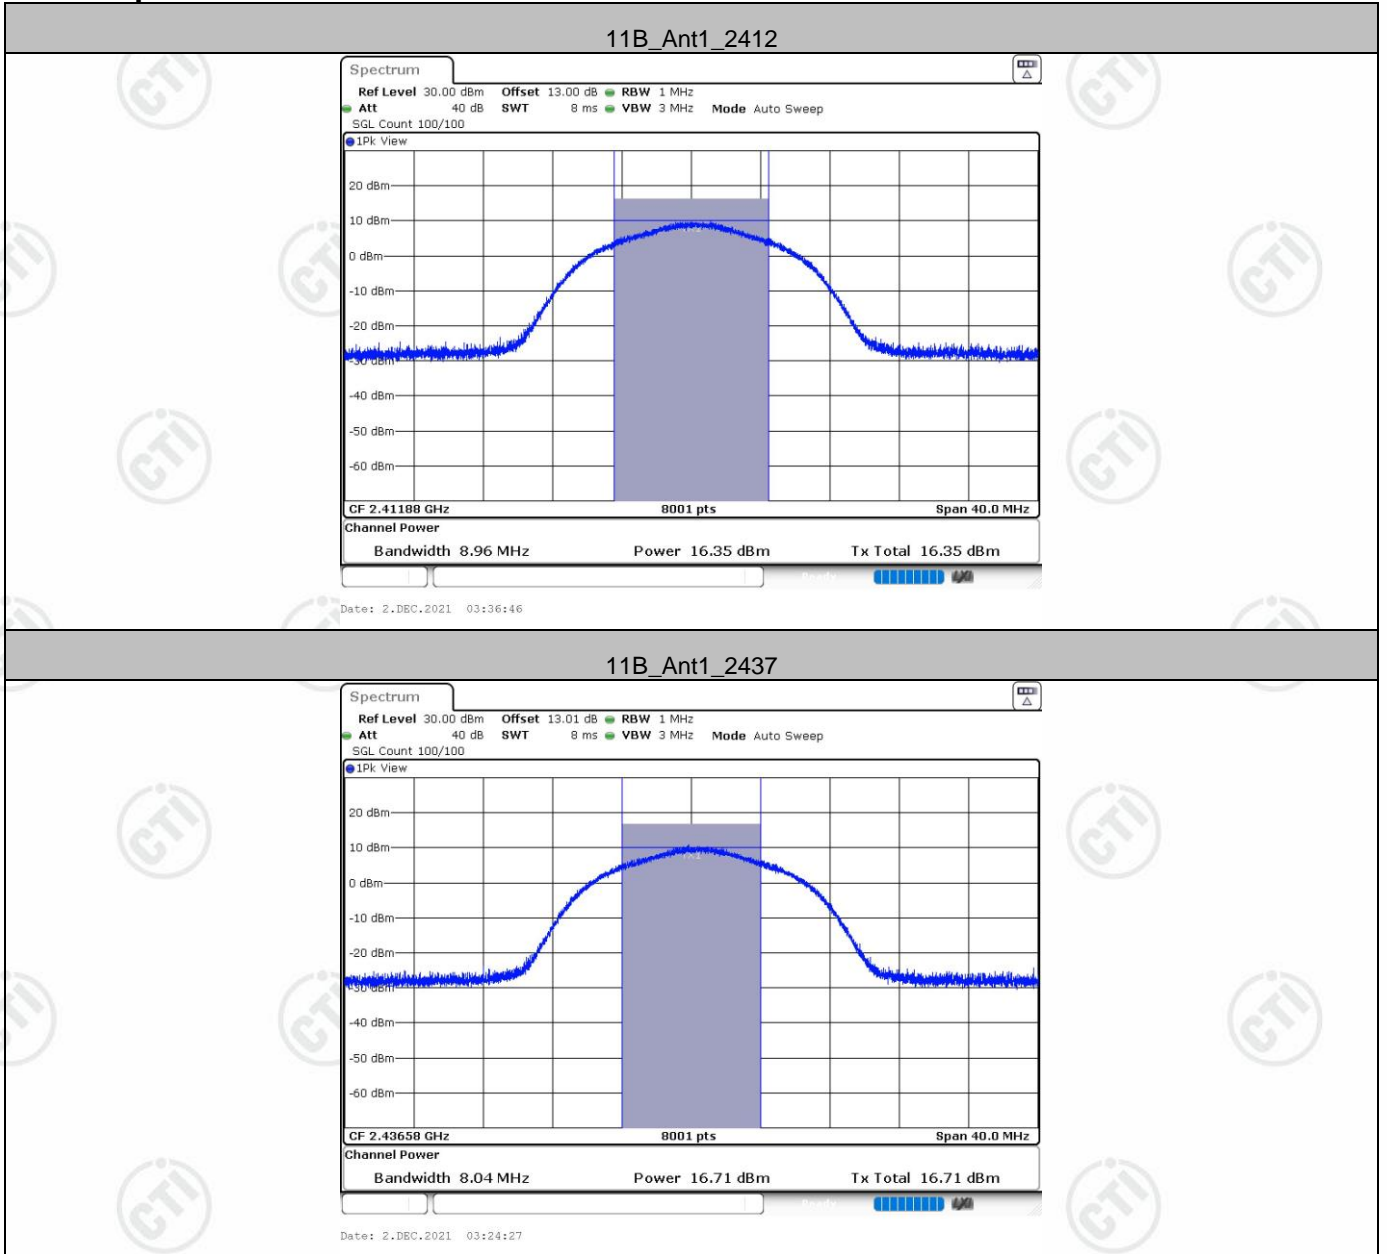

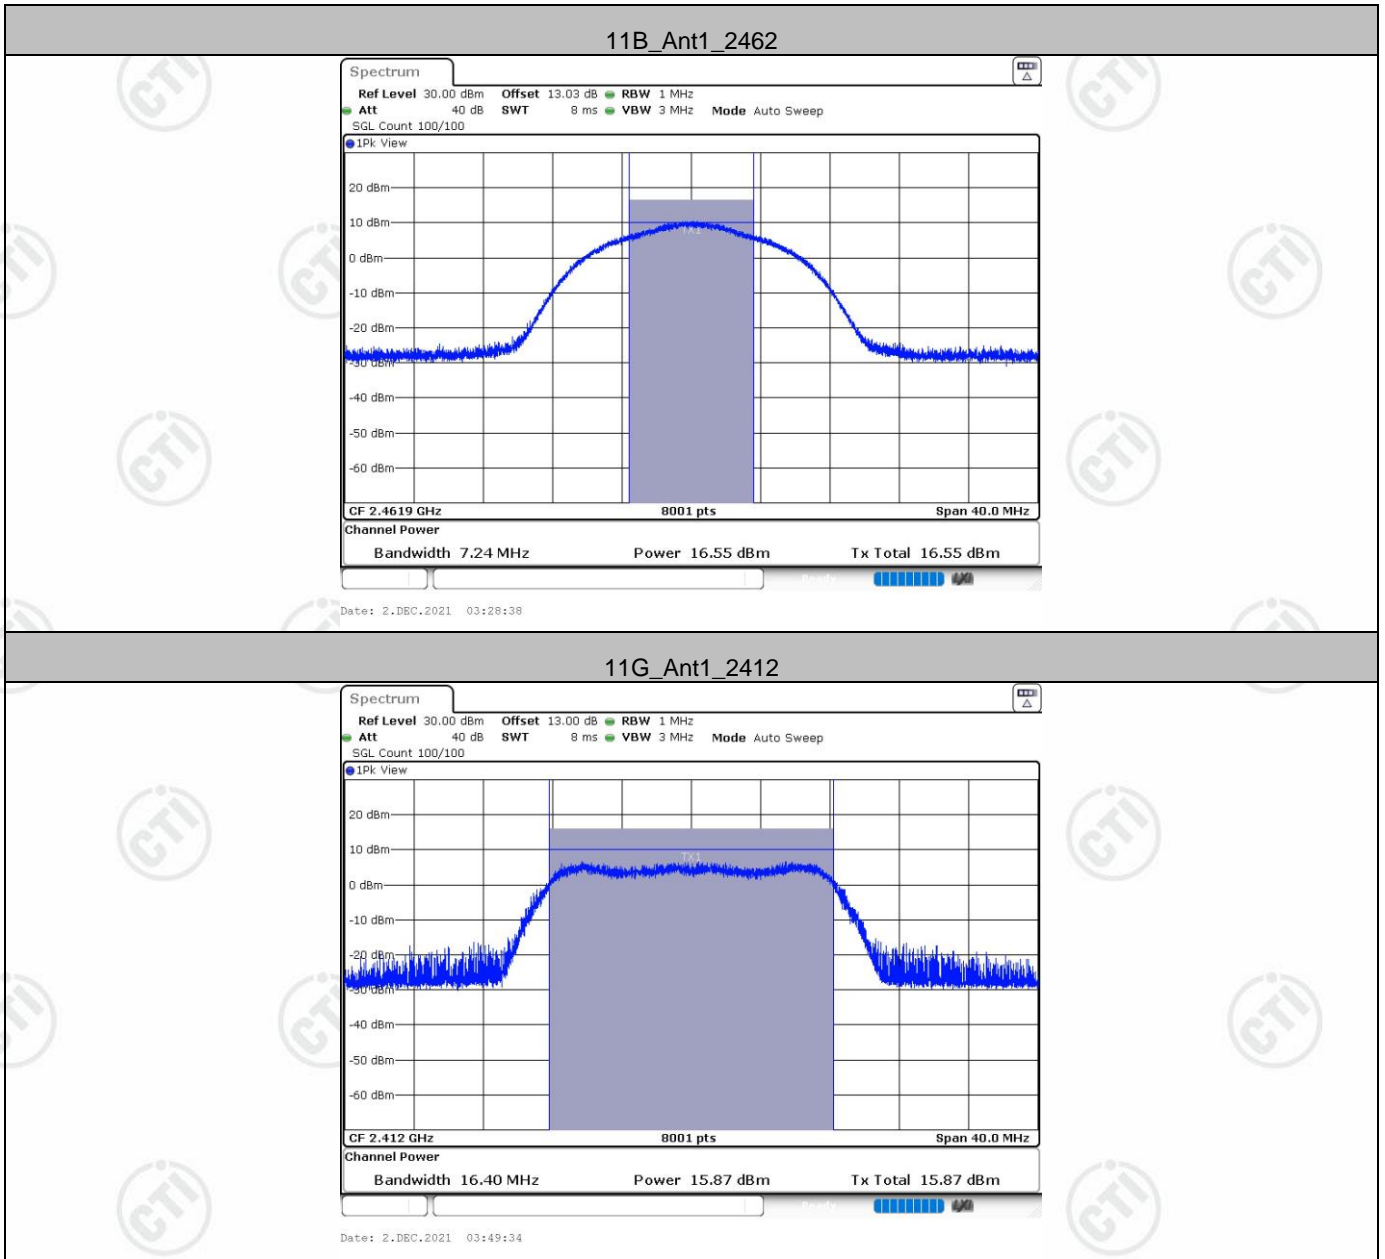


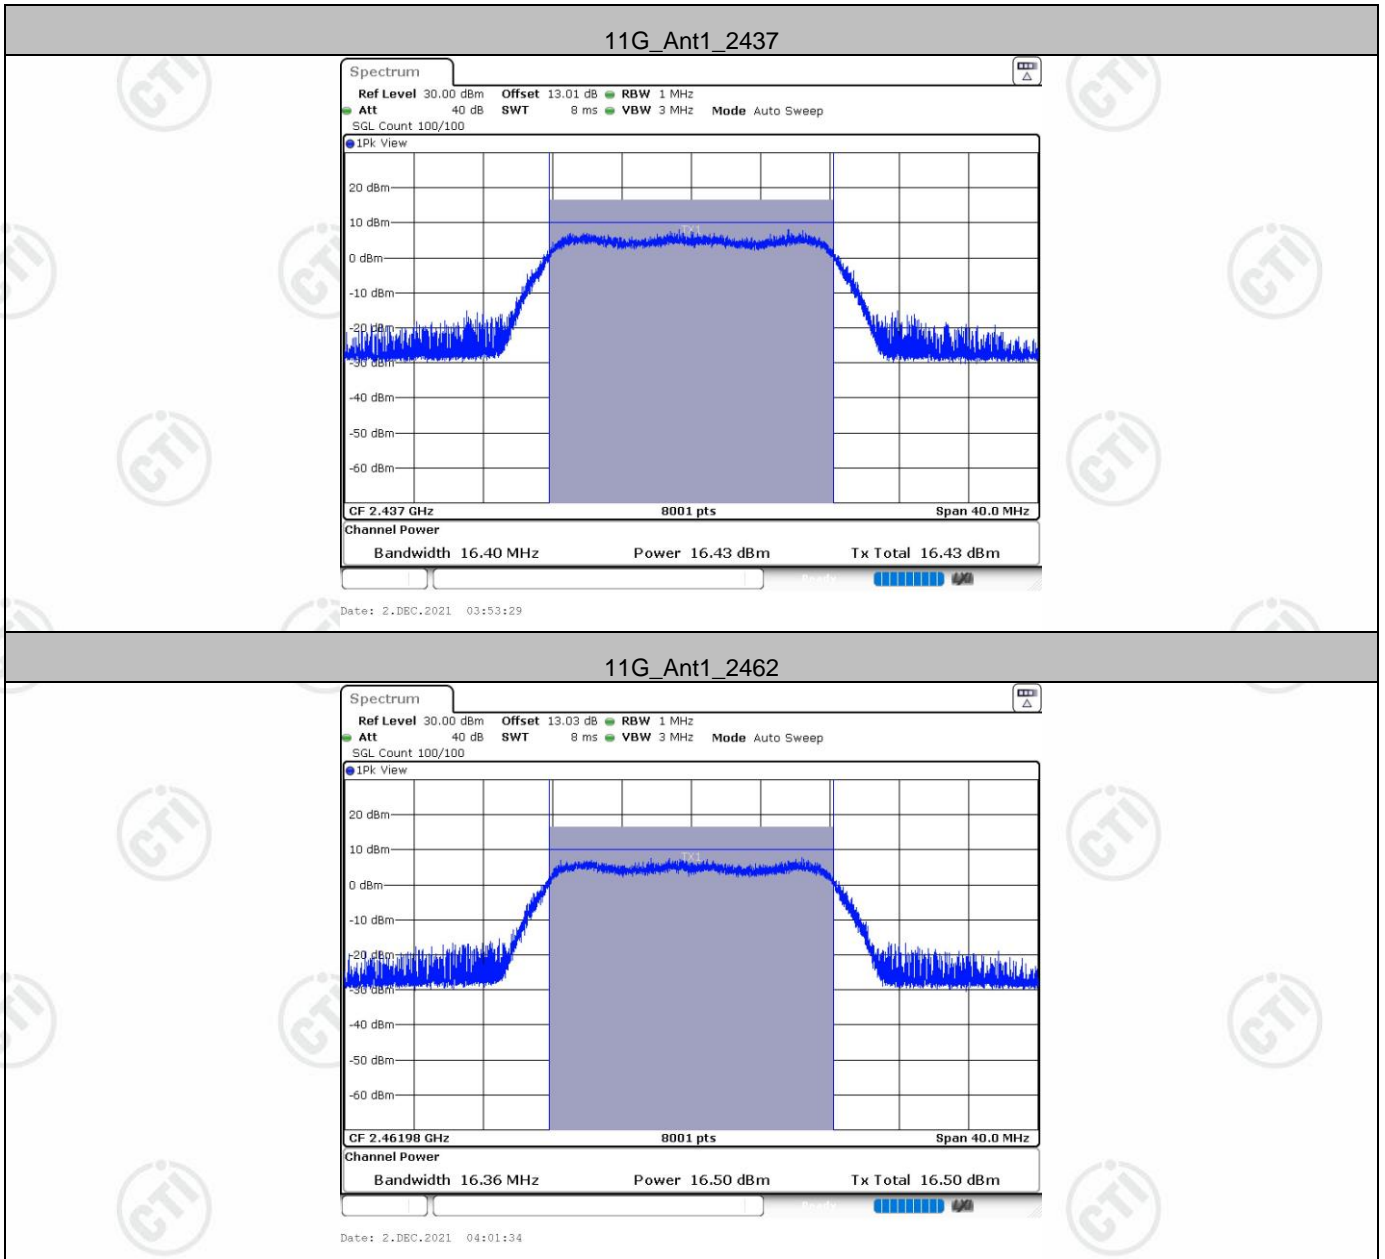



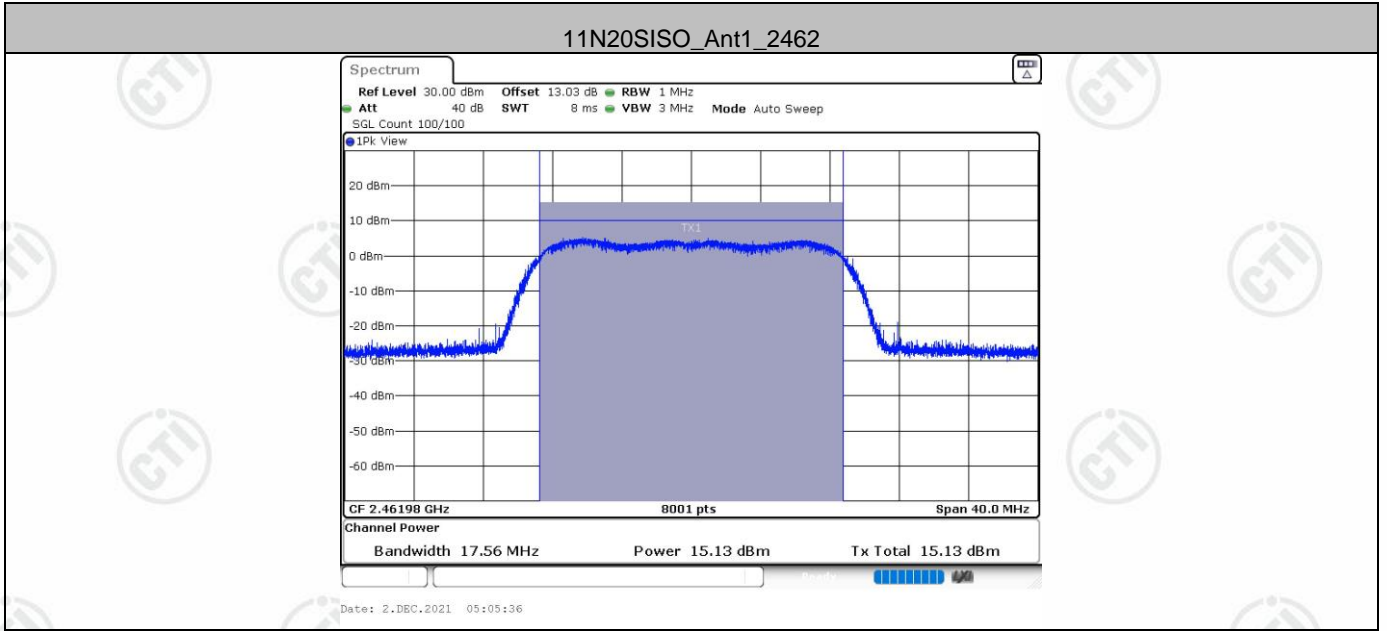

Appendix B): DTS Bandwidth

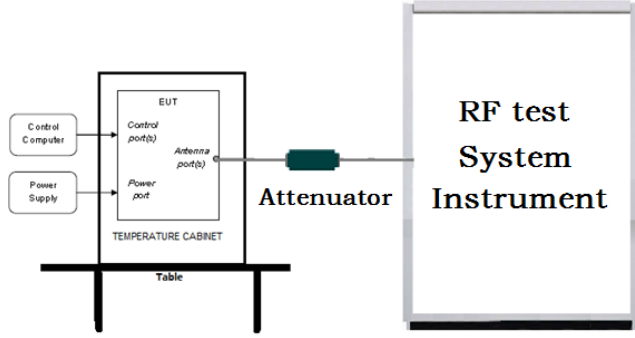Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ul style="list-style-type: none"> a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Limit:	≥ 500 kHz
Test Mode:	Refer to clause 2.2
Test Results:	Pass

Result Table:


Test Mode	Antenna	Channel	DTS BW [MHz]	F _L [MHz]	F _H [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.960	2407.400	2416.360	0.5	PASS
		2437	8.040	2432.560	2440.600	0.5	PASS
		2462	7.240	2458.280	2465.520	0.5	PASS
11G	Ant1	2412	16.400	2403.800	2420.200	0.5	PASS
		2437	16.400	2428.800	2445.200	0.5	PASS
		2462	16.360	2453.800	2470.160	0.5	PASS
11N20SISO	Ant1	2412	17.160	2403.600	2420.760	0.5	PASS
		2437	16.880	2428.240	2445.120	0.5	PASS
		2462	17.560	2453.200	2470.760	0.5	PASS


Test Graph:








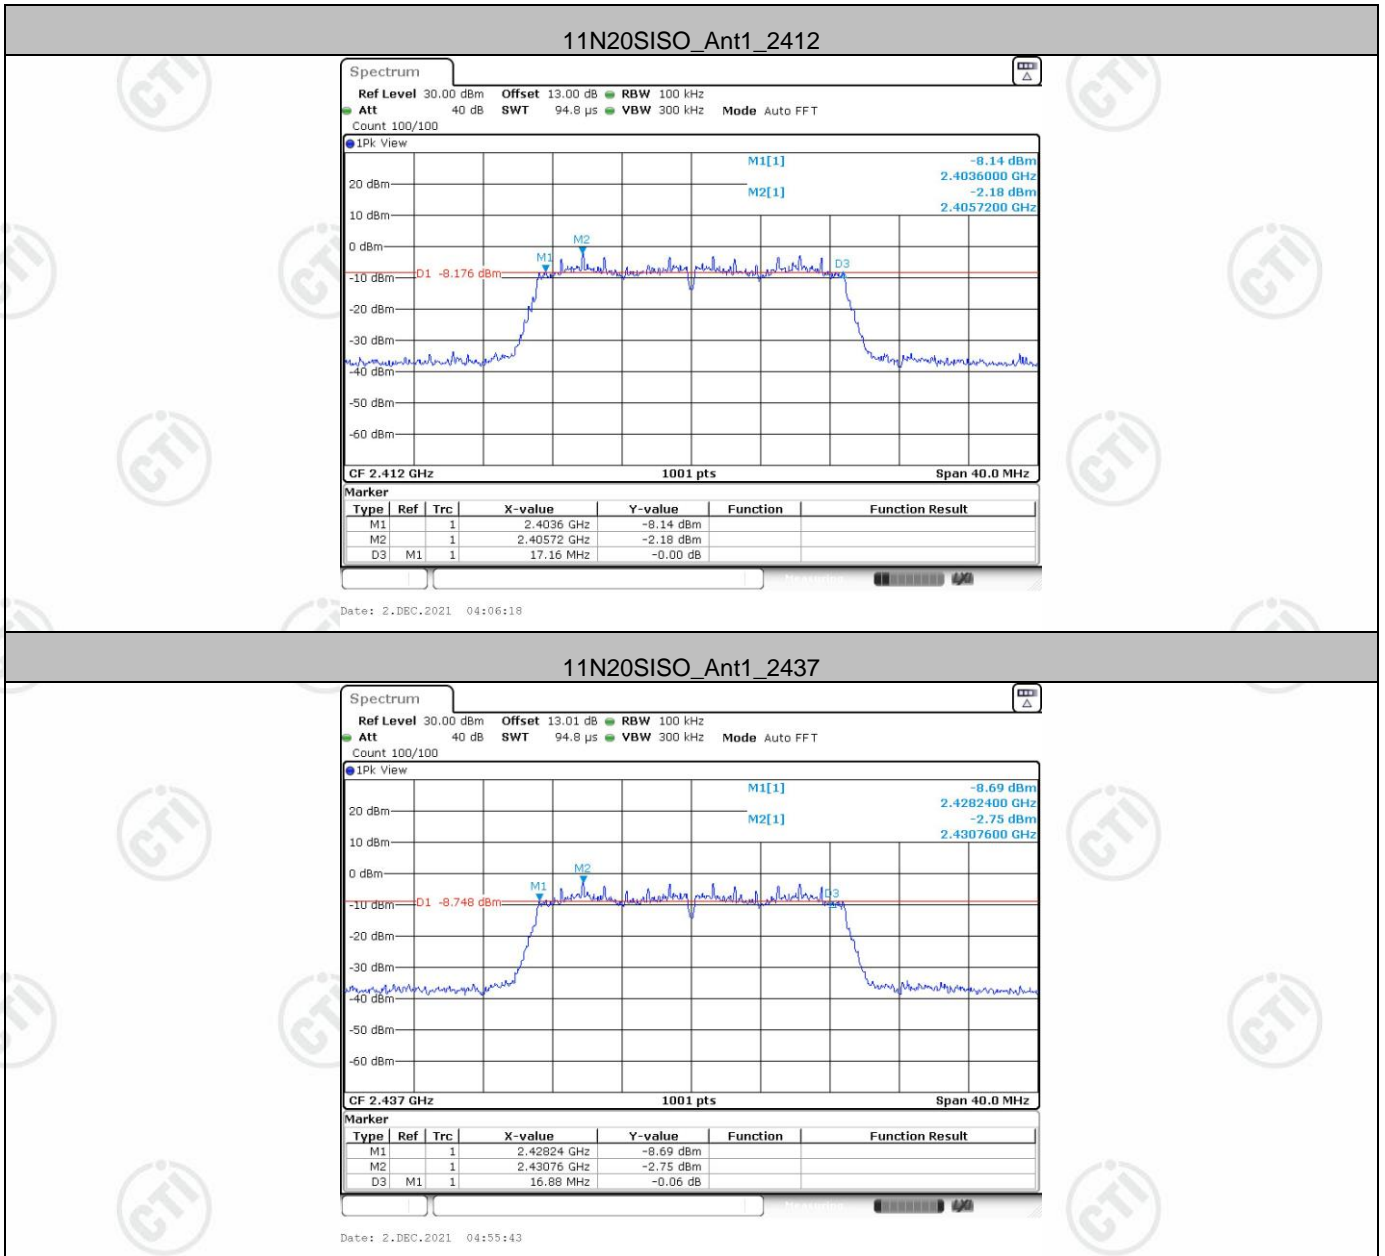

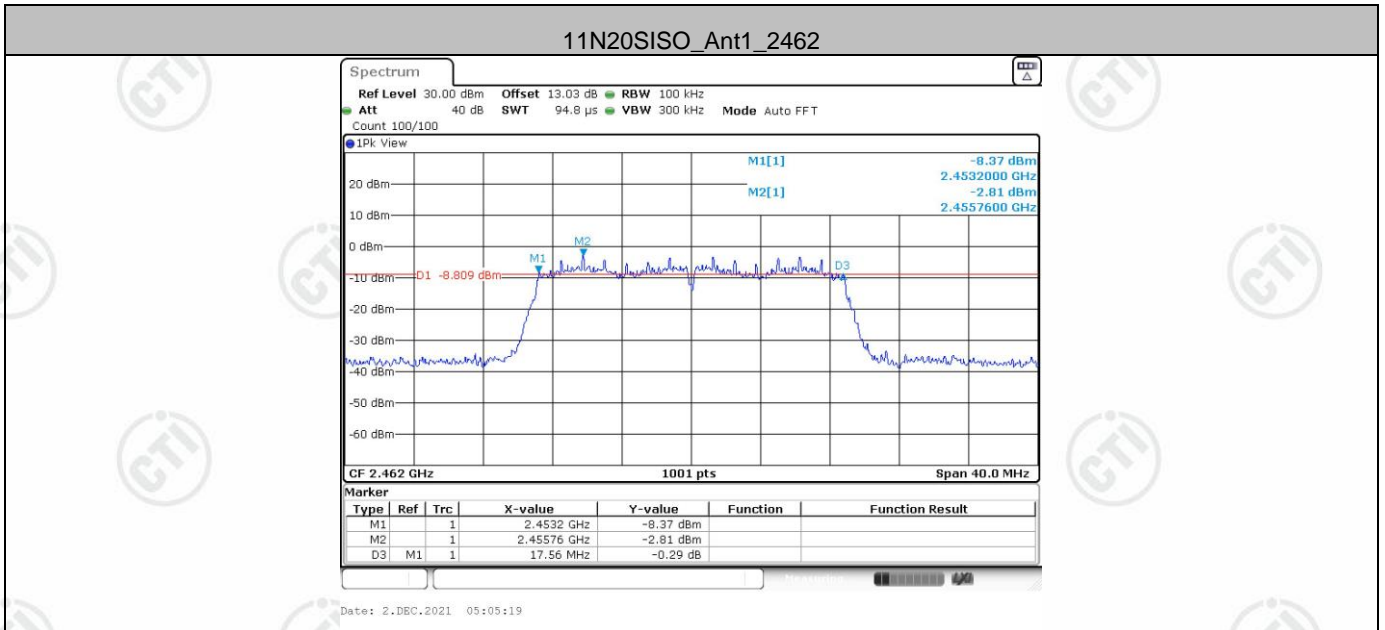

Appendix C): Band-edge for RF Conducted Emissions

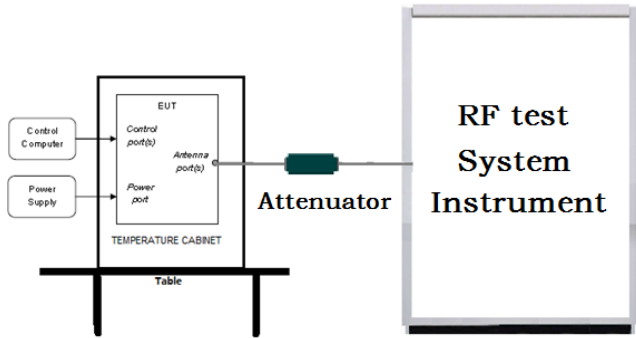Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ul style="list-style-type: none"> a) Set RBW = 100KHz. b) Set VBW = 300KHz. c) Sweep time = auto couple. d) Detector = peak. e) Trace mode = max hold. f) Allow trace to fully stabilize. g) Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 2.2
Test Results:	Pass


Result Table:

Test Mode	Antenna	Ch Name	Channel	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	2.71	-42.98	≤-17.29	PASS
		High	2462	3.03	-43.96	≤-16.97	PASS
11G	Ant1	Low	2412	-2.89	-38.26	≤-22.89	PASS
		High	2462	-1.25	-43.31	≤-21.25	PASS
11N20SISO	Ant1	Low	2412	-3.09	-38.87	≤-23.09	PASS
		High	2462	-2.17	-45.11	≤-22.17	PASS


Test Graph:



11G_Ant1_Low_2412

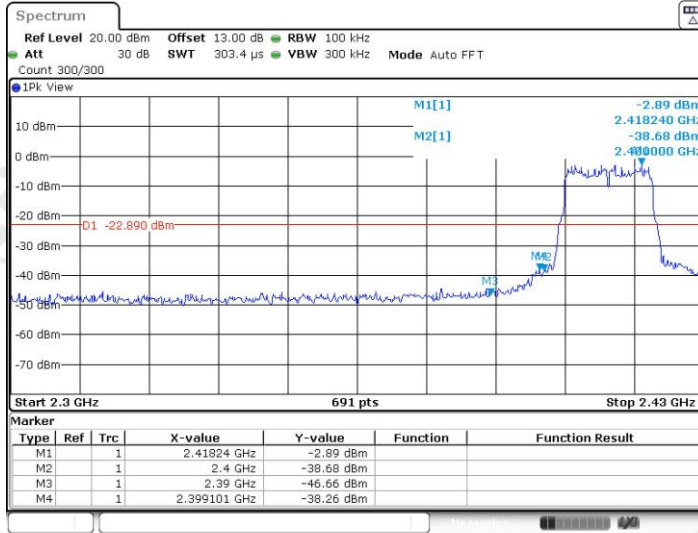


11G_Ant1_High_2462

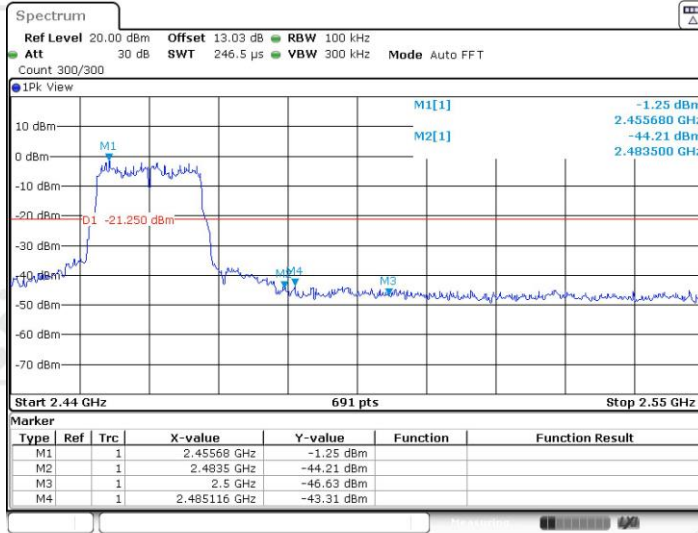



Appendix D): RF Conducted Spurious Emissions

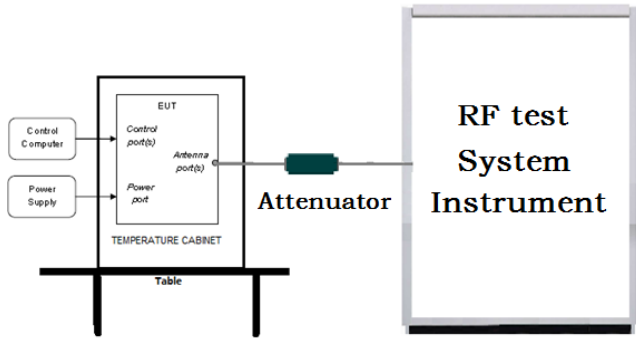Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> Set RBW = 100KHz. Set VBW = 300KHz. Sweep time = auto couple. Detector = peak. Trace mode = max hold. Allow trace to fully stabilize. Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 2.2
Test Results:	Pass

Result Table:

Test Mode	Antenna	Channel	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	2.59	2.59	---	PASS
			30~1000	2.59	-55.54	≤-17.41	PASS
			1000~26500	2.59	-44.87	≤-17.41	PASS
		2437	Reference	4.01	4.01	---	PASS
			30~1000	4.01	-55.73	≤-15.99	PASS
			1000~26500	4.01	-43.31	≤-15.99	PASS
		2462	Reference	3.24	3.24	---	PASS
			30~1000	3.24	-55.47	≤-16.76	PASS
			1000~26500	3.24	-42.39	≤-16.76	PASS

Test Mode	Antenna	Channel	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
11G	Ant1	2412	Reference	-2.14	-2.14	---	PASS
			30~1000	-2.14	-55.79	≤-22.14	PASS
			1000~26500	-2.14	-45.57	≤-22.14	PASS
		2437	Reference	-1.16	-1.16	---	PASS
			30~1000	-1.16	-56	≤-21.16	PASS
			1000~26500	-1.16	-45.42	≤-21.16	PASS
		2462	Reference	-0.99	-0.99	---	PASS
			30~1000	-0.99	-55.77	≤-20.99	PASS
			1000~26500	-0.99	-46.26	≤-20.99	PASS
11N20SISO	Ant1	2412	Reference	-2.78	-2.78	---	PASS
			30~1000	-2.78	-55.38	≤-22.78	PASS
			1000~26500	-2.78	-45.75	≤-22.78	PASS
		2437	Reference	-2.56	-2.56	---	PASS
			30~1000	-2.56	-55.6	≤-22.56	PASS
			1000~26500	-2.56	-45.23	≤-22.56	PASS
		2462	Reference	-1.95	-1.95	---	PASS
			30~1000	-1.95	-53.66	≤-21.95	PASS
			1000~26500	-1.95	-46.47	≤-21.95	PASS

Test Graph:



