

RF Test Report

Applicant : Nippon POP Rivets & Fasteners Ltd.
Product Type : Power Tool
Trade Name : STANLEY
Model Number : NB08PT-18
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Received Date : Oct. 19, 2020
Test Period : Nov. 12 ~ Dec. 01, 2020
Issued Date : Dec. 16, 2020

Issued by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range : 9 kHz to 40 GHz
Test Firm MRA designation number: TW0010

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.



Revision History

Rev.	Issued Date	Revisions	Revised By
00	Dec. 16, 2020	Initial Issue	Emma Chao

Verification of Compliance

Applicant : Nippon POP Rivets & Fasteners Ltd.
Product Type : Power Tool
Trade Name : STANLEY
Model Number : NB08PT-18
FCC ID : 2AWAW-NB08PT18
EUT Rated Voltage : DC 20 V
Test Voltage : DC 20 V
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

: Fly Lu
(Fly Lu)

(Manager)



TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Measurement Uncertainty	5
2	EUT Description.....	6
3	Test Methodology.....	7
3.1.	Mode of Operation.....	7
3.2.	EUT Test Step.....	7
3.3.	Configuration of Test System Details.....	8
3.4.	Test Instruments	9
3.5.	Test Site Environment.....	9
4	Measurement Procedure.....	10
4.1.	AC Power Line Conducted Emission Measurement.....	10
4.2.	Radiated Emission Measurement.....	12
4.3.	Maximum Conducted Output Power Measurement.....	16
4.4.	6 dB RF Bandwidth Measurement.....	17
4.5.	Maximum Power Density Measurement.....	18
4.6.	Out of Band Conducted Emissions Measurement.....	19
4.7.	Antenna Measurement	19
5	Test Results	20
	Annex A. Conducted Test Results	20
	Annex B. Radiated Emission Measurement	27



1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	N/A	The EUT used DC Power source.
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6 dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.1 dB
	18000 MHz ~ 26500 MHz	4.4 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power	1.1 dB	
RF Bandwidth	4.7 %	
Power Spectral Density	1.1 dB	

2 EUT Description

Applicant	Nippon POP Rivets & Fasteners Ltd. Hosoda, Noyori-cho, Toyohashi-shi, Aichi, 441-8540, Japan	
Manufacturer	Nippon POP Rivets & Fasteners Ltd. Hosoda, Noyori-cho, Toyohashi-shi, Aichi, 441-8540, Japan	
Product Type	Power Tool	
Trade Name	STANLEY	
Model No.	NB08PT-18	
FCC ID	2AWAW-NB08PT18	
Frequency Range	2402 ~ 2480 MHz	
Modulation Type	GFSK	
Operate Temp. Range	0 ~ +40 °C	
Antenna information	Type	Max. Gain (dBi)
	PCB antenna	2
RF Output Power	0.00234 W	

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: LE, GFSK Continuous TX Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X and Y) position of EUT transmitted status, it was found that "Y axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %.


3.2. EUT Test Step

1	Setup the EUT shown on "Configuration of Test System Details".
2	Turn on the power of all equipment.
3	Turn on TX function.
4	EUT run test program.

Measurement Software			
No.	Description	Software	Version
1	Radiated Emission	EZ EMC	1.1.4.4

3.3. Configuration of Test System Details

Radiated Emissions

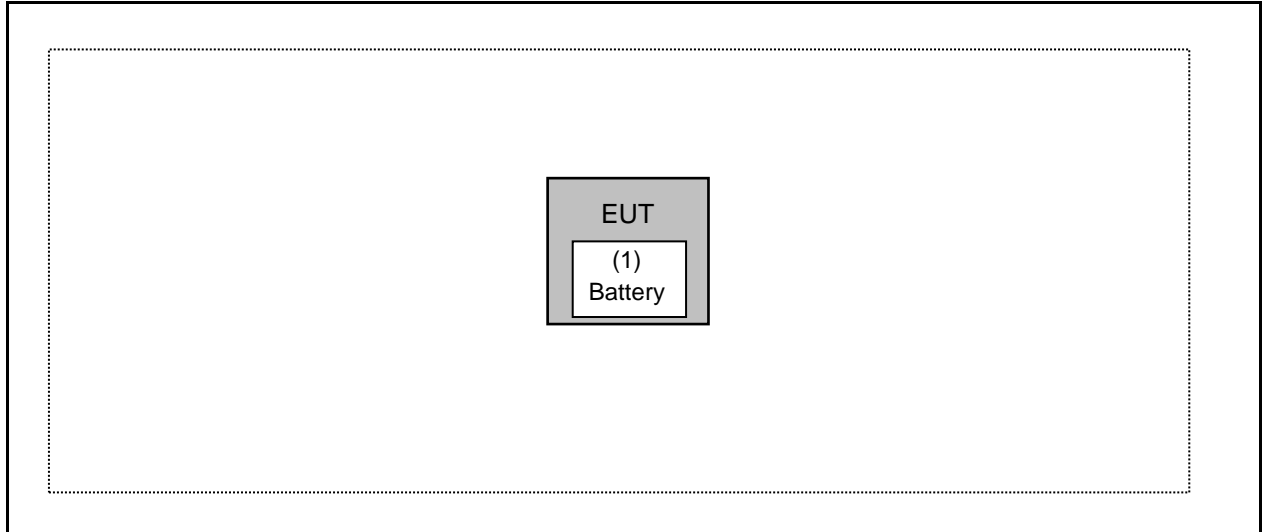

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Battery	DEWALT	DCB203	N/A	N/A



3.4. Test Instruments

For Radiated Emissions

Test Period: Nov. 14 ~ Nov. 30, 2020

Testing Engineer: JS.Liao, Marc Yeh

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	KEYSIGHT	N9030B	MY57143537	04/14/2020	1 year
Pre Amplifier (1 kHz~1 GHz)	Titan	T0910E00014330A1F	001	07/23/2020	1 year
Pre Amplifier (1~26.5 GHz)	Titan	T0912E01263025A1F	002	07/23/2020	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/27/2020	1 year
Broadband Antenna	Schwarzbeck	VULB9168	01146	07/03/2020	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	02207	06/30/2020	1 year
Horn Antenna (18~40 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	08/18/2020	1 year
Coaxial Cable	Titan	T0710AT327A10A100	J11005	08/13/2020	1 year
Coaxial Cable	Titan	T0710AT327A10A900	J11004	08/13/2020	1 year
Coaxial Cable	Titan	T0712AT340A12A900	J11002	08/13/2020	1 year

For Conducted

Test Period: Nov. 12 ~ Dec. 01, 2020

Testing Engineer: Brian.Lin, Andy Lu, Peter Shui

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	09/01/2020	1 year
Power Meter	Anritsu	ML2495A	1135009	09/01/2020	1 year
Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	09/24/2020	1 year

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

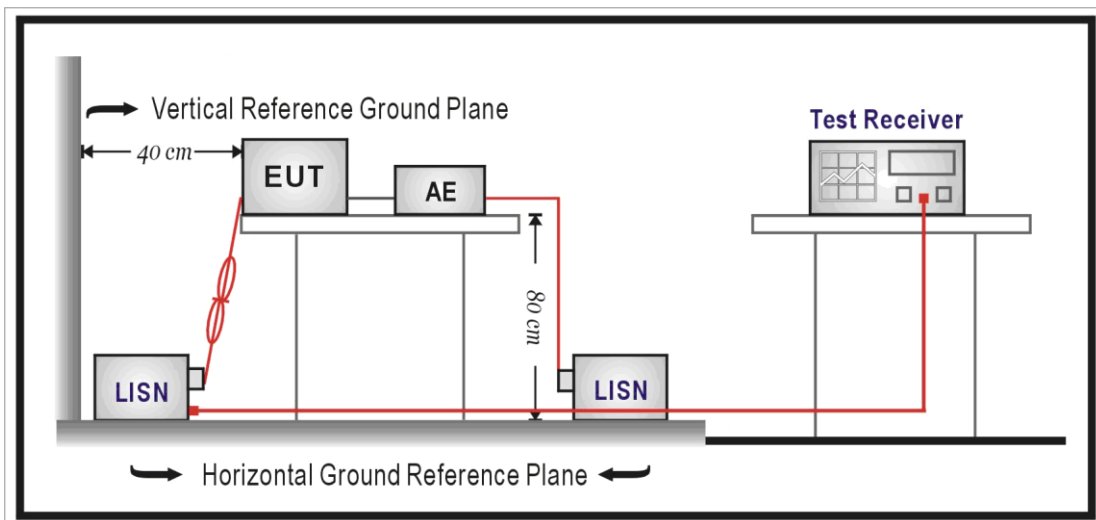

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50 \Omega // 50 \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50 \Omega // 50 \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

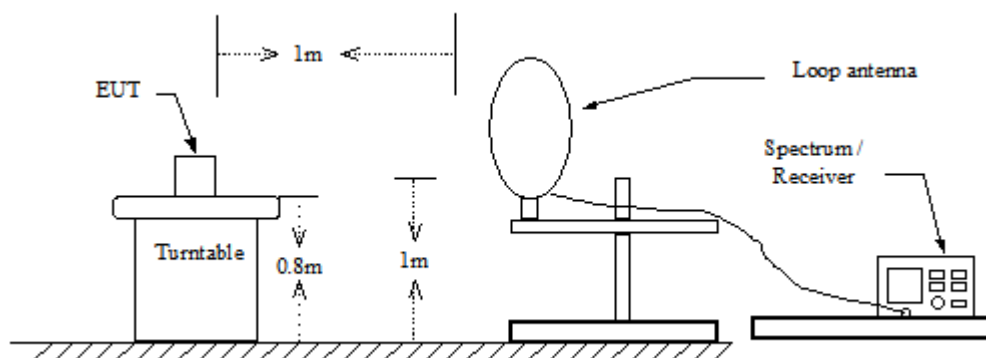

Below 1 GHz

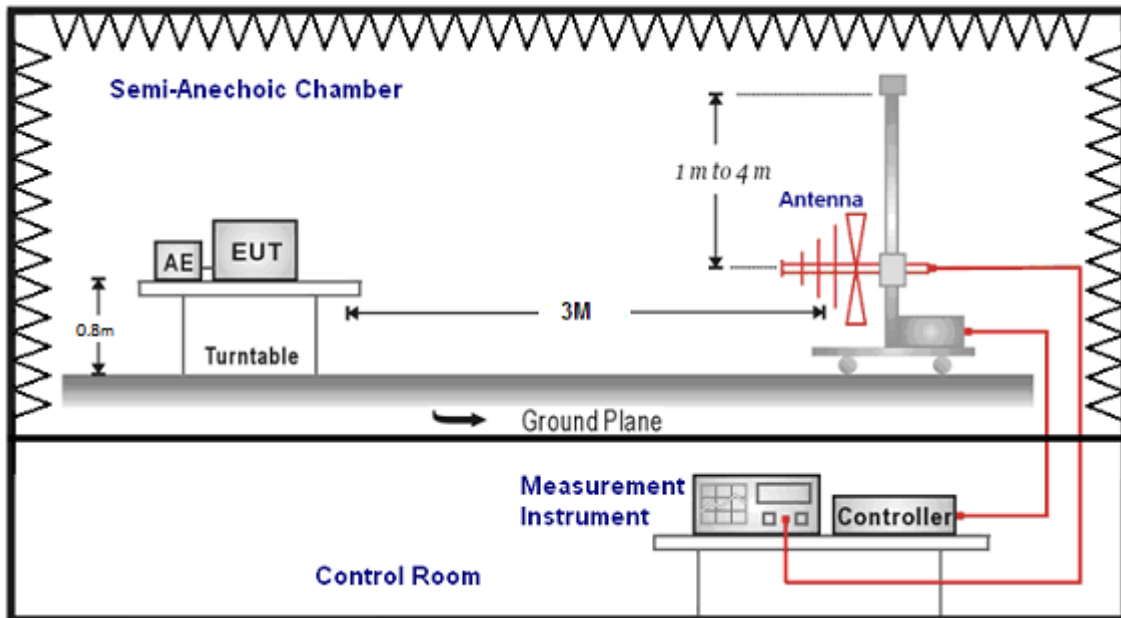

Above 1 GHz

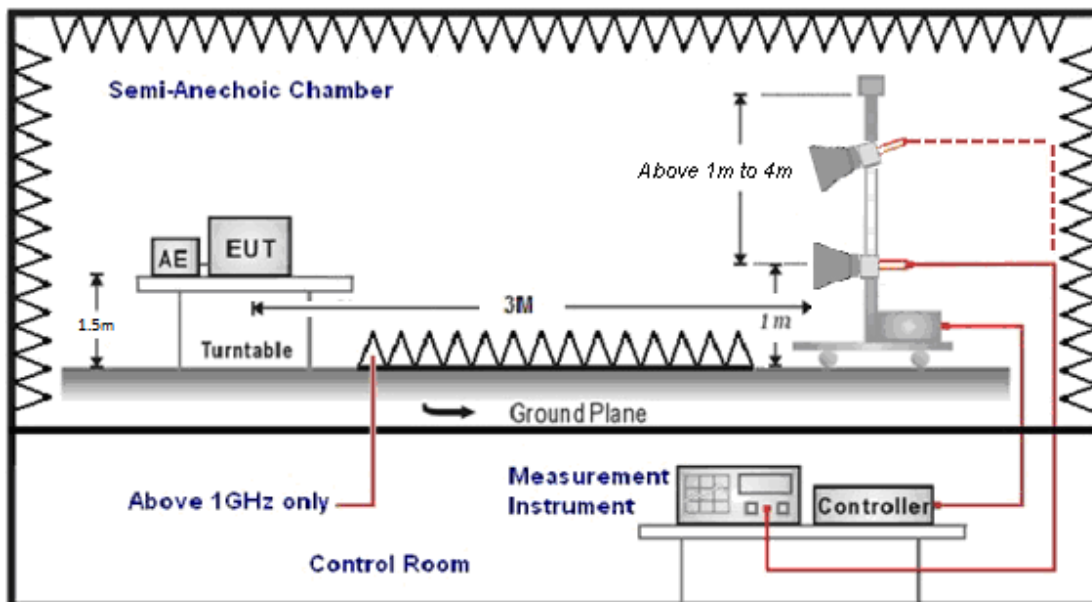

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / $1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter ($\mu\text{V}/\text{m}$).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter ($\mu\text{V}/\text{m}$).



The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

4.3. Maximum Conducted Output Power Measurement

■ Limit

For systems using digital modulation in the 2400-2483.5 MHz, the limit for peak output power is 30 dBm.

■ Test Setup

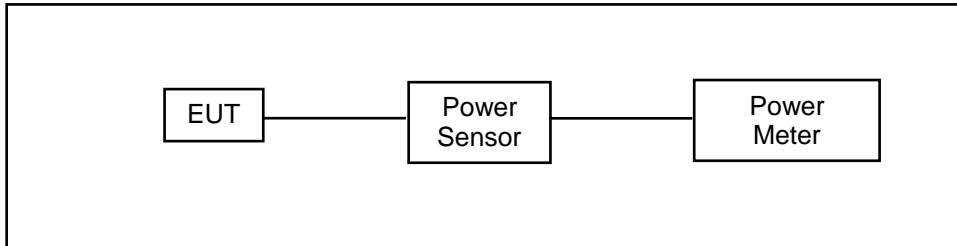

■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor..


4.4. 6 dB RF Bandwidth Measurement

■ **Limit**

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

■ **Test Setup**

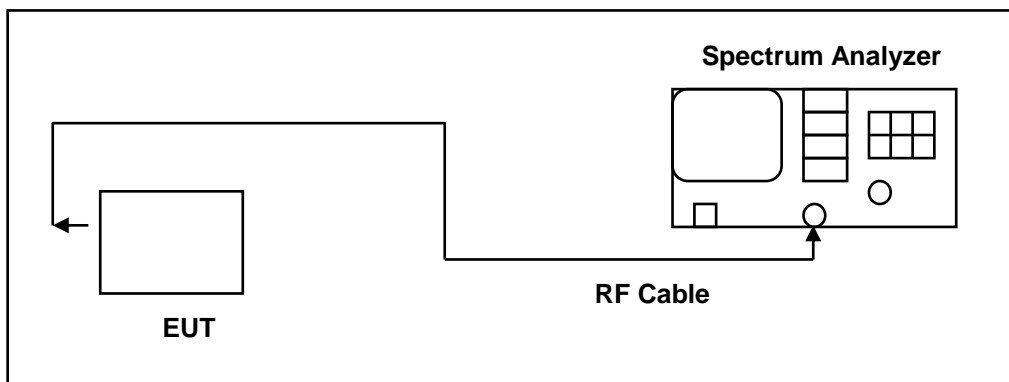

■ **Test Procedure**

The EUT tested to DTS test procedure of ANSI C63.10-2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

4.5. Maximum Power Density Measurement

■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Test Setup

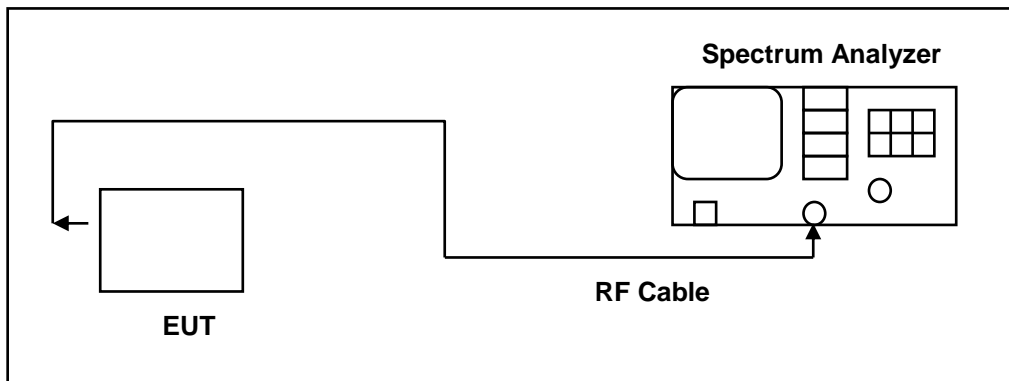

■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.6. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

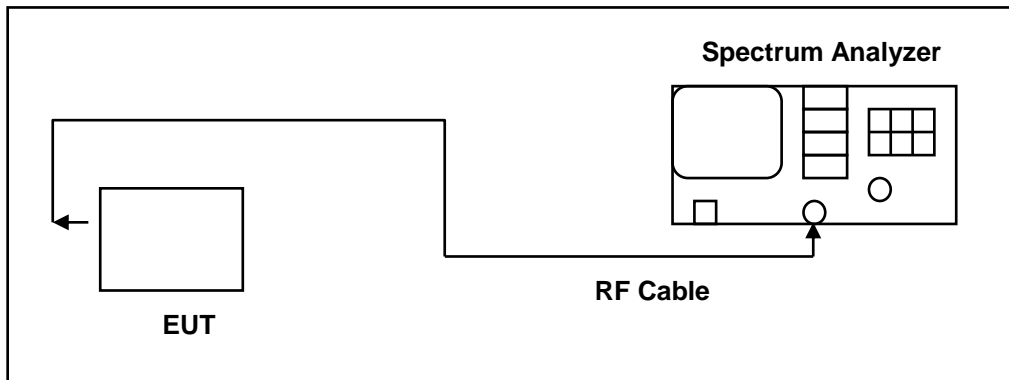

■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

4.7. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Connector Construction

See section 2 – antenna information.



5 Test Results

Annex A. Conducted Test Results

Maximum Conducted Output Power Measurement

Test Mode	Mode 1				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	3.47	0.00222	3.69	0.00234	≤ 30
2440	2.61	0.00182	2.81	0.00191	≤ 30
2480	1.61	0.00145	1.82	0.00152	≤ 30

Note: The relevant measured result has the offset with cable loss already.

6 dB RF Bandwidth Measurement

Test Mode	Mode 1	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	653.700	≥ 500
2440	654.000	≥ 500
2480	656.400	≥ 500



■ Test Graphs

Mode 1	
2402 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz Trig: Free Run #Atten: 30 dB AvgHld: 1/1 Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 30.00 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 1.0325 MHz Total Power 10.3 dBm Transmit Freq Error 1.443 kHz x dB Bandwidth 653.7 kHz OBW Power 99.00 % x dB -6.00 dB</p> <p>Center Freq: 2.402000000 GHz CF Step: 300.000 kHz Freq Offset: 0 Hz</p>
2440 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.440000000 GHz Trig: Free Run #Atten: 30 dB AvgHld: 1/1 Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 30.00 dBm</p> <p>Center 2.44 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 1.0349 MHz Total Power 9.48 dBm Transmit Freq Error 1.475 kHz x dB Bandwidth 654.0 kHz OBW Power 99.00 % x dB -6.00 dB</p> <p>Center Freq: 2.440000000 GHz CF Step: 300.000 kHz Freq Offset: 0 Hz</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz Trig: Free Run #Atten: 30 dB AvgHld: 1/1 Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 30.00 dBm</p> <p>Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 1.0373 MHz Total Power 9.01 dBm Transmit Freq Error 1.458 kHz x dB Bandwidth 656.4 kHz OBW Power 99.00 % x dB -6.00 dB</p> <p>Center Freq: 2.480000000 GHz CF Step: 300.000 kHz Freq Offset: 0 Hz</p>



Maximum Power Density Measurement

Test Mode	Mode 1	
Frequency (MHz)	Measurement Results (dBm/ 3 kHz)	Limit (dBm)
2402	-11.460	≤ 8
2440	-12.339	≤ 8
2480	-12.794	≤ 8



■ Test Graphs

Mode 1	
2402 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset: 0.8 dB Ref: 20.00 dBm</p> <p>Mkr1 2.402 013 464 GHz -11.460 dBm</p> <p>Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 104.0 ms (40001 pts)</p> <p>Span 981.0 kHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.401509500 GHz</p> <p>Stop Freq 2.402490500 GHz</p> <p>CF Step 98.100 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
2440 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset: 0.8 dB Ref: 20.00 dBm</p> <p>Mkr1 2.440 012 851 GHz -12.339 dBm</p> <p>Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 104.0 ms (40001 pts)</p> <p>Span 981.0 kHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.440000000 GHz</p> <p>Start Freq 2.439509500 GHz</p> <p>Stop Freq 2.440490500 GHz</p> <p>CF Step 98.100 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset: 0.8 dB Ref: 20.00 dBm</p> <p>Mkr1 2.480 013 248 GHz -12.794 dBm</p> <p>Center 2.4800000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 104.0 ms (40001 pts)</p> <p>Span 985.0 kHz</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.479507500 GHz</p> <p>Stop Freq 2.480492500 GHz</p> <p>CF Step 98.500 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>



Out of Band Conducted Emissions Measurement

Reference level

Mode 1	
2402 MHz	<p>Agilent Spectrum Analyzer - Swept SA AL33V-AUTO 10:44:50 PM Dec 01, 2020 Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 1/1 Mkr1 2.402 245 667 GHz 3.618 dBm Ref Offset: 0.8 dB Ref 20.00 dBm 10 dB/div L-Log Center 2.4020000 GHz #Res BW 100 kHz #VBW 300 kHz Span 981.0 kHz Sweep 2.667 ms (40001 pts) File <BBB.png> saved</p>
2440 MHz	<p>Agilent Spectrum Analyzer - Swept SA AL33V-AUTO 10:43:18 PM Dec 01, 2020 Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 1/1 Mkr1 2.440 244 416 GHz 2.828 dBm Ref Offset: 0.8 dB Ref 20.00 dBm 10 dB/div L-Log Center 2.4400000 GHz #Res BW 100 kHz #VBW 300 kHz Span 981.0 kHz Sweep 2.667 ms (40001 pts) File <BBB.png> saved</p>
2480 MHz	<p>Agilent Spectrum Analyzer - Swept SA AL33V-AUTO 10:42:31 PM Dec 01, 2020 Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 1/1 Mkr1 2.480 239 971 GHz 2.266 dBm Ref Offset: 0.8 dB Ref 20.00 dBm 10 dB/div L-Log Center 2.4800000 GHz #Res BW 100 kHz #VBW 300 kHz Span 985.0 kHz Sweep 2.667 ms (40001 pts) File <BBB.png> saved</p>




Out of Band Conducted Emissions

Mode 1																																														
2402 MHz	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 0 GHz</td> <td>2.755 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>800.9 MHz</td> <td>-43.871 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>28.633 GHz</td> <td>-48.491 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>3.202 GHz</td> <td>-51.747 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 0 GHz	2.755 dBm				2	N	1	f	800.9 MHz	-43.871 dBm				3	N	1	f	28.633 GHz	-48.491 dBm				4	N	1	f	3.202 GHz	-51.747 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 0 GHz	2.755 dBm																																									
2	N	1	f	800.9 MHz	-43.871 dBm																																									
3	N	1	f	28.633 GHz	-48.491 dBm																																									
4	N	1	f	3.202 GHz	-51.747 dBm																																									
2440 MHz	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 0 GHz</td> <td>1.435 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>813.5 MHz</td> <td>-43.778 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>28.632 GHz</td> <td>-47.893 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>3.263 GHz</td> <td>-52.747 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 0 GHz	1.435 dBm				2	N	1	f	813.5 MHz	-43.778 dBm				3	N	1	f	28.632 GHz	-47.893 dBm				4	N	1	f	3.263 GHz	-52.747 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.440 0 GHz	1.435 dBm																																									
2	N	1	f	813.5 MHz	-43.778 dBm																																									
3	N	1	f	28.632 GHz	-47.893 dBm																																									
4	N	1	f	3.263 GHz	-52.747 dBm																																									
2480 MHz	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 0 GHz</td> <td>0.938 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>826.7 MHz</td> <td>-44.091 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>28.723 GHz</td> <td>-48.477 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>3.307 GHz</td> <td>-55.033 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 0 GHz	0.938 dBm				2	N	1	f	826.7 MHz	-44.091 dBm				3	N	1	f	28.723 GHz	-48.477 dBm				4	N	1	f	3.307 GHz	-55.033 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 0 GHz	0.938 dBm																																									
2	N	1	f	826.7 MHz	-44.091 dBm																																									
3	N	1	f	28.723 GHz	-48.477 dBm																																									
4	N	1	f	3.307 GHz	-55.033 dBm																																									




Conducted Band Edge

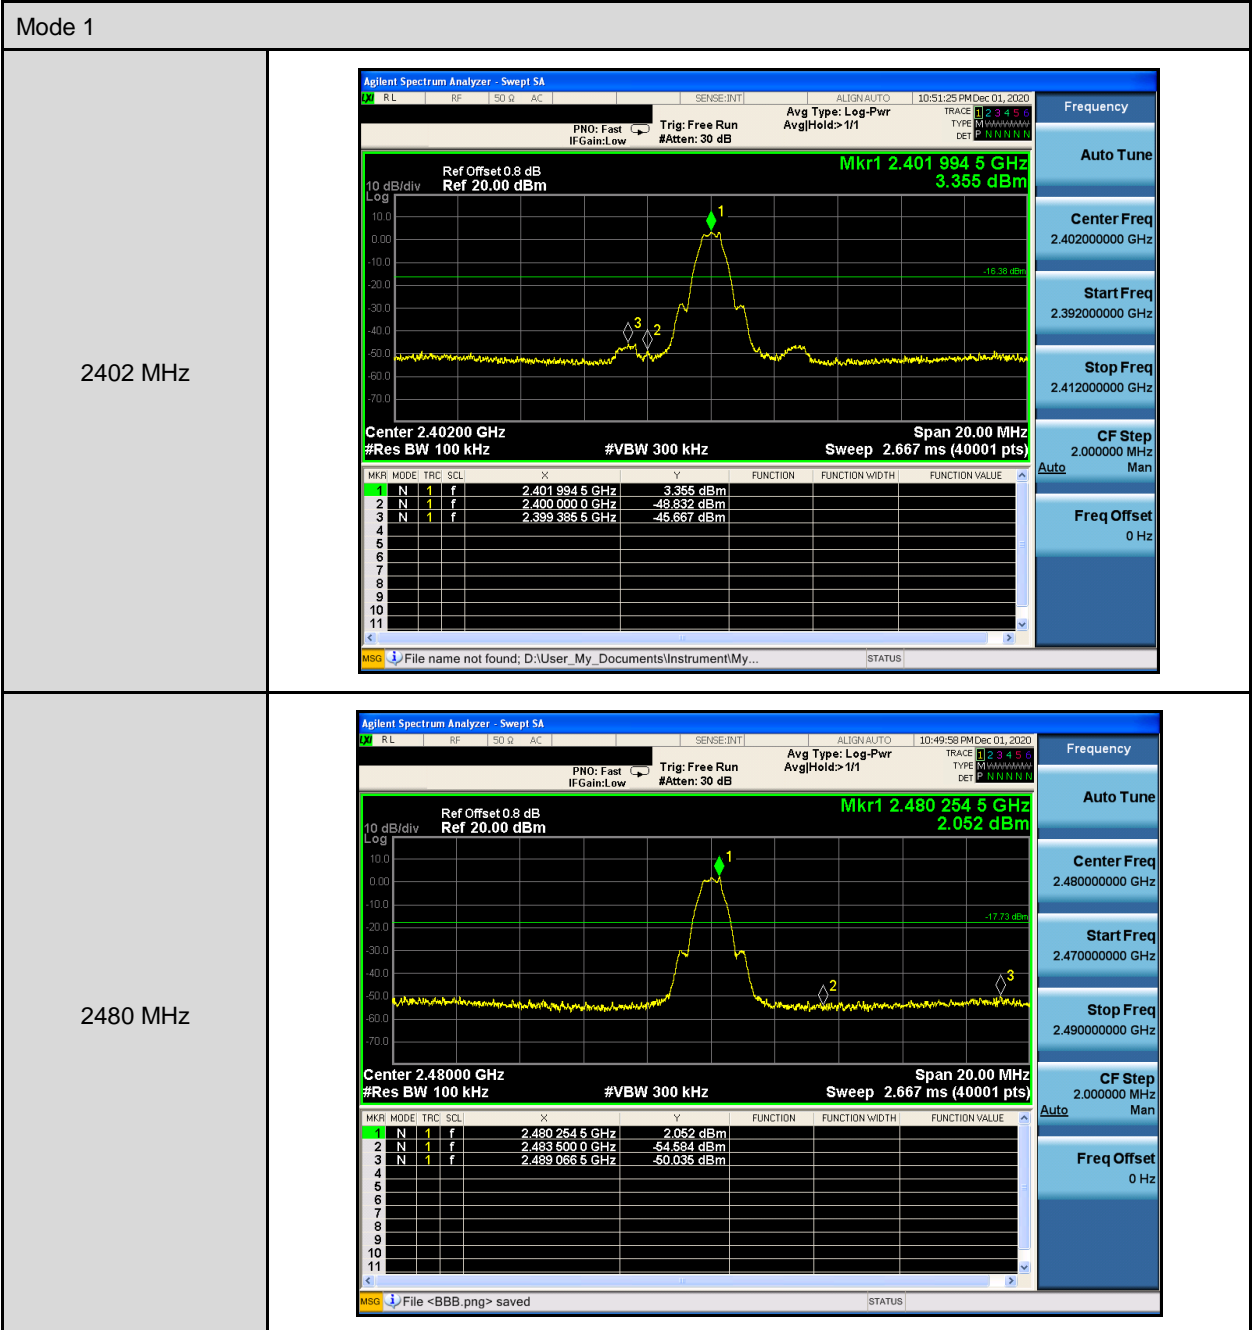

Annex B. Radiated Emission Measurement

Below 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2402 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

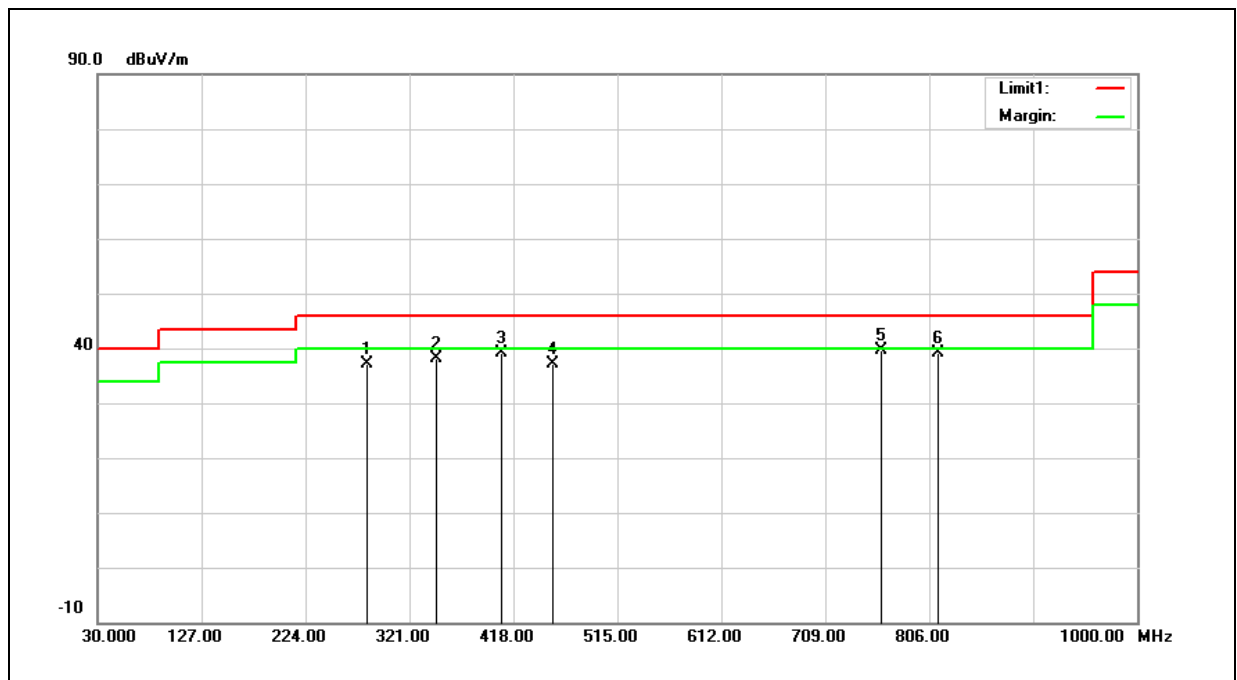

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	281.2300	61.15	-24.11	37.04	46.00	-8.96	QP
2	346.2200	60.64	-22.54	38.10	46.00	-7.90	QP
3	406.3600	60.20	-21.18	39.02	46.00	-6.98	QP
4	454.8600	57.31	-20.12	37.19	46.00	-8.81	QP
5	761.3800	54.62	-15.08	39.54	46.00	-6.46	QP
6	814.7300	53.47	-14.35	39.12	46.00	-6.88	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: $37.04 = -24.11 + 61.15$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2402 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

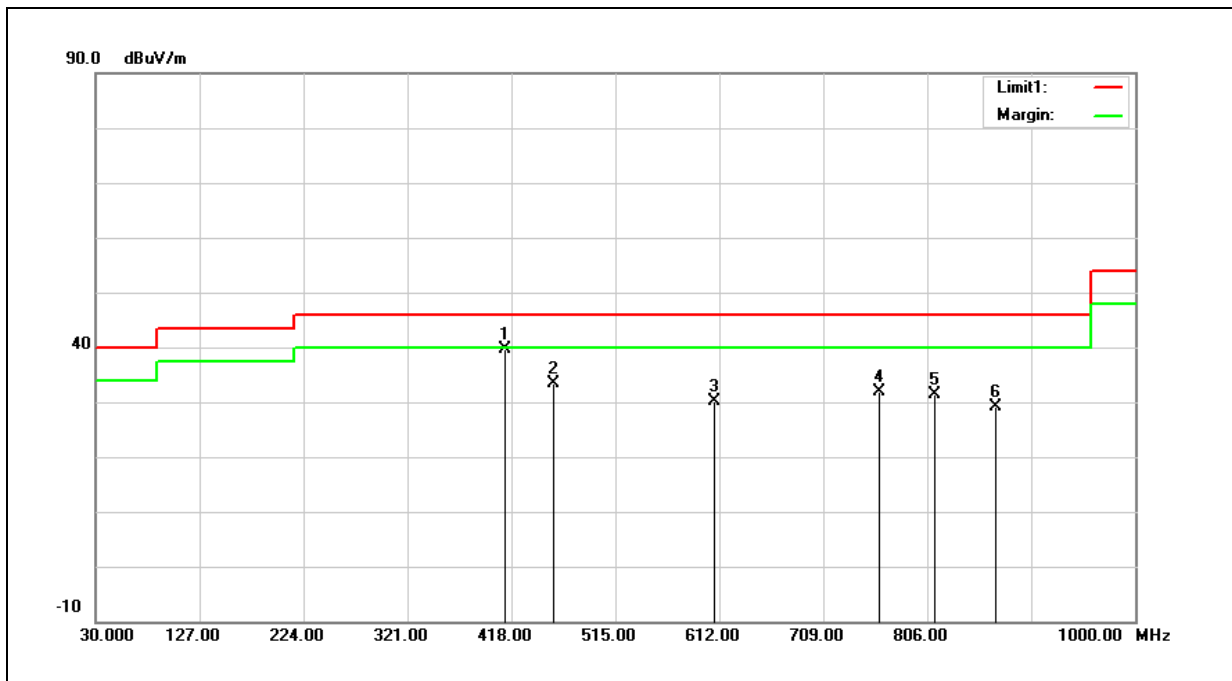

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	412.1800	60.75	-21.04	39.71	46.00	-6.29	QP
2	456.8000	53.58	-20.10	33.48	46.00	-12.52	QP
3	607.1500	47.06	-17.05	30.01	46.00	-15.99	QP
4	761.3800	46.99	-15.08	31.91	46.00	-14.09	QP
5	812.7900	45.64	-14.37	31.27	46.00	-14.73	QP
6	870.0200	42.80	-13.61	29.19	46.00	-16.81	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 39.71 = -21.04 + 60.75


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Harmonic

Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2402 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

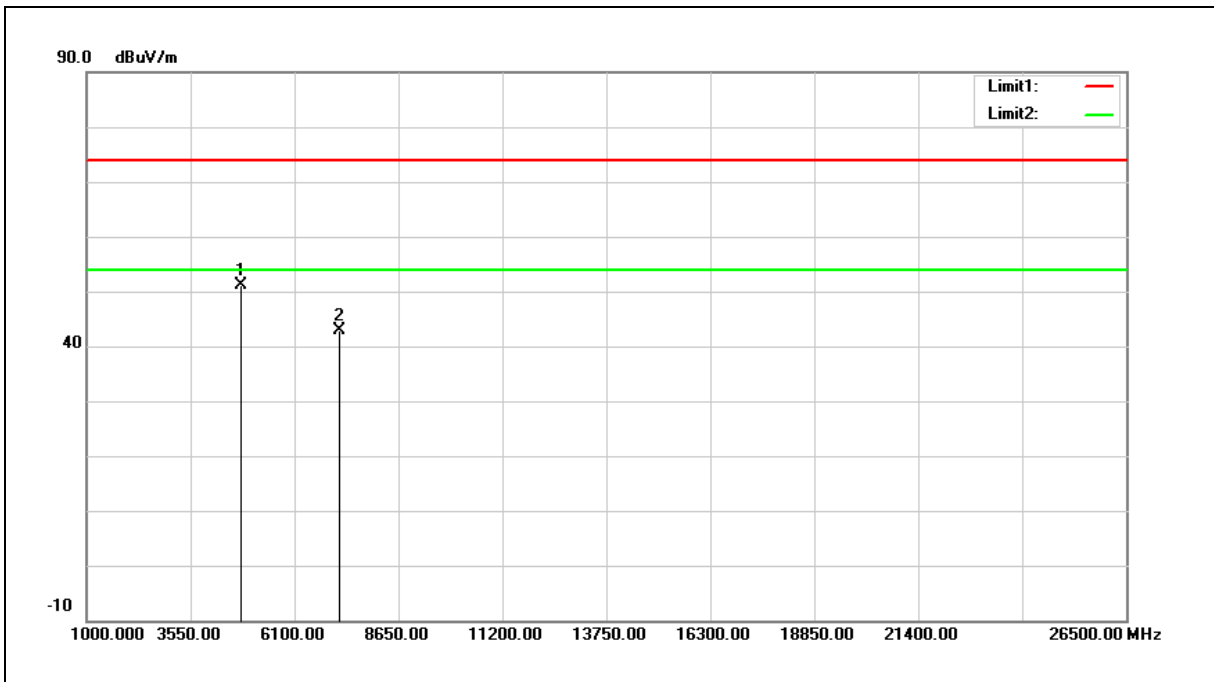

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	52.32	-1.30	51.02	74.00	-22.98	peak
2	7206.000	37.18	5.74	42.92	74.00	-31.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: $51.02 = -1.30 + 52.32$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2402 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

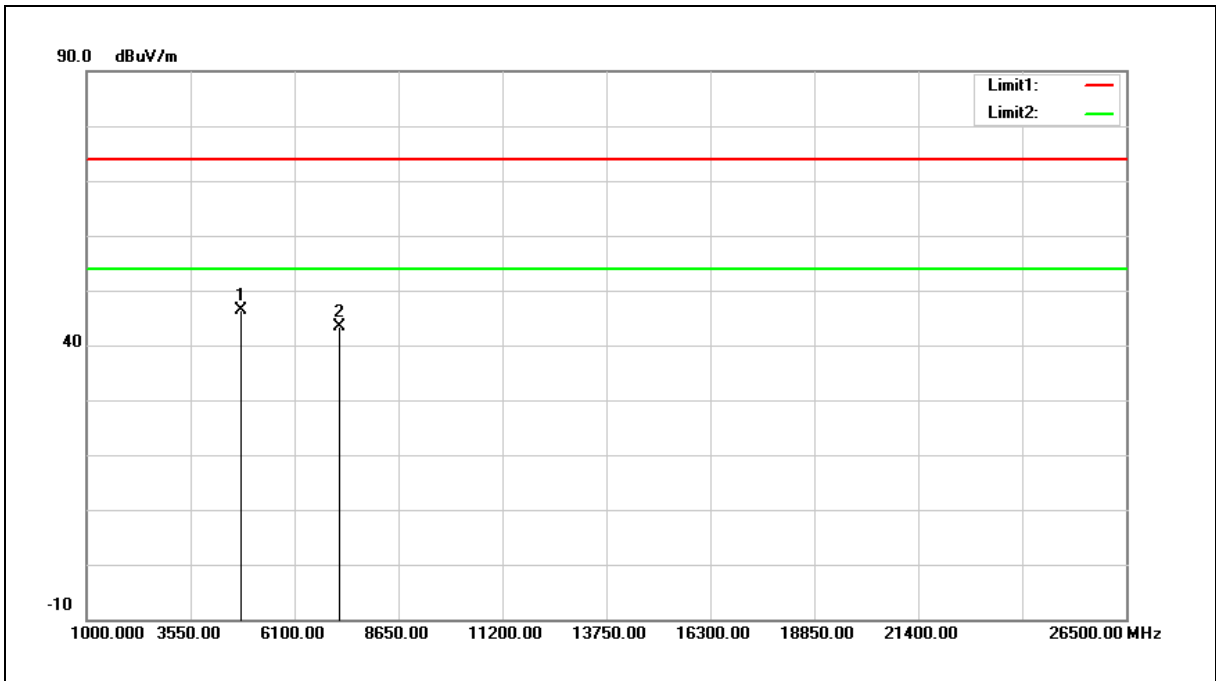

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	47.58	-1.30	46.28	74.00	-27.72	peak
2	7206.000	37.75	5.74	43.49	74.00	-30.51	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $46.28 = -1.30 + 47.58$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2440 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

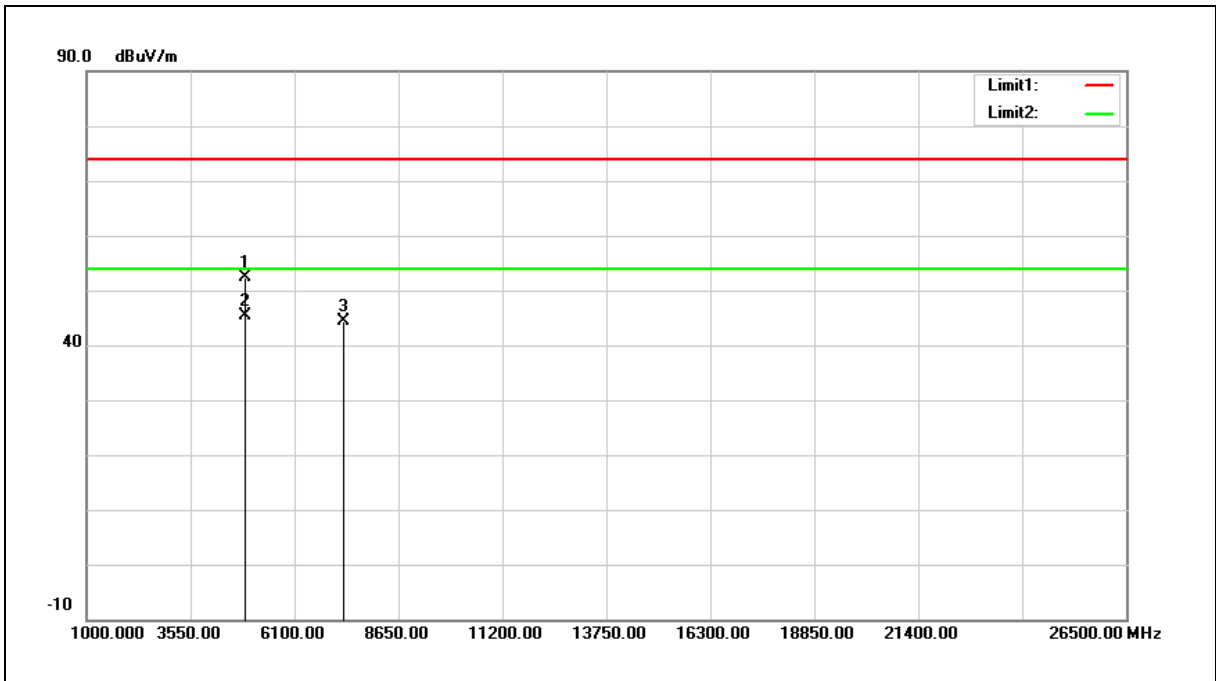

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	53.48	-1.11	52.37	74.00	-21.63	peak
2	4880.000	46.57	-1.11	45.46	54.00	-8.54	AVG
3	7320.000	38.26	6.15	44.41	74.00	-29.59	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2440 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

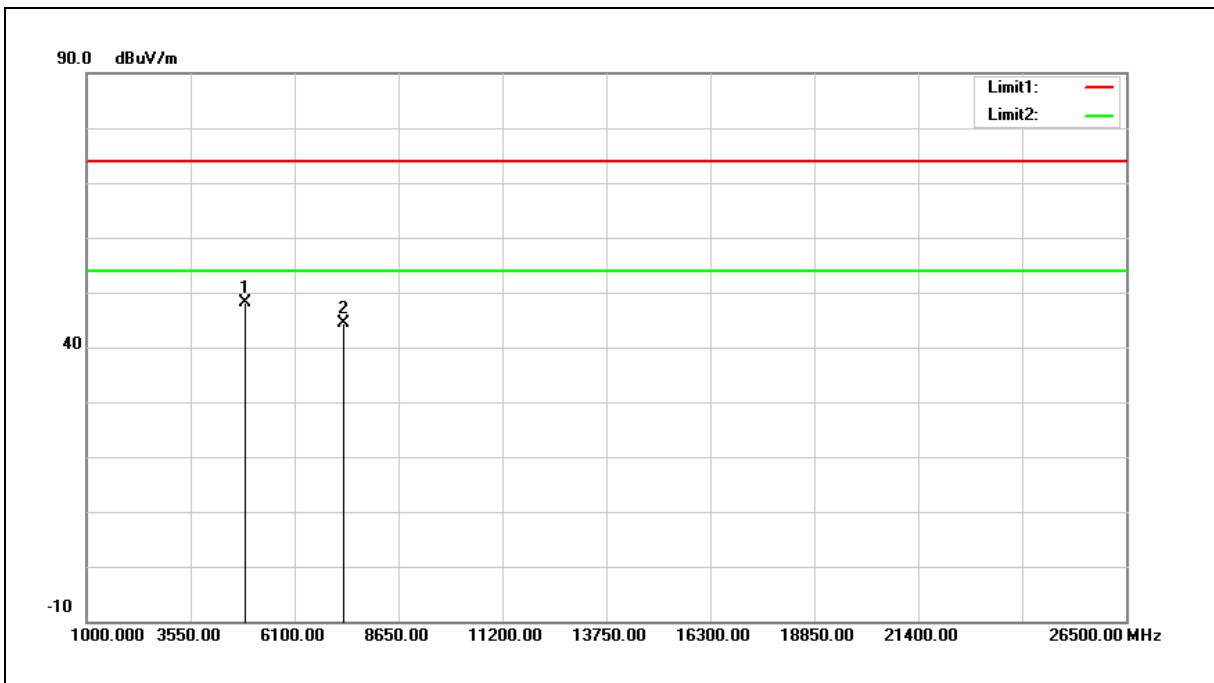


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	49.22	-1.11	48.11	74.00	-25.89	peak
2	7320.000	38.33	6.15	44.48	74.00	-29.52	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2480 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

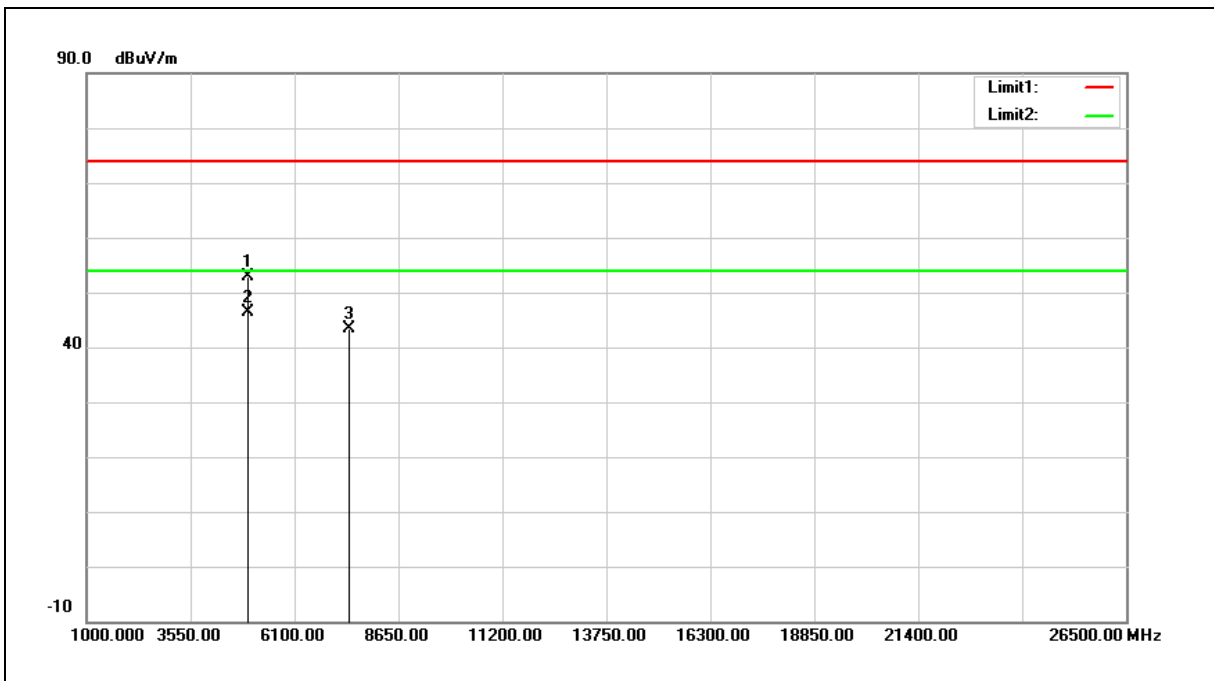

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	53.86	-0.88	52.98	74.00	-21.02	peak
2	4960.000	47.18	-0.88	46.30	54.00	-7.70	AVG
3	7440.000	36.93	6.56	43.49	74.00	-30.51	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2480 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

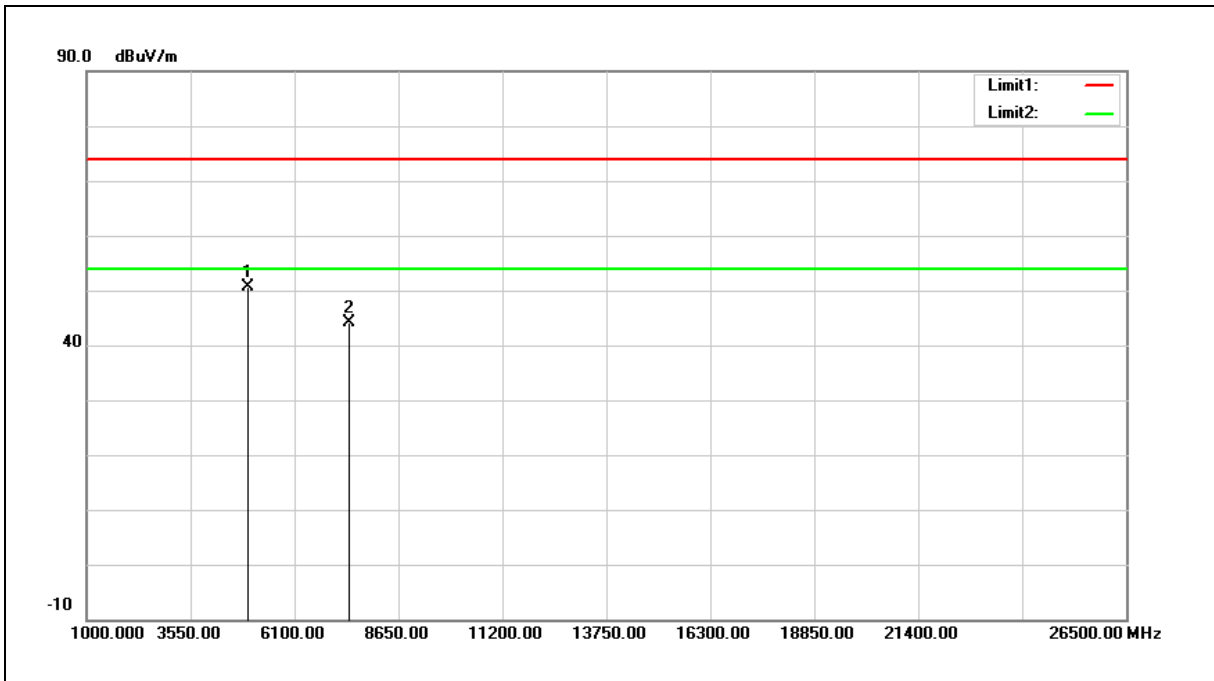


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	51.45	-0.88	50.57	74.00	-23.43	peak
2	7440.000	37.49	6.56	44.05	74.00	-29.95	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2402 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

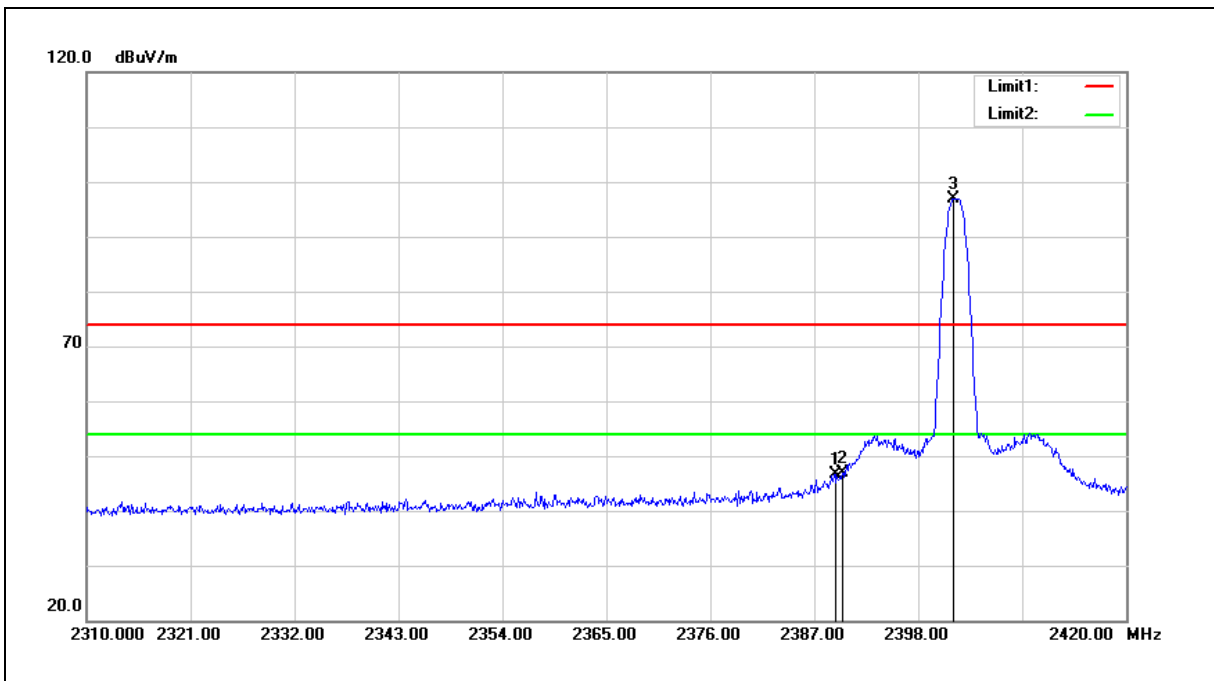

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.200	54.30	-7.72	46.58	74.00	-27.42	peak
2	2390.000	54.62	-7.72	46.90	74.00	-27.10	peak
3	2401.740	104.62	-7.66	96.96	--	--	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2402 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

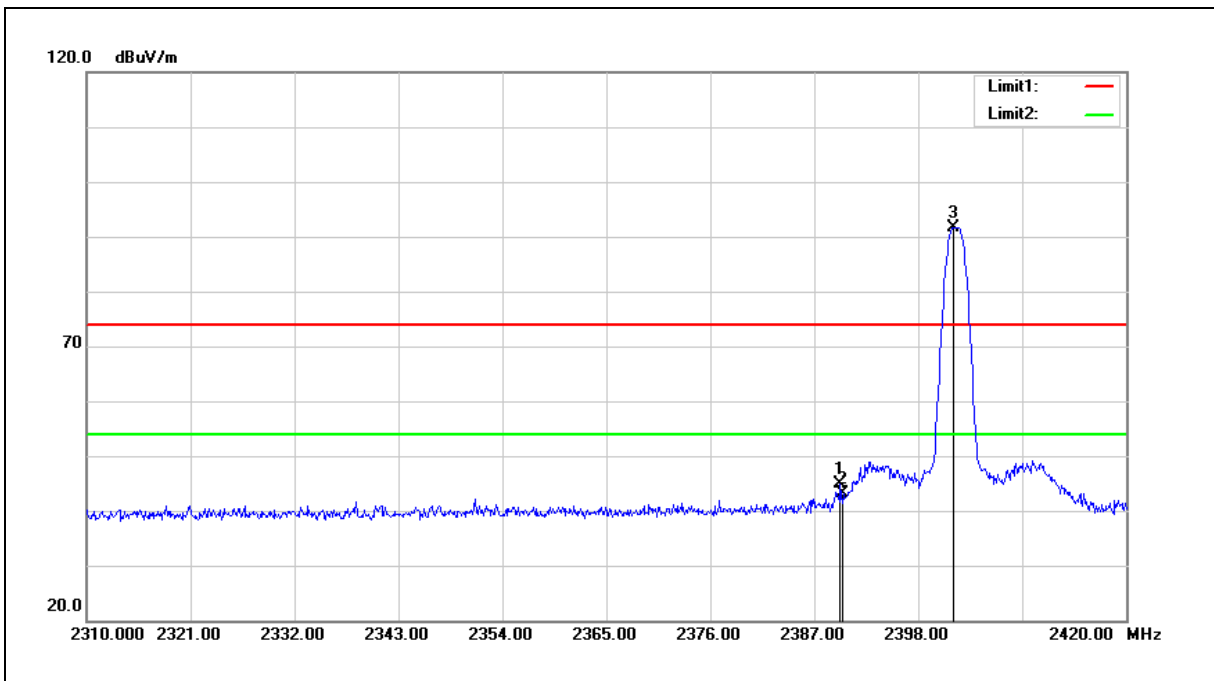

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.750	52.51	-7.72	44.79	74.00	-29.21	peak
2	2390.000	50.86	-7.72	43.14	74.00	-30.86	peak
3	2401.740	99.41	-7.66	91.75	--	--	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

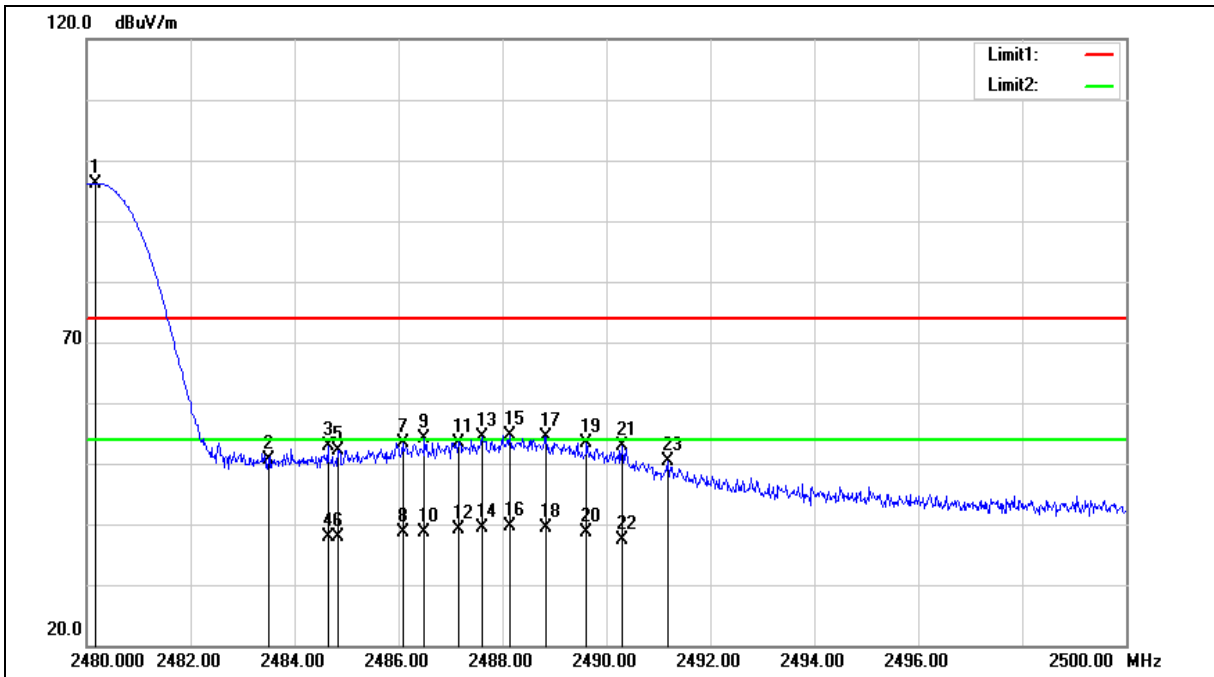



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.180	103.58	-7.35	96.23	--	--	peak
2	2483.500	58.04	-7.34	50.70	74.00	-23.30	peak
3	2484.640	60.18	-7.34	52.84	74.00	-21.16	peak
4	2484.640	45.20	-7.34	37.86	54.00	-16.14	AVG
5	2484.840	59.54	-7.34	52.20	74.00	-21.80	peak
6	2484.840	45.17	-7.34	37.83	54.00	-16.17	AVG
7	2486.080	60.73	-7.32	53.41	74.00	-20.59	peak
8	2486.080	45.92	-7.32	38.60	54.00	-15.40	AVG
9	2486.500	61.57	-7.32	54.25	74.00	-19.75	peak
10	2486.500	46.04	-7.32	38.72	54.00	-15.28	AVG
11	2487.160	60.82	-7.32	53.50	74.00	-20.50	peak
12	2487.160	46.50	-7.32	39.18	54.00	-14.82	AVG
13	2487.600	61.65	-7.32	54.33	74.00	-19.67	peak
14	2487.600	46.72	-7.32	39.40	54.00	-14.60	AVG
15	2488.140	62.05	-7.32	54.73	74.00	-19.27	peak
16	2488.140	47.01	-7.32	39.69	54.00	-14.31	AVG
17	2488.840	61.74	-7.31	54.43	74.00	-19.57	peak
18	2488.840	46.80	-7.31	39.49	54.00	-14.51	AVG
19	2489.620	60.72	-7.31	53.41	74.00	-20.59	peak
20	2489.620	45.94	-7.31	38.63	54.00	-15.37	AVG
21	2490.300	60.10	-7.31	52.79	74.00	-21.21	peak
22	2490.300	44.67	-7.31	37.36	54.00	-16.64	AVG
23	2491.180	57.70	-7.31	50.39	74.00	-23.61	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2480 MHz		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

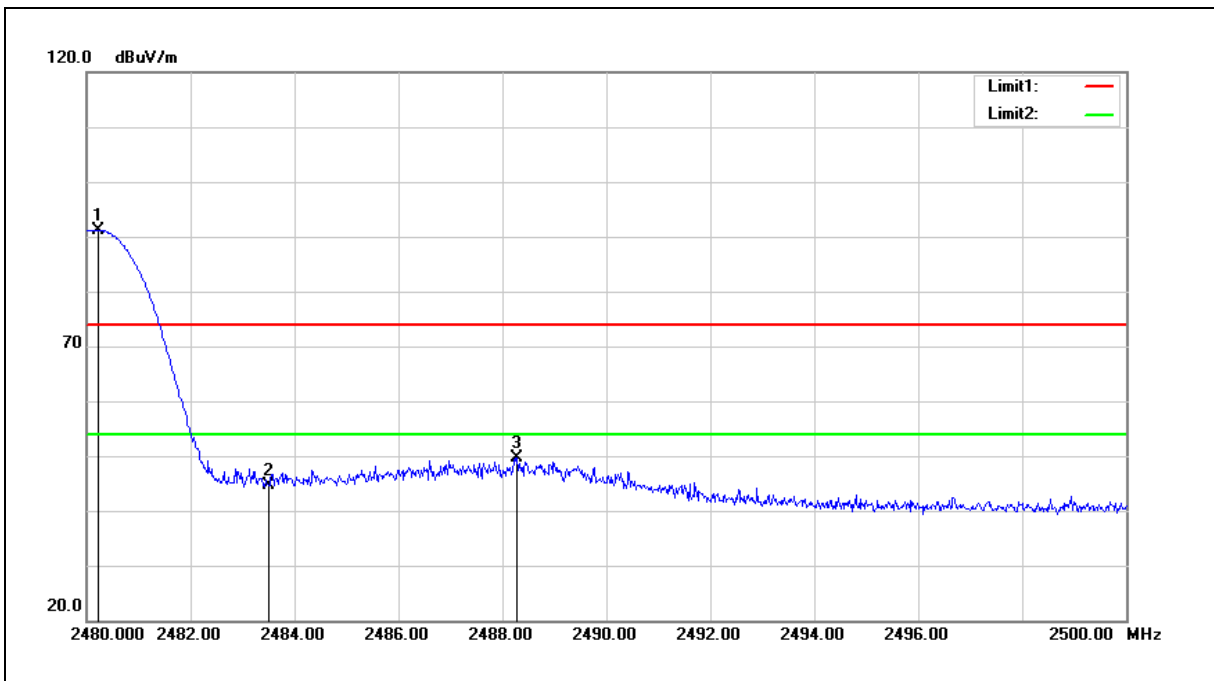

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.220	98.53	-7.35	91.18	--	--	peak
2	2483.500	52.01	-7.34	44.67	74.00	-29.33	peak
3	2488.280	56.98	-7.32	49.66	74.00	-24.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

---END---