

# 802.11n 20 TEST RESULT TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL




# TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL





# TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

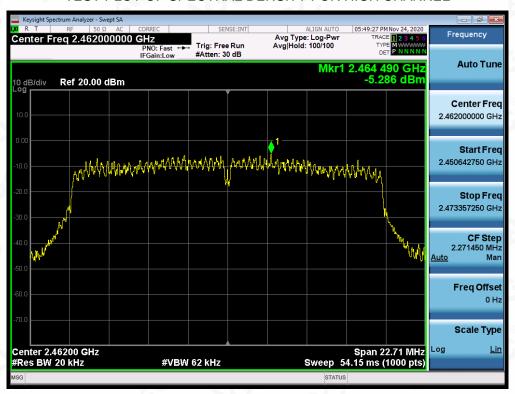


802.11n 40 TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL






# TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

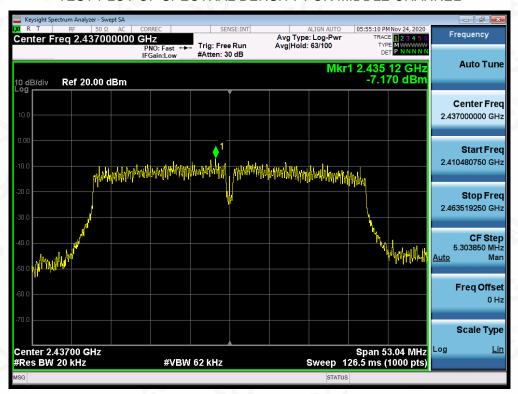

#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

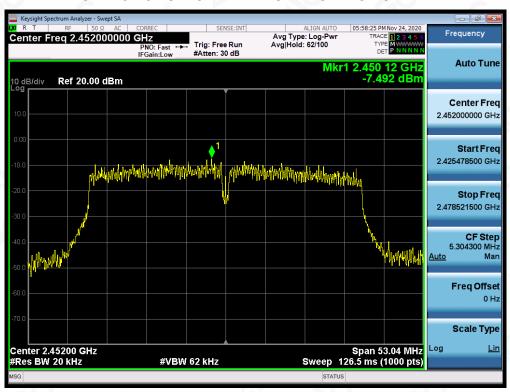

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pest no/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 50 of 98

#### 11. RADIATED EMISSION


#### 11.1. MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




# 11.2. TEST SETUP


# Radiated Emission Test-Setup Frequency Below 30MHz

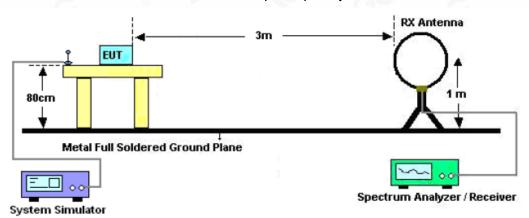

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

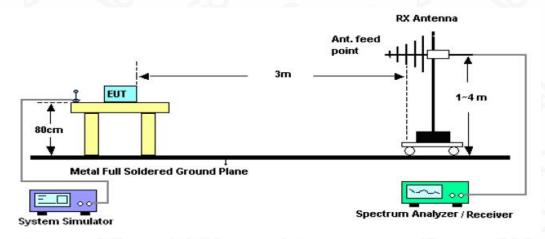

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

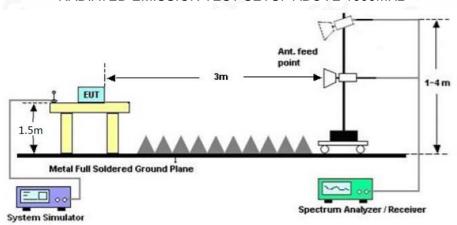

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 52 of 98

# 11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission, the test records reported below are the worst result compared to other modes.

# 11.4. TEST RESULT

#### **RADIATED EMISSION BELOW 30MHZ**


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



# **RADIATED EMISSION BELOW 1GHZ**

# Test with adapter 1: HJ-0501500W1-US

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

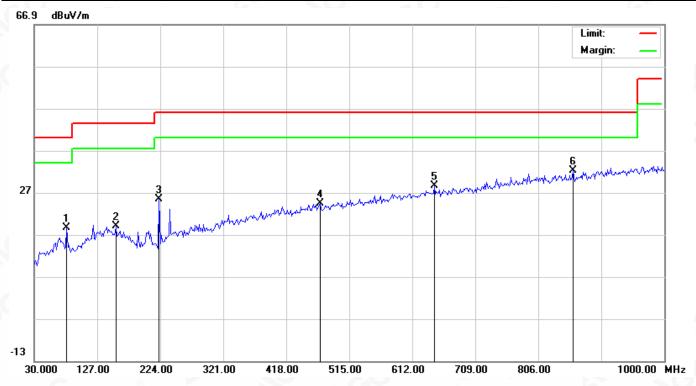


	No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
Ī	1		80.1167	3.73	14.94	18.67	40.00	-21.33	peak
	2		156.1000	-0.16	19.20	19.04	43.50	-24.46	peak
	3		222.3833	9.72	15.65	25.37	46.00	-20.63	peak
	4		469.7333	0.00	24.38	24.38	46.00	-21.62	peak
-	5		645.9500	1.01	27.50	28.51	46.00	-17.49	peak
	6	*	859.3500	1.12	31.18	32.30	46.00	-13.70	peak

#### **RESULT: PASS**



EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

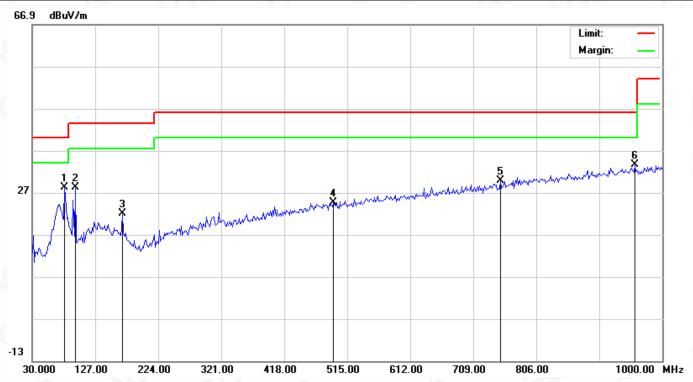


) -	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
Ī			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
Ī	1	*	80.1167	13.34	14.94	28.28	40.00	-11.72	peak
Ī	2		96.2833	12.49	15.63	28.12	43.50	-15.38	peak
	3		169.0333	3.78	18.26	22.04	43.50	-21.46	peak
Ī	4		493.9833	-0.20	24.87	24.67	46.00	-21.33	peak
1	5		751.0333	0.45	29.30	29.75	46.00	-16.25	peak
_	6		957.9667	1.38	32.20	33.58	46.00	-12.42	peak

**RESULT: PASS** 




# Test with adapter 2: TPA-46050150UU

EUT	Multi-color Smart Table Lamp - WIFI		HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

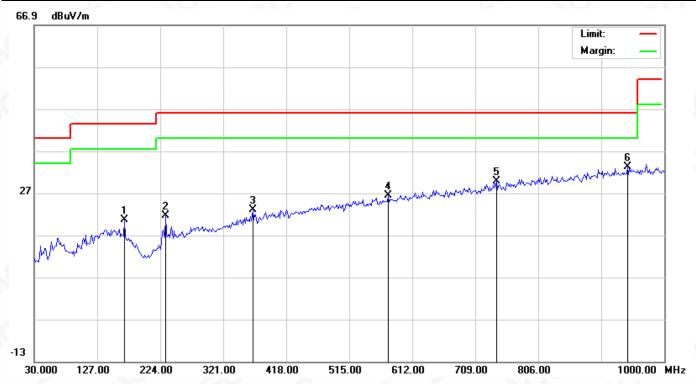


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		169.0333	2.42	18.26	20.68	43.50	-22.82	peak
2		232.0833	4.27	17.31	21.58	46.00	-24.42	peak
3		366.2667	1.28	21.80	23.08	46.00	-22.92	peak
4		574.8167	-0.03	26.46	26.43	46.00	-19.57	peak
5		741.3333	0.71	29.08	29.79	46.00	-16.21	peak
6	*	943.4167	1.22	32.07	33.29	46.00	-12.71	peak

**RESULT: PASS** 





EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A	
Temperature	25°C	Relative Humidity	58%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical	

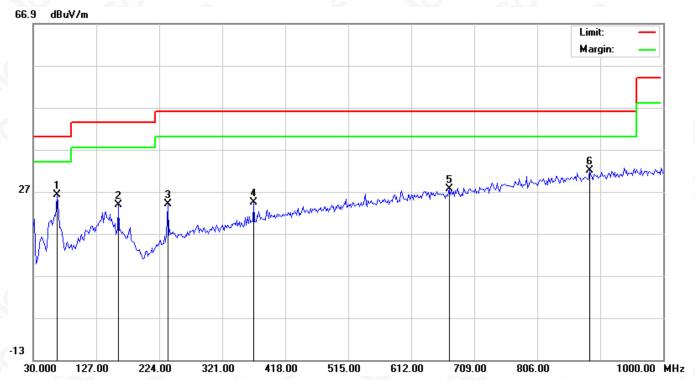

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	67.1833	9.39	16.76	26.15	40.00	-13.85	peak
2		160.9500	4.70	19.09	23.79	43.50	-19.71	peak
3		236.9333	5.89	18.14	24.03	46.00	-21.97	peak
4		369.5000	2.52	21.91	24.43	46.00	-21.57	peak
5		670.2000	-0.15	27.79	27.64	46.00	-18.36	peak
6		886.8333	0.43	31.53	31.96	46.00	-14.04	peak

# **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated resingular spection.

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written extinorization of AGC who test result presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued of the test report Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 57 of 98

# **RADIATED EMISSION ABOVE 1GHZ**


Test with adapter 1: HJ-0501500W1-US

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A	
Temperature	25°C	Relative Humidity	58%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal	

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	56.48	0.08	56.56	74	-17.44	peak
4824.000	47.12	0.08	47.2	54	-6.8	AVG
7236.000	51.09	2.21	53.3	74	-20.7	peak
7236.000	40.28	2.21	42.49	54	-11.51	AVG
- C			₹G <sup>C</sup>	- C	<b>(</b>	
emark:						

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A	
Temperature	25°C	Relative Humidity	58%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical	

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4824.000	56.89	0.08	56.97	74	-17.03	peak
4824.000	47.28	0.08	47.36	54	-6.64	AVG
7236.000	41.35	2.21	43.56	74	-30.44	peak
7236.000	42.67	2.21	44.88	54	-9.12	AVG
			9 - 0		<u> </u>	
temark:	-6	8		100	- 0	8
actor = Ante	enna Factor + Ca	ble Loss – F	Pre-amplifier.			






EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	56.12	0.14	56.26	74	-17.74	peak
4874.000	45.97	0.14	46.11	54	-7.89	AVG
7311.000	51.24	2.36	53.6	74	-20.4	peak
7311.000	40.23	2.36	42.59	54	-11.41	AVG
			0			C_
emark:					0	
actor = Ante	enna Factor + C	able Loss –	Pre-amplifier.			

Factor = Antenna F	actor + Cable	e Loss – P	re-amplifier		@	
	-6	8			-C	

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	55.44	0.14	55.58	74	-18.42	peak
4874.000	46.29	0.14	46.43	54	-7.57	AVG
7311.000	50.27	2.36	52.63	74	-21.37	peak
7311.000	41.37	2.36	43.73	54	-10.27	AVG
(6)				8		
	®				8	
lemark:	2.0	®			-C	· ·
actor = Ante	enna Factor + Ca	able Loss – I	Pre-amplifier.			





EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	56.23	0.22	56.45	74	-17.55	peak
4924.000	45.18	0.22	45.4	54	-8.6	AVG
7386.000	51.27	2.64	53.91	74	-20.09	peak
7386.000	40.39	2.64	43.03	54	-10.97	AVG
0	,C				- GG	
Remark:				(a)		10
actor = Ante	enna Factor + C	able Loss –	Pre-amplifier.		(0)	

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	57.69	0.22	57.91	74	-16.09	peak
4924.000	48.23	0.22	48.45	54	-5.55	AVG
7386.000	52.13	2.64	54.77	74	-19.23	peak
7386.000	41.37	2.64	44.01	54	-9.99	AVG
		0				
emark:						
actor = Ante	enna Factor + Ca	ble Loss – I	Pre-amplifier.	8		

**RESULT: PASS** 



Page 60 of 98

/Inspection he test results he test report.

# Test with adapter 2: TPA-46050150UU

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	56.19	0.08	56.27	74	-17.73	peak
4824.000	47.23	0.08	47.31	54	-6.69	AVG
7236.000	51.28	2.21	53.49	74	-20.51	peak
7236.000	41.35	2.21	43.56	54	-10.44	AVG
						60
emark:	0		100	8	8	
actor = Ante	enna Factor + Ca	able Loss -	Pre-amplifier.		- C	(6)

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4824.000	56.29	0.08	56.37	74	-17.63	peak
4824.000	47.23	0.08	47.31	54	-6.69	AVG
7236.000	41.54	2.21	43.75	74	-30.25	peak
7236.000	30.98	2.21	33.19	54	-20.81	AVG
			®			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appreciated in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 61 of 98

g/Inspection The test results

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	56.29	0.14	56.43	74	-17.57	peak
4874.000	45.29	0.14	45.43	54	-8.57	AVG
7311.000	51.27	2.36	53.63	74	-20.37	peak
7311.000	40.23	2.36	42.59	54	-11.41	AVG
<u>GY</u>	60			50	-GO	
emark:						

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	56.12	0.14	56.26	74	-17.74	peak
4874.000	45.27	0.14	45.41	54	-8.59	AVG
7311.000	50.22	2.36	52.58	74	-21.42	peak
7311.000	40.35	2.36	42.71	54	-11.29	AVG
®		<del>6</del>		3)		<b>10</b>
emark:			<u> </u>		<u> </u>	
$actor = \Delta nte$	nna Factor + Ca	hla I nee _	Pre-amplifier			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesture Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Page 62 of 98

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	56.23	0.22	56.45	74	-17.55	peak
4924.000	45.19	0.22	45.41	54	-8.59	AVG
7386.000	51.28	2.64	53.92	74	-20.08	peak
7386.000	40.13	2.64	42.77	54	-11.23	AVG
-0						
emark:	-0	3)	8		- 60	
actor = Ante	enna Factor + Ca	ble Loss -	Pre-amplifier.			

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	57.43	0.22	57.65	74	-16.35	peak
4924.000	46.28	0.22	46.5	54	-7.5	AVG
7386.000	53.54	2.64	56.18	74	-17.82	peak
7386.000	42.83	2.64	45.47	54	-8.53	AVG
(3)					0	
						®
temark:		8				
actor = Ante	enna Factor + Ca	ble Loss -	Pre-amplifier.			

# **RESULT: PASS**

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



Page 63 of 98

# 12. BAND EDGE EMISSION

#### 12.1. MEASUREMENT PROCEDURE

Radiated restricted band edge measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

# 12.2. TEST SET-UP

same as 11.2

#### Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB( $\mu$ V) to represent the Amplitude. Use the F dB( $\mu$ V /m) to represent the Field Strength. So A=F.



#### 12.3. TEST RESULT

EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Horizontal


PK



ΑV



# **RESULT: PASS**





EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Vertical




#### ΑV



# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Horizontal



#### AV



# **RESULT: PASS**



g/Inspection The test results



EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Vertical

#### PK




#### ΑV



# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exphorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Horizontal



#### ΑV



# **RESULT: PASS**






EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Vertical




#### AV

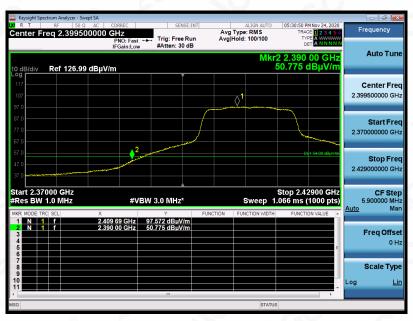

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.







EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Horizontal



#### ΑV

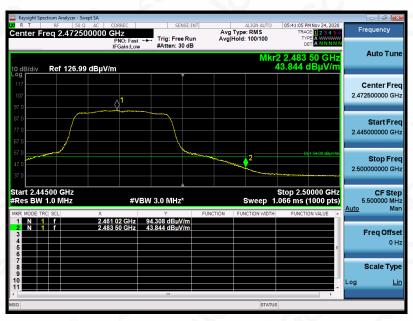

# **RESULT: PASS**






EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Vertical



#### ΑV



# **RESULT: PASS**







EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Horizontal



#### ΑV

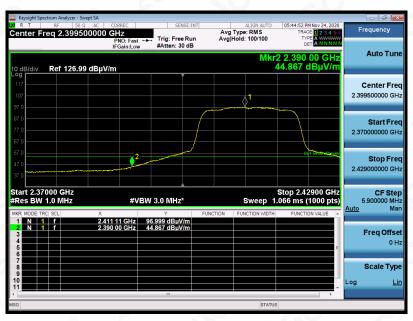

# **RESULT: PASS**







EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Vertical



#### ΑV

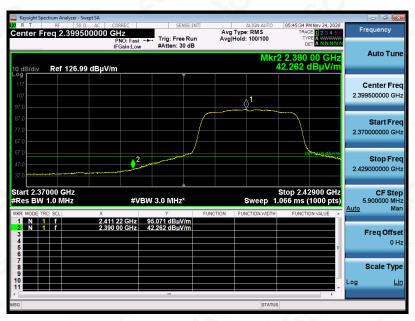

# **RESULT: PASS**






EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Horizontal



#### AV



# **RESULT: PASS**






EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Vertical




#### ΑV

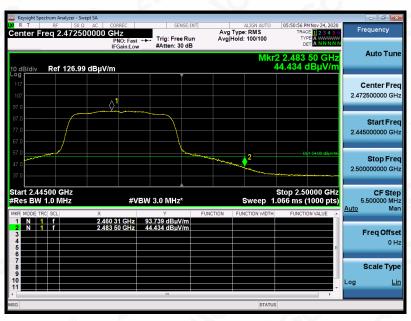

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter permitted without the writter permitted without the writter permitted in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2422MHZ	Antenna	Horizontal




#### AV

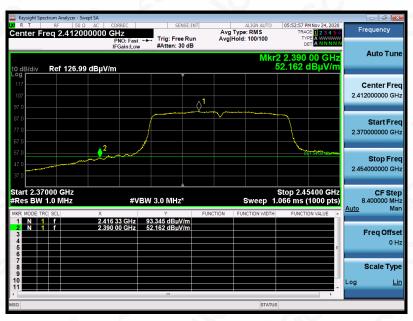

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2422MHZ	Antenna	Vertical




#### ΑV

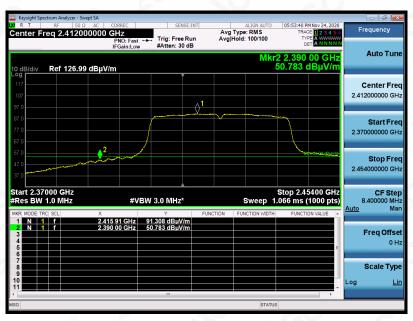

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A		
Temperature	25°C	Relative Humidity	60%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	802.11n 40with data rate 13.5 2452MHZ	Antenna	Horizontal		




#### AV

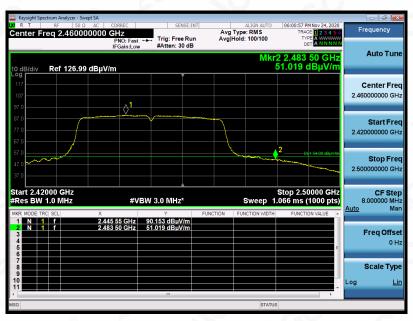

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the content of the report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.







EUT	Multi-color Smart Table Lamp - WIFI	Model Name	HS-001A		
Temperature	25°C	Relative Humidity	60%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	802.11n 40 with data rate 13.5 2452MHZ	Antenna	Vertical		



#### ΑV

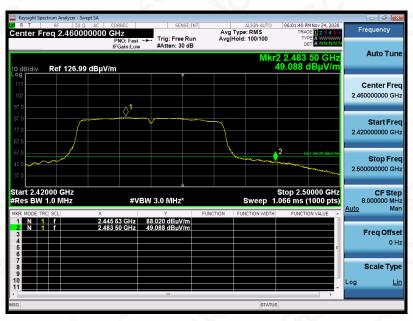

# **RESULT: PASS**





# 13. FCC LINE CONDUCTED EMISSION TEST


# 13.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage							
Frequency	Q.P.( dBuV)	Average( dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

# Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

# 13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

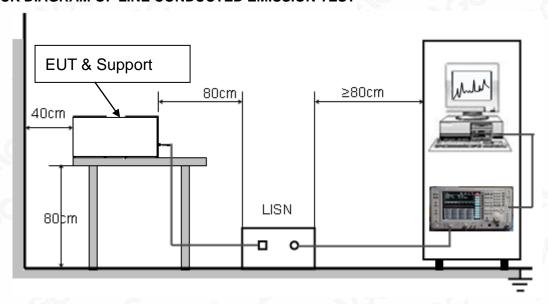



Page 81 of 98

#### 13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

# 13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



# 13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

# Test with adapter 1: HJ-0501500W1-US

Line Conducted Emission Test Line 1-L

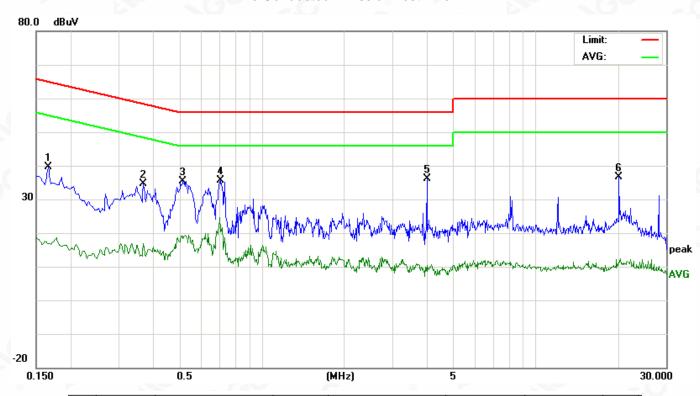


No.	Freq.	Reading_Level (dBuV)		Correct Measurement Factor (dBuV)				Limit (dBuV)		Margin (dB)		P/F	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.1660	24.17	N/A	5.72	12.81	36.98	N/A	18.53	65.15	55.15	-28.17	-36.62	Р
2	0.3700	21.20	N/A	3.50	13.36	34.56	N/A	16.86	58.50	48.50	-23.94	-31.64	Р
3	0.5180	21.63	N/A	4.75	13.75	35.38	N/A	18.50	56.00	46.00	-20.62	-27.50	Р
4	0.7100	21.75	N/A	6.55	13.81	35.56	N/A	20.36	56.00	46.00	-20.44	-25.64	Р
Ę	4.0180	24.32	N/A	-1.48	11.92	36.24	N/A	10.44	56.00	46.00	-19.76	-35.56	Р
6	20.1660	23.56	N/A	-1.71	13.15	36.71	N/A	11.44	60.00	50.00	-23.29	-38.56	Р

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual



# Line Conducted Emission Test Line 2-N

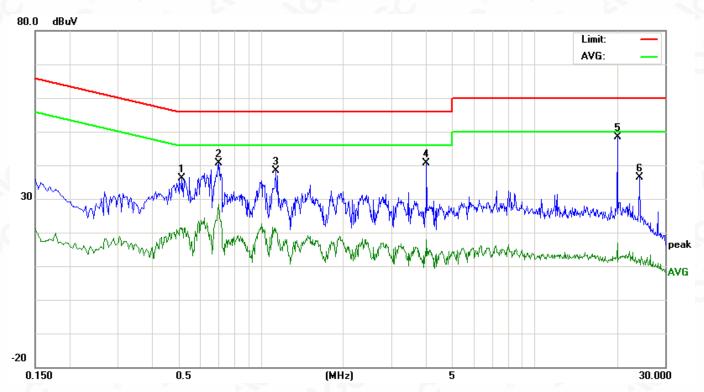


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F
		Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.5180	22.30	N/A	7.53	13.75	36.05	N/A	21.28	56.00	46.00	-19.95	-24.72	Р
2	0.7019	26.76	N/A	14.65	13.81	40.57	N/A	28.46	56.00	46.00	-15.43	-17.54	Р
3	1.1380	24.51	N/A	7.08	13.79	38.30	N/A	20.87	56.00	46.00	-17.70	-25.13	Р
4	4.0300	28.72	N/A	6.08	11.90	40.62	N/A	17.98	56.00	46.00	-15.38	-28.02	Р
5	20.1580	35.12	25.80	-1.46	13.15	48.27	38.95	11.69	60.00	50.00	-21.05	-38.31	Р
6	24.2260	23.40	N/A	-1.32	13.07	36.47	N/A	11.75	60.00	50.00	-23.53	-38.25	Р

**RESULT: PASS** 



# Test with adapter 2: TPA-46050150UU


# Line Conducted Emission Test Line 1-L

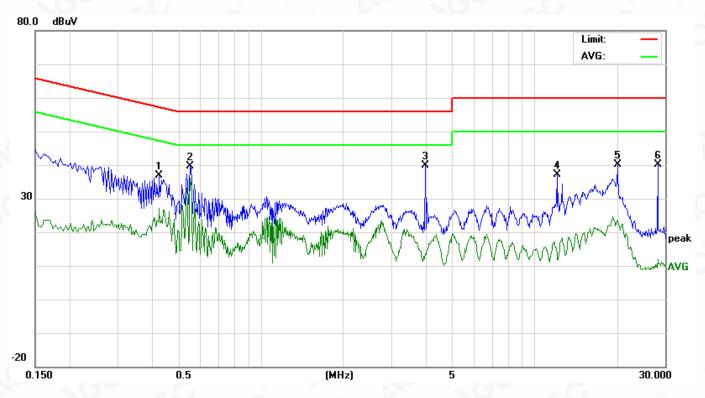

No.	Freq.	Reading_Level (dBuV)		Correct Measurement Factor (dBuV)			Limit (dBuV)		Margin (dB)		P/F		
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.4260	23.24	19.00	12.10	13.57	36.81	32.57	25.67	57.33	47.33	-24.76	-21.66	Р
2	0.5540	25.84	25.11	22.35	13.78	39.62	38.89	36.13	56.00	46.00	-17.11	-9.87	Р
3	4.0020	28.04	8.42	-0.63	11.95	39.99	20.37	11.32	56.00	46.00	-35.63	-34.68	Р
4	12.1020	23.73	10.84	-1.48	13.32	37.05	24.16	11.84	60.00	50.00	-35.84	-38.16	Р
5	20.1460	27.07	25.77	8.89	13.15	40.22	38.92	22.04	60.00	50.00	-21.08	-27.96	Р
6	28.1980	26.95	8.11	-4.09	13.21	40.16	21.32	9.12	60.00	50.00	-38.68	-40.88	Р



# Line Conducted Emission Test Line 2-N

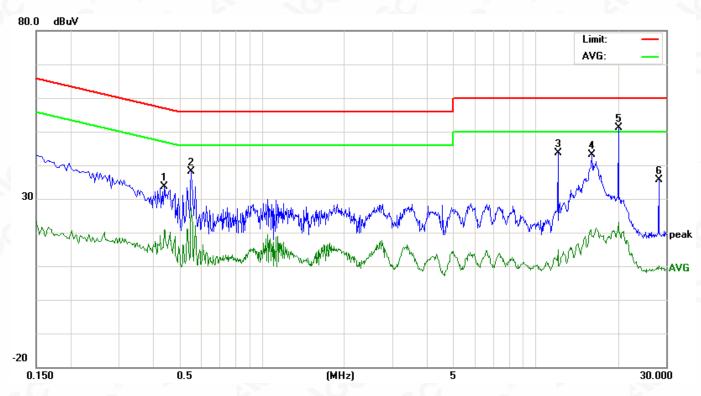

No.	No.	Freq. (MHz)	Reading_Level (dBuV)		Correct Measurement Factor (dBuV)			Limit (dBuV)		Margin (dB)		P/F		
			Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG	
	1	0.4420	20.07	16.10	5.62	13.61	33.68	29.71	19.23	57.02	47.02	-27.31	-27.79	Р
	2	0.5540	24.27	22.38	13.03	13.78	38.05	36.16	26.81	56.00	46.00	-19.84	-19.19	Р
	3	12.0860	30.42	26.99	-2.01	13.31	43.73	40.30	11.30	60.00	50.00	-19.70	-38.70	Р
	4	16.0900	29.79	21.13	4.82	13.23	43.02	34.36	18.05	60.00	50.00	-25.64	-31.95	Р
	5	20.1340	37.90	29.56	7.41	13.15	51.05	42.71	20.56	60.00	50.00	-17.29	-29.44	Р
	6	28.1620	22.37	4.32	-4.79	13.21	35.58	17.53	8.42	60.00	50.00	-42.47	<b>-4</b> 1.58	Р


# **RESULT: PASS**

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.



# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP- ADAPTER-1**

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

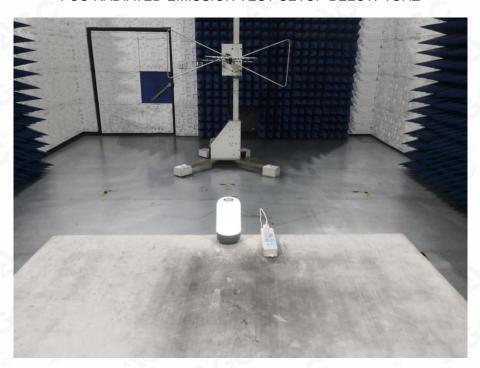

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHz



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual