

Appendix B: Test results of EMC (07 version)

APPENDIX B: TEST RESULTS OF EMC (07 VERSION)	1
APPENDIX B.1: TEST PLOTS OF RADIATED EMISSION, BELOW 1GHZ	2
<i>BT+NB+Normal Operating+LED on</i>	2
<i>BT+GPRS+Normal Operating+LED on</i>	3
<i>BT+EMTC+Normal Operating+LED on</i>	4
APPENDIX B.2: TEST PLOTS OF RADIATED EMISSION, ABOVE 1GHZ	5
<i>BT+NB+Normal Operating+LED on</i>	5
<i>BT+GPRS+Normal Operating+LED on</i>	7
<i>BT+EMTC+Normal Operating+LED on</i>	9
APPENDIX B.3: TEST PLOTS OF CONDUCTED EMISSIONS ON AC MAINS	11
<i>BT+NB+Normal Operating+LED on</i>	11
<i>BT+GPRS+Normal Operating+LED on</i>	13
<i>BT+EMTC+Normal Operating+LED on</i>	15


Appendix B.1: Test Plots of Radiated Emission, Below 1GHz

Note: The following illustration shows the limit that meet the FCC requirements, and these measured value also comply with IC requirements.

BT+NB+Normal Operating+LED on

EUT Information

EUT Name:	AMAZON LOCKER
Order Number:	168323034 10
Model:	ZL-ODIN-V1
Test Mode:	BT+NB-IOT +Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Richard Lin
Review By:	Gary Chen
Remark:	10m Chamber

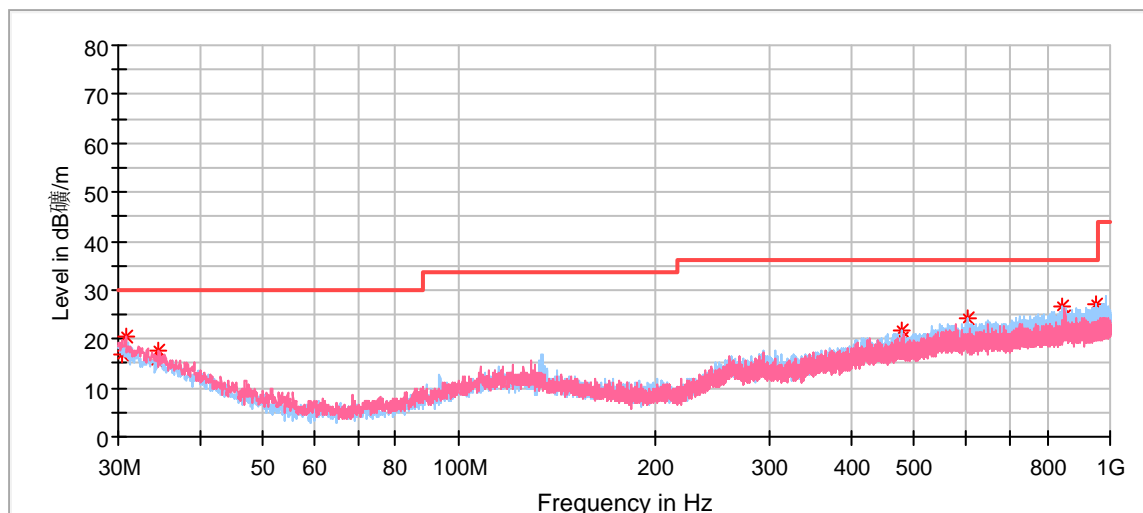


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.485000	16.86	30.00	13.14	100.0	H	279.0	-11.7
30.808333	20.48	30.00	9.52	200.0	V	114.0	-5.3
34.418889	15.51	30.00	14.49	200.0	H	267.0	-13.7
34.688333	17.44	30.00	12.56	100.0	V	112.0	-7.6
479.217778	21.62	36.00	14.38	100.0	H	177.0	-10.0
479.487222	19.96	36.00	16.04	100.0	V	182.0	-5.9
602.838889	24.15	36.00	11.85	200.0	H	140.0	-7.8
603.755000	20.85	36.00	15.15	100.0	V	235.0	-4.6
845.123333	26.60	36.00	9.40	200.0	H	223.0	-5.4
846.955556	24.74	36.00	11.26	100.0	V	203.0	-2.9
950.314444	26.92	36.00	9.08	100.0	H	230.0	-4.2
950.961111	23.36	36.00	12.64	100.0	V	358.0	-2.3

BT+GPRS+Normal Operating+LED on

EUT Information

EUT Name:	AMAZON LOCKER
Order Number:	168323034 10
Model:	ZL-ODIN-V1
Test Mode:	BT+GPRS link+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Richard Lin
Review By:	Gary Chen
Remark:	10m Chamber

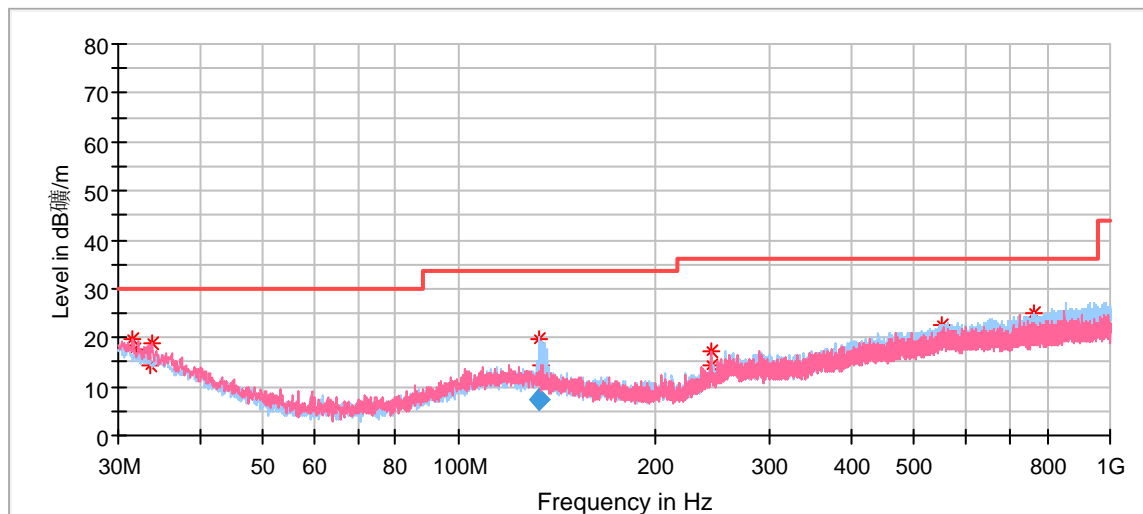

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.616667	19.50	30.00	10.50	100.0	V	74.0	-5.8
31.778333	17.82	30.00	12.18	100.0	H	226.0	-12.6
33.718333	14.27	30.00	15.73	100.0	H	116.0	-13.5
33.826111	18.99	30.00	11.01	200.0	V	134.0	-7.1
132.421667	19.74	33.50	13.82	250.0	H	162.0	-17.0
133.574444	14.44	33.50	19.06	200.0	V	352.0	-11.9
243.400000	17.05	36.00	18.95	100.0	V	342.0	-12.0
243.669444	14.38	36.00	21.62	200.0	H	23.0	-16.5
551.482778	20.72	36.00	15.28	100.0	V	226.0	-4.5
551.698333	22.53	36.00	13.47	100.0	H	353.0	-8.2
759.655556	22.97	36.00	13.03	100.0	V	170.0	-3.5
761.649444	24.90	36.00	11.10	200.0	H	248.0	-6.4


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
132.421667	7.50	33.50	26.00	1000.0	120.000	250.0	H	162.0	-17.0

BT+EMTC+Normal Operating+LED on

EUT Information

EUT Name:	AMAZON LOCKER
Order Number:	168323034 10
Model:	ZL-ODIN-V1
Test Mode:	BT+EMTC+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Richard Lin
Review By:	Gary Chen
Remark:	10m Chamber

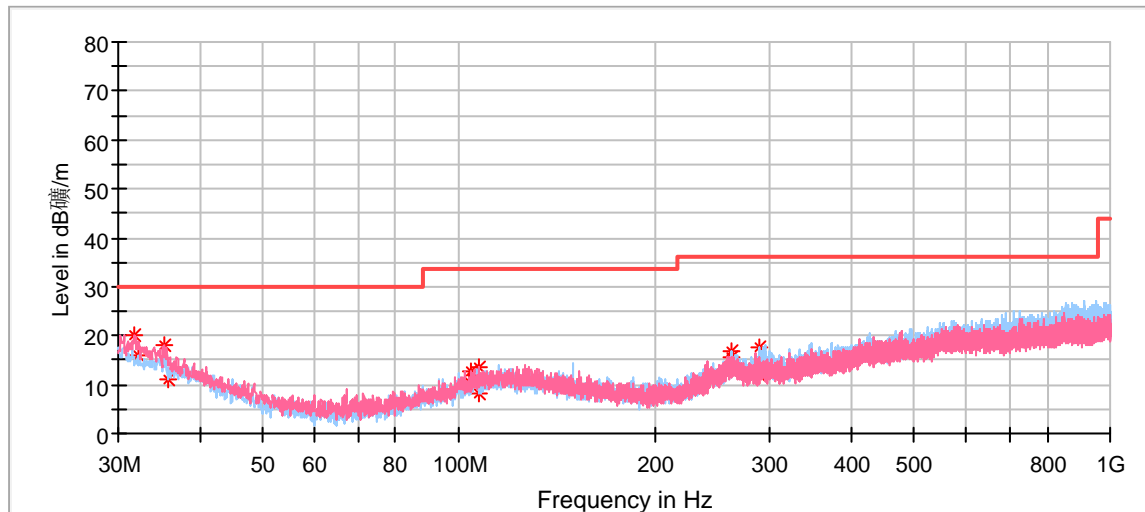

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.832222	19.92	30.00	10.08	100.0	V	18.0	-5.9
32.155556	16.08	30.00	13.92	100.0	H	160.0	-12.8
35.227222	17.99	30.00	12.01	100.0	V	77.0	-7.9
35.766111	11.26	30.00	18.74	100.0	H	138.0	-14.4
103.666111	10.85	33.50	22.65	100.0	H	7.0	-18.0
104.420556	12.54	33.50	20.96	100.0	V	164.0	-12.4
107.061111	13.60	33.50	19.90	100.0	V	120.0	-12.1
107.492222	8.20	33.50	25.30	100.0	H	234.0	-17.4
261.668333	15.67	36.00	20.33	100.0	V	261.0	-9.4
262.207222	16.71	36.00	19.29	100.0	H	81.0	-13.9
289.852222	17.83	36.00	18.17	100.0	H	199.0	-14.9
290.175556	11.79	36.00	24.21	100.0	V	185.0	-10.4


Appendix B.2: Test Plots of Radiated Emission, Above 1GHz

Note: Testing was carried out within frequency range 30MHz to the 5th harmonics. The measurement results above 6GHz were greater than 20dB below the limit, so only record the test result within the 30MHz to 6GHz.

BT+NB+Normal Operating+LED on

EUT Information

EUT Name:	AMAZON LOCKER
Order Number:	168323034 10
Model:	ZL-ODIN-V1
Test Mode:	BT+NB-IOT +Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Richard Lin
Review By:	Gary Chen
Remark:	10m Chamber

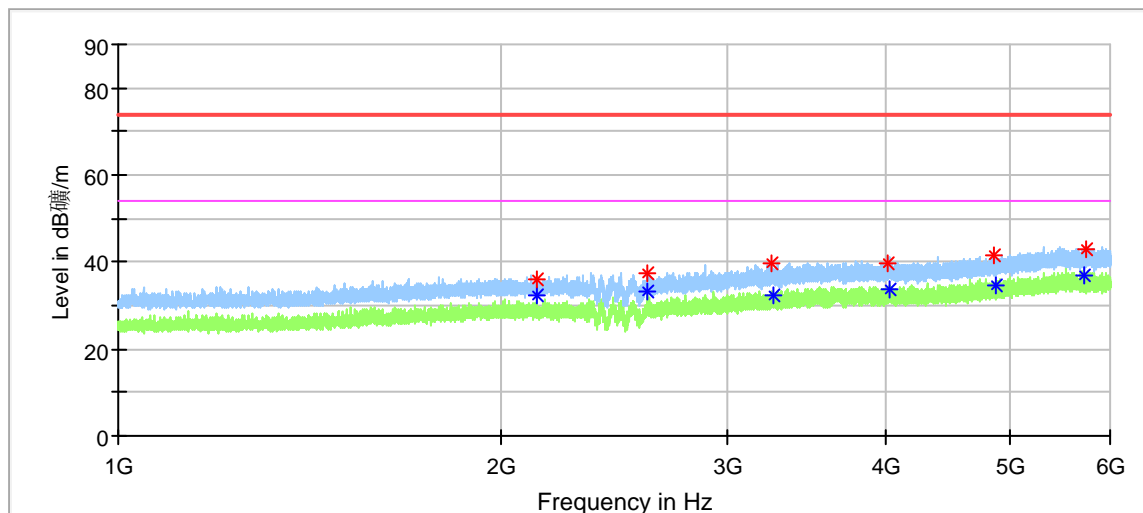


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2131.041667	---	54.00	21.52	100.0	H	270.0	-3.1
2133.333333	36.17	74.00	37.83	100.0	H	0.0	-3.1
2599.166667	---	54.00	20.65	100.0	H	330.0	-2.1
2601.041667	37.29	74.00	36.71	100.0	H	49.0	-2.0
3254.166667	39.48	74.00	34.52	100.0	H	258.0	1.5
3268.750000	---	54.00	21.65	100.0	H	283.0	1.5
4014.375000	39.78	74.00	34.22	100.0	H	0.0	4.0
4029.583333	---	54.00	20.28	100.0	H	330.0	4.0
4863.333333	41.65	74.00	32.35	100.0	H	294.0	7.0
4878.750000	---	54.00	19.56	100.0	H	101.0	7.1
5726.875000	---	54.00	16.92	100.0	H	196.0	10.0
5741.250000	42.70	74.00	31.30	100.0	H	312.0	10.0

EUT Information

EUT Name:	AMAZON LOCKER
Order Number:	168323034 10
Model:	ZL-ODIN-V1
Test Mode:	BT+NB-IOT +Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Richard Lin
Review By:	Gary Chen
Remark:	10m Chamber

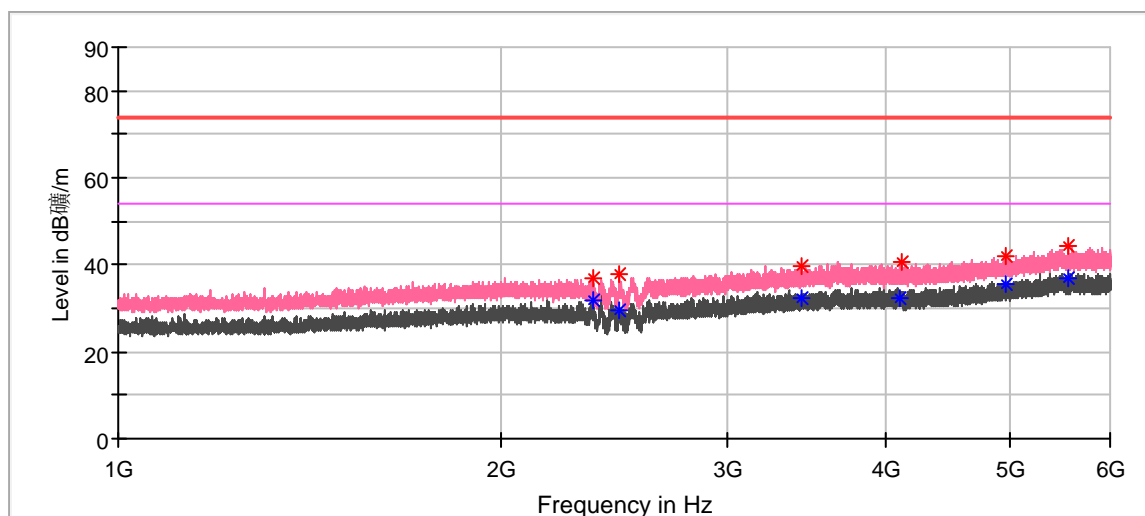


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2358.750000	---	54.00	22.36	100.0	V	288.0	-2.8
2358.750000	37.04	74.00	36.96	100.0	V	288.0	-2.8
2475.000000	---	54.00	24.43	100.0	V	20.0	-2.6
2475.625000	37.73	74.00	36.27	100.0	V	119.0	-2.6
3430.208333	39.92	74.00	34.08	100.0	V	288.0	2.3
3431.666667	---	54.00	21.61	100.0	V	282.0	2.4
4110.208333	---	54.00	21.77	100.0	V	68.0	4.1
4115.000000	40.56	74.00	33.44	100.0	V	136.0	4.1
4970.625000	41.80	74.00	32.20	100.0	V	235.0	7.5
4972.291667	---	54.00	18.66	100.0	V	85.0	7.5
5556.041667	44.44	74.00	29.56	100.0	V	102.0	9.9
5559.166667	---	54.00	16.98	100.0	V	79.0	9.9

BT+GPRS+Normal Operating+LED on

EUT Information

EUT Name:	AMAZON LOCKER
Order Number:	168323034 10
Model:	ZL-ODIN-V1
Test Mode:	BT+GPRS link+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Richard Lin
Review By:	Gary Chen
Remark:	10m Chamber

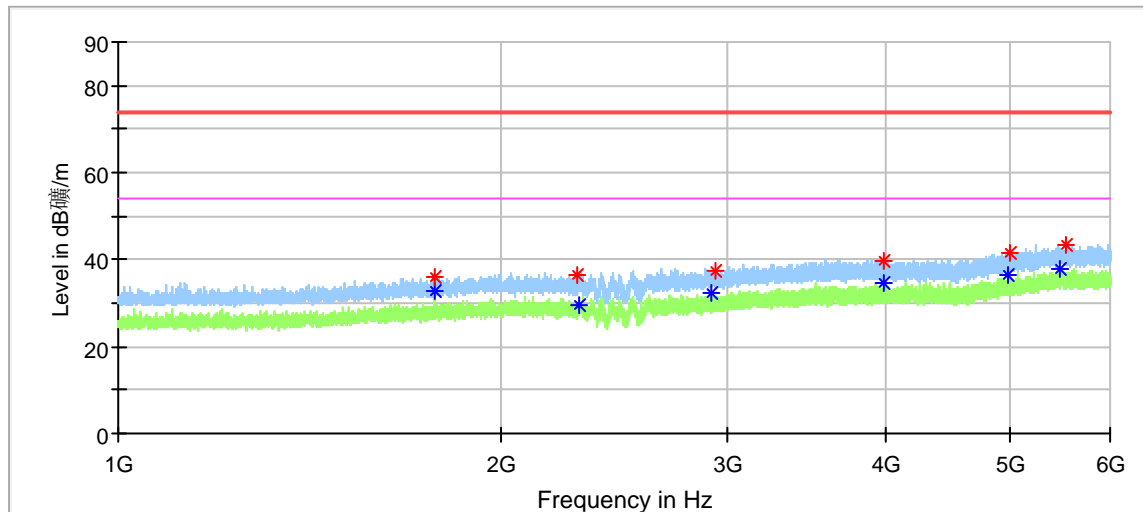


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1769.791667	36.07	74.00	37.93	100.0	H	285.0	-4.1
1769.791667	---	54.00	21.22	100.0	H	285.0	-4.1
2294.791667	36.30	74.00	37.70	100.0	H	74.0	-2.9
2296.666667	---	54.00	24.60	100.0	H	62.0	-2.9
2923.333333	---	54.00	21.61	100.0	H	280.0	-0.3
2938.958333	37.41	74.00	36.59	100.0	H	96.0	-0.2
3980.625000	---	54.00	19.17	100.0	H	285.0	3.9
3991.458333	39.78	74.00	34.22	100.0	H	250.0	3.9
4995.208333	---	54.00	17.69	100.0	H	321.0	7.7
5004.375000	41.76	74.00	32.24	100.0	H	62.0	7.7
5490.625000	---	54.00	16.31	100.0	H	164.0	9.9
5542.083333	43.52	74.00	30.48	100.0	H	34.0	9.9

EUT Information

EUT Name: AMAZON LOCKER
 Order Number: 168323034 10
 Model: ZL-ODIN-V1
 Test Mode: BT+GPRS link+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Richard Lin
 Review By: Gary Chen
 Remark: 10m Chamber

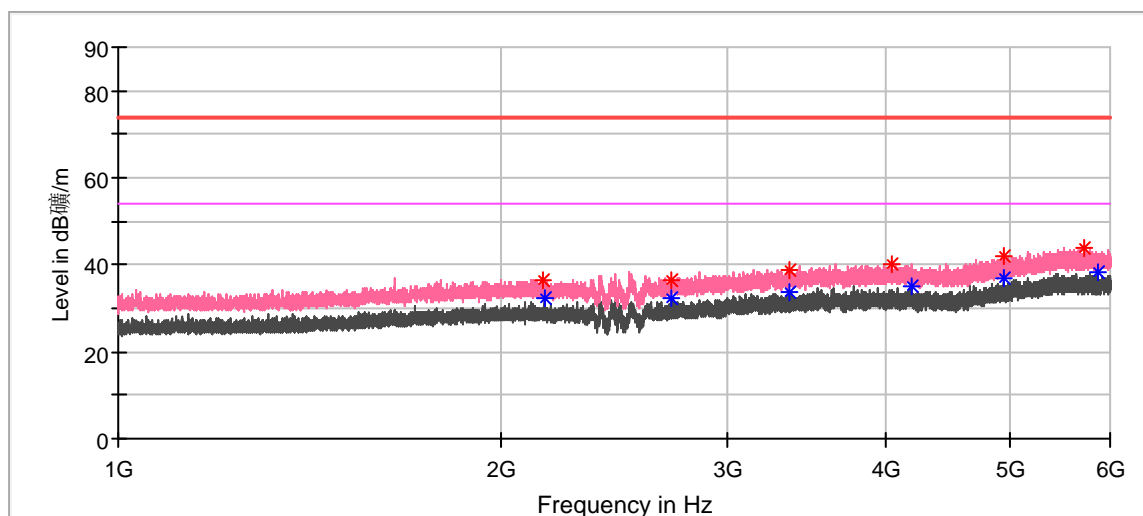


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2151.041667	36.56	74.00	37.44	100.0	V	2.0	-3.1
2158.125000	---	54.00	21.80	100.0	V	117.0	-3.1
2716.041667	---	54.00	21.59	100.0	V	146.0	-1.4
2716.041667	36.33	74.00	37.67	100.0	V	146.0	-1.4
3358.333333	---	54.00	20.09	100.0	V	2.0	2.0
3364.375000	38.71	74.00	35.29	100.0	V	248.0	2.0
4047.916667	40.19	74.00	33.81	100.0	V	180.0	4.0
4188.541667	---	54.00	18.94	100.0	V	169.0	4.3
4944.166667	---	54.00	16.95	100.0	V	322.0	7.4
4944.166667	41.99	74.00	32.01	100.0	V	322.0	7.4
5725.833333	43.86	74.00	30.14	100.0	V	58.0	10.0
5881.250000	---	54.00	15.75	100.0	V	209.0	10.1

BT+EMTC+Normal Operating+LED on

EUT Information

EUT Name: AMAZON LOCKER
 Order Number: 168323034 10
 Model: ZL-ODIN-V1
 Test Mode: BT+EMTC+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Richard Lin
 Review By: Gary Chen
 Remark: 10m Chamber

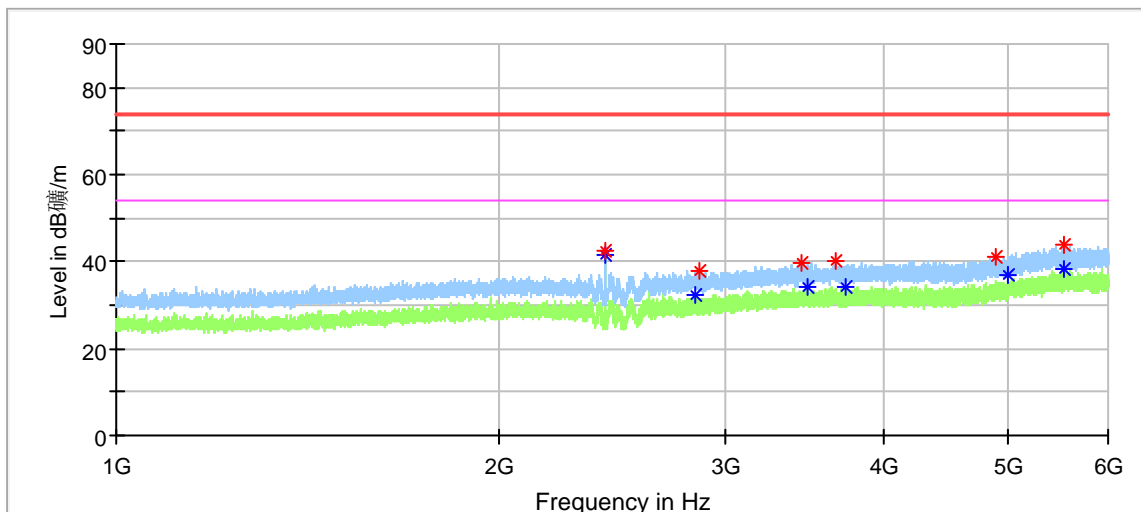


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2418.333333	---	54.00	12.35	100.0	H	130.0	-2.7
2418.333333	42.59	74.00	31.41	100.0	H	130.0	-2.7
2842.916667	---	54.00	21.64	100.0	H	220.0	-0.7
2862.708333	37.63	74.00	36.37	100.0	H	88.0	-0.6
3448.333333	39.89	74.00	34.11	100.0	H	203.0	2.4
3484.583333	---	54.00	20.04	100.0	H	203.0	2.6
3663.541667	40.00	74.00	34.00	100.0	H	340.0	3.1
3738.958333	---	54.00	19.78	100.0	H	0.0	3.3
4903.958333	41.23	74.00	32.77	100.0	H	24.0	7.2
5010.208333	---	54.00	17.27	100.0	H	357.0	7.7
5532.083333	---	54.00	15.54	100.0	H	340.0	9.9
5532.708333	43.68	74.00	30.32	100.0	H	141.0	9.9

EUT Information

EUT Name:	AMAZON LOCKER
Order Number:	168323034 10
Model:	ZL-ODIN-V1
Test Mode:	BT+EMTC+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Richard Lin
Review By:	Gary Chen
Remark:	10m Chamber

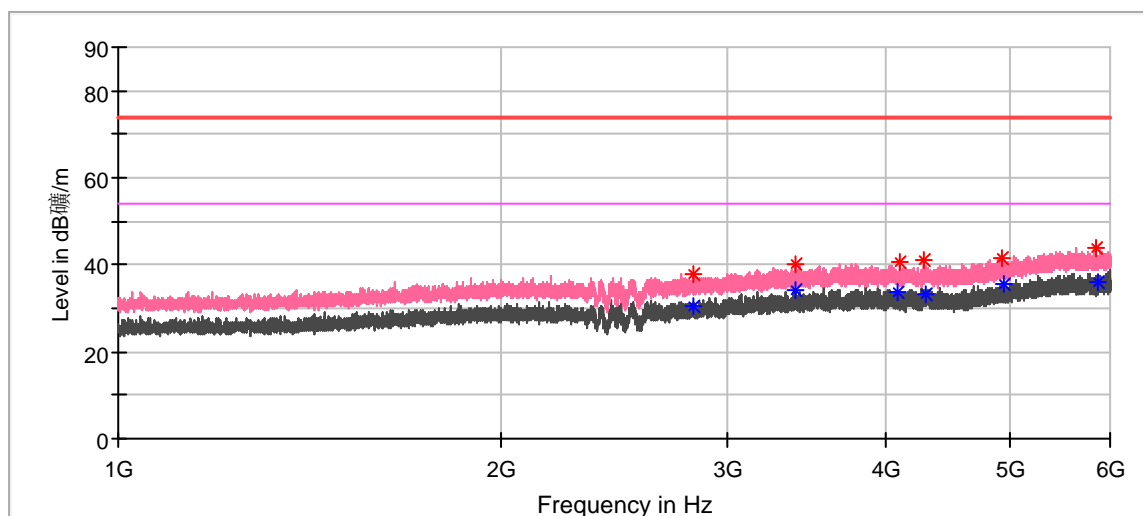

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2821.875000	---	54.00	23.55	100.0	V	248.0	-0.9
2821.875000	37.88	74.00	36.12	100.0	V	248.0	-0.9
3400.000000	40.03	74.00	33.97	100.0	V	198.0	2.1
3400.000000	---	54.00	19.80	100.0	V	198.0	2.1
4093.958333	---	54.00	20.32	100.0	V	69.0	4.1
4103.541667	40.72	74.00	33.28	100.0	V	266.0	4.1
4280.416667	40.86	74.00	33.14	100.0	V	102.0	4.5
4301.666667	---	54.00	20.67	100.0	V	36.0	4.5
4943.541667	41.37	74.00	32.63	100.0	V	129.0	7.4
4952.708333	---	54.00	18.60	100.0	V	295.0	7.4
5841.875000	43.88	74.00	30.12	100.0	V	278.0	10.1
5868.333333	---	54.00	17.97	100.0	V	24.0	10.1

Appendix B.3: Test Plots of Conducted Emissions on AC Mains

BT+NB+Normal Operating+LED on

EUT Information

EUT Name:	Amazon Locker
Order No.:	168323034 10
Model:	ZL-ODIN-V1
Test Mode:	BT+NB+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Richard Lin
Review By:	Gary Chen
Remark:	SR1

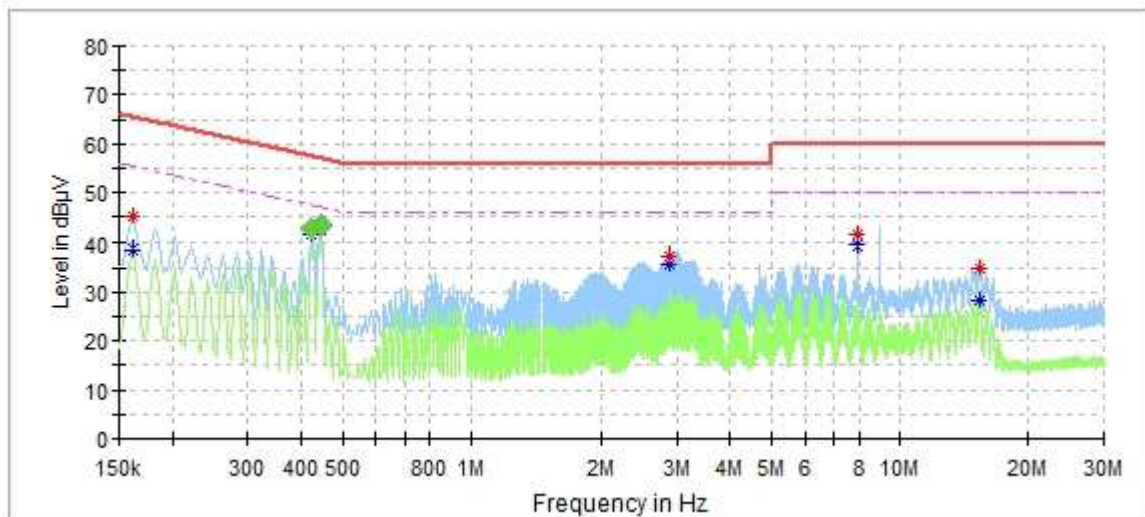

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.162000	---	38.48	55.36	16.88	L1	9.6
0.162000	45.11	---	65.36	20.25	L1	9.6
0.424500	42.79	---	57.33	14.54	L1	9.7
0.424500	---	41.40	47.33	5.93	L1	9.7
0.444500	43.47	---	56.95	13.48	L1	9.7
0.444500	---	42.41	46.95	4.53	L1	9.7
2.888000	---	35.61	46.00	10.39	L1	9.8
2.892000	37.26	---	56.00	18.74	L1	9.8
7.972000	---	39.44	50.00	10.56	L1	10.0
7.972000	41.59	---	60.00	18.41	L1	10.0
15.384000	34.82	---	60.00	25.18	L1	10.3
15.392000	---	28.51	50.00	21.49	L1	10.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.424500	---	42.47	47.36	4.88	1000.0	9.000	L1	9.7
0.424500	42.76	---	57.36	14.60	1000.0	9.000	L1	9.7
0.444500	---	43.16	46.98	3.81	1000.0	9.000	L1	9.7
0.444500	43.32	---	56.98	13.65	1000.0	9.000	L1	9.7

EUT Information

EUT Name: Amazon Locker
 Order No.: 168323034 10
 Model: ZL-ODIN-V1
 Test Mode: BT+NB+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Richard Lin
 Review By: Gary Chen
 Remark: SR1

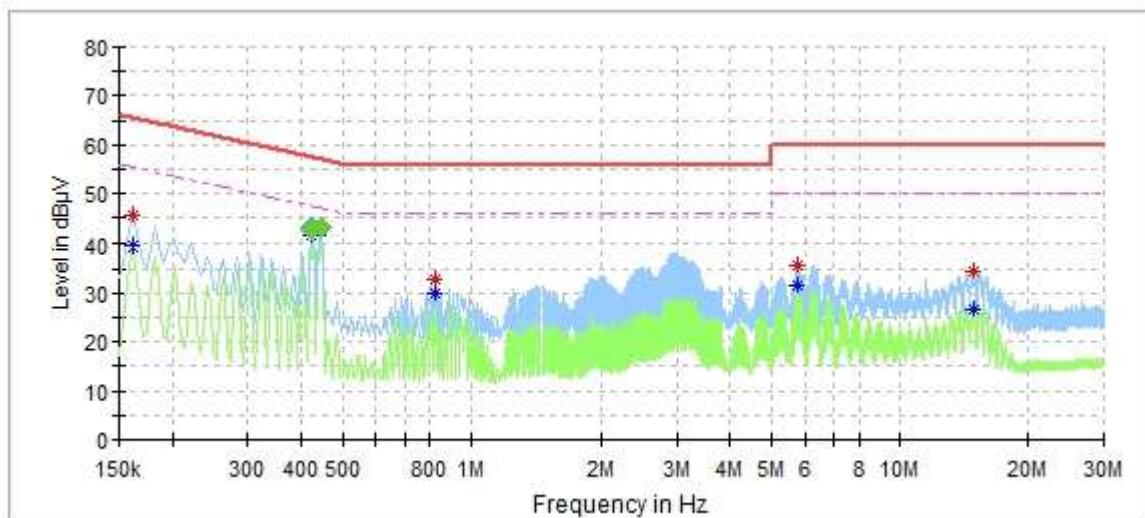

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.162000	---	39.28	55.36	16.08	N	9.6
0.162000	45.52	---	65.36	19.84	N	9.6
0.424500	43.01	---	57.33	14.32	N	9.7
0.424500	---	41.28	47.33	6.05	N	9.7
0.444500	43.28	---	56.95	13.66	N	9.7
0.444500	---	42.19	46.95	4.76	N	9.7
0.828000	---	29.82	46.00	16.18	N	9.7
0.828000	32.67	---	56.00	23.33	N	9.7
5.756000	---	31.77	50.00	18.23	N	10.0
5.756000	35.88	---	60.00	24.12	N	10.0
14.840000	---	26.68	50.00	23.32	N	10.3
14.852000	34.34	---	60.00	25.66	N	10.3


Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.424500	---	42.60	47.36	4.76	1000.0	9.000	N	9.7
0.424500	42.91	---	57.36	14.45	1000.0	9.000	N	9.7
0.444500	---	43.06	46.98	3.92	1000.0	9.000	N	9.7
0.444500	43.23	---	56.98	13.75	1000.0	9.000	N	9.7

BT+GPRS+Normal Operating+LED on

EUT Information

EUT Name:	Amazon Locker
Order No.:	168323034 10
Model:	ZL-ODIN-V1
Test Mode:	BT+GPRS+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Richard Lin
Review By:	Gary Chen
Remark:	SR1

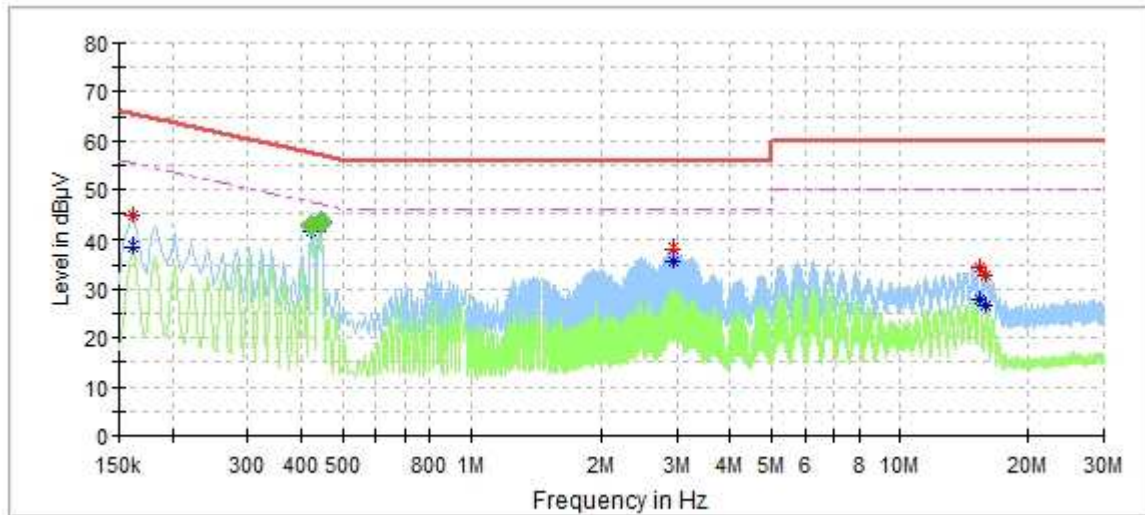

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.162000	---	38.45	55.36	16.91	L1	9.6
0.162000	44.84	---	65.36	20.52	L1	9.6
0.424500	42.73	---	57.41	14.68	L1	9.7
0.424500	---	41.30	47.41	6.11	L1	9.7
0.444500	43.71	---	57.02	13.32	L1	9.7
0.444500	---	42.29	47.02	4.74	L1	9.7
2.948000	---	35.70	46.00	10.30	L1	9.8
2.948000	38.16	---	56.00	17.84	L1	9.8
15.348000	---	28.10	50.00	21.90	L1	10.3
15.352000	34.29	---	60.00	25.71	L1	10.3
15.916000	32.91	---	60.00	27.09	L1	10.3
15.936000	---	26.59	50.00	23.41	L1	10.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.424500	---	42.47	47.36	4.89	1000.0	9.000	L1	9.7
0.424500	42.75	---	57.36	14.60	1000.0	9.000	L1	9.7
0.444500	---	43.23	46.98	3.75	1000.0	9.000	L1	9.7
0.444500	43.36	---	56.98	13.62	1000.0	9.000	L1	9.7

EUT Information

EUT Name: Amazon Locker
 Order No.: 168323034 10
 Model: ZL-ODIN-V1
 Test Mode: BT+GPRS+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Richard Lin
 Review By: Gary Chen
 Remark: SR1

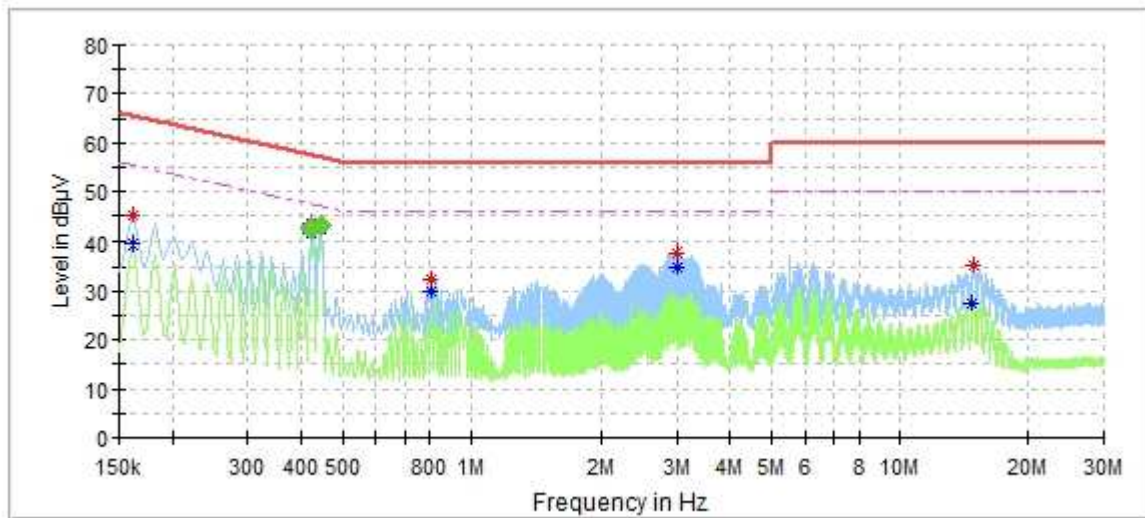

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.162000	---	39.22	55.36	16.14	N	9.6
0.162000	45.25	---	65.36	20.11	N	9.6
0.424500	---	41.57	47.33	5.76	N	9.7
0.424500	43.49	---	57.33	13.84	N	9.7
0.444500	---	42.38	46.95	4.57	N	9.7
0.444500	43.44	---	56.95	13.51	N	9.7
0.808000	---	29.88	46.00	16.12	N	9.7
0.808000	32.31	---	56.00	23.69	N	9.7
3.008000	---	34.96	46.00	11.04	N	9.8
3.008000	37.85	---	56.00	18.15	N	9.8
14.784000	---	27.63	50.00	22.37	N	10.3
14.948000	35.24	---	60.00	24.76	N	10.3


Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.424500	---	42.31	47.36	5.05	1000.0	9.000	N	9.7
0.424500	42.81	---	57.36	14.55	1000.0	9.000	N	9.7
0.444500	---	42.98	46.98	4.00	1000.0	9.000	N	9.7
0.444500	43.22	---	56.98	13.76	1000.0	9.000	N	9.7

BT+EMTC+Normal Operating+LED on

EUT Information

EUT Name: Amazon Locker
 Order No.: 168323034 10
 Model: ZL-ODIN-V1
 Test Mode: BT+EMTC+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Richard Lin
 Review By: Gary Chen
 Remark: SR1

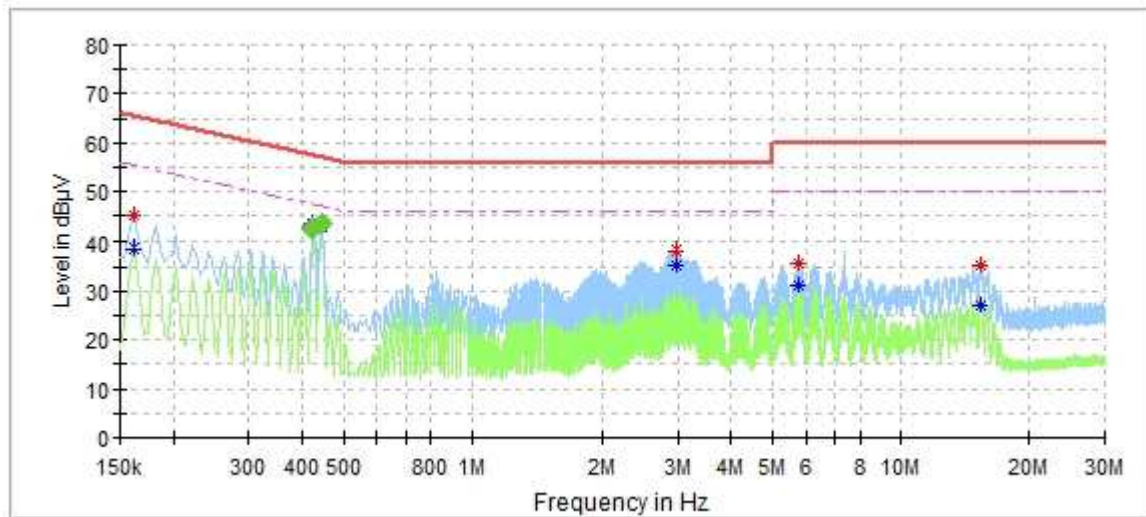

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.162000	45.27	---	65.36	20.09	L1	9.6
0.162000	---	38.55	55.36	16.81	L1	9.6
0.424500	43.38	---	57.33	13.95	L1	9.7
0.424500	---	41.86	47.33	5.47	L1	9.7
0.444500	43.78	---	56.95	13.17	L1	9.7
0.444500	---	42.77	46.95	4.18	L1	9.7
2.972000	---	35.28	46.00	10.72	L1	9.8
2.972000	38.10	---	56.00	17.90	L1	9.8
5.776000	---	31.01	50.00	18.99	L1	10.0
5.776000	35.57	---	60.00	24.43	L1	10.0
15.332000	35.28	---	60.00	24.72	L1	10.3
15.400000	---	27.12	50.00	22.88	L1	10.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.424500	---	42.25	47.36	5.11	1000.0	9.000	L1	9.7
0.424500	42.55	---	57.36	14.81	1000.0	9.000	L1	9.7
0.444500	---	43.36	46.98	3.62	1000.0	9.000	L1	9.7
0.444500	43.46	---	56.98	13.51	1000.0	9.000	L1	9.7

EUT Information

EUT Name: Amazon Locker
 Order No.: 168323034 10
 Model: ZL-ODIN-V1
 Test Mode: BT+EMTC+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Richard Lin
 Review By: Gary Chen
 Remark: SR1

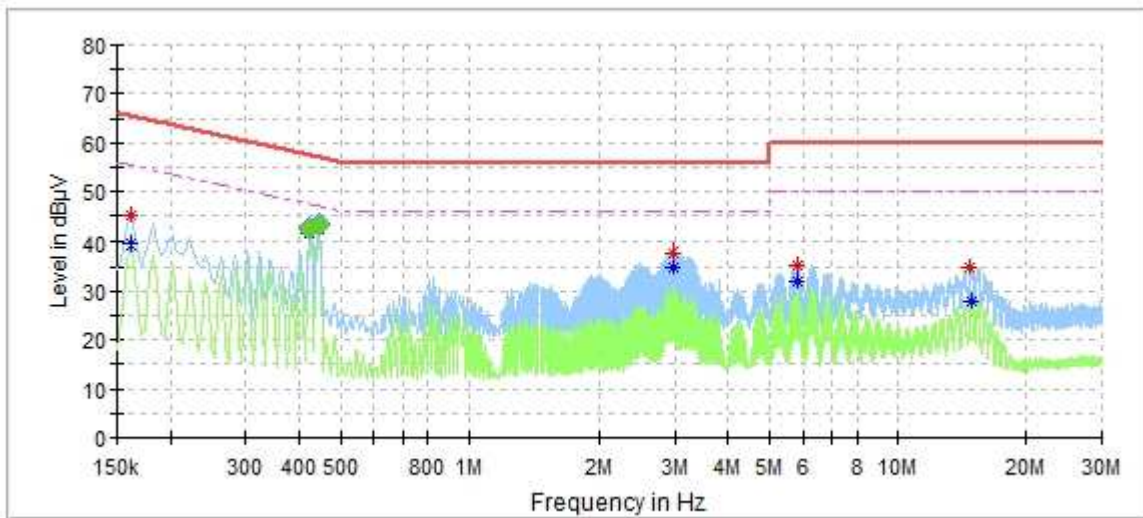

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.162000	---	39.21	55.36	16.15	N	9.6
0.162000	45.20	---	65.36	20.16	N	9.6
0.424500	43.17	---	57.33	14.16	N	9.7
0.424500	---	41.58	47.33	5.75	N	9.7
0.444500	43.52	---	56.95	13.43	N	9.7
0.444500	---	42.42	46.95	4.53	N	9.7
2.968000	---	35.04	46.00	10.96	N	9.8
2.968000	37.92	---	56.00	18.08	N	9.8
5.816000	35.24	---	60.00	24.76	N	10.0
5.820000	---	31.85	50.00	18.15	N	10.0
14.772000	34.77	---	60.00	25.23	N	10.3
14.932000	---	28.00	50.00	22.00	N	10.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.424500	---	42.40	47.36	4.96	1000.0	9.000	N	9.7
0.424500	42.76	---	57.36	14.60	1000.0	9.000	N	9.7
0.444500	---	43.24	46.98	3.74	1000.0	9.000	N	9.7
0.444500	43.32	---	56.98	13.66	1000.0	9.000	N	9.7