

Appendix D: Test results of EMC (09 version)


APPENDIX D: TEST RESULTS OF EMC (09 VERSION)	1
APPENDIX D.1: TEST PLOTS OF RADIATED EMISSION, BELOW 1GHZ	2
<i>BT+GPRS+Normal Operating+LED on</i>	2
<i>BT+EMTC+Normal Operating+LED on</i>	4
<i>BT+NB+Normal Operating+LED on</i>	6
APPENDIX D.2: TEST PLOTS OF RADIATED EMISSION, ABOVE 1GHZ	8
<i>BT+GPRS+Normal Operating+LED on</i>	8
<i>BT+EMTC+Normal Operating+LED on</i>	10
<i>BT+NB+Normal Operating+LED on</i>	12
APPENDIX D.3: TEST PLOTS OF CONDUCTED EMISSIONS ON AC MAINS	14
<i>BT+GPRS+Normal Operating+LED on</i>	14
<i>BT+EMTC+Normal Operating+LED on</i>	16
<i>BT+NB+Normal Operating+LED on</i>	18

Appendix D.1: Test Plots of Radiated Emission, Below 1GHz

BT+GPRS+Normal Operating+LED on

EUT Information

EUT Name:	Amazon Locker
Order Number:	168324514
Model:	ZL-ODIN-V1
Test Mode:	BT+GPRS link+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	10m Chamber (FCC 15B)

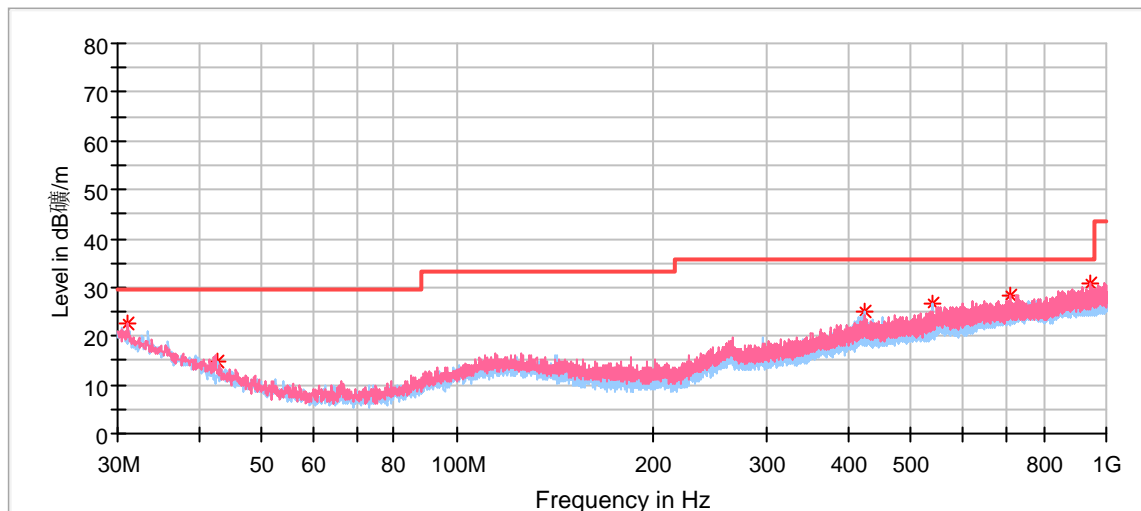


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.131667	22.37	30.00	7.63	300.0	V	322.0	-5.1
42.879444	14.90	30.00	15.10	100.0	H	130.0	-16.9
425.544444	24.90	36.00	11.10	300.0	H	0.0	-10.0
540.651111	26.56	36.00	9.44	100.0	H	15.0	-8.0
710.724444	28.28	36.00	7.72	200.0	V	212.0	-0.4
945.680000	30.58	36.00	5.42	200.0	V	58.0	2.7

EUT Information

EUT Name: Amazon Locker
 Order Number: 168324514
 Model: ZL-ODIN-V1
 Test Mode: BT+GPRS link+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: 10m Chamber (ICES-003)

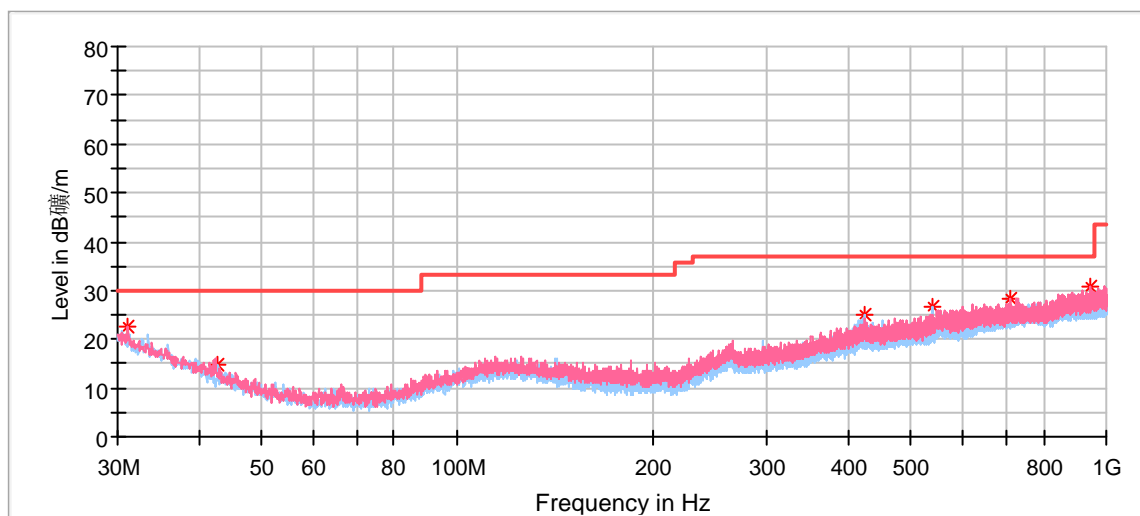


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.131667	22.37	30.00	7.63	300.0	V	322.0	-5.1
42.879444	14.90	30.00	15.10	100.0	H	130.0	-16.9
425.544444	24.90	37.00	12.10	300.0	H	0.0	-10.0
540.651111	26.56	37.00	10.44	100.0	H	15.0	-8.0
710.724444	28.28	37.00	8.72	200.0	V	212.0	-0.4
945.680000	30.58	37.00	6.42	200.0	V	58.0	2.7

BT+EMTC+Normal Operating+LED on

EUT Information

EUT Name:	Amazon Locker
Order Number:	168324514
Model:	ZL-ODIN-V1
Test Mode:	BT+EMTC Link+LED on+Normal Operating
Test Voltage:	AC 120V/60Hz
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	10m Chamber (FCC 15B)

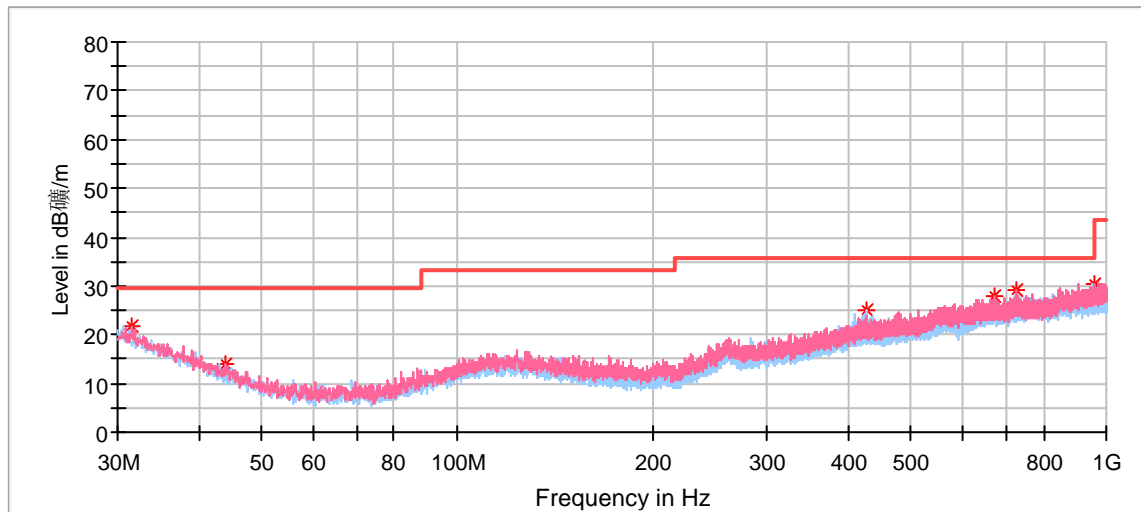


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.562778	21.77	30.00	8.23	200.0	V	14.0	-5.3
44.065000	14.03	30.00	15.97	200.0	V	2.0	-12.2
426.891667	25.21	36.00	10.79	300.0	H	133.0	-10.0
673.163889	27.71	36.00	8.29	200.0	V	0.0	-0.3
728.615556	29.23	36.00	6.77	300.0	V	0.0	-0.2
959.044444	30.54	36.00	5.46	100.0	V	332.0	2.9

EUT Information

EUT Name: Amazon Locker
 Order Number: 168324514
 Model: ZL-ODIN-V1
 Test Mode: BT+EMTC Link+LED on+Normal Operating
 Test Voltage: AC 120V/60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: 10m Chamber (ICES-003)

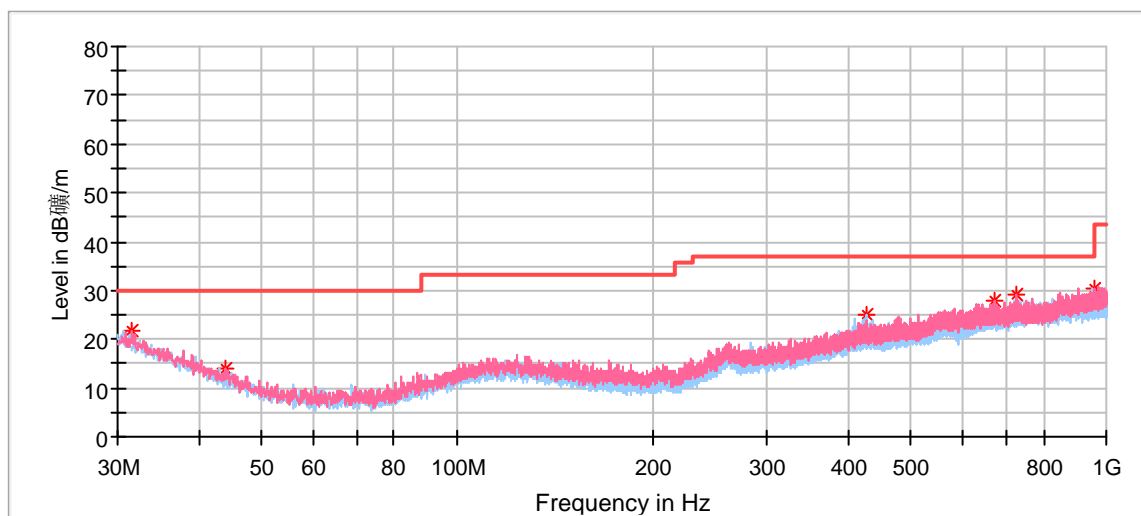


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.562778	21.77	30.00	8.23	200.0	V	14.0	-5.3
44.065000	14.03	30.00	15.97	200.0	V	2.0	-12.2
426.891667	25.21	37.00	11.79	300.0	H	133.0	-10.0
673.163889	27.71	37.00	9.29	200.0	V	0.0	-0.3
728.615556	29.23	37.00	7.77	300.0	V	0.0	-0.2
959.044444	30.54	37.00	6.46	100.0	V	332.0	2.9

BT+NB+Normal Operating+LED on

EUT Information

EUT Name:	Amazon Locker
Order Number:	168324514
Model:	ZL-ODIN-V1
Test Mode:	BT+NB IOT+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	10m Chamber (FCC 15B)

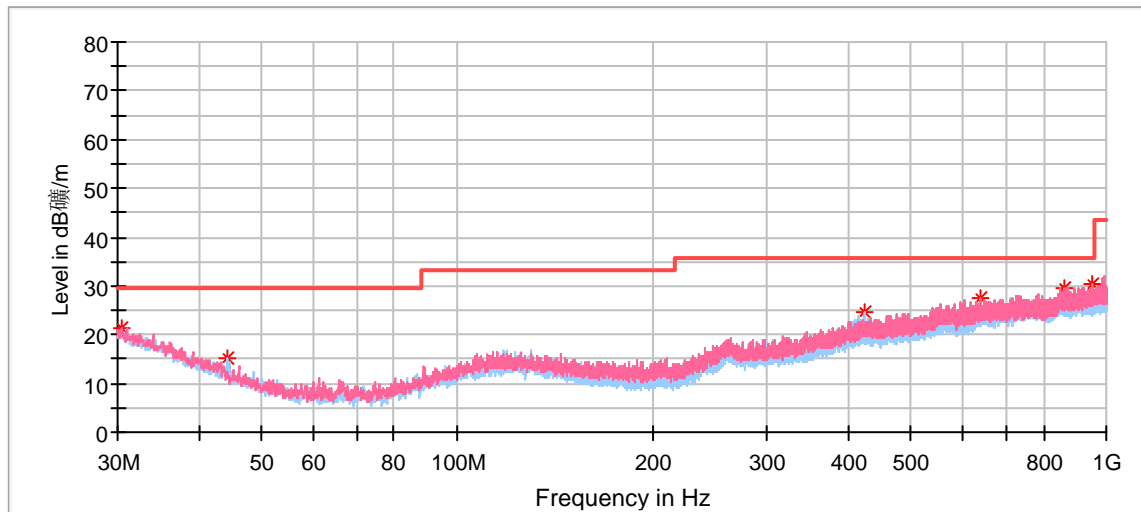


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.431111	21.41	30.00	8.59	100.0	V	226.0	-4.7
44.226667	15.04	30.00	14.96	300.0	H	71.0	-17.6
425.436667	24.50	36.00	11.50	300.0	H	358.0	-10.0
641.261667	27.59	36.00	8.41	100.0	V	89.0	-0.4
859.511667	29.60	36.00	6.40	200.0	V	316.0	1.6
953.008889	30.31	36.00	5.69	100.0	V	69.0	2.8

EUT Information

EUT Name: Amazon Locker
 Order Number: 168324514
 Model: ZL-ODIN-V1
 Test Mode: BT+NB IOT+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: 10m Chamber (ICES-003)

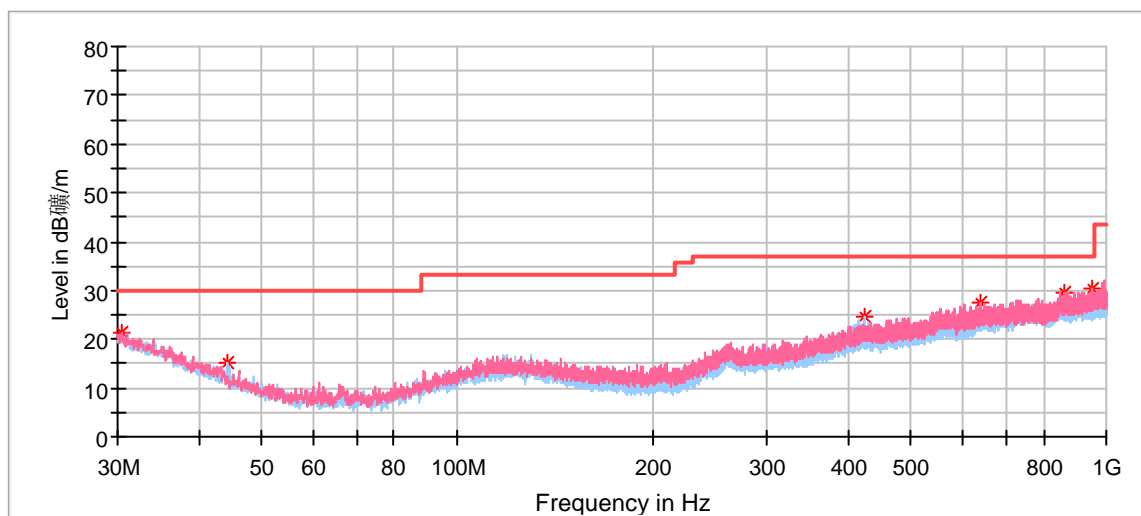

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.431111	21.41	30.00	8.59	100.0	V	226.0	-4.7
44.226667	15.04	30.00	14.96	300.0	H	71.0	-17.6
425.436667	24.50	37.00	12.50	300.0	H	358.0	-10.0
641.261667	27.59	37.00	9.41	100.0	V	89.0	-0.4
859.511667	29.60	37.00	7.40	200.0	V	316.0	1.6
953.008889	30.31	37.00	6.69	100.0	V	69.0	2.8


Appendix D.2: Test Plots of Radiated Emission, Above 1GHz

Note: Testing was carried out within frequency range 30MHz to the 5th harmonics. The measurement results above 6GHz were greater than 20dB below the limit, so only record the test result within the 30MHz to 6GHz.

BT+GPRS+Normal Operating+LED on

EUT Information

EUT Name:	Amazon Locker
Order Number:	168324514
Model:	ZL-ODIN-V1
Test Mode:	BT+GPRS link+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	10m Chamber

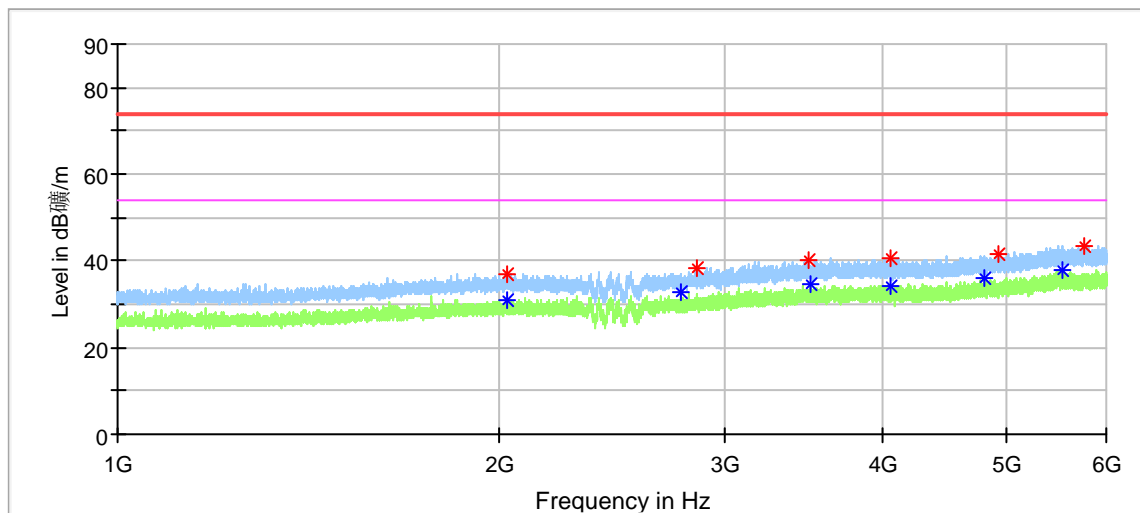


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2022.916667	36.88	74.00	37.12	200.0	H	264.0	-3.2
2022.916667	---	54.00	22.96	200.0	H	264.0	-3.2
2772.083333	---	54.00	21.37	100.0	H	291.0	-1.1
2857.708333	38.47	74.00	35.53	200.0	H	304.0	-0.7
3501.458333	40.34	74.00	33.66	200.0	H	157.0	2.6
3509.583333	---	54.00	19.27	100.0	H	78.0	2.6
4058.958333	---	54.00	19.93	200.0	H	96.0	4.1
4060.000000	40.55	74.00	33.45	200.0	H	162.0	4.1
4805.625000	---	54.00	17.85	200.0	H	259.0	6.7
4938.750000	41.54	74.00	32.46	200.0	H	191.0	7.4
5547.916667	---	54.00	16.01	100.0	H	38.0	9.9
5761.875000	43.50	74.00	30.50	200.0	H	213.0	10.1

EUT Information

EUT Name: Amazon Locker
 Order Number: 168324514
 Model: ZL-ODIN-V1
 Test Mode: BT+GPRS link+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: 10m Chamber

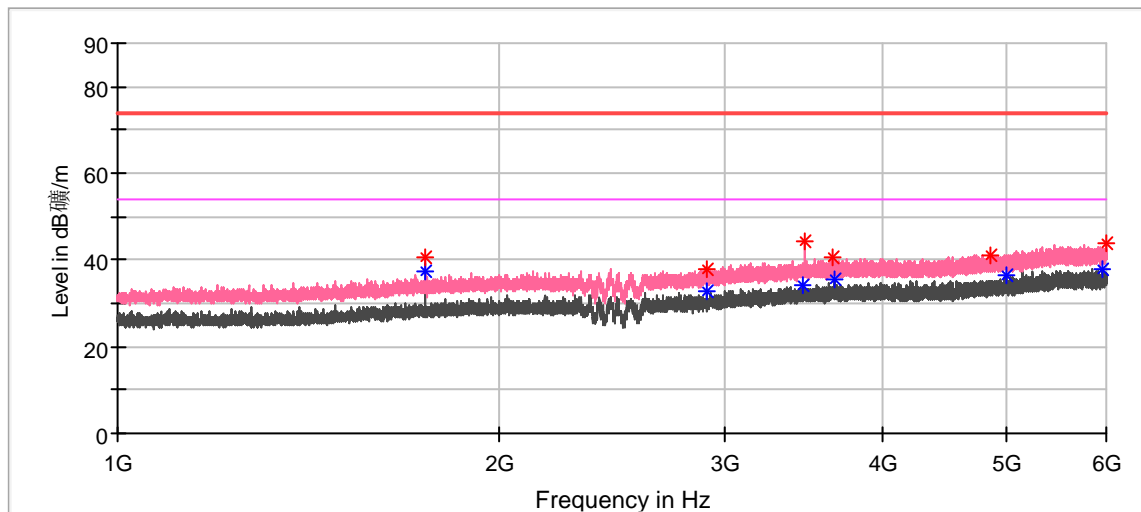


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1747.500000	---	54.00	16.39	200.0	V	172.0	-4.2
1747.500000	40.44	74.00	33.56	200.0	V	172.0	-4.2
2907.291667	---	54.00	21.31	100.0	V	303.0	-0.4
2907.291667	37.66	74.00	36.34	100.0	V	303.0	-0.4
3461.041667	---	54.00	19.97	100.0	V	144.0	2.5
3475.000000	44.52	74.00	29.48	100.0	V	155.0	2.5
3653.750000	40.65	74.00	33.35	100.0	V	285.0	3.1
3666.458333	---	54.00	18.26	200.0	V	222.0	3.1
4871.666667	41.22	74.00	32.78	200.0	V	134.0	7.0
5009.583333	---	54.00	17.53	100.0	V	350.0	7.7
5962.291667	---	54.00	16.35	100.0	V	38.0	10.2
5996.666667	43.78	74.00	30.22	100.0	V	44.0	10.2

BT+EMTC+Normal Operating+LED on

EUT Information

EUT Name:	Amazon Locker
Order Number:	168324514
Model:	ZL-ODIN-V1
Test Mode:	BT+EMTC Link+LED on+Normal Operating
Test Voltage:	AC 120V/60Hz
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	10m Chamber

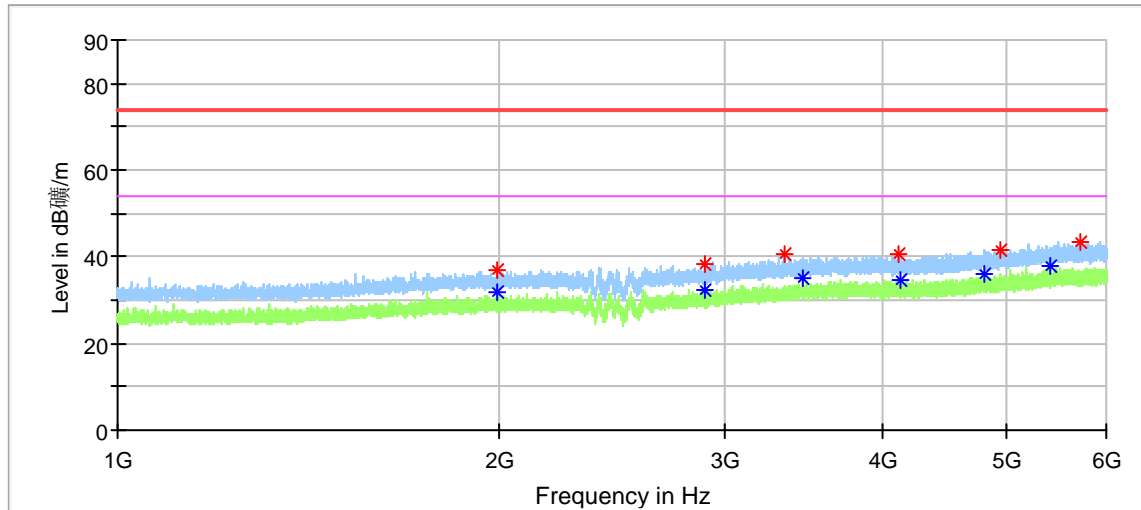


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1989.791667	37.06	74.00	36.94	200.0	H	115.0	-3.2
1990.625000	---	54.00	22.13	200.0	H	93.0	-3.2
2894.583333	38.20	74.00	35.80	200.0	H	122.0	-0.4
2902.916667	---	54.00	21.66	200.0	H	145.0	-0.4
3347.291667	40.48	74.00	33.52	100.0	H	165.0	1.9
3464.166667	---	54.00	18.82	200.0	H	328.0	2.5
4113.333333	40.51	74.00	33.49	100.0	H	1.0	4.1
4135.416667	---	54.00	19.26	100.0	H	83.0	4.2
4806.458333	---	54.00	17.89	100.0	H	306.0	6.7
4948.750000	41.60	74.00	32.40	100.0	H	154.0	7.4
5428.333333	---	54.00	15.95	200.0	H	234.0	9.5
5733.958333	43.46	74.00	30.54	200.0	H	139.0	10.0

EUT Information

EUT Name: Amazon Locker
 Order Number: 168324514
 Model: ZL-ODIN-V1
 Test Mode: BT+EMTC Link+LED on+Normal Operating
 Test Voltage: AC 120V/60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: 10m Chamber

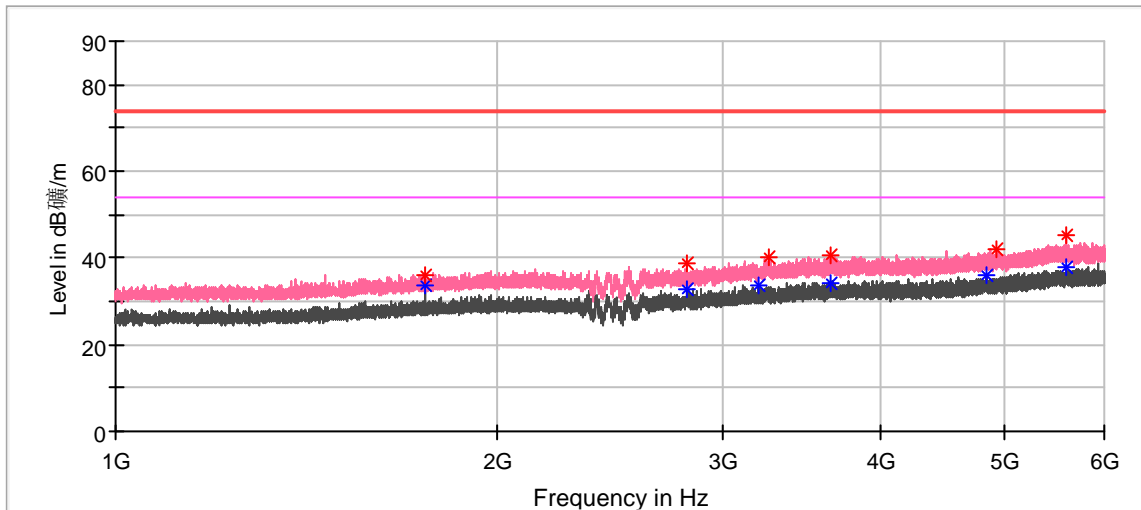


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1753.333333	---	54.00	20.31	200.0	V	0.0	-4.2
1753.750000	36.12	74.00	37.88	200.0	V	0.0	-4.1
2817.291667	---	54.00	21.19	200.0	V	101.0	-0.9
2817.291667	38.69	74.00	35.31	200.0	V	101.0	-0.9
3205.208333	---	54.00	20.24	100.0	V	336.0	1.2
3269.166667	40.03	74.00	33.97	100.0	V	0.0	1.5
3654.583333	---	54.00	19.71	200.0	V	135.0	3.1
3658.958333	40.73	74.00	33.27	200.0	V	54.0	3.1
4846.041667	---	54.00	18.19	100.0	V	343.0	6.9
4926.250000	42.04	74.00	31.96	100.0	V	59.0	7.3
5595.000000	45.11	74.00	28.89	200.0	V	156.0	10.0
5598.125000	---	54.00	16.35	100.0	V	80.0	10.0

EUT Information

EUT Name: Amazon Locker
 Order Number: 168324514
 Model: ZL-ODIN-V1
 Test Mode: BT+NB IOT+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: 10m Chamber

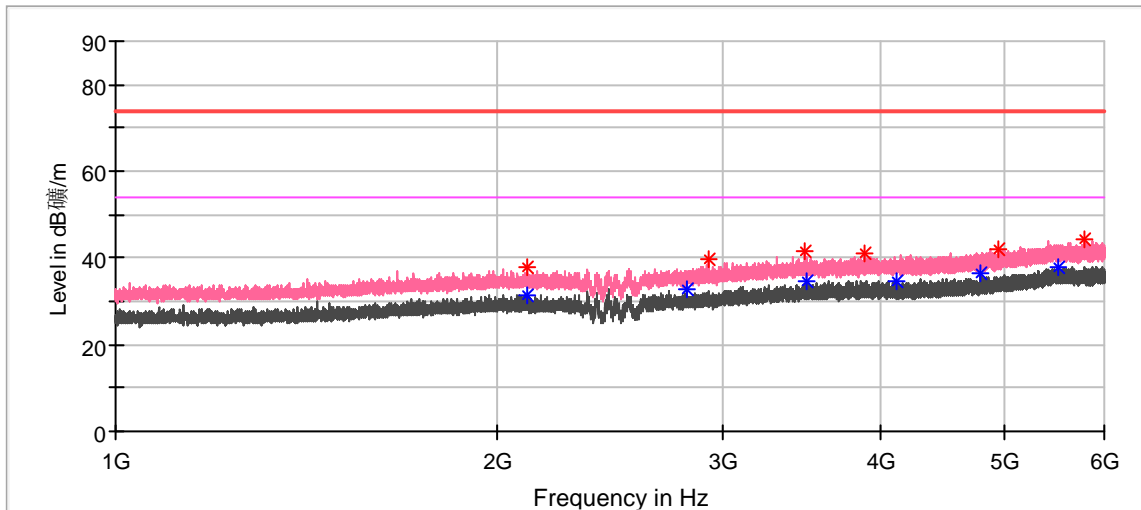

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2108.333333	---	54.00	22.59	100.0	V	259.0	-3.1
2108.333333	37.71	74.00	36.29	100.0	V	259.0	-3.1
2814.583333	---	54.00	21.39	100.0	V	106.0	-0.9
2928.541667	39.54	74.00	34.46	100.0	V	209.0	-0.3
3491.458333	41.36	74.00	32.64	200.0	V	66.0	2.6
3494.166667	---	54.00	19.18	100.0	V	199.0	2.6
3892.083333	41.00	74.00	33.00	100.0	V	323.0	3.7
4123.750000	---	54.00	19.27	200.0	V	200.0	4.1
4800.208333	---	54.00	17.63	200.0	V	293.0	6.7
4952.916667	42.06	74.00	31.94	200.0	V	200.0	7.4
5528.958333	---	54.00	15.94	100.0	V	288.0	9.9
5779.375000	44.16	74.00	29.84	100.0	V	166.0	10.1

Appendix D.3: Test Plots of Conducted Emissions on AC Mains

BT+GPRS+Normal Operating+LED on

EUT Information

EUT Name: Amazon Locker
 Order Number: 168324514
 Model: ZL-ODIN-V1
 Test Mode: BT+GPRS link+Normal Operating+LED on t
 Test Voltage: AC 120V/60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: SR1

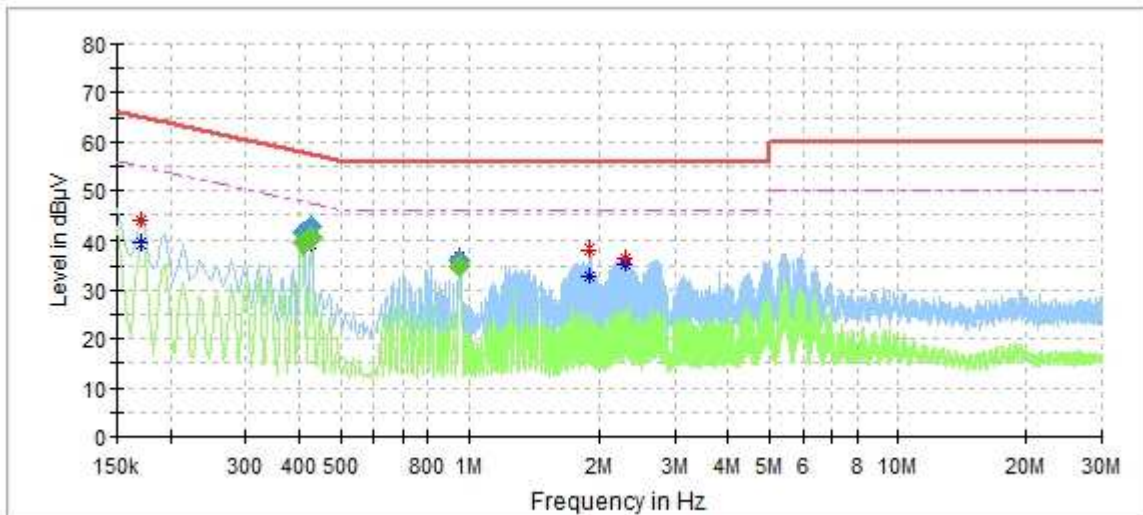

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.170000	---	39.28	54.96	15.68	L1	9.6
0.170000	44.01	---	64.96	20.96	L1	9.6
0.408500	41.55	---	57.73	16.18	L1	9.7
0.408500	---	39.77	47.73	7.96	L1	9.7
0.428500	40.88	---	57.25	16.38	L1	9.7
0.428500	---	39.55	47.25	7.71	L1	9.7
0.954500	36.88	---	56.00	19.12	L1	9.7
0.954500	---	35.69	46.00	10.31	L1	9.7
1.904000	---	33.01	46.00	12.99	L1	9.7
1.904000	38.00	---	56.00	18.00	L1	9.7
2.312000	---	35.18	46.00	10.82	L1	9.7
2.312000	36.69	---	56.00	19.31	L1	9.7

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.408500	---	39.26	47.68	8.42	1000.0	9.000	L1	9.7
0.408500	41.33	---	57.68	16.35	1000.0	9.000	L1	9.7
0.428500	---	40.62	47.28	6.66	1000.0	9.000	L1	9.7
0.428500	42.65	---	57.28	14.63	1000.0	9.000	L1	9.7
0.954500	---	34.98	46.00	11.02	1000.0	9.000	L1	9.7
0.954500	35.91	---	56.00	20.09	1000.0	9.000	L1	9.7

EUT Information

EUT Name: Amazon Locker
 Order Number: 168324514
 Model: ZL-ODIN-V1
 Test Mode: BT+GPRS link+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: SR1

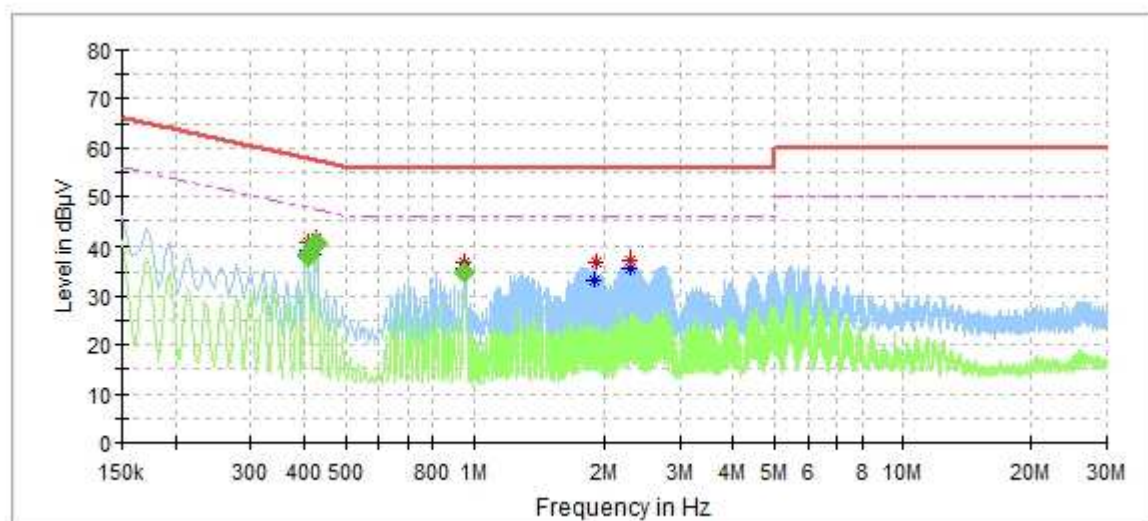

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.408500	---	39.08	47.73	8.65	N	9.7
0.408500	40.77	---	57.73	16.95	N	9.7
0.428500	---	39.55	47.25	7.71	N	9.7
0.428500	41.38	---	57.25	15.88	N	9.7
0.954500	36.85	---	56.00	19.15	N	9.7
0.954500	---	35.64	46.00	10.36	N	9.7
1.904000	---	33.35	46.00	12.65	N	9.7
1.908000	37.12	---	56.00	18.88	N	9.7
2.312000	---	35.66	46.00	10.34	N	9.7
2.312000	37.50	---	56.00	18.50	N	9.7


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.408500	---	38.35	47.68	9.33	1000.0	9.000	N	9.7
0.408500	38.53	---	57.68	19.15	1000.0	9.000	N	9.7
0.428500	---	40.47	47.28	6.81	1000.0	9.000	N	9.7
0.428500	40.68	---	57.28	16.60	1000.0	9.000	N	9.7
0.954500	---	35.02	46.00	10.98	1000.0	9.000	N	9.7
0.954500	34.97	---	56.00	21.03	1000.0	9.000	N	9.7

BT+EMTC+Normal Operating+LED on

EUT Information

EUT Name: Amazon Locker
 Order Number: 168324514
 Model: ZL-ODIN-V1
 Test Mode: BT+EMTC link+Normal Operating+LED on
 Test Voltage: AC 230V/50Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: SR1

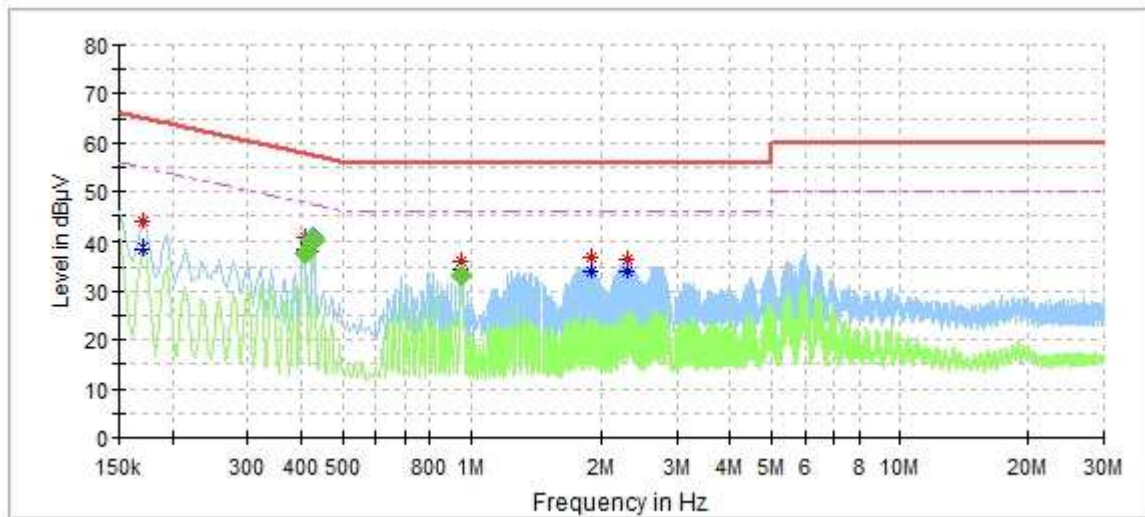

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.170000	---	38.47	54.96	16.49	L1	9.6
0.170000	43.74	---	64.96	21.23	L1	9.6
0.408500	40.60	---	57.73	17.13	L1	9.7
0.408500	---	38.68	47.73	9.05	L1	9.7
0.428500	40.58	---	57.25	16.67	L1	9.7
0.428500	---	39.18	47.25	8.07	L1	9.7
0.954500	36.00	---	56.00	20.00	L1	9.7
0.954500	---	34.45	46.00	11.55	L1	9.7
1.904000	37.01	---	56.00	18.99	L1	9.7
1.904000	---	33.95	46.00	12.05	L1	9.7
2.312000	---	34.09	46.00	11.91	L1	9.7
2.312000	36.64	---	56.00	19.36	L1	9.7

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.408500	---	37.69	47.68	9.99	1000.0	9.000	L1	9.7
0.408500	37.93	---	57.68	19.75	1000.0	9.000	L1	9.7
0.428500	---	40.13	47.28	7.15	1000.0	9.000	L1	9.7
0.428500	40.44	---	57.28	16.84	1000.0	9.000	L1	9.7
0.954500	---	33.41	46.00	12.59	1000.0	9.000	L1	9.7
0.954500	33.39	---	56.00	22.61	1000.0	9.000	L1	9.7

EUT Information

EUT Name:	Amazon Locker
Order Number:	168324514
Model:	ZL-ODIN-V1
Test Mode:	BT+EMTC link+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	SR1

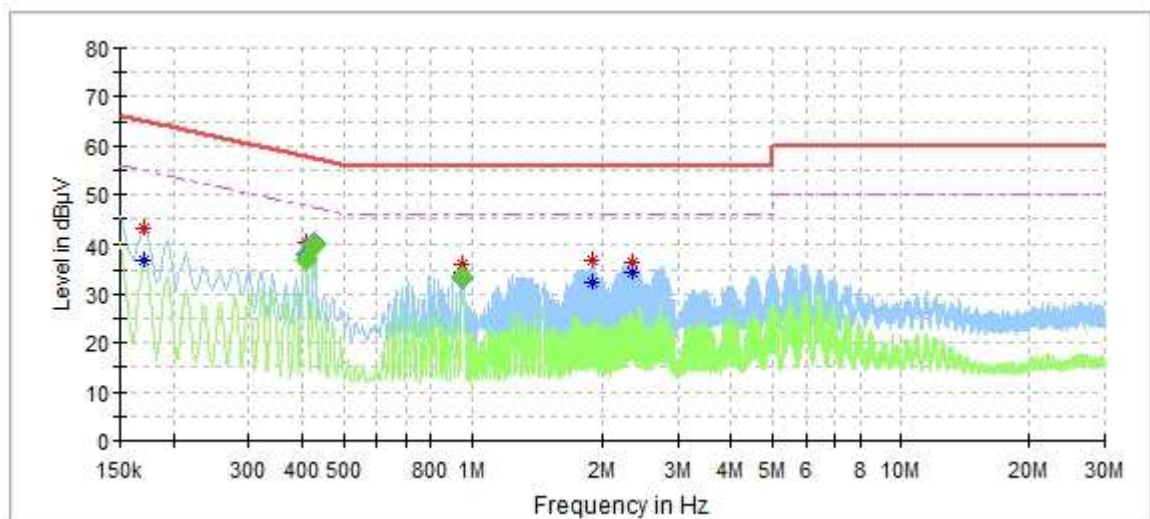

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.170000	43.23	---	64.96	21.73	N	9.6
0.170000	---	36.94	54.96	18.03	N	9.6
0.408500	40.04	---	57.73	17.69	N	9.7
0.408500	---	38.02	47.73	9.71	N	9.7
0.428500	40.41	---	57.25	16.84	N	9.7
0.428500	---	39.21	47.25	8.05	N	9.7
0.950500	35.97	---	56.00	20.03	N	9.7
0.954500	---	34.34	46.00	11.66	N	9.7
1.904000	---	32.24	46.00	13.76	N	9.7
1.904000	36.74	---	56.00	19.26	N	9.7
2.356000	36.61	---	56.00	19.39	N	9.7
2.356000	---	34.39	46.00	11.61	N	9.7


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.408500	38.01	---	57.68	19.67	1000.0	9.000	N	9.7
0.408500	---	37.08	47.68	10.60	1000.0	9.000	N	9.7
0.428500	40.19	---	57.28	17.09	1000.0	9.000	N	9.7
0.428500	---	39.98	47.28	7.31	1000.0	9.000	N	9.7
0.950500	33.13	---	56.00	22.87	1000.0	9.000	N	9.7
0.954500	---	33.48	46.00	12.52	1000.0	9.000	N	9.7

BT+NB+Normal Operating+LED on

EUT Information

EUT Name: Amazon Locker
 Order Number: 168324514
 Model: ZL-ODIN-V1
 Test Mode: BT+NB IOT+Normal Operating+LED on
 Test Voltage: AC 120V/60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: SR1

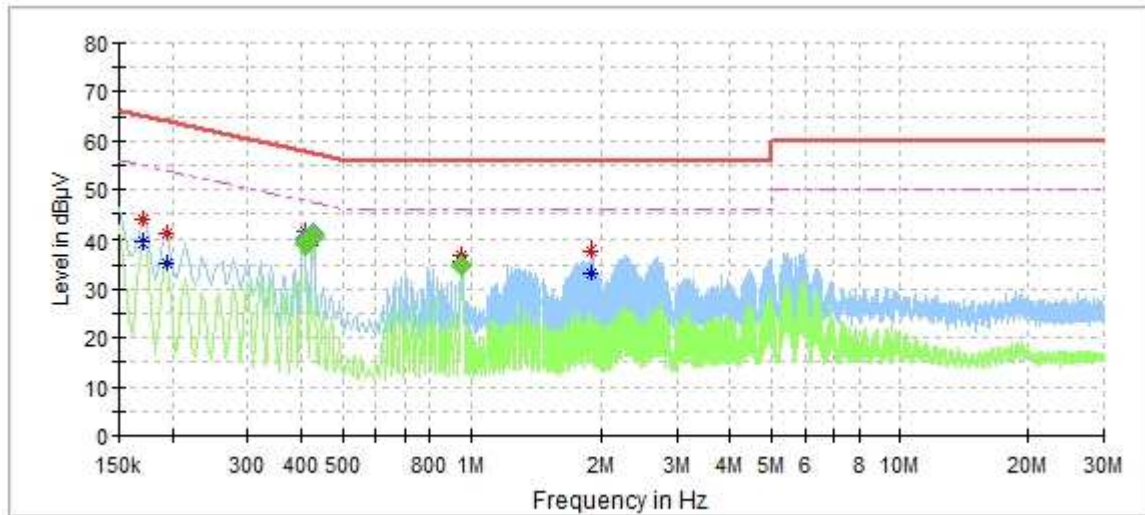

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.170000	---	39.23	54.96	15.73	L1	9.6
0.170000	43.99	---	64.96	20.97	L1	9.6
0.194000	---	35.28	53.86	18.58	L1	9.6
0.194000	40.82	---	63.86	23.04	L1	9.6
0.408500	41.36	---	57.73	16.37	L1	9.7
0.408500	---	39.68	47.73	8.05	L1	9.7
0.428500	41.10	---	57.33	16.23	L1	9.7
0.428500	---	39.69	47.33	7.64	L1	9.7
0.954500	36.79	---	56.00	19.21	L1	9.7
0.954500	---	35.57	46.00	10.43	L1	9.7
1.904000	---	33.29	46.00	12.71	L1	9.7
1.904000	37.55	---	56.00	18.45	L1	9.7

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.408500	---	38.93	47.68	8.75	1000.0	9.000	L1	9.7
0.408500	39.61	---	57.68	18.07	1000.0	9.000	L1	9.7
0.428500	---	40.61	47.28	6.67	1000.0	9.000	L1	9.7
0.428500	40.87	---	57.28	16.41	1000.0	9.000	L1	9.7
0.954500	---	34.91	46.00	11.09	1000.0	9.000	L1	9.7
0.954500	34.87	---	56.00	21.13	1000.0	9.000	L1	9.7

EUT Information

EUT Name:	Amazon Locker
Order Number:	168324514
Model:	ZL-ODIN-V1
Test Mode:	BT+NB IOT+Normal Operating+LED on
Test Voltage:	AC 120V/60Hz
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	SR1

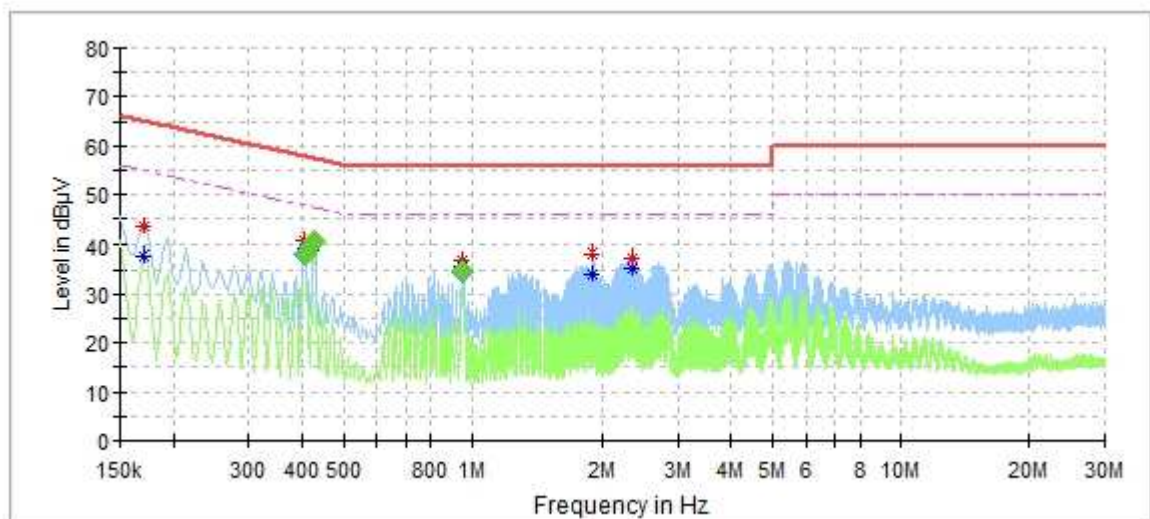

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.170000	---	37.80	54.96	17.16	N	9.6
0.170000	43.51	---	64.96	21.45	N	9.6
0.404500	40.44	---	57.73	17.29	N	9.7
0.408500	---	38.95	47.73	8.78	N	9.7
0.428500	41.09	---	57.33	16.24	N	9.7
0.428500	---	39.85	47.33	7.48	N	9.7
0.954500	37.06	---	56.00	18.94	N	9.7
0.954500	---	35.53	46.00	10.47	N	9.7
1.904000	---	33.88	46.00	12.12	N	9.7
1.904000	38.13	---	56.00	17.87	N	9.7
2.352000	---	35.09	46.00	10.91	N	9.7
2.352000	37.18	---	56.00	18.82	N	9.7

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.404500	38.16	---	57.76	19.60	1000.0	9.000	N	9.7
0.408500	---	38.21	47.68	9.47	1000.0	9.000	N	9.7
0.428500	---	40.49	47.28	6.79	1000.0	9.000	N	9.7
0.428500	40.72	---	57.28	16.56	1000.0	9.000	N	9.7
0.954500	---	34.68	46.00	11.32	1000.0	9.000	N	9.7
0.954500	34.65	---	56.00	21.35	1000.0	9.000	N	9.7