



## Test Report for FCC

FCC ID :2AWCDRP70A-BIO

Report Number		ESTRFC2004-003		
Applicant	Company name	Gen2wave		
	Address	7th fl., Point town B/D, 187-4, Gumi-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Rep of Korea		
	Telephone	+82 607 7537		
	Contact person	Sungkil Lee		
Product	Product name	Tablet PC		
	Model No.	PR70A BIO	Manufacturer	Gen2wave
	Serial No.	NONE	Country of origin	KOREA
Test date	07-Apr-20 ~ 08-Apr-20		Date of issue	28-Apr-20
Testing location	140-16, Eongmali-ro, Majang-myeon, Icheon-si, Gyeonggi-do, Korea			
Standard	FCC PART 15 Subpart C (15.247), ANSI C 63.10(2013), KDB 558074 D01v05r02			
Measurement facility registration number	659627			
Tested by	Senior Engineer H.G. Lee		(Signature)	
Reviewed by	Engineering Manager I.K Hong		(Signature)	
Abbreviation				
<p>* Note</p> <ul style="list-style-type: none"> <li>- This test report is not permitted to copy partly without our permission</li> <li>- This test result is dependent on only equipment to be used</li> <li>- This test result based on a single evaluation of one sample of the above mentioned</li> <li>- This test report is not related to KOLAS accreditation</li> <li>- Additional models name: MetaDolce MD7200-BIO, RP70</li> <li>- (Basic and additional Model(s) are same products, only model name are different)</li> </ul>				

## Contents

1. Laboratory Information .....	3
2. Description of EUT .....	4
3. Test Standards .....	6
4. Measurement condition .....	67
5. DTS bandwidth .....	11
5.1 Test procedure .....	11
5.2 Test instruments and measurement setup .....	11
5.3 Measurement results .....	11
5.4 Trace data .....	12
6. Maximum Peak Output Power .....	14
6.1 Test procedure .....	14
6.2 Measurement results .....	14
7. Maximum conducted (average) output power .....	15
7.1 Test procedure .....	15
7.2 Measurement results .....	15
8. Maximum power spectral density level in the fundamental emission .....	16
8.1 Test procedure .....	16
8.2 Test instruments and measurement setup .....	16
8.3 Measurement results .....	16
8.4 Trace data .....	17
9. Emissions in non-restricted frequency bands .....	19
9.1 Test procedure .....	19
9.2 Test instruments and measurement setup .....	19
9.3 Measurement results of band-edge & out of emission .....	19
9.4 Trace data of band-edge & Out of Emission.....	20
10. Measurement of radiated emission .....	23
10.1 Measurement equipment .....	23
10.2 Environmental conditions .....	23
10.3 Measurement Instrument setting for Radiated Emission .....	24
10.4 Test Data.....	25
11. Measurement of conducted emission .....	37
11.1 Measurement equipment .....	37
11.2 Environmental conditions .....	37
11.3 Test Data.....	38

Appendix 1. Special diagram

Appendix 2. Antenna Information



## 1. Laboratory Information

### 1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

### 1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Suite 1015 World Meridian II, 123 Gasan Digital 2-ro, Geumcheon-gu, Seoul 153-759, R. O. Korea

EMC/Telecom/Safety Test Lab : 140-16, Eongmalli-ro, Majang-myeon, Icheon-si,  
Gyeonggi-do 467-811, R. O. Korea

### 1.3 Official Qualification(s)

MSIP : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Conformity Assessment Body(CAB) with registration number 659627 under APEC TEL MRA between the RRA and the FCC

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE



## 2. Description of EUT

### 2.1 Summary of Equipment Under Test

Modulation Type	: Bluetooth (GFSK)
Transfer Rate	: 1 Mbps
Number of Channel	: 40 ch
PEAK Output Power	: GFSK : 6.281 mW
Rating	: INPUT: AC(100 – 240) V, (50–60)Hz, 1 A : OUTPUT: DC 5 V, 5 A
Receipt Date	: 18-Feb-20
X-tal list(s) or Frequencies generated	: The highest operating frequency is 2480 MHz(Bluetooth) : Bluetooth : 2.4 GHz

### 2.2 General descriptions of EUT

Category	Specification	
Performance Characteristics	CPU	Hexa core CPU Cortex A72 Dual-core 1.8GHz, Cortex A53 Quad core 1.4Ghz
	RAM	4GB
	ROM	32GB (64GB / 128GB optional)
	OS	Android 8.1 Oreo
Integrated Radios	Wireless WAN	LTE, HSPA+
	Wireless LAN	IEEE 802.11 a/b/g/n/ac (2.4, 5GHz)
	Bluetooth	Bluetooth 4.2 BLE
	GPS	AGPS (GLONASS optional)
DATA CAPTURE	Camera	Front Camera : 2MP / Rear Camera : 13MP Auto Focus
		LED Flash
	1D/2D Imager	2D Imager (SW Decoder) : Zebra SE4710
	RFID	NXP PN548 HF 13.56MHz, Read Tag : 14443A/B, 15693
	SAM	2 SAM Slot
	OCR(MRZ)	Font : OCR B MRZ Lines : 1 line : IDL, CAN, etc 2 line : ID2 cards, Epp
	Fingerprint	Module : BM-Slim 2 (Suprema) Sensor Type : Optical Sensor Sensing Area : 16.5mm(W) x 21.0mm(L) Pixel Resolution : 500 ppi Gray Scale : 256 level Output Image Format : RAW, BMP, WSQ, ISO 19794-4 Format : FBI PIV certified, FBI Mobile ID FAP 20 certified



Category	Specification	
DATA CAPTURE	Contact Smart Card	Contact type Smart Card Reader (gemalto) : ISO7816
	Iris Recognition (Opal)	Camera : 5MP B&W CMOS sensor Operating Range : 320±0mm (11"~14") Resolution : Above 160 pixel/cm Iris Capture Volume : 130mm x 45mm x 80mm Illumination : IR LED Image : 2592 x 920 x 30 Frame
Physical Characteristics	Demensions	213mm(H) x 195.3mm(W) x 30.55mm / 21mm : Minimum Thickness (D)
	Weight	850g
	Display	7.0Inch / HD(1280x800)
	Display Visibility	700 nits (cd/m2)
	Touchpannel	Capacitive Touch / 10 point multi touch / Gorilla Glass 3
	Keypad	3 Front Key / 5 Side Key (Programmable)
	Battery	Built in Battery : Li-Polymer, 3.7V, 10,050mAh
	Expanslon Slot	MicroSDXC upto 2TB supported Communication
ETC	Communication	Tablet side : USB3.0 Host, USB2.0 Client(OTG) Extension 10pin connector : Serial, USB2.0 Host I/O 25pin connector : USB2.0 Host, HDMI, Serial, Ethernet (with cradle)
	Audio	Dual Speaker, MIC
	Jack	DC jack, USB3.0 Host, USB2.0 Client, 3.5phi Ear-Mic Jack
	IO connector	POGO 25 pin (Power, RS232, USB 3port, HDMI, Ethernet)
	Extention pin	POGO 10 pin
	LED	Front 2 LED : Charging, Power
	Sensor	Acceleration Sensor, Compass, Ambient Light Sensor
	power	DC Jack 5V / 5A Adaptor
User Environment	Use time	Stand-by time : > 150hr Working time : > 8hr
	Operating Temp	-20℃~ 70℃
	torage Temp	-30℃~ 70℃
	umidity	Non-condensing, 93%
	Drop	1.2 m

### 3. Test Standards

#### Test Standard : FCC PART 15 Subpart C (15.247)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

#### Test Method : ANSI C 63.10 (2013) & KDB558074 D01v05r02

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

#### Summary of Test Results

Applied Standard : 47 CFR Part 15 Subpart C				remark
Standard	Test Type	Result	Remark	Limit
15.207	AC Power Conducted Emission	Pass	Meet the requirement	
15.205 & 15.209	Restricted band / Intentional Radiated Emission	Pass	Meet the requirement	
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement	Min. 500 kHz
	Occupied Bandwidth			
15.247(b)(3)	Maximum Peak/average output power	Pass	Meet the requirement	Max. 30 dBm
15.247(c)	Transmitter Radiated Emission	Pass	Meet the requirement	Table 15.209
15.247(e)	Power Spectral Density	Pass	Meet the requirement	Max. 8 dBm
15.247(d)	Band Edge Measurement	Pass	Meet the requirement	20 dB less

## 4. Measurement Condition

### 4.1 EUT Operation

#### a. Channel

Ch.	Frequency	Ch.	Frequency
0	2402 MHz	20	2442 MHz
1	2404 MHz	21	2444 MHz
2	2406 MHz	22	2446 MHz
3	2408 MHz	23	2448 MHz
4	2410 MHz	24	2450 MHz
5	2412 MHz	25	2452 MHz
6	2414 MHz	...	...
...	...	39	2480 MHz
19	2440 MHz		

b. Measurement Channel : Bluetooth : Low(2402 MHz), Middle(2440 MHz), High(2480 MHz)


c. Test Mode : Continuous Output, GFSK

d. Test rate : 1 Mbps

## 4.2 EUT Operation.

- The EUT was in the following operation mode during all testing
  - \* Bluetooth operation check
  - \* Transmit mode were measured each channels(Low, Middle, High)
  - \* The EUT was measured up to tenth harmonic or 40 GHz of the highest operating frequencies.

## 4.3 Configuration and Peripherals

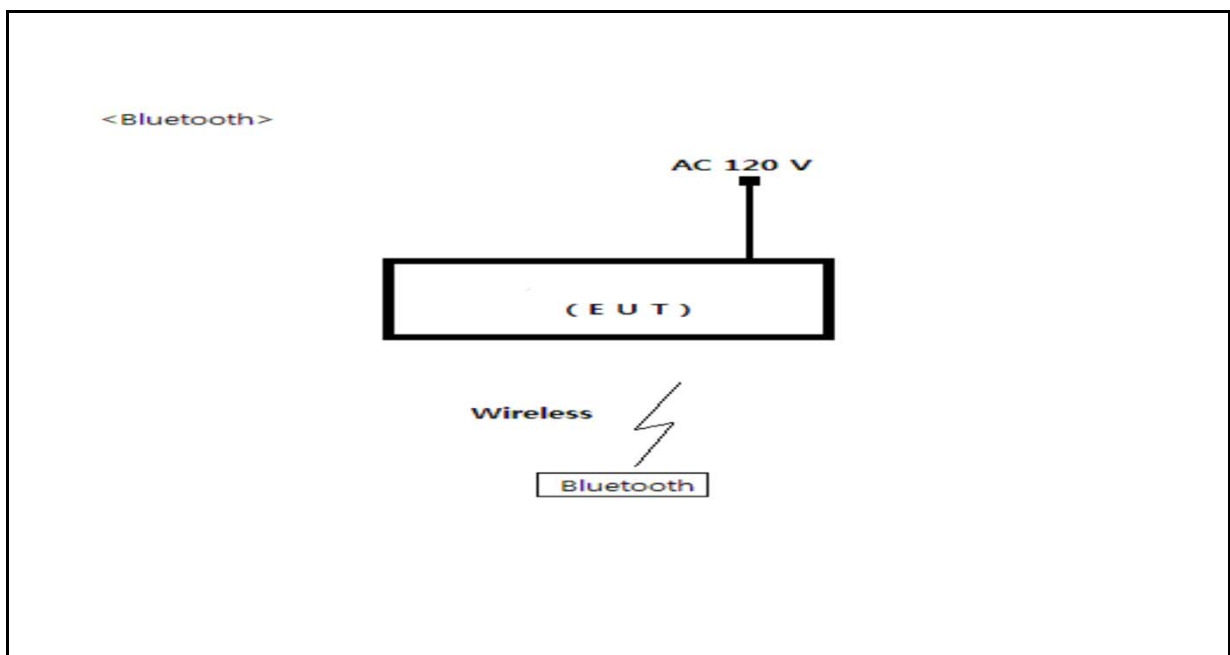



#### 4.4 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
Tablet PC	PR70A BIO	NONE	Gen2wave	EUT
Adapter	ATS036T-P050	NONE	Boayang Electronics Co., Ltd.	

#### 4.5 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
Tablet PC	POWER	Adapter	-	2	Unshielded	





## 5. DTS bandwidth

### 5.1 Test procedure

558074 D01 DTS Meas Guidance v05r02 Option 2

### 5.2 Test instruments and measurement setup

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq$  3 X RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.

Limits : FCC § 15.247(a)(2)

#### 6dB Bandwidth Test Instruments


Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	2-Dec-20
RF Cable	Length: 30 cm	-	
-Spectrum Analyzer $\Leftrightarrow$ EUT	Loss: 1 dB	-	

### 5.3 Measurement results


EUT	Tablet PC	MODEL	PR70A BIO
MODE	GFSK	ENVIRONMENTAL CONDITION	22.0 °C, 44.0 % R.H.
INPUT POWER	DC 3.7 V		

Channel Frequency (MHz)	Occupied Bandwidth(MHz)	Bandwidth at 6dB below(MHz)	Minimum Limit (MHz)	PASS/FAIL
2402	1.08	0.69	0.5	PASS
2440	1.09	0.69	0.5	PASS
2480	1.08	0.67	0.5	PASS

### 5.4 Trace data (ch\_0)

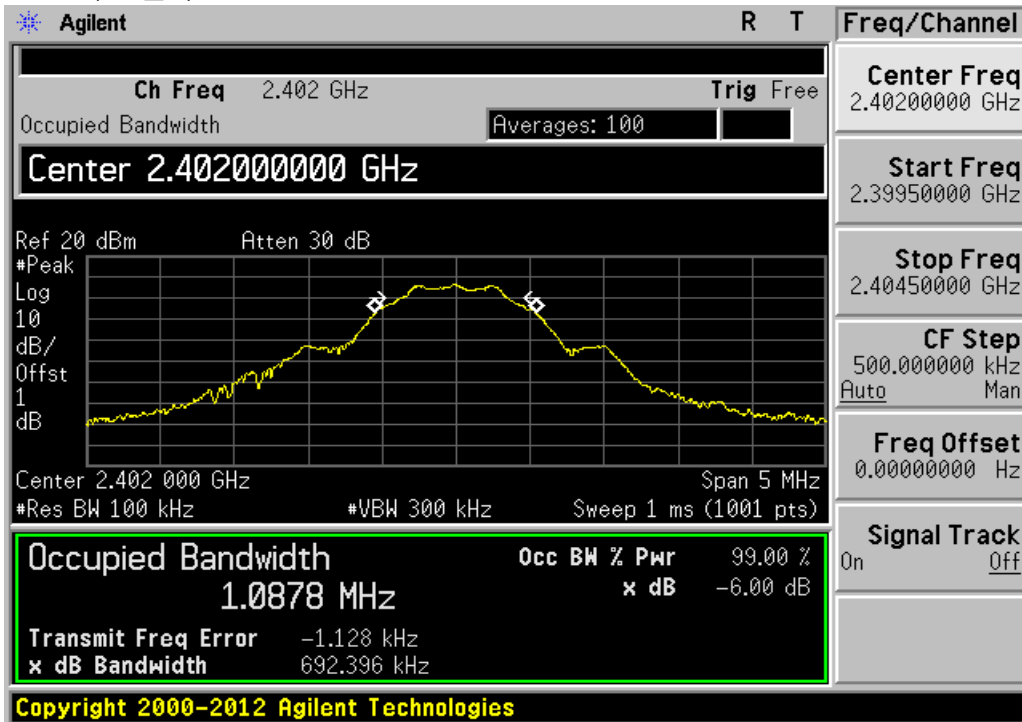


### (ch\_19)

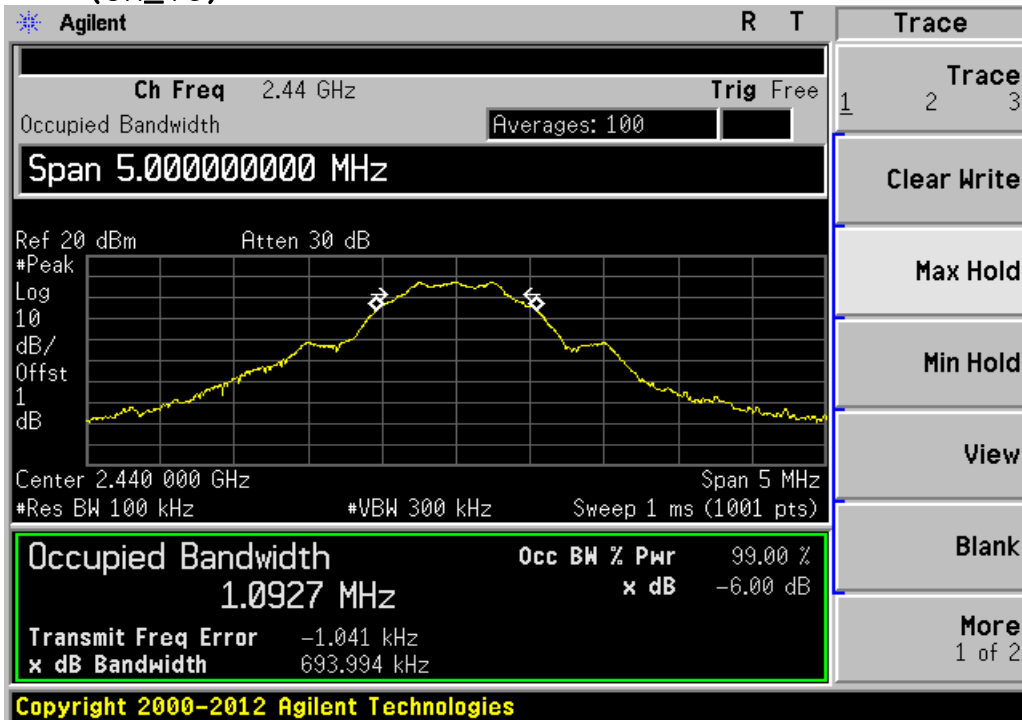



**Estech**  
your best partner

(ch\_39)

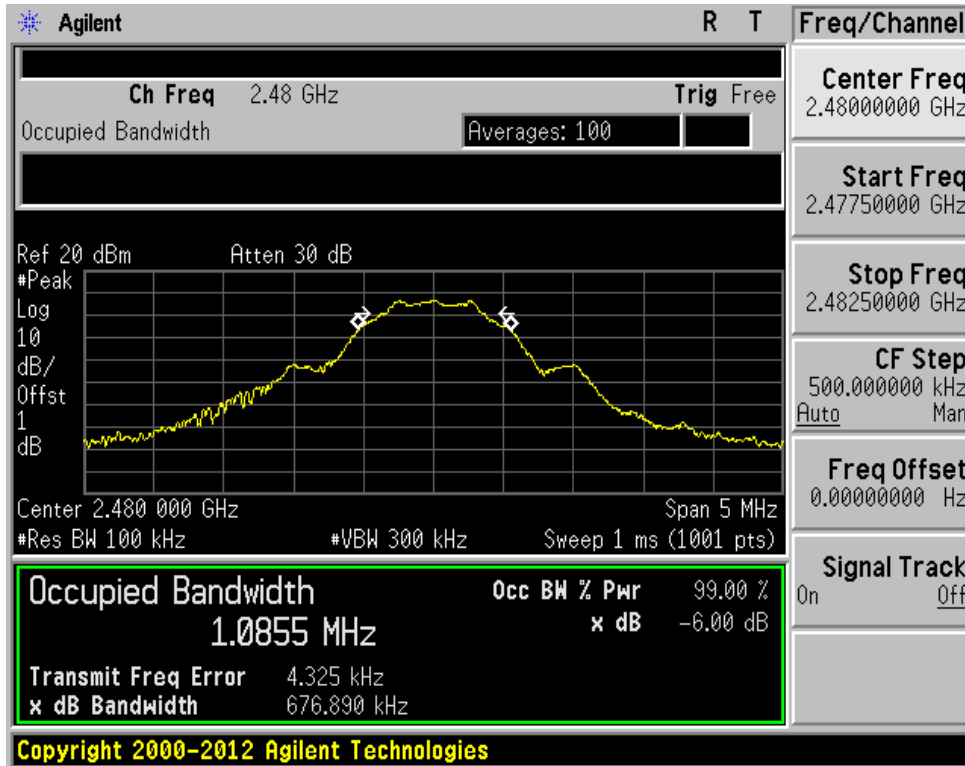

## 6. Maximum peak conducted output power

### 6.1 Test procedure

The transmitter antenna terminal is connected to the input of a Power Sensor. Measurement is made while EUT is operating in transmission mode at the appropriate center frequency. The maximum peak output power measurement is 30 dBm.

Limits : FCC § 15.247

#### Maximum Peak Output Power Test Instruments

Description	Model	Serial Number	Cal. Due Date
Power Meter	N1921A	MY45100570	2020-12-02
Power Sensor	N1921A	MY45240427	2020-12-02
Power Meter <=> EUT	Loss: 1 dB	-	

### 6.2 Measurement results

EUT	Tablet PC	MODEL	PR70A BIO
MODE	GFSK	ENVIRONMENTAL CONDITION	22.0 °C, 45.0 % R.H.
INPUT POWER	DC 3.7 V		

CHANNEL	Channel Requency (MHz)	Conducted Power Output(dBm)			Limit[1W] (dBm)	PASS/FAIL
		Detector	(dBm)	(mW)		
0	2 402	PEAK	6.98	4.989	30.0	PASS
19	2 440	PEAK	7.98	6.281	30.0	PASS
39	2 480	PEAK	7.51	5.636	30.0	PASS

## 7. Maximum conducted (average) output power

### 7.1 Test procedure

The transmitter antenna terminal is connected to the input of a Power Sensor. Measurement is made while EUT is operating in transmission mode at the appropriate center frequency. The maximum Average output power measurement is 30 dBm.

Limits : FCC § 15.247

#### Maximum conducted (average) output power Test Instruments

Description	Model	Serial Number	Cal. Due Date
Power Meter	N1921A	MY45100570	2020-12-02
Power Sensor	N1921A	MY45240427	2020-12-02
Power Meter <=> EUT	Loss: 1 dB	-	

### 7.2 Measurement results

EUT	Tablet PC	MODEL	PR70A BIO
MODE	GFSK	ENVIRONMENTAL CONDITION	22.0 °C, 45.0 % R.H.
INPUT POWER	DC 3.7 V		

CHANNEL	Channel Requency (MHz)	Conducted Power Output(dBm)			Measured + Duty Cycle(dBm)	Measured + Duty Cycle(W)
		Detector	(dBm)	Duty Cycle		
0	2 402	AVG	-0.75	2.08	1.3	0.0014
19	2 440	AVG	-0.13	2.08	1.9	0.0016
39	2 480	AVG	-0.45	2.08	1.6	0.0015



## 8. Maximum power spectral density level in the fundamental emission

### 8.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V05r02 10.2 Method PKPSD (peak PSD)

### 8.2 Test instruments and measurement setup

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Limits FCC § 15.247

#### The peak power density Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E440A	US42041291	2-Dec-20
RF Cable	Length: 30 cm	-	
-Spectrum Analyzer <=> EUT	Loss: 1 dB	-	


### 8.3 Measurement results

EUT	Tablet PC	MODEL	PR70A BIO
MODE	GFSK	ENVIRONMENTAL CONDITION	21.0 °C, 45.0 % R.H.
INPUT POWER	DC 3.7 V		


CHANNEL	Channel Frequency (MHz)	Measured Power Spectral Density (dBm)	Maximum Permissible Power Density (dBm/3kHz)	Margin
0	2 402	-7.37	8.0	15.37
19	2 440	-6.37	8.0	14.37
39	2 480	-6.81	8.0	14.81



### 8.4 Trace data (ch\_0)

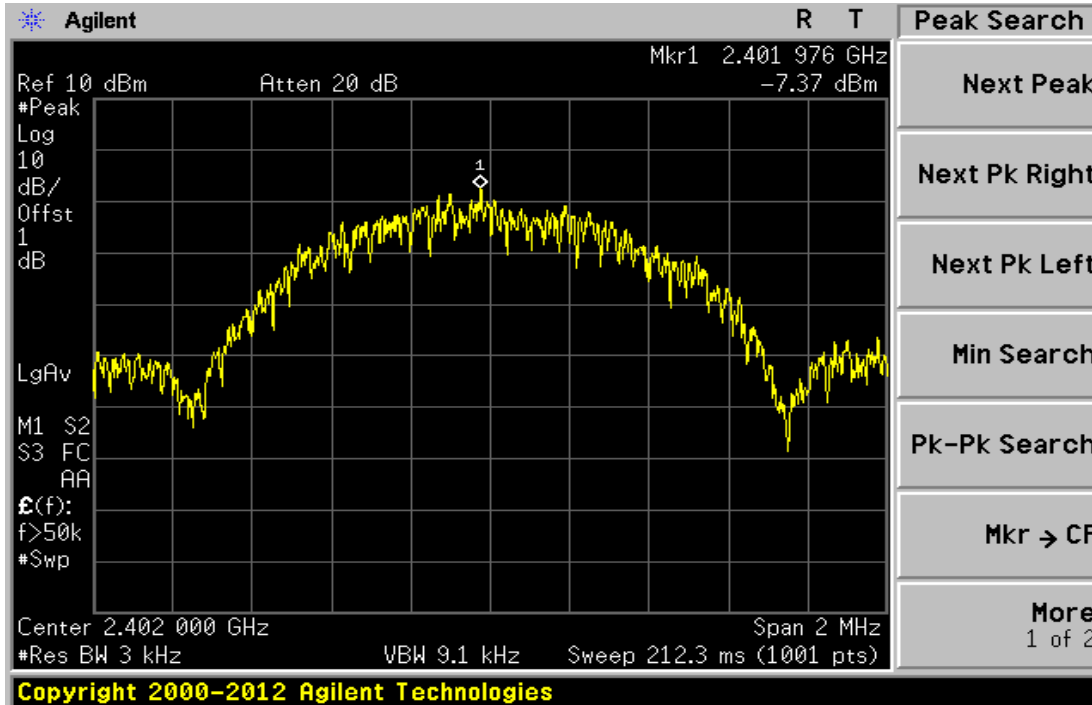


(ch\_19)

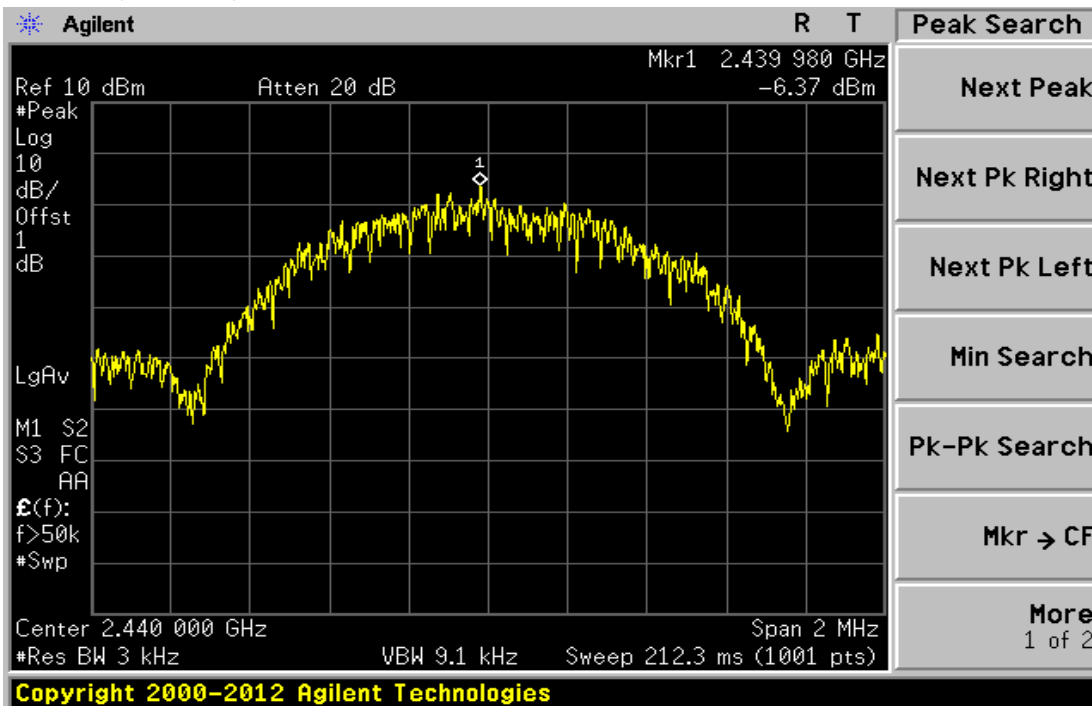



**Estech**  
your best partner

(ch\_39)

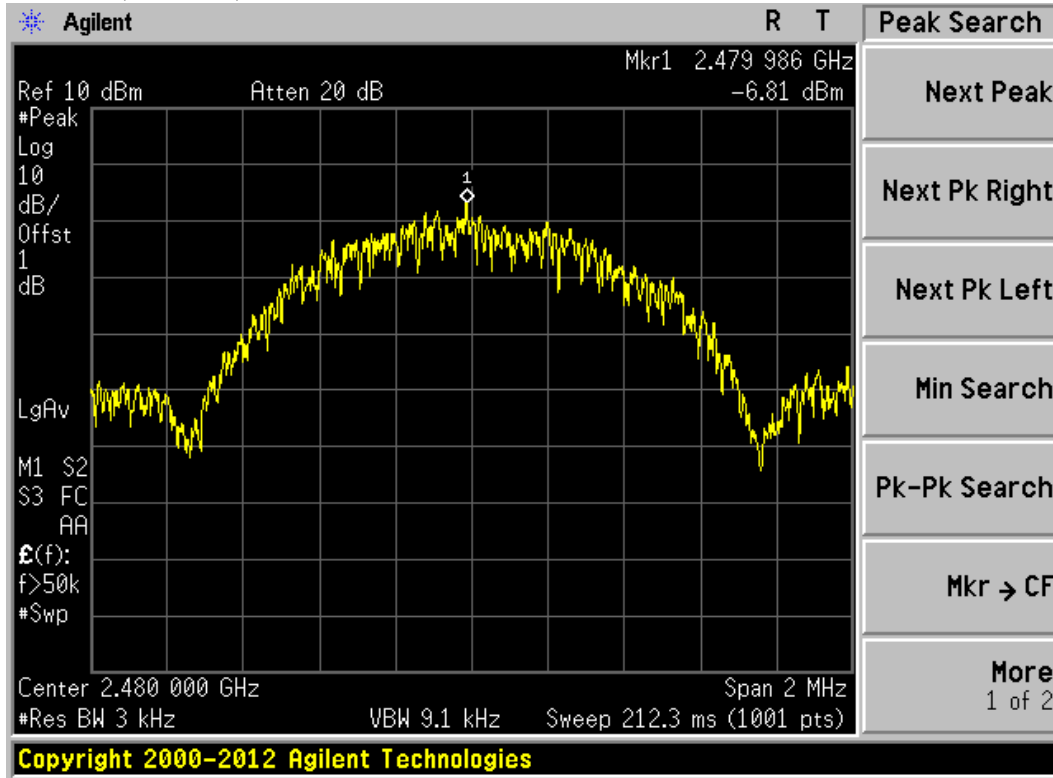

## 9. Emissions in non-restricted frequency bands

### 9.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V05r02 11.0 Emissions in non-restricted frequency

### 9.2 Test instruments and measurement setup

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions(15.247(d))

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq 3 \times$  RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Limits FCC § 15.247

#### Band Edge&Out of Emission Test Instruments


Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	2-Dec-20
RF Cable	Length: 30 cm		-
-Spectrum Analyzer <=> EUT	Loss: 1 dB		-

### 9.3 Measurement results of band-edge & out of emission


EUT	Tablet PC	MODEL	PR70A BIO
MODE	GFSK	ENVIRONMENTAL CONDITION	21.0 °C, 45.0 % R.H.
INPUT POWER	DC 3.7 V		

CHANNEL	Channel Frequency (MHz)	limit	PASS/FAIL
0	2 402	20dBc	PASS
39	2 480	20dBc	PASS

### 9.4 Trace data of band-edge & Out of Emission (ch\_0)

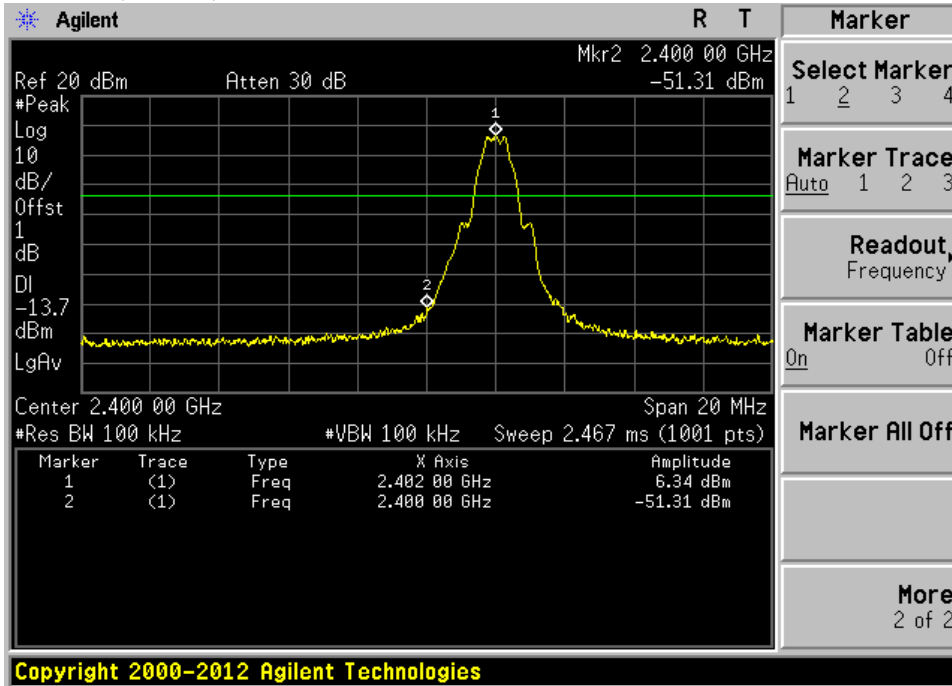


### (ch\_39)

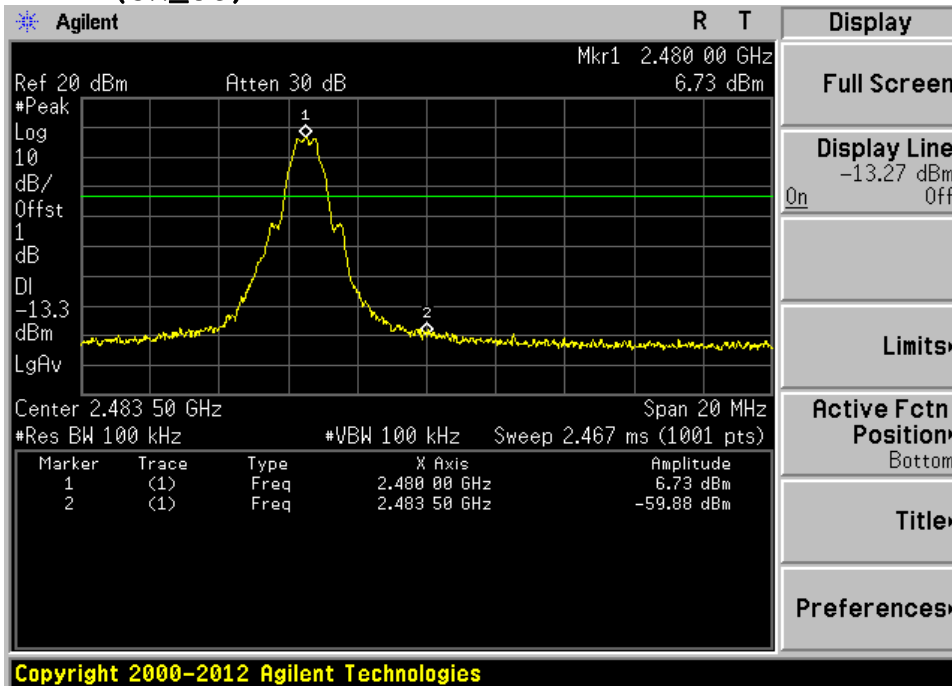




**Estech**  
your best partner

(ch\_0)

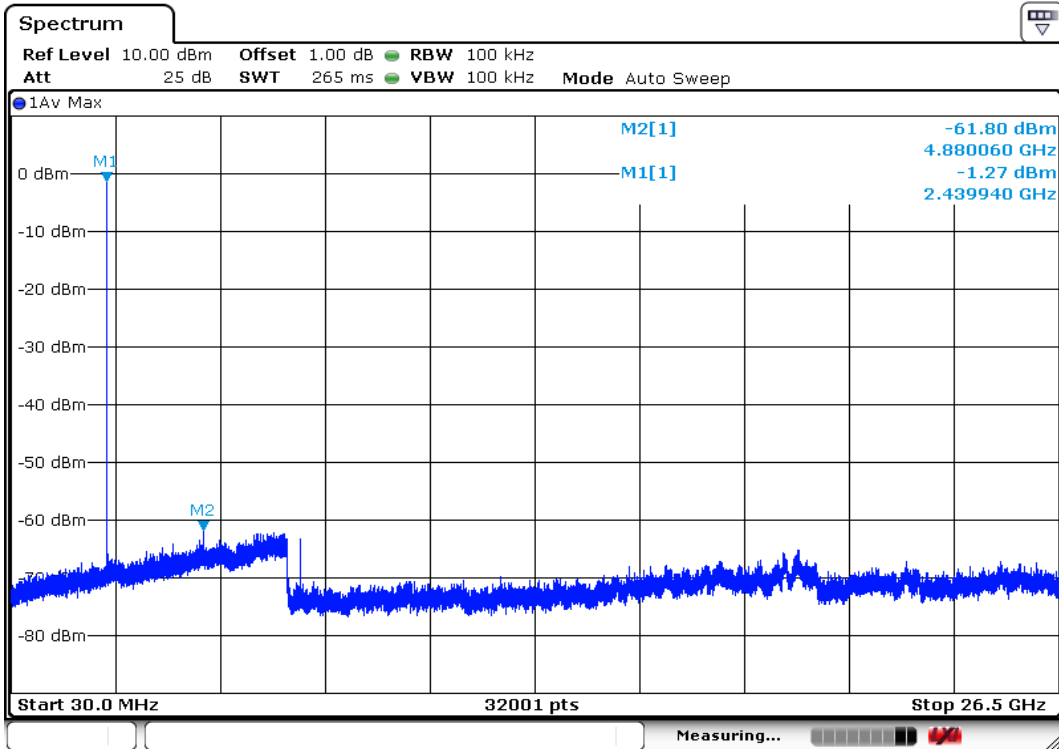

RP 70A B D


(ch\_19)

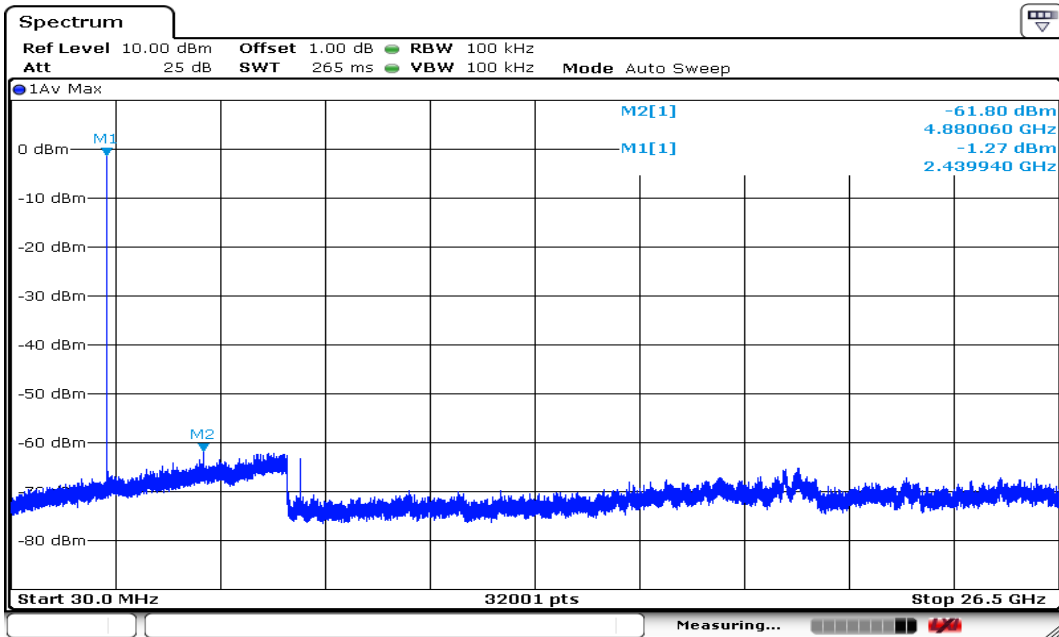

RP 70A B D



(ch\_39)

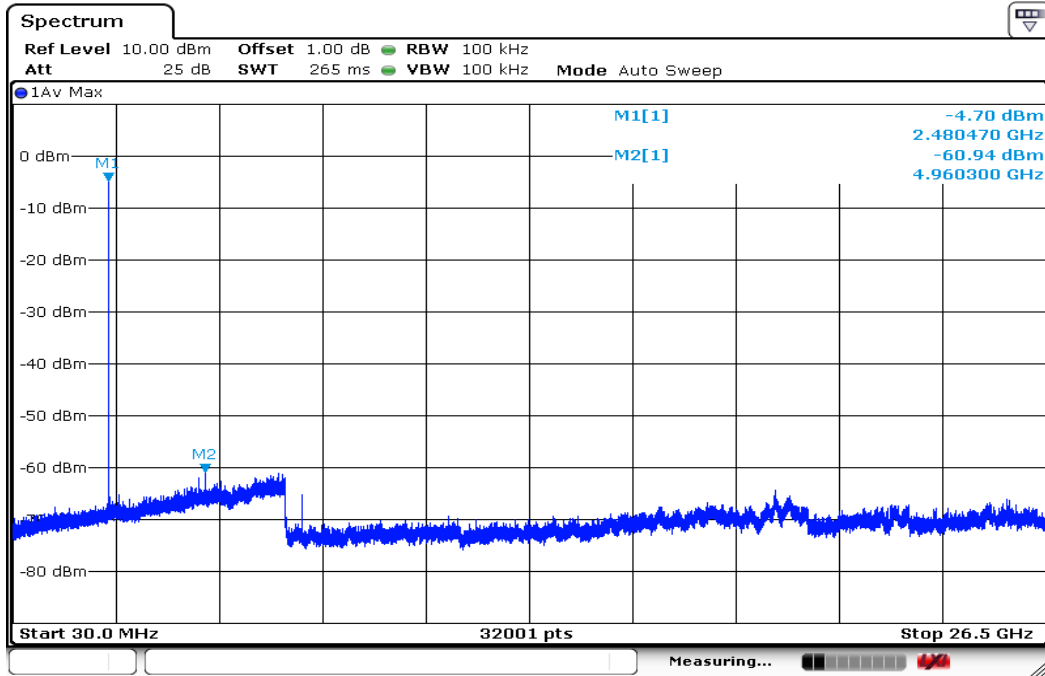

R P 70A B D

## 10. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC PART 15.205, 15.209 . The test setup was made according to ANSI C 63.10 (2013) & KDB 558074 D01v05r02 Semi-anechoic chamber, which allows a 3 m distance measurement. The EUT was placed in the center of styrofoam turntable. The height of this table was 0.8 m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

### 10.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESCI7	ROHDE & SCHWARZ	100916	9-Sep-20
Logbicon Antenna	VULB 9168	SCHWARZBECK	193	14-Jan-22
Turn Table	DT3000-2t	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
PREAMPLIFIER	8449B	AGILENT	3008A00581	9-Sep-20
Horn Antenna	BBHA9120D	SCHWARZBECK	469	6-Jan-21
Test Receiver	ESPI7	ROHDE & SCHWARZ	100185	9-Sep-20
Signal Analyzer	FSV40	ROHDE & SCHWARZ	100393	2-Dec-20
Turn Table	DT1500-S	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
Horn Antenna	BBHA 9170	SCHWARZBECK	752	1-Nov-20
Antenna Master & Turn table controller	CO2000-P	Innco System GmbH	CO2000/642 /28051111/L	-

### 10.2 Environmental Condition

**Below 1 GHz –Test Place : 10 m Semi-anechoic chamber**

#### BT(BLE) MODE

Temperature (°C) : 20.4 °C

Humidity (% R.H.) : 42.2 % R.H.

**Above 1 GHz–Test Place : 3 m Semi-anechoic chamber**

#### BT(BLE) MODE

Temperature (°C) : 22.6 °C

Humidity (% R.H.) : 43.2 % R.H.

## 10.3 Measurement Instrument setting for Radiated Emission

### 10.3.1 Frequency range below 1 GHz

Detector : Quasi-Peak

### 10.3.2 Frequency range above 1 GHz

#### Peak Power Measurement Procedure (KDB 558074 section 12.2.4)

- a. RBW : 1 MHz , VBW : 3 MHz
- b. Trace mode = max hold
- c. Detector : Peak
- d. Sweep time = auto

#### Average Power Measurement Procedures (KDB 558074 section 12.2.5.2)

- a. Set analyzer center frequency to the frequency associated with the emission
- b. RBW : 1 MHz , VBW : 3 MHz
- c. Detector : RMS
- d. Sweep time = auto

Note

Band	Duty cycle(%)	Ton (ms)	Ton + Toff (ms)	DCF=10*log(1/Duty) (dB)
BT(BLE)	62.0	0.388	0.625	2.076

\* This was applied of duty cycle factor for average value because of measured with the EUT transmitting continuously less than 98 % duty cycle at its maximum power control level.



### 10.4 Test data(30 MHz ~ 1 000 MHz)


Test Date : 7-Apr-20

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Position (V/H)	Height (m)	Correction Factor		Result Value(Quasi-peak)		
				Ant Factor (dB)	Cable (dB)	Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Margin (dB)
40.70	12.62	V	1.0	13.19	0.95	40.00	26.76	13.24
200.00	19.33	H	1.8	10.02	2.16	43.50	31.51	11.99
400.00	16.00	H	1.4	15.63	3.16	46.00	34.79	11.21
600.00	17.33	V	1.6	19.72	3.93	46.00	40.98	5.02
800.00	14.79	H	1.0	22.43	4.63	46.00	41.85	4.15
1000.00	6.71	H	1.0	24.40	5.23	54.00	36.34	17.66
Remark	<p>H : Horizontal, V : Vertical TEST MODE : BT BLE (CH : 19 - 2 440 MHz)</p> <p>*Checked in all 3 axis and the maximum measured data were reported.( Worst data is X axis of position)</p> <p>*CL = Cable Loss(In case of below 1 000 MHz)</p> <p>*Result Value = Reading + Ant Factor + Cable loss</p> <p>*The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.</p>							


# 10.4-1 Restricted Band Edges

Polarity:Horizontal

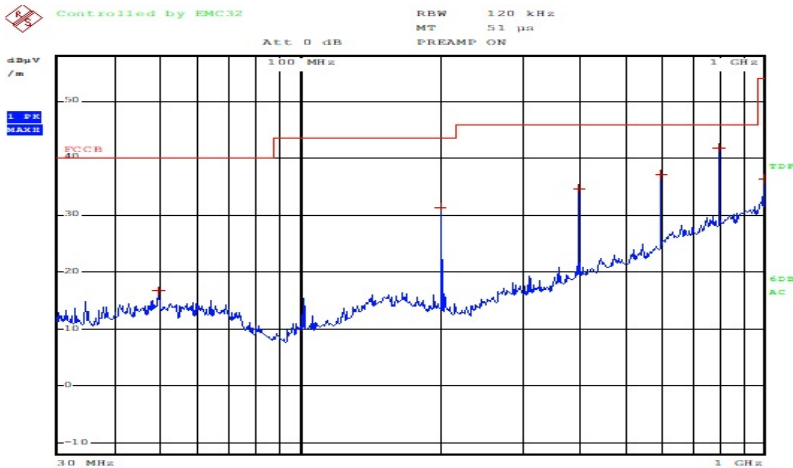

ESTR-20-00077\_BLE\_HOR

Polarity:Vertical

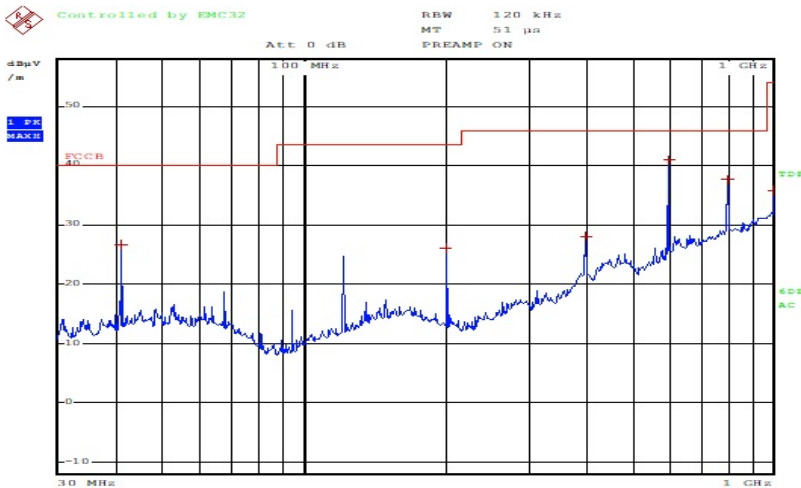

ESTR-20-00077\_BLE\_VER



### 10.4-2 Test Data(Low)

Test Date : 8-Apr-20

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	AMP & Cable (dB)		Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2390.00	46.25	H	1.5	27.98	-30.90		74.00	43.33	30.67
2390.00	44.79	V	1.5	27.98	-30.90		74.00	41.87	32.13
4804.00	46.29	H	1.7	31.60	-27.53		74.00	50.36	23.64
4804.00	46.15	V	1.7	31.60	-27.53		74.00	50.22	23.78
AV(RBW: 1 MHz VBW: 3 MHz)									
2390.00	34.53	H	1.5	27.98	-30.90	2.08	54.00	33.69	20.31
2390.00	34.43	V	1.5	27.98	-30.90	2.08	54.00	33.59	20.41
4804.00	33.52	H	1.7	31.60	-27.53	2.08	54.00	39.67	14.33
4804.00	33.42	V	1.7	31.60	-27.53	2.08	54.00	39.57	14.43
Remark	<p>H : Horizontal, V : Vertical TEST MODE : CH : 0 - 2 402 MHz (x postion)</p> <p>*The TX signal wasn't detected from 3th harmonics.            *Checked in all 3 axis and the maximum measured data were reported.( Worst data is X axis of position)            *Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Correction            *This test was radiated up to 26.5 GHz but no noise was measured.</p>								



### 10.4-3 Test Data(Middle)

Test Date : 8-Apr-20

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ W)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	AMP & Cable (dB)		Limit (dB $\mu$ W/m)	Result (dB $\mu$ W/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
4880.00	46.37	H	1.5	31.52	-27.42	/	74.00	50.47	23.53
4880.00	46.25	V	1.6	31.52	-27.42		74.00	50.35	23.65
AV(RBW: 1 MHz VBW: 3 MHz)									
4880.00	33.59	H	1.5	31.52	-27.42	2.08	54.00	39.77	14.23
4880.00	33.47	V	1.6	31.52	-27.42	2.08	54.00	39.65	14.35
Remark	H : Horizontal, V : Vertical TEST MODE : CH : 19 - 2 440 MHz (x postion)  *The TX signal wasn't detected from 3th harmonics. *Checked in all 3 axis and the maximum measured data were reported.( Worst data is X axis of position) *Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Correction *This test was radiated up to 26.5 GHz but no noise was measured.								

### 10.4-4 Test Data(High)

Test Date : 8-Apr-20

Measurement Distance : 3 m


Frequency (MHz)	Reading (dB $\mu$ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction (dB)	Result Value		
				Ant Factor (dB)	AMP & Cable (dB)		Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2483.50	56.76	H	1.6	27.50	-30.92		74.00	53.34	20.66
2483.50	53.55	V	1.8	27.50	-30.92		74.00	50.13	23.87
4960.00	47.15	H	1.6	31.62	-27.28		74.00	51.49	22.51
4960.00	46.89	V	1.9	31.62	-27.28		74.00	51.23	22.77
AV(RBW: 1 MHz VBW: 3 MHz)									
2483.50	45.62	H	1.6	27.50	-30.92	2.08	54.00	44.28	9.72
2483.50	43.11	V	1.8	27.50	-30.92	2.08	54.00	41.77	12.23
4960.00	33.52	H	1.6	31.62	-27.28	2.08	54.00	39.94	14.06
4960.00	33.48	V	1.9	31.62	-27.28	2.08	54.00	39.90	14.10
Remark	<p>H : Horizontal, V : Vertical TEST MODE : CH : 39 - 2 480 MHz (x postion)</p> <p>*The TX signal wasn't detected from 3th harmonics.            *Checked in all 3 axis and the maximum measured data were reported.( Worst data is X axis of position)            *Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Correction            *This test was radiated up to 26.5 GHz but no noise was measured.</p>								

## 10.4-5 Restricted Band Edges

Band Edges(CH Low)

Detector mode:Peak


Polarity:Horizontal

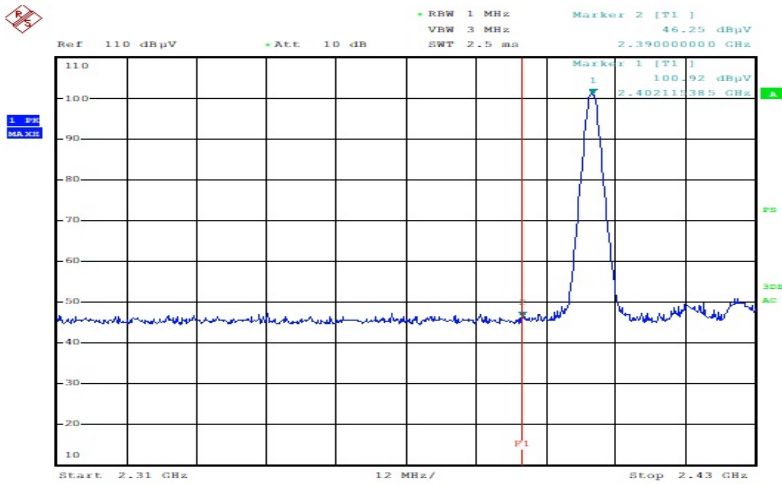

RP70A\_BIO\_BT\_LE\_CH0\_PEAK\_HOR

Detector mode:Average

Polarity:Horizontal

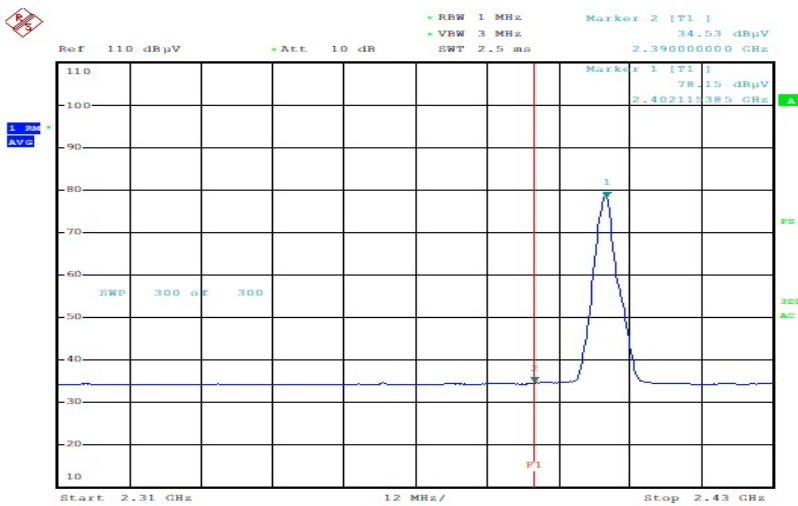


RP70A\_BIO\_BT\_LE\_CH0\_AV\_HOR



Band Edges(CH High)

Detector mode:Peak


Polarity:Horizontal

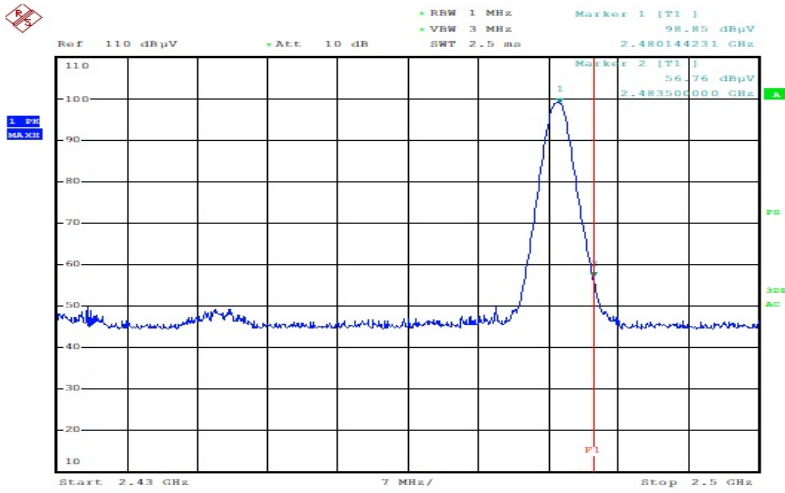

RP70A BIO\_BT\_LE\_CH39\_PEAK\_HOR

Detector mode:Average

Polarity:Horizontal

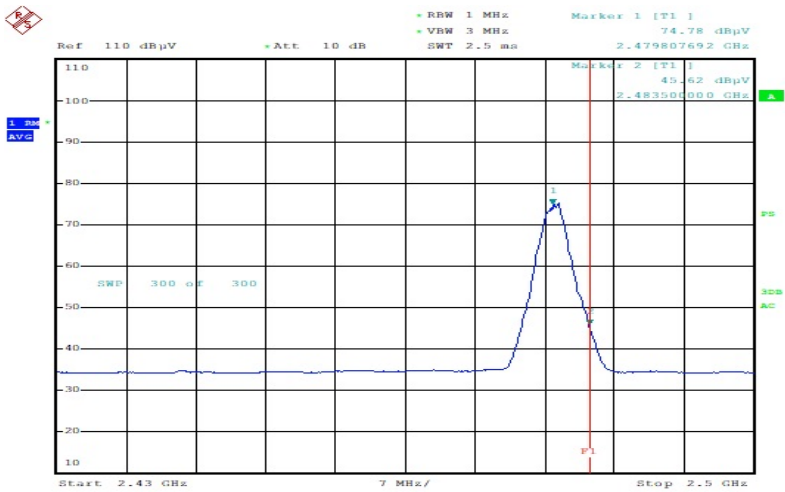


RP70A BIO\_BT\_LE\_CH39\_AV\_HOR



Band Edges(CH High)

Detector mode:Peak


Polarity:Vertical

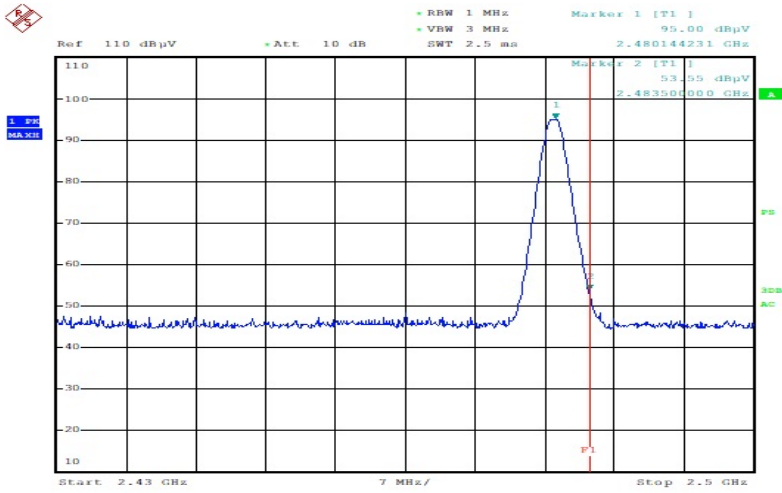

RP70A BIO\_BT\_LE\_CH39\_PEAK\_VER

Detector mode:Average

Polarity:Vertical

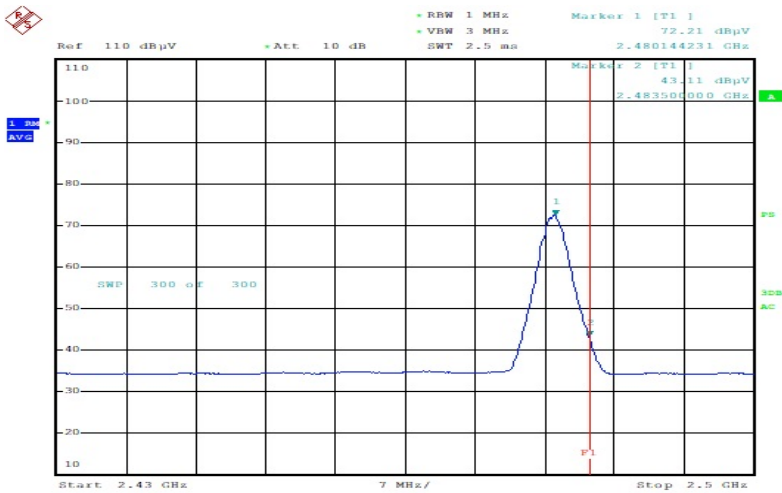


RP70A BIO\_BT\_LE\_CH39\_AV\_VER


# 10.4-6 Restricted Band Edges

Band Edges(CH Low)

Polarity:Horizontal

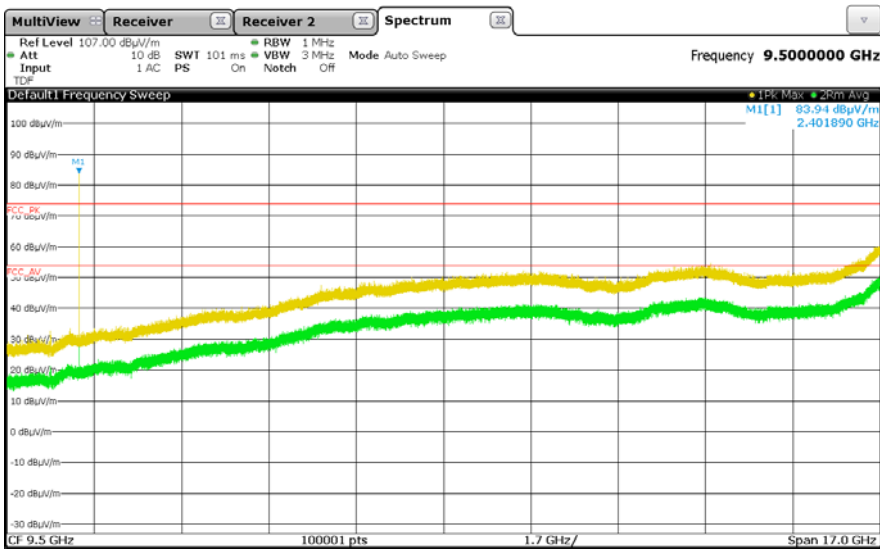


Polarity:Vertical

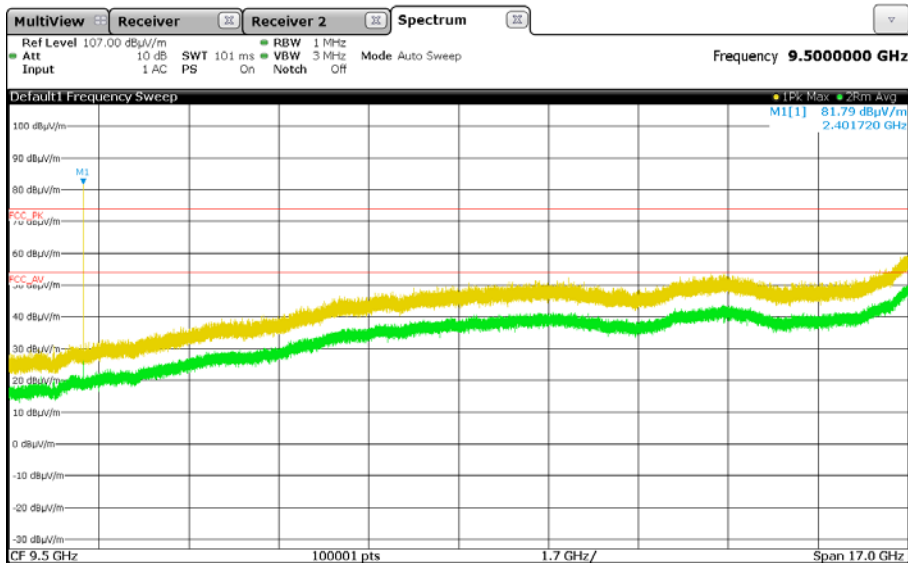

Band Edges(CH Middle)

Polarity:Horizontal

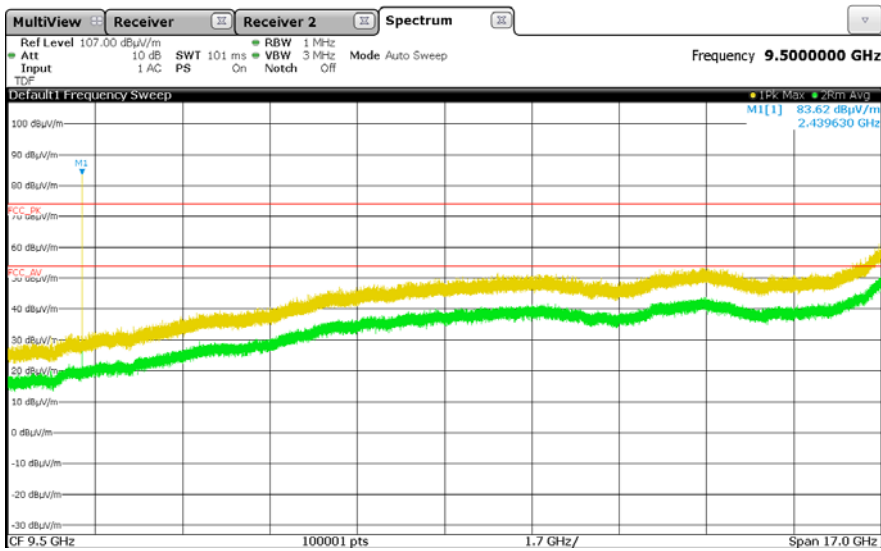


Polarity:Vertical




Band Edges(CH High)

Polarity:Horizontal

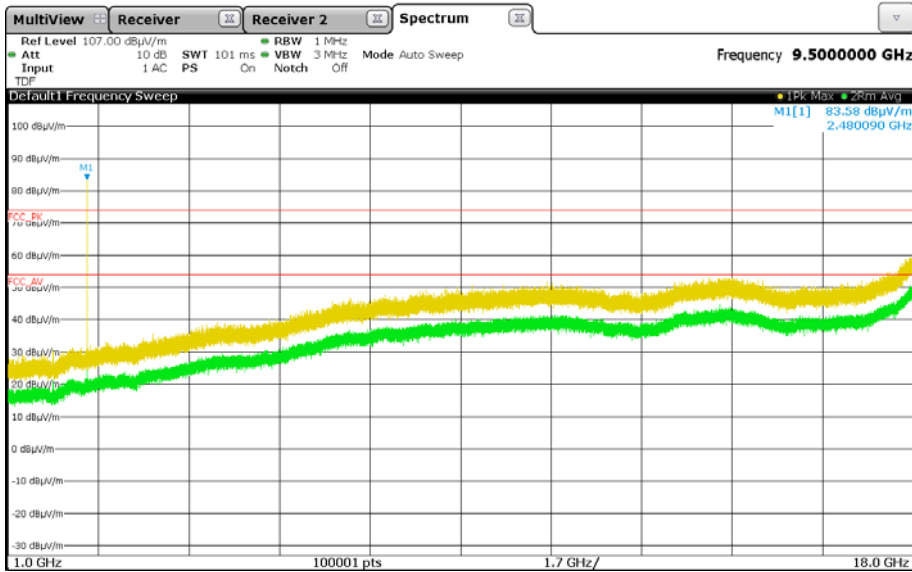

Polarity:Vertical

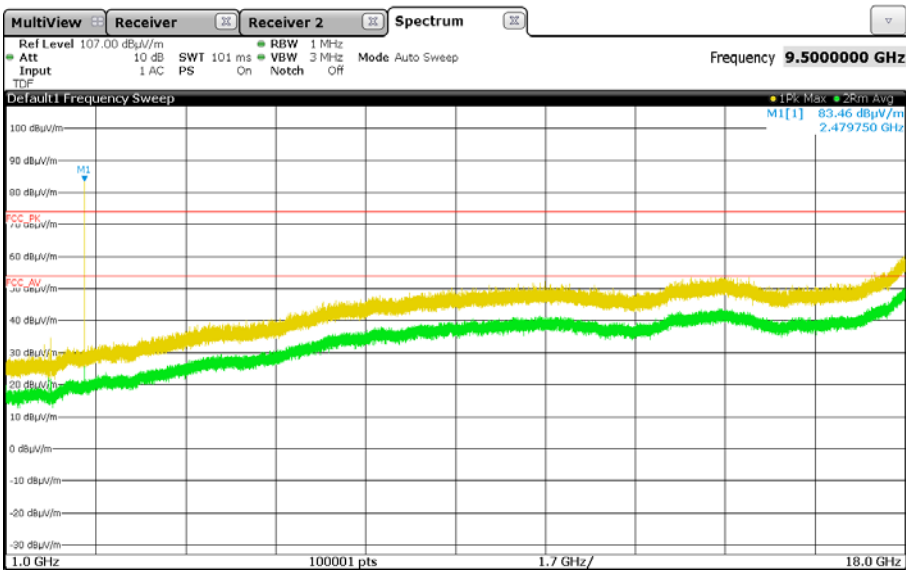

## 11. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC PART 15.207. The test setup was made according to ANSI C 63.10 (2013) in a shielded room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

### 11.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST RECEIVER	ESPI	Rohde & Schwarz	100005	9-Sep-20
LISN	ESH3-Z5	Rohde & Schwarz	836679/025	9-Sep-20
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	9-Sep-20

### 11.2 Environmental Condition

Test Place : Shielded Room

Temperature (°C) : 22.3 °C

Humidity (% R.H.) : 45.5 % R.H.


### 11.3 Test Data

Test Date : 7-Apr-20

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Result (dB)
0.16	0.09	0.13	N	65.52	46.47	46.69	55.52	31.48	31.70
0.17	0.09	0.16	N	64.77	43.37	43.62	54.77	30.78	31.03
0.20	0.16	0.20	H	63.45	37.42	37.78	53.45	26.26	26.62
0.39	0.09	0.21	N	58.06	40.67	40.97	48.06	33.42	33.72
0.80	0.10	0.23	N	56.00	27.22	27.55	46.00	20.71	21.04
13.65	0.46	0.36	N	60.00	37.97	38.80	50.00	30.38	31.21
Remark	H : Hot Line, N : Neutral Line *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading								


# Appendix 1. Special diagram

\* HOT LINE

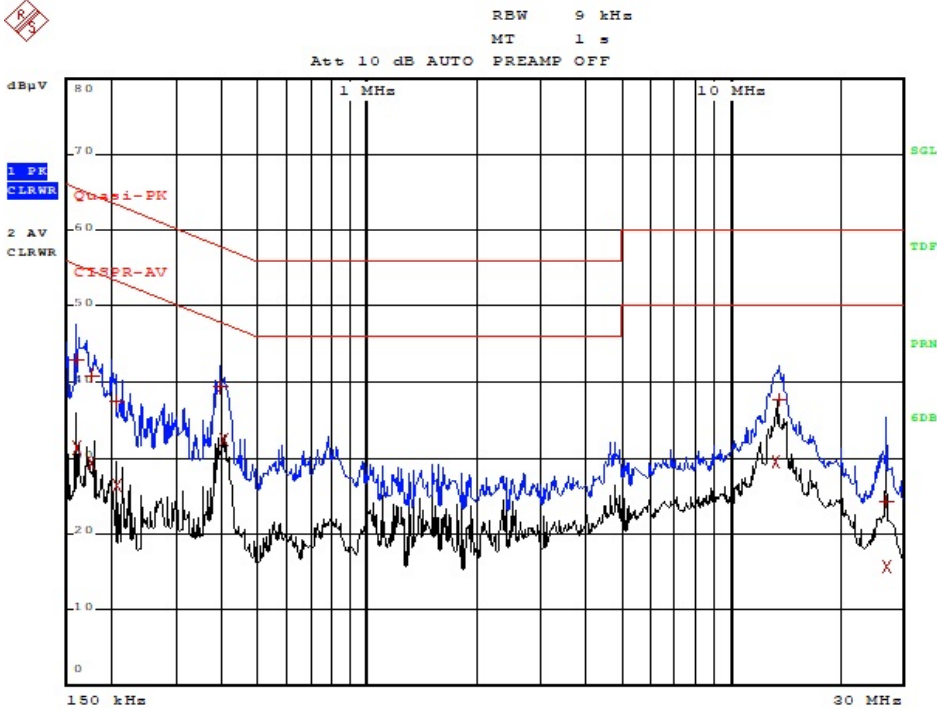

Comment: ESTR-20-00077\_BLE\_HOT

\* NEUTRAL LINE

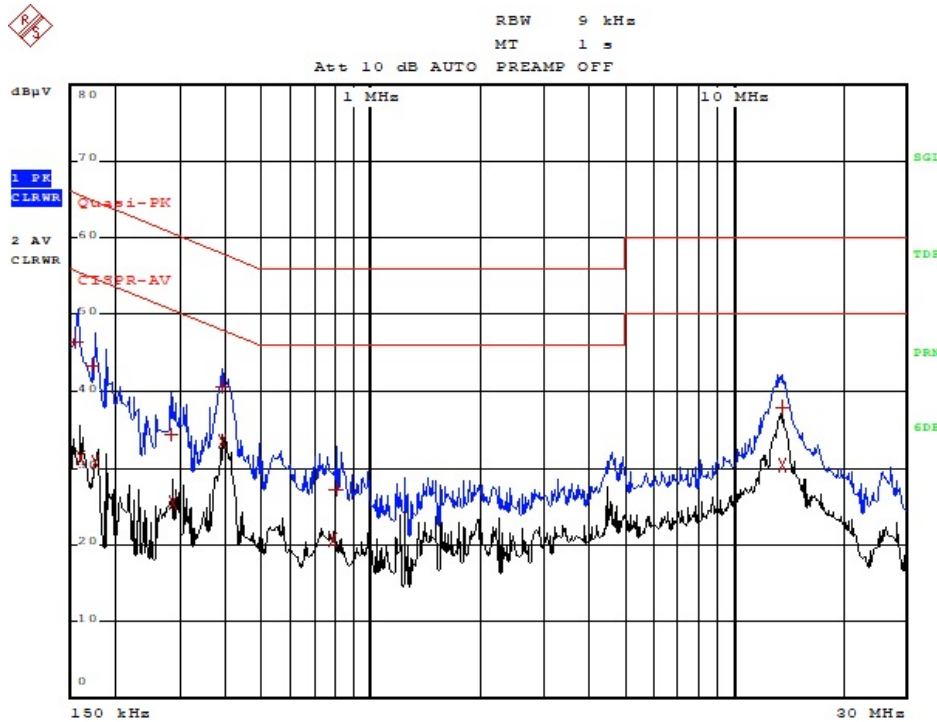

Comment: ESTR-20-00077\_BLE\_NEUTRAL

## Appendix 2. Antenna information

### 1. Antenna information

antenna type : WIFI Dual Band ANTENNA.

antenna location : Integral

antenna gain : 0.25 dBi

No temporary RF connector provided