

---

# FCC Test Report

---

Report No.:AGC03057200502FE07

**FCC ID** : 2AWCR-U850

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : 4G Wireless Router

**BRAND NAME** : signalinks

**MODEL NAME** : U850

**APPLICANT** : Shenzhen Xinfengweiye Technology Co., Ltd

**DATE OF ISSUE** : Jun. 18, 2020

**STANDARD(S)** : FCC Part 22 Rules  
FCC Part 24 Rules  
FCC Part 27 Rules

**REPORT VERSION** : V1.0

Attestation of *Global Compliance (Shenzhen) Co., Ltd.*

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 18, 2020	Valid	Initial Release

## TABLE OF CONTENTS

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>5</b>
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1 PRODUCT DESCRIPTION.....	6
2.2 RELATED SUBMITTAL(S) / GRANT (S).....	8
2.3 TEST METHODOLOGY .....	8
2.4 TEST FACILITY .....	9
2.5 SPECIAL ACCESSORIES .....	11
2.6 EQUIPMENT MODIFICATIONS.....	11
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>12</b>
3.1 EUT CONFIGURATION .....	12
3.2 EUT EXERCISE.....	12
3.3 GENERAL TECHNICAL REQUIREMENTS .....	12
3.4 CONFIGURATION OF EUT SYSTEM .....	13
<b>4. SUMMARY OF TEST RESULTS .....</b>	<b>14</b>
<b>5. DESCRIPTION OF TEST MODES.....</b>	<b>15</b>
<b>6. OUTPUT POWER .....</b>	<b>20</b>
6.1 CONDUCTED OUTPUT POWER.....	20
6.1.1 MEASUREMENT METHOD.....	20
6.2 RADIATED OUTPUT POWER .....	48
6.2.1 MEASUREMENT METHOD.....	48
6.3. PEAK-TO-AVERAGE RATIO .....	64
6.3.1 MEASUREMENT METHOD.....	64
<b>7. SPURIOUS EMISSION .....</b>	<b>91</b>
7.1 CONDUCTED SPURIOUS EMISSION.....	99
7.2 RADIATED SPURIOUS EMISSION .....	102
<b>8. FREQUENCY STABILITY.....</b>	<b>110</b>
8.1 MEASUREMENT METHOD.....	110
8.2 PROVISIONS APPLICABLE .....	111
8.3 MEASUREMENT RESULT (WORST).....	112
<b>9. OCCUPIED BANDWIDTH .....</b>	<b>115</b>
9.1 MEASUREMENT METHOD.....	115
9.2 PROVISIONS APPLICABLE .....	115
9.3 MEASUREMENT RESULT .....	115
<b>10. EMISSION BANDWIDTH.....</b>	<b>126</b>

10.1 MEASUREMENT METHOD.....	126
10.2 PROVISIONS APPLICABLE.....	126
10.3 MEASUREMENT RESULT.....	126
<b>11. BAND EDGE.....</b>	<b>137</b>
11.1 MEASUREMENT METHOD.....	137
11.2 PROVISIONS APPLICABLE.....	137
11.3 MEASUREMENT RESULT.....	137
<b>APPENDIX A TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION.....</b>	<b>138</b>
<b>APPENDIX B TEST PLOTS FOR OCCUPIED BANDWIDTH (99%).....</b>	<b>142</b>
EMISSION BANDWIDTH (-26dBC).....	145
<b>APPENDIX C TEST PLOTS FOR BAND EDGES.....</b>	<b>166</b>
<b>APPENDIX D PHOTOGRAPHS OF TEST SETUP.....</b>	<b>192</b>


## 1. VERIFICATION OF COMPLIANCE

<b>Applicant</b>	Shenzhen Xinfengweiye Technology Co., Ltd
<b>Address</b>	301, Blk 6, Donglongxing Science Park, Huaning Rd., Longhua Dist., Shenzhen, China
<b>Manufacturer</b>	Shenzhen Xinfengweiye Technology Co., Ltd
<b>Address</b>	301, Blk 6, Donglongxing Science Park, Huaning Rd., Longhua Dist., Shenzhen, China
<b>Factory</b>	Shenzhen Xinfengweiye Technology Co., Ltd
<b>Address</b>	301, Blk 6, Donglongxing Science Park, Huaning Rd., Longhua Dist., Shenzhen, China
<b>Product Designation</b>	4G Wireless Router
<b>Brand Name</b>	signalinks
<b>Test Model</b>	U850
<b>Date of test</b>	May 07, 2020 to Jun. 16, 2020
<b>Deviation</b>	No any deviation from the test method.
<b>Condition of Test Sample</b>	Normal

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 22, 24 and 27. The test results of this report relate only to the tested sample identified in this report.

Prepared By



Donjon Huang  
(Project Engineer)

Jun. 16, 2020

Reviewed By



Max Zhang  
(Reviewer)

Jun. 18, 2020

Approved By



Forrest Lei  
(Authorized Officer)

Jun. 18, 2020

## 2. GENERAL INFORMATION

### 2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Radio System Type:	LTE	
Frequency Bands:	<input checked="" type="checkbox"/> FDD Band 2 <input checked="" type="checkbox"/> FDD Band 4 <input checked="" type="checkbox"/> FDD Band 7 <input checked="" type="checkbox"/> FDD Band 12 <input checked="" type="checkbox"/> FDD Band 25 (U.S. Bands) <input type="checkbox"/> FDD Band 20 <input checked="" type="checkbox"/> FDD Band 28 <input type="checkbox"/> TDD Band 38 (Non-U.S. Bands)	
Frequency Range	LTE Band 2	Transmission (TX): 1850 to 1909.9 MHz
		Receiving (RX): 1930 to 1989.9 MHz
	LTE Band 4	Transmission (TX): 1710 to 1754.9 MHz
		Receiving (RX): 2110 to 2154.9 MHz
	LTE Band 7	Transmission (TX): 2500 to 2569.9MHz
		Receiving (RX): 2620 to 2689.9MHz
	LTE Band 12	Transmission (TX): 700 to 715.9MHz
		Receiving (RX): 730 to 745.9MHz
	LTE Band 25	Transmission (TX): 1850 to 1914.9MHz
		Receiving (RX): 1930 to 1994.9MHz
Supported Channel Bandwidth	LTE Band 2	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz
		<input checked="" type="checkbox"/> 10 MHz <input checked="" type="checkbox"/> 15 MHz <input checked="" type="checkbox"/> 20 MHz
	LTE Band 4	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz
		<input checked="" type="checkbox"/> 10 MHz <input checked="" type="checkbox"/> 15 MHz <input checked="" type="checkbox"/> 20 MHz
	LTE Band 7	<input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz <input checked="" type="checkbox"/> 15 MHz <input checked="" type="checkbox"/> 20 MHz
LTE Band 12	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz	
LTE Band 25	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz	
	<input checked="" type="checkbox"/> 15 MHz <input checked="" type="checkbox"/> 20 MHz	
Hardware Version	F232E_V3.0_RR_FX	
Software Version	XFNJ_B03P14_F232E_V3.0_RR_FX_F232_P005	
Antenna:	PIFA Antenna	
Type of Modulation	QPSK/16QAM	
Antenna gain:	Band 2: 1.1dBi; Band 4: 0.9dBi; Band 7: 1.5dBi; Band 12: 0.7dBi; Band 25: 1.1dBi;	
Diversity Antenna gain:	Band 2: 0.98dBi; Band 4: 0.8dBi; Band 7: 1.3dBi; Band 12: 0.6dBi; Band 25: 1.0dBi;	
Power Supply:	DC 5V	
Single Card:	WCDMA/LTE Card Slot	
Power Class	3	

Extreme Vol. Limits:	DC4.5V to 5.5V (Normal: 5V)
Temperature range	-10°C to +60°C
<b>Note1:</b> The High Voltage DC5.5V and Low Voltage DC4.5V were declared by manufacturer, The EUT couldn't be operating normally with higher or lower voltage..	

## **2.2 RELATED SUBMITTAL(S) / GRANT (S)**

This submittal(s) (test report) is intended for **FCC ID:2AWCR-U850** , filing to comply with the FCC Part 22, Part 24 and Part 27 requirements

## **2.3 TEST METHODOLOGY**

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E-2016, and FCC KDB 971168 D01 Power Means License Digital Systems V03R01.



## 2.4 TEST FACILITY

<b>Test Site</b>	Attestation of Global Compliance (Shenzhen) Co., Ltd
<b>Location</b>	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
<b>Designation Number</b>	CN1259
<b>FCC Test Firm Registration Number</b>	975832
<b>A2LA Cert. No.</b>	5054.02
<b>Description</b>	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

## ALL TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 12, 2019	Jun. 11, 2020
TEST RECEIVER	R&S	ESPI	101206	Jun. 10, 2020	Jun. 09, 2021
LISN	R&S	ESH2-Z5	100086	Aug.26, 2019	Aug.25, 2020
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 11, 2020
TEST RECEIVER	R&S	ESCI	10096	Jun. 10, 2020	Jun. 09, 2021
EXA Signal Analyzer	Agilent	N9010A	MY53470504	Dec.18, 2019	Dec.17, 2020
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2019	Sep. 20, 2021
preamplifier	ChengYi	EMC184045SE	980508	Sep. 23, 2019	Sep. 22, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May.17, 2019	May.16, 2021
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 12, 2019	Jun. 11, 2020
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 10, 2020	Jun. 09, 2021
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.20, 2019	Sep.19, 2020
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep. 09, 2019	Sep. 08, 2020
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	Sep. 09, 2019	Sep. 08, 2020
Wireless communicationtest	R&S	CMW500	120909	Oct. 26, 2019	Oct. 25, 2020
Power Splitter	Agilent	11636A	34	Jun. 12, 2019	Jun. 11, 2020
Power Splitter	Agilent	11636A	34	Jun. 10, 2020	Jun. 09, 2021

Attenuator	JFW	50FHC-006-50	N/A	Jun. 12, 2019	Jun. 11, 2020
Attenuator	JFW	50FHC-006-50	N/A	Jun. 10, 2020	Jun. 09, 2021

## **2.5 SPECIAL ACCESSORIES**

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

## **2.6 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

#### 3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	2.1046/22.913(a)(2)/24.232(c)/ 27.50(d)(4)/ 27.50(h)(2)
		Radiated output power	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)
3	Spurious Emission	Conducted spurious emission	2.1051/22.917(a)/24.238(a) 27.53(h)/ 27.53(g)
		Radiated spurious emission	
4	Frequency Stability		2.1055/22.355/24.235/27.54
5	Occupied Bandwidth		2.1049 (h)(i)
6	Band Edge		2.1051/22.917(a)/24.238(a) 27.53(h)/ 27.53(g)

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different.

### 3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	4G Wireless Router	U850	FCC ID: 2AWCR-U850	EUT
2	PC	Xiaomi Inc.	--	AE
3	USB Cable	N/A	N/A	AE

\*\*\*Note: All the accessories have been used during the test. The following “EUT” in setup diagram means EUT system.

#### 4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046/22.913(a)(2)/24.232(c)/ 27.50(d)(4)/ 27.50(h)(2)	Pass
		Radiated Output Power		
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051/22.917(a)/24.238(a) 27.53(h)/ 27.53(g)	Pass
		Radiated Spurious Emission		
4	Frequency Stability		2.1055/22.355/24.235/27.54	Pass
5	Occupied Bandwidth		2.1049 (h)(i)	Pass
6	Band Edge		2.1051/22.917(a)/24.238(a) 27.53(h)/ 27.53(g)	Pass

## 5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMW 500) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both LTE frequency band.

The worst condition was recorded in the test report if no other modes test data.

Test Mode	Test Modes Description
LTE	LTE system, QPSK modulation
LTE	LTE system, 16QAM modulation

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 2	TX (1.4M)	Channel 18607	Channel 18900	Channel 19193
		1850.7 MHz	1880 MHz	1909.3 MHz
	TX (3M)	Channel 18615	Channel 18900	Channel 19185
		1851.5 MHz	1880 MHz	1908.5 MHz
	TX (5M)	Channel 18625	Channel 18900	Channel 19175
		1852.5 MHz	1880 MHz	1907.5 MHz
	TX (10M)	Channel 18650	Channel 18900	Channel 19150
		1855.0 MHz	1880 MHz	1905.0 MHz
	TX (20M)	Channel 18700	Channel 18900	Channel 19100
		1860.0 MHz	1880 MHz	1900.0 MHz
	RX (1.4M)	Channel 607	Channel 900	Channel 1193
		1930.7 MHz	1960 MHz	1989.3 MHz
	RX (3M)	Channel 615	Channel 900	Channel 1185
		1931.5 MHz	1960 MHz	1988.5 MHz
	RX (5M)	Channel 625	Channel 900	Channel 1175
		1932.5 MHz	1960 MHz	1987.5 MHz
	RX (10M)	Channel 650	Channel 900	Channel 1150
		1935 MHz	1960 MHz	1985 MHz
	RX (20M)	Channel 700	Channel 900	Channel 1100
		1940.0 MHz	1960 MHz	1980 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 4	TX (1.4M)	Channel 19957	Channel 20175	Channel 20393
		1710.7 MHz	1732.5 MHz	1754.3 MHz
	TX (3M)	Channel 19965	Channel 20175	Channel 20385
		1711.5 MHz	1732.5 MHz	1753.5 MHz
	TX (5M)	Channel 19975	Channel 20175	Channel 20375
		1712.5 MHz	1732.5 MHz	1752.5 MHz
	TX (10M)	Channel 20000	Channel 20175	Channel 20350
		1715 MHz	1732.5 MHz	1750 MHz
	TX (15M)	Channel 20025	Channel 20175	Channel 20325
		1717.5 MHz	1732.5 MHz	1747.5 MHz
	TX (20M)	Channel 20050	Channel 20175	Channel 20300
		1720 MHz	1732.5 MHz	1745 MHz
	RX (1.4M)	Channel 1957	Channel 2175	Channel 2393
		2110.7 MHz	2132.5 MHz	2154.3 MHz
	RX (3M)	Channel 1965	Channel 2175	Channel 2385
		2111.5 MHz	2132.5 MHz	2153.5 MHz
	RX (5M)	Channel 1975	Channel 2175	Channel 2375
		2112.5 MHz	2132.5 MHz	2152.5 MHz
	RX (10M)	Channel 2000	Channel 2175	Channel 2350
		2115 MHz	2132.5 MHz	2150 MHz
	RX (15M)	Channel 2025	Channel 2175	Channel 2325
		2117.5 MHz	2132.5 MHz	2147.5 MHz
	RX (20M)	Channel 2050	Channel 2175	Channel 2300
		2120 MHz	2132.5 MHz	2145 MHz



Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 7	TX (5M)	Channel 20775	Channel 21100	Channel 21425
		2502.5 MHz	2535 MHz	2567.5 MHz
	TX (10M)	Channel 20800	Channel 21100	Channel 21400
		2505.0 MHz	2535 MHz	2565 MHz
	TX (15M)	Channel 20825	Channel 21100	Channel 21275
		2507.5 MHz	2535 MHz	2562.5 MHz
	TX (20M)	Channel 20850	Channel 21100	Channel 21350
		2510.0 MHz	2535 MHz	2560 MHz
	RX (5M)	Channel 2775	Channel 3100	Channel 3425
		2622.5 MHz	2655 MHz	2687.5 MHz
	RX (10M)	Channel 2800	Channel 3100	Channel 3400
		2625.0 MHz	2655 MHz	2685 MHz
	RX (15M)	Channel 2825	Channel 3100	Channel 3375
		2627.5 MHz	2655 MHz	2682.5 MHz
	RX (20M)	Channel 2850	Channel 3100	Channel 3350
		2630.0 MHz	2655 MHz	2680.0 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 12	TX (1.4M)	Channel 23027	Channel 23100	Channel 23173
		700.7 MHz	708 MHz	715.3 MHz
	TX (3M)	Channel 23035	Channel 23100	Channel 23165
		701.5 MHz	708 MHz	714.5 MHz
	TX (5M)	Channel 23045	Channel 23100	Channel 23155
		702.5 MHz	708 MHz	713.5 MHz
	TX (10M)	Channel 23070	Channel 23100	Channel 23130
		705.0 MHz	708 MHz	711.0 MHz
	RX (1.4M)	Channel 5027	Channel 5100	Channel 5173
		730.7 MHz	738 MHz	745.3 MHz
	RX (3M)	Channel 5035	Channel 5100	Channel 5165
		731.5 MHz	738 MHz	744.5 MHz
	RX (5M)	Channel 5045	Channel 5100	Channel 5155
		732.5 MHz	738 MHz	743.5 MHz
	RX (10M)	Channel 5070	Channel 5100	Channel 5130
		735.0 MHz	738 MHz	741.0 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 25	TX (1.4M)	Channel 26047	Channel 26365	Channel 26683
		1850.7 MHz	1882.5 MHz	1914.3 MHz
	TX (3M)	Channel 26055	Channel 26365	Channel 26675
		1851.5 MHz	1882.5 MHz	1913.5 MHz
	TX (5M)	Channel 26065	Channel 26365	Channel 26665
		1852.5 MHz	1882.5 MHz	1912.5 MHz
	TX (10M)	Channel 26090	Channel 26365	Channel 26640
		1855.0 MHz	1882.5 MHz	1910.0 MHz
	TX (15M)	Channel 26115	Channel 26365	Channel 26615
		1857.5 MHz	1882.5 MHz	1907.5 MHz
	TX (20M)	Channel 26140	Channel 26365	Channel 26590
		1860.0 MHz	1882.5 MHz	1905.0 MHz
	RX (1.4M)	Channel 8047	Channel 8365	Channel 8683
		1930.7 MHz	1962.5 MHz	1994.3 MHz
	RX (3M)	Channel 8055	Channel 8365	Channel 8675
		1931.5 MHz	1962.5 MHz	1993.5 MHz
	RX (5M)	Channel 8065	Channel 8365	Channel 8665
		1932.5 MHz	1962.5 MHz	1992.5 MHz
	RX (10M)	Channel 8090	Channel 8365	Channel 8640
		1935.0 MHz	1962.5 MHz	1990.0 MHz
	RX (15M)	Channel 8115	Channel 8365	Channel 8615
		1937.5 MHz	1962.5 MHz	1987.5 MHz
	RX (20M)	Channel 8140	Channel 8365	Channel 8590
		1940.0 MHz	1962.5 MHz	1985.0 MHz

## **6. OUTPUT POWER**

### **6.1 CONDUCTED OUTPUT POWER**

#### **6.1.1 MEASUREMENT METHOD**

The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50ohm, the path loss as the factor is calibrated to correct the reading. A system simulator was used to establish communication with the EUT , Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported. The measurements were performed on all modes at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

LTE Band 2

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
20MHz	18700	1860.0	QPSK	1	0	0	23.09
				1	49	0	22.31
				1	99	0	22.98
				50	0	1	22.56
				50	25	1	22.56
				50	49	1	21.84
				100	0	1	22.01
			16QAM	1	0	1	22.65
				1	49	1	21.89
				1	99	1	22.47
				50	0	2	22.56
				50	25	2	22.56
				50	49	2	21.84
				100	0	2	21.60
	18900	1880.0	QPSK	1	0	0	23.56
				1	49	0	22.50
				1	99	0	24.16
				50	0	1	21.61
				50	25	1	21.61
				50	49	1	22.25
				100	0	1	22.45
			16QAM	1	0	1	22.26
				1	49	1	22.16
				1	99	1	23.15
				50	0	2	21.60
				50	25	2	21.60
				50	49	2	22.24
				100	0	2	21.93
	19100	1900.0	QPSK	1	0	0	23.65
				1	49	0	22.80
1				99	0	23.05	
50				0	1	22.74	
50				25	1	22.73	
50				49	1	22.26	
100				0	1	22.17	
16QAM			1	0	1	23.19	
			1	49	1	22.36	
			1	99	1	21.51	
			50	0	2	22.94	
			50	25	2	22.93	
			50	49	2	22.18	
			100	0	2	21.70	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
15MHz	18675	1857.5	QPSK	1	0	0	23.21
				1	38	0	22.05
				1	74	0	22.72
				38	0	1	22.12
				38	18	1	22.12
				38	37	1	22.12
				75	0	1	22.12
			16QAM	1	0	1	22.57
				1	38	1	21.53
				1	74	1	22.16
				38	0	2	22.11
				38	18	2	22.11
				38	37	2	22.12
				75	0	2	21.66
	18900	1880.0	QPSK	1	0	0	22.78
				1	38	0	22.00
				1	74	0	24.00
				38	0	1	22.11
				38	18	1	22.11
				38	37	1	22.11
				75	0	1	22.09
			16QAM	1	0	1	22.24
				1	38	1	21.48
				1	74	1	22.70
				38	0	2	22.10
				38	18	2	22.10
				38	37	2	22.09
				75	0	2	21.53
	19125	1902.5	QPSK	1	0	0	23.54
				1	38	0	22.01
				1	74	0	22.42
				38	0	1	21.87
				38	18	1	21.87
				38	37	1	21.87
				75	0	1	21.92
			16QAM	1	0	1	22.96
1				38	1	21.42	
1				74	1	20.91	
38				0	2	21.89	
38				18	2	21.89	
38				37	2	21.89	
75				0	2	21.47	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	18650	1855.0	QPSK	1	0	0	23.43
				1	24	0	22.27
				1	49	0	22.97
				25	0	1	22.14
				25	12	1	22.14
				25	25	1	21.98
			16QAM	50	0	1	22.39
				1	0	1	22.49
				1	24	1	21.54
				1	49	1	22.26
				25	0	2	22.14
				25	12	2	22.14
				25	25	2	21.98
				50	0	2	21.83
	18900	1880.0	QPSK	1	0	0	22.63
				1	24	0	21.90
				1	49	0	24.66
				25	0	1	21.77
				25	12	1	21.77
				25	25	1	22.04
			16QAM	50	0	1	21.97
				1	0	1	21.98
				1	24	1	21.14
				1	49	1	22.76
				25	0	2	21.77
				25	12	2	21.77
				25	25	2	22.04
				50	0	2	21.41
	19150	1905.0	QPSK	1	0	0	23.18
				1	24	0	21.65
				1	49	0	23.36
				25	0	1	22.06
				25	12	1	22.06
				25	25	1	21.01
			16QAM	50	0	1	21.75
				1	0	1	22.70
1				24	1	21.38	
1				49	1	21.02	
25				0	2	22.07	
25				12	2	22.08	
25				25	2	21.02	
50				0	2	21.33	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	18625	1852.5	QPSK	1	0	0	22.56
				1	12	0	22.25
				1	24	0	22.75
				12	0	1	22.10
				12	6	1	22.10
				12	13	1	22.10
				25	0	1	22.10
			16QAM	1	0	1	22.18
				1	12	1	21.91
				1	24	1	22.41
				12	0	2	22.10
				12	6	2	22.10
				12	13	2	22.10
				25	0	2	21.54
	18900	1880.0	QPSK	1	0	0	22.35
				1	12	0	22.16
				1	24	0	22.95
				12	0	1	21.84
				12	6	1	21.83
				12	13	1	21.83
				25	0	1	21.83
			16QAM	1	0	1	21.93
				1	12	1	21.59
				1	24	1	22.11
				12	0	2	21.83
				12	6	2	21.82
				12	13	2	21.82
				25	0	2	21.27
	19175	1907.5	QPSK	1	0	0	22.19
				1	12	0	21.91
1				24	0	21.66	
12				0	1	21.77	
12				6	1	21.77	
12				13	1	21.77	
25				0	1	21.78	
16QAM			1	0	1	21.77	
			1	12	1	20.57	
			1	24	1	20.19	
			12	0	2	20.77	
			12	6	2	20.78	
			12	13	2	20.78	
			25	0	2	20.39	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	18615	1851.5	QPSK	1	0	0	22.68
				1	8	0	22.09
				1	14	0	22.76
				8	0	1	21.93
				8	4	1	21.93
				8	8	1	21.93
			16QAM	15	0	1	21.93
				1	0	1	22.03
				1	8	1	21.42
				1	14	1	22.12
				8	0	2	21.94
				8	4	2	21.93
	18900	1880.0	QPSK	8	8	2	21.93
				15	0	2	21.35
				1	0	0	22.92
				1	8	0	21.93
				1	14	0	22.80
				8	0	1	21.73
			16QAM	8	4	1	21.73
				8	7	1	21.73
				15	0	1	21.72
				1	0	1	22.09
				1	8	1	21.10
				1	14	1	22.01
	19185	1908.5	QPSK	8	0	2	21.72
				8	4	2	21.73
				8	8	2	21.73
				15	0	2	21.13
				1	0	0	21.55
				1	8	0	21.32
			16QAM	1	14	0	21.68
				8	0	1	20.26
				8	4	1	20.26
				8	8	1	20.26
				15	0	1	20.25
				1	0	1	21.02
16QAM	1	8	1	20.94			
	1	14	1	20.18			
	8	0	2	20.25			
	8	4	2	20.25			
	8	8	2	20.25			
	15	0	2	20.87			

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	18607	1850.7	QPSK	1	0	0	22.98
				1	2	0	22.86
				1	5	0	22.89
				3	0	0	22.99
				3	1	0	22.98
				3	2	0	22.98
				6	0	1	22.39
			16QAM	1	0	1	22.67
				1	2	1	22.56
				1	5	1	22.60
				3	0	1	22.94
				3	1	1	22.93
				3	2	1	22.99
				6	0	2	22.85
	18900	1880.0	QPSK	1	0	0	22.72
				1	2	0	22.81
				1	5	0	22.77
				3	0	0	22.77
				3	1	0	22.75
				3	2	0	22.13
				6	0	1	22.95
			16QAM	1	0	1	22.31
				1	2	1	22.26
				1	5	1	22.28
				3	0	1	22.73
				3	1	1	22.73
				3	2	1	22.71
				6	0	2	21.57
	19193	1909.3	QPSK	1	0	0	21.11
				1	2	0	21.76
1				5	0	21.79	
3				0	0	21.96	
3				1	0	21.99	
3				2	0	21.78	
6				0	1	21.28	
16QAM			1	0	1	21.57	
			1	2	1	21.41	
			1	5	1	21.39	
			3	0	1	21.92	
			3	1	1	21.94	
			3	2	1	21.76	
			6	0	2	20.93	

LTE Band 4

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
20MHz	20050	1720.0	QPSK	1	0	0	23.80
				1	49	0	22.52
				1	99	0	23.34
				50	0	1	22.75
				50	25	1	22.75
				50	49	1	22.39
				100	0	1	22.31
			16QAM	1	0	1	23.64
				1	49	1	22.37
				1	99	1	23.03
				50	0	2	22.76
				50	25	2	22.77
				50	49	2	22.40
				100	0	2	21.91
	20175	1732.5	QPSK	1	0	0	22.26
				1	49	0	22.10
				1	99	0	22.53
				50	0	1	21.74
				50	25	1	21.74
				50	49	1	21.84
				100	0	1	22.01
			16QAM	1	0	1	21.89
				1	49	1	21.71
				1	99	1	22.36
				50	0	2	21.72
				50	25	2	21.72
				50	49	2	21.83
				100	0	2	21.74
	20300	1745.0	QPSK	1	0	0	22.52
				1	49	0	21.36
				1	99	0	21.44
				50	0	1	22.04
				50	25	1	22.03
				50	49	1	20.48
				100	0	1	20.81
			16QAM	1	0	1	22.01
1				49	1	21.05	
1				99	1	21.11	
50				0	2	22.04	
50				25	2	22.04	
50				49	2	20.49	
100				0	2	20.40	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
15MHz	20025	1717.5	QPSK	1	0	0	23.86
				1	37	0	22.22
				1	74	0	23.19
				36	0	1	22.27
				36	16	1	22.27
				36	35	1	22.27
				75	0	1	22.28
			16QAM	1	0	1	23.51
				1	37	1	21.86
				1	74	1	22.86
				36	0	2	22.27
				36	16	2	22.27
				36	35	2	22.28
				75	0	2	21.88
	20175	1732.5	QPSK	1	0	0	22.42
				1	37	0	21.78
				1	74	0	22.79
				36	0	1	21.83
				36	16	1	21.82
				36	35	1	21.82
				75	0	1	21.79
			16QAM	1	0	1	22.08
				1	37	1	21.18
				1	74	1	22.29
				36	0	2	21.81
				36	16	2	21.81
				36	35	2	21.80
				75	0	2	21.50
	20325	1747.5	QPSK	1	0	0	22.94
				1	37	0	20.51
				1	74	0	21.25
				36	0	1	20.46
				36	16	1	20.47
				36	35	1	20.47
				75	0	1	20.51
			16QAM	1	0	1	22.38
1				37	1	20.16	
1				74	1	19.90	
36				0	2	20.49	
36				16	2	20.49	
36				35	2	20.50	
75				0	2	20.08	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	20000	1715.0	QPSK	1	0	0	24.00
				1	24	0	22.72
				1	49	0	23.55
				25	0	1	22.88
				25	12	1	22.88
				25	25	1	22.34
				50	0	1	22.78
			16QAM	1	0	1	23.62
				1	24	1	22.47
				1	49	1	23.32
				25	0	2	22.88
				25	12	2	22.88
				25	25	2	22.35
				50	0	2	22.37
	20175	1732.5	QPSK	1	0	0	23.00
				1	24	0	21.77
				1	49	0	22.98
				25	0	1	21.63
				25	12	1	21.62
				25	25	1	21.68
				50	0	1	21.67
			16QAM	1	0	1	22.41
				1	24	1	21.22
				1	49	1	22.54
				25	0	2	21.60
				25	12	2	21.60
				25	25	2	21.66
				50	0	2	21.38
	20350	1750.0	QPSK	1	0	0	22.11
				1	24	0	21.33
				1	49	0	22.02
				25	0	1	21.61
				25	12	1	21.61
				25	25	1	21.87
				50	0	1	21.41
			16QAM	1	0	1	21.81
1				24	1	21.06	
1				49	1	22.02	
25				0	2	21.62	
25				12	2	21.63	
25				25	2	20.88	
50				0	2	21.05	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	19975	1712.5	QPSK	1	0	0	23.63
				1	12	0	23.27
				1	24	0	23.54
				12	0	1	23.05
				12	6	1	23.05
				12	11	1	23.09
				25	0	1	23.05
			16QAM	1	0	1	23.47
				1	12	1	22.95
				1	24	1	23.30
				12	0	2	23.03
				12	6	2	23.03
				12	11	2	23.07
				25	0	2	22.60
	20175	1732.5	QPSK	1	0	0	22.62
				1	12	0	22.15
				1	24	0	22.58
				12	0	1	21.68
				12	6	1	21.67
				12	11	1	21.70
				25	0	1	21.66
			16QAM	1	0	1	21.96
				1	12	1	21.50
				1	24	1	21.97
				12	0	2	21.65
				12	6	2	21.65
				12	11	2	21.68
				25	0	2	21.36
	20375	1752.5	QPSK	1	0	0	22.14
				1	12	0	22.11
1				24	0	21.94	
12				0	1	21.24	
12				6	1	21.24	
12				11	1	21.58	
25				0	1	21.94	
16QAM			1	0	1	21.89	
			1	12	1	21.90	
			1	24	1	21.64	
			12	0	2	21.24	
			12	6	2	21.24	
			12	11	2	21.59	
			25	0	2	21.55	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	19965	1711.5	QPSK	1	0	0	23.53
				1	7	0	23.00
				1	14	0	23.57
				8	0	1	22.74
				8	4	1	22.75
				8	7	1	22.75
			16QAM	15	0	1	22.75
				1	0	1	23.28
				1	7	1	22.78
				1	14	1	23.38
				8	0	2	22.74
				8	4	2	22.74
	20175	1732.5	QPSK	8	7	2	22.75
				15	0	2	22.33
				1	0	0	22.57
				1	7	0	21.90
				1	14	0	22.53
				8	0	1	21.48
			16QAM	8	4	1	21.48
				8	7	1	21.48
				15	0	1	21.45
				1	0	1	22.16
				1	7	1	21.46
				1	14	1	22.15
	20385	1753.5	QPSK	8	0	2	21.47
				8	4	2	21.47
				8	7	2	21.46
				15	0	2	21.11
				1	0	0	21.58
				1	7	0	21.55
			16QAM	1	14	0	21.82
				8	0	1	21.45
				8	4	1	21.46
				8	7	1	21.46
				15	0	1	21.47
				1	0	1	22.23
16QAM	1	7	1	21.25			
	1	14	1	22.69			
	8	0	2	21.46			
	8	4	2	21.46			
	8	7	2	21.46			
	15	0	2	21.12			

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	19957	1710.7	QPSK	1	0	0	23.71
				1	2	0	23.61
				1	5	0	23.86
				3	0	0	23.87
				3	1	0	23.86
				3	2	0	23.80
			16QAM	6	0	1	23.20
				1	0	1	23.26
				1	2	1	23.17
				1	5	1	23.49
				3	0	1	23.84
				3	1	1	23.84
	20175	1732.5	QPSK	3	2	1	23.78
				6	0	2	22.82
				1	0	0	22.69
				1	2	0	22.59
				1	5	0	22.60
				3	0	0	22.55
			16QAM	3	1	0	22.52
				3	2	0	22.52
				6	0	1	21.90
				1	0	1	22.06
				1	2	1	21.98
				1	5	1	22.07
	20393	1754.3	QPSK	3	0	1	22.51
				3	1	1	22.51
				3	2	1	22.50
				6	0	2	21.56
				1	0	0	21.24
				1	2	0	21.94
16QAM			1	5	0	21.88	
			3	0	0	22.09	
			3	1	0	22.07	
			3	2	0	21.89	
			6	0	1	21.52	
			1	0	1	21.72	
16QAM	1	2	1	21.61			
	1	5	1	22.44			
	3	0	1	22.08			
	3	1	1	22.06			
	3	2	1	22.88			
	6	0	2	21.20			



LTE Band 7

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
20MHz	20850	2510	QPSK	1	0	0	24.30
				1	49	0	22.79
				1	99	0	23.38
				50	0	1	24.30
				50	25	1	24.30
				50	49	1	23.29
			16QAM	100	0	1	23.84
				1	0	1	24.98
				1	49	1	23.79
				1	99	1	24.33
				50	0	2	24.28
				50	25	2	24.28
	21100	2535	QPSK	50	49	2	23.28
				100	0	2	22.97
				1	0	0	23.84
				1	49	0	22.60
				1	99	0	23.24
				50	0	1	23.33
			16QAM	50	25	1	23.31
				50	49	1	23.47
				100	0	1	23.72
				1	0	1	23.45
				1	49	1	23.10
				1	99	1	23.73
	21350	2560	QPSK	50	0	2	23.31
				50	25	2	23.61
				50	49	2	23.45
				100	0	2	22.93
				1	0	0	23.39
				1	49	0	21.30
16QAM			1	99	0	23.32	
			50	0	1	23.26	
			50	25	1	23.27	
			50	49	1	23.26	
			100	0	1	22.34	
			1	0	1	23.84	
1	49	1	23.99				
1	99	1	23.65				
50	0	2	23.24				
50	25	2	23.26				
50	49	2	23.26				
100	0	2	21.51				

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
15MHz	20825	2507.5	QPSK	1	0	0	24.71
				1	37	0	22.72
				1	74	0	23.43
				36	0	1	24.31
				36	16	1	24.31
				36	35	1	24.31
			16QAM	75	0	1	24.32
				1	0	1	25.32
				1	37	1	23.64
				1	74	1	24.39
				36	0	2	24.31
				36	16	2	24.31
	21100	2535	QPSK	36	35	2	24.32
				75	0	2	23.46
				1	0	0	22.83
				1	37	0	22.20
				1	74	0	23.19
				36	0	1	23.36
			16QAM	36	16	1	23.37
				36	35	1	23.37
				75	0	1	23.37
				1	0	1	23.25
				1	37	1	22.61
				1	74	1	23.55
	21375	2562.5	QPSK	36	0	2	23.36
				36	16	2	23.36
				36	35	2	23.36
				75	0	2	22.54
				1	0	0	23.44
				1	37	0	21.68
16QAM			1	74	0	23.15	
			36	0	1	22.47	
			36	16	1	22.46	
			36	35	1	22.45	
			75	0	1	22.40	
			1	0	1	22.06	
16QAM	1	37	1	22.33			
	1	74	1	22.53			
	36	0	2	22.43			
	36	16	2	22.42			
	36	35	2	22.42			
	75	0	2	21.57			

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	20800	2505	QPSK	1	0	0	24.63
				1	24	0	22.67
				1	49	0	23.97
				25	0	1	24.38
				25	12	1	24.39
				25	25	1	23.96
				50	0	1	24.23
			16QAM	1	0	1	25.25
				1	24	1	23.52
				1	49	1	24.88
				25	0	2	24.40
				25	12	2	24.40
				25	25	2	23.97
				50	0	2	23.40
	21100	2535	QPSK	1	0	0	23.25
				1	24	0	22.14
				1	49	0	23.27
				25	0	1	23.40
				25	12	1	23.39
				25	25	1	23.53
				50	0	1	23.37
			16QAM	1	0	1	23.67
				1	24	1	22.57
				1	49	1	23.59
				25	0	2	23.40
				25	12	2	23.39
				25	25	2	23.53
				50	0	2	22.59
	21400	2565	QPSK	1	0	0	22.10
				1	24	0	21.45
1				49	0	23.47	
25				0	1	22.21	
25				12	1	22.22	
25				25	1	23.62	
50				0	1	23.40	
16QAM			1	0	1	23.70	
			1	24	1	22.00	
			1	49	1	23.10	
			25	0	2	23.18	
			25	12	2	23.18	
			25	25	2	23.59	
			50	0	2	22.25	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	20775	2502.5	QPSK	1	0	0	24.22
				1	12	0	24.16
				1	24	0	24.03
				12	0	1	24.90
				12	6	1	24.89
				12	13	1	24.66
				25	0	1	24.72
			16QAM	1	0	1	24.92
				1	12	1	24.51
				1	24	1	24.63
				12	0	2	24.86
				12	6	2	24.85
				12	13	2	24.62
				25	0	2	23.84
	21100	2535	QPSK	1	0	0	22.92
				1	12	0	22.75
				1	24	0	23.20
				12	0	1	23.62
				12	6	1	23.61
				12	13	1	23.54
				25	0	1	23.42
			16QAM	1	0	1	23.42
				1	12	1	23.20
				1	24	1	23.41
				12	0	2	23.60
				12	6	2	23.60
				12	13	2	23.51
				25	0	2	22.60
	21425	2567.5	QPSK	1	0	0	22.37
				1	12	0	22.29
				1	24	0	22.82
				12	0	1	23.08
				12	6	1	23.08
				12	13	1	23.33
				25	0	1	23.58
			16QAM	1	0	1	23.88
1				12	1	22.92	
1				24	1	23.36	
12				0	2	23.03	
12				6	2	23.02	
12				13	2	23.43	
25				0	2	22.42	

LTE Band 12

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	23060	704.0	QPSK	1	0	0	23.04
				1	24	0	22.10
				1	49	0	22.41
				25	0	1	22.35
				25	12	1	22.15
				25	25	1	21.20
				50	0	1	21.84
			16QAM	1	0	1	22.31
				1	24	1	22.52
				1	49	1	22.54
				25	0	2	21.22
				25	12	2	22.38
				25	25	2	22.40
				50	0	2	21.55
	23095	707.5	QPSK	1	0	0	23.71
				1	24	0	22.40
				1	49	0	23.46
				25	0	1	21.58
				25	12	1	22.71
				25	25	1	21.66
				50	0	1	21.35
			16QAM	1	0	1	21.05
				1	24	1	23.14
				1	49	1	22.36
				25	0	2	23.85
				25	12	2	23.54
				25	25	2	23.63
				50	0	2	22.41
	23130	711.0	QPSK	1	0	0	23.02
				1	24	0	23.16
1				49	0	23.85	
25				0	1	21.42	
25				12	1	22.31	
25				25	1	21.45	
50				0	1	21.85	
16QAM			1	0	1	21.02	
			1	24	1	21.60	
			1	49	1	21.24	
			25	0	2	21.39	
			25	12	2	21.58	
			25	25	2	21.61	
			50	0	2	20.74	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	23035	701.5	QPSK	1	0	0	24.02
				1	12	0	22.80
				1	24	0	23.28
				12	0	1	23.07
				12	6	1	23.08
				12	13	1	22.52
				25	0	1	22.81
			16QAM	1	0	1	23.60
				1	12	1	22.48
				1	24	1	22.79
				12	0	2	22.65
				12	6	2	22.61
				12	13	2	22.07
				25	0	2	22.38
	23095	707.5	QPSK	1	0	0	23.22
				1	12	0	22.90
				1	24	0	23.51
				12	0	1	22.50
				12	6	1	22.49
				12	13	1	22.72
				25	0	1	22.37
			16QAM	1	0	1	22.99
				1	12	1	22.66
				1	24	1	23.17
				12	0	2	22.06
				12	6	2	22.05
				12	13	2	22.39
				25	0	2	22.00
	23155	713.5	QPSK	1	0	0	22.86
				1	12	0	21.74
1				24	0	22.13	
12				0	1	21.55	
12				6	1	21.56	
12				13	1	20.94	
25				0	1	21.72	
16QAM			1	0	1	22.40	
			1	12	1	21.38	
			1	24	1	21.83	
			12	0	2	21.95	
			12	6	2	21.97	
			12	13	2	21.63	
			25	0	2	21.39	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	23025	700.5	QPSK	1	0	0	24.20
				1	7	0	23.00
				1	14	0	23.40
				8	0	1	23.24
				8	4	1	23.26
				8	7	1	22.72
				15	0	1	22.95
			16QAM	1	0	1	23.81
				1	7	1	22.49
				1	14	1	22.88
				8	0	2	22.81
				8	4	2	22.80
				8	7	2	22.30
				15	0	2	22.68
	23095	707.5	QPSK	1	0	0	23.27
				1	7	0	22.63
				1	14	0	23.53
				8	0	1	22.33
				8	4	1	22.29
				8	7	1	22.43
				15	0	1	22.07
			16QAM	1	0	1	22.85
				1	7	1	22.21
				1	14	1	23.01
				8	0	2	21.91
				8	4	2	21.90
				8	7	2	22.08
				15	0	2	22.04
	23165	714.5	QPSK	1	0	0	21.33
				1	7	0	21.99
1				14	0	21.91	
8				0	1	22.08	
8				4	1	21.07	
8				7	1	21.79	
15				0	1	21.84	
16QAM			1	0	1	22.78	
			1	7	1	22.64	
			1	14	1	22.43	
			8	0	2	21.95	
			8	4	2	21.79	
			8	7	2	21.46	
			15	0	2	21.52	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	23017	699.7	QPSK	1	0	0	24.69
				1	2	0	24.43
				1	5	0	24.31
				3	0	0	24.42
				3	1	0	24.37
				3	2	0	24.13
			16QAM	6	0	1	23.80
				1	0	1	24.19
				1	2	1	23.90
				1	5	1	23.94
				3	0	1	23.83
				3	1	1	23.85
	23095	707.5	QPSK	3	2	1	23.50
				6	0	2	23.21
				1	0	0	23.32
				1	2	0	23.22
				1	5	0	23.39
				3	0	0	23.59
			16QAM	3	1	0	23.57
				3	2	0	23.49
				6	0	1	22.79
				1	0	1	23.23
				1	2	1	23.04
				1	5	1	23.10
	23173	715.3	QPSK	3	0	1	23.10
				3	1	1	23.08
				3	2	1	23.00
				6	0	2	22.38
				1	0	0	23.19
				1	2	0	23.32
16QAM			1	5	0	23.61	
			3	0	0	23.25	
			3	1	0	23.24	
			3	2	0	23.49	
			6	0	1	23.75	
			1	0	1	23.91	
16QAM	1	2	1	22.01			
	1	5	1	22.22			
	3	0	1	22.66			
	3	1	1	22.73			
	3	2	1	22.98			
	6	0	2	22.36			



LTE Band 25

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)		
20MHz	26140	1860.0	QPSK	1	0	0	24.94		
				1	49	0	22.82		
				1	99	0	22.89		
				50	0	1	23.02		
				50	25	1	23.04		
				50	50	1	22.24		
				100	0	1	23.25		
			16QAM	1	0	1	24.44		
				1	49	1	22.26		
				1	99	1	22.65		
				50	0	2	23.03		
				50	25	2	23.04		
				50	50	2	22.25		
				100	0	2	23.24		
	26365	1882.5	QPSK	1	0	0	23.66		
				1	49	0	23.18		
				1	99	0	23.97		
				50	0	1	22.65		
				50	25	1	22.65		
				50	50	1	23.05		
				100	0	1	23.17		
				16QAM	1	0	1	23.23	
			1		49	1	22.84		
			1		99	1	23.62		
			50		0	2	22.66		
			50		25	2	22.66		
			50		50	2	23.06		
			100		0	2	22.66		
			26590		1905.0	QPSK	1	0	0
				1			49	0	22.27
1	99	0		22.23					
50	0	1		23.13					
50	25	1		23.14					
50	50	1		21.41					
100	0	1		22.11					
16QAM	1	0		1			23.65		
	1	49		1		22.94			
	1	99		1		22.90			
	50	0		2		23.14			
	50	25		2		23.15			
	50	50		2		22.42			
	100	0		2		22.65			

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
15MHz	26115	1857.5	QPSK	1	0	0	24.00
				1	37	0	22.04
				1	74	0	22.21
				37	0	1	22.27
				37	18	1	22.27
				37	38	1	22.27
				75	0	1	22.24
			16QAM	1	0	1	23.47
				1	37	1	21.43
				1	74	1	21.59
				37	0	2	22.25
				37	18	2	22.24
				37	38	2	22.24
				75	0	2	22.23
	26365	1882.5	QPSK	1	0	0	23.88
				1	37	0	22.89
				1	74	0	24.14
				37	0	1	23.02
				37	18	1	23.02
				37	38	1	23.02
				75	0	1	23.00
			16QAM	1	0	1	23.50
				1	37	1	22.53
				1	74	1	23.57
				37	0	2	23.01
				37	18	2	23.00
				37	38	2	23.00
				75	0	2	22.47
	26615	1907.5	QPSK	1	0	0	23.95
				1	37	0	21.81
1				74	0	22.89	
37				0	1	22.19	
37				18	1	22.19	
37				38	1	22.18	
75				0	1	22.18	
16QAM			1	0	1	23.56	
			1	37	1	21.47	
			1	74	1	21.66	
			37	0	2	22.18	
			37	18	2	22.18	
			37	38	2	22.18	
			75	0	2	21.69	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	26090	1855.0	QPSK	1	0	0	22.69
				1	24	0	21.93
				1	49	0	21.49
				25	0	1	21.66
				25	12	1	21.65
				25	25	1	21.65
				50	0	1	21.62
			16QAM	1	0	1	22.28
				1	24	1	21.59
				1	49	1	21.19
				25	0	2	21.13
				25	12	2	21.13
				25	25	2	21.13
				50	0	2	21.61
	26365	1882.5	QPSK	1	0	0	23.85
				1	24	0	22.91
				1	49	0	22.82
				25	0	1	22.78
				25	12	1	22.78
				25	25	1	22.87
				50	0	1	22.95
			16QAM	1	0	1	23.45
				1	24	1	22.51
				1	49	1	23.63
				25	0	2	22.77
				25	12	2	22.77
				25	25	2	22.85
				50	0	2	22.45
	26640	1910.0	QPSK	1	0	0	23.16
				1	24	0	21.18
1				49	0	21.22	
25				0	1	21.98	
25				12	1	21.97	
25				25	1	21.64	
50				0	1	21.29	
16QAM			1	0	1	22.67	
			1	24	1	20.65	
			1	49	1	21.79	
			25	0	2	21.93	
			25	12	2	21.92	
			25	25	2	20.60	
			50	0	2	20.80	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	26065	1852.5	QPSK	1	0	0	22.93
				1	12	0	22.15
				1	24	0	22.38
				12	0	1	21.96
				12	6	1	21.94
				12	13	1	21.83
				25	0	1	21.73
			16QAM	1	0	1	22.48
				1	12	1	21.76
				1	24	1	22.02
				12	0	2	21.85
				12	6	2	21.84
				12	13	2	21.73
				25	0	2	21.68
	26365	1882.5	QPSK	1	0	0	23.80
				1	12	0	23.54
				1	24	0	23.80
				12	0	1	23.43
				12	6	1	23.41
				12	13	1	23.27
				25	0	1	23.26
			16QAM	1	0	1	23.31
				1	12	1	22.84
				1	24	1	23.44
				12	0	2	23.37
				12	6	2	23.36
				12	13	2	23.22
				25	0	2	22.73
	26665	1912.5	QPSK	1	0	0	21.89
				1	12	0	22.10
1				24	0	21.73	
12				0	1	21.94	
12				6	1	21.93	
12				13	1	21.54	
25				0	1	21.68	
16QAM			1	0	1	21.31	
			1	12	1	21.55	
			1	24	1	22.44	
			12	0	2	22.89	
			12	6	2	22.89	
			12	13	2	22.49	
			25	0	2	22.15	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	26055	1851.5	QPSK	1	0	0	22.15
				1	7	0	22.06
				1	14	0	21.77
				8	0	1	21.26
				8	4	1	21.26
				8	7	1	21.24
				15	0	1	21.19
			16QAM	1	0	1	22.05
				1	7	1	21.83
				1	14	1	21.82
				8	0	2	21.22
				8	4	2	21.23
				8	7	2	21.21
				15	0	2	21.20
	26365	1882.5	QPSK	1	0	0	23.74
				1	7	0	22.94
				1	14	0	22.64
				8	0	1	22.77
				8	4	1	22.77
				8	7	1	22.77
				15	0	1	22.77
			16QAM	1	0	1	23.35
				1	7	1	22.48
				1	14	1	22.24
				8	0	2	22.77
				8	4	2	22.77
				8	7	2	22.77
				15	0	2	22.23
	26675	1913.5	QPSK	1	0	0	21.24
				1	7	0	21.35
1				14	0	21.06	
8				0	1	21.17	
8				4	1	21.17	
8				7	1	21.17	
15				0	1	21.14	
16QAM			1	0	1	21.69	
			1	7	1	20.71	
			1	14	1	20.70	
			8	0	2	21.16	
			8	4	2	21.15	
			8	7	2	21.15	
			15	0	2	20.64	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	26047	1850.7	QPSK	1	0	0	25.16
				1	2	0	24.29
				1	5	0	25.65
				3	0	0	24.88
				3	1	0	24.86
				3	2	0	25.17
			16QAM	6	0	1	24.98
				1	0	1	24.86
				1	2	1	23.85
				1	5	1	24.87
				3	0	1	24.84
				3	1	1	24.82
	26365	1882.5	QPSK	3	2	1	25.14
				6	0	2	24.96
				1	0	0	23.79
				1	2	0	23.62
				1	5	0	23.66
				3	0	0	23.71
			16QAM	3	1	0	23.71
				3	2	0	23.62
				6	0	1	23.11
				1	0	1	23.25
				1	2	1	23.05
				1	5	1	23.11
	26683	1914.3	QPSK	3	0	1	23.67
				3	1	1	23.68
				3	2	1	23.60
				6	0	2	23.65
				1	0	0	23.25
				1	2	0	23.06
16QAM			1	5	0	23.97	
			3	0	0	23.77	
			3	1	0	23.77	
			3	2	0	23.08	
			6	0	1	23.13	
			1	0	1	22.97	
16QAM	1	2	1	22.95			
	1	5	1	22.87			
	3	0	1	23.76			
	3	1	1	23.74			
	3	2	1	23.14			
	6	0	2	23.75			

According to 3GPP 36.521 sub-clause 6.2.3.3, the maximum output power is allowed to be reduced by following the table.

Table 6.2.3.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (For PRACH, PUCCH and SRS transmission, the allowed MPR is according to that specified for PUSCH QPSK modulation for the corresponding transmission bandwidth.).

When PRACH, PUCCH are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

For each subframe, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) within the slot, the maximum MPR over the two slots is then applied for the entire subframe.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5.3 apply. The normative reference for this requirement is TS 36.101 clause 6.2.3.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

## 6.2 RADIATED OUTPUT POWER

### 6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.


- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl} = P_{in} + 2.15 - P_r$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 27.50(d)(4). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15dBi$ .

#### Test Setup


NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.



**Step 1: Pre-test**

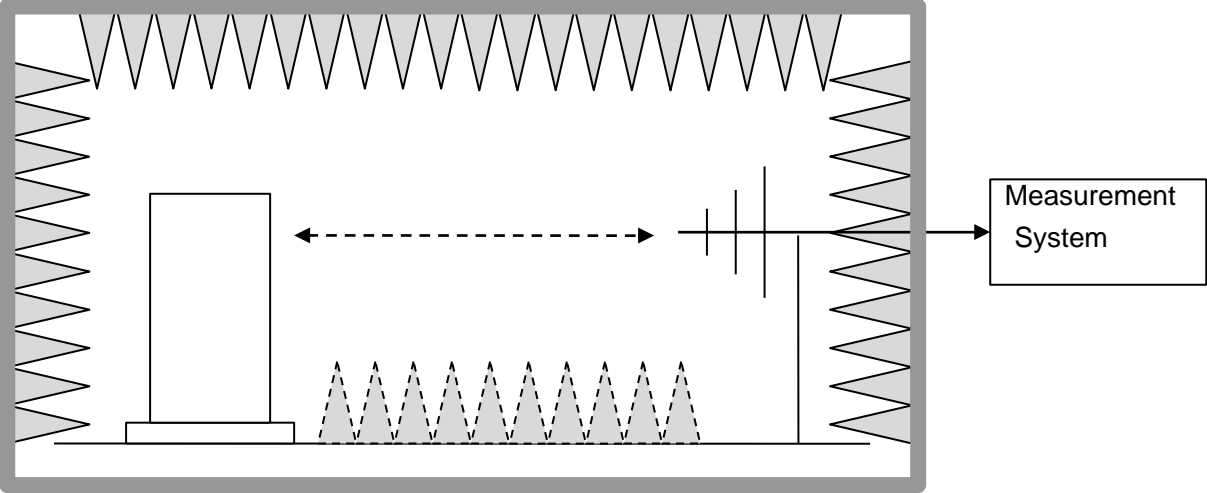

**Step 2: Substitution method to verify the maximum ERP**

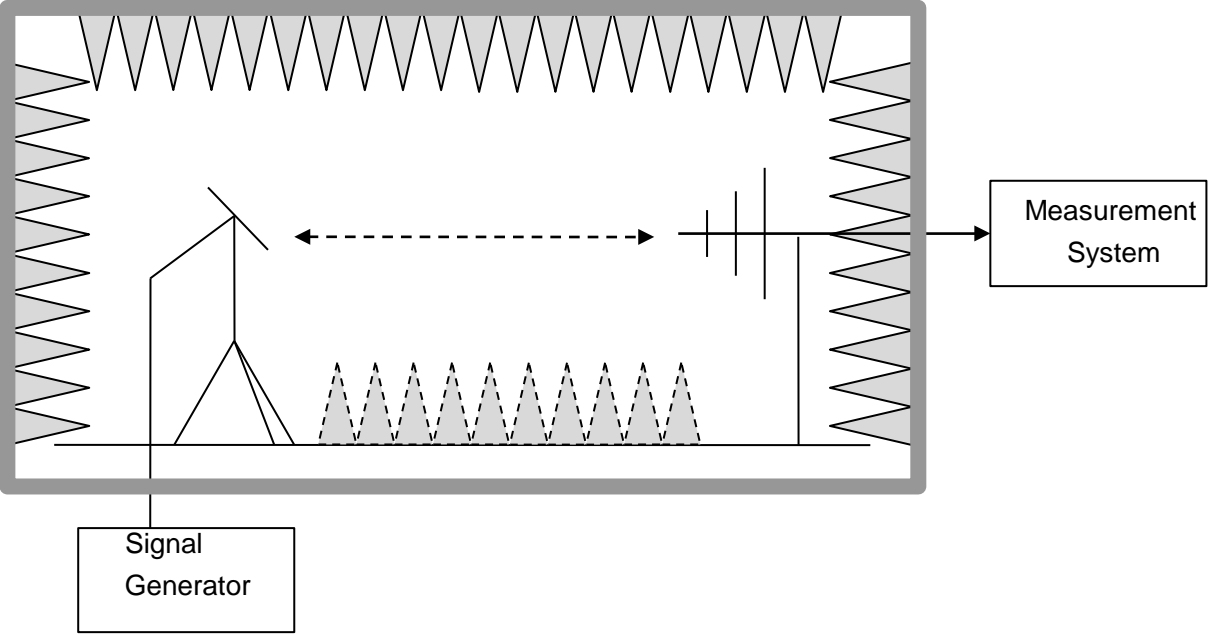

**6.2.2 PROVISIONS APPLICABLE**

<b>Mode</b>	<b>Limit</b>
LTE Band 2	$\leq 33\text{dBm}$ (2W)
LTE Band 4	$\leq 30\text{dBm}$ (1W)
LTE Band 7	$\leq 33\text{dBm}$ (2W)
LTE Band 12	$\leq 34.77\text{dBm}$ (3W)
LTE Band 25	$\leq 33\text{dBm}$ (2W)

### 6.2.3 MEASUREMENT RESULT

#### EIRP for LTE Band 2

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
1850.7	1.4	QPSK	1/0	13.58	V	7.95	0.79	20.74	33
1880.0	1.4	QPSK	1/0	13.45	V	7.95	0.79	20.61	33
1909.3	1.4	QPSK	1/0	11.93	V	7.95	0.79	19.09	33
1850.7	1.4	QPSK	1/0	13.68	H	7.95	0.79	20.84	33
1880.0	1.4	QPSK	1/0	13.44	H	7.95	0.79	20.6	33
1909.3	1.4	QPSK	1/0	12.56	H	7.95	0.79	19.72	33
1850.7	1.4	16-QAM	1/5	12.01	V	7.95	0.79	19.17	33
1880.0	1.4	16-QAM	1/0	13.39	V	7.95	0.79	20.55	33
1909.3	1.4	16-QAM	1/0	14.15	V	7.95	0.79	21.31	33
1850.7	1.4	16-QAM	1/5	13.06	H	7.95	0.79	20.22	33
1880.0	1.4	16-QAM	1/0	14.89	H	7.95	0.79	22.05	33
1909.3	1.4	16-QAM	1/0	13.47	H	7.95	0.79	20.63	33
1851.5	3	QPSK	1/0	11.63	V	7.95	0.79	18.79	33
1880.0	3	QPSK	1/0	11.64	V	7.95	0.79	18.8	33
1908.5	3	QPSK	1/0	14.24	V	7.95	0.79	21.4	33
1851.5	3	QPSK	1/0	14.72	H	7.95	0.79	21.88	33
1880.0	3	QPSK	1/0	12.25	H	7.95	0.79	19.41	33
1908.5	3	QPSK	1/0	14.2	H	7.95	0.79	21.36	33
1851.5	3	16-QAM	1/0	12.39	V	7.95	0.79	19.55	33
1880.0	3	16-QAM	1/0	13.76	V	7.95	0.79	20.92	33
1908.5	3	16-QAM	1/0	14.3	V	7.95	0.79	21.46	33
1851.5	3	16-QAM	1/0	13.14	H	7.95	0.79	20.3	33
1880.0	3	16-QAM	1/0	13.88	H	7.95	0.79	21.04	33
1908.5	3	16-QAM	1/0	14.01	H	7.95	0.79	21.17	33
1852.5	5	QPSK	1/0	10.71	V	7.95	0.79	17.87	33
1880.0	5	QPSK	1/0	14.6	V	7.95	0.79	21.76	33
1907.5	5	QPSK	1/24	11.26	V	7.95	0.79	18.42	33
1852.5	5	QPSK	1/0	10.91	H	7.95	0.79	18.07	33
1880.0	5	QPSK	1/0	14.82	H	7.95	0.79	21.98	33
1907.5	5	QPSK	1/24	11.94	H	7.95	0.79	19.1	33
1852.5	5	16-QAM	1/0	13.09	V	7.95	0.79	20.25	33
1880.0	5	16-QAM	1/0	12.41	V	7.95	0.79	19.57	33
1907.5	5	16-QAM	1/24	13.87	V	7.95	0.79	21.03	33

1852.5	5	16-QAM	1/0	13.94	H	7.95	0.79	21.1	33
1880.0	5	16-QAM	1/0	13.5	H	7.95	0.79	20.66	33
1907.5	5	16-QAM	1/24	14.01	H	7.95	0.79	21.17	33
1855	10	QPSK	1/0	13.95	V	7.95	0.79	21.11	33
1880	10	QPSK	1/49	11.99	V	7.95	0.79	19.15	33
1905	10	QPSK	1/0	12.75	V	7.95	0.79	19.91	33
1855	10	QPSK	1/0	13.66	H	7.95	0.79	20.82	33
1880	10	QPSK	1/49	13.9	H	7.95	0.79	21.06	33
1905	10	QPSK	1/0	13.51	H	7.95	0.79	20.67	33
1855	10	16-QAM	1/0	13.77	V	7.95	0.79	20.93	33
1880	10	16-QAM	1/49	14.87	V	7.95	0.79	22.03	33
1905	10	16-QAM	1/0	12.14	V	7.95	0.79	19.3	33
1855	10	16-QAM	1/0	12.47	H	7.95	0.79	19.63	33
1880	10	16-QAM	1/49	14.92	H	7.95	0.79	22.08	33
1905	10	16-QAM	1/0	13.03	H	7.95	0.79	20.19	33
1857.5	15	QPSK	1/0	13	V	7.95	0.79	20.16	33
1880	15	QPSK	1/74	13.18	V	7.95	0.79	20.34	33
1902.5	15	QPSK	1/0	14.07	V	7.95	0.79	21.23	33
1857.5	15	QPSK	1/0	13.29	H	7.95	0.79	20.45	33
1880	15	QPSK	1/74	13.34	H	7.95	0.79	20.5	33
1902.5	15	QPSK	1/0	14.24	H	7.95	0.79	21.4	33
1857.5	15	16-QAM	1/0	13.17	V	7.95	0.79	20.33	33
1880	15	16-QAM	1/74	10.43	V	7.95	0.79	17.59	33
1902.5	15	16-QAM	1/0	11.71	V	7.95	0.79	18.87	33
1857.5	15	16-QAM	1/0	14.05	H	7.95	0.79	21.21	33
1880	15	16-QAM	1/74	10.58	H	7.95	0.79	17.74	33
1902.5	15	16-QAM	1/0	11.82	H	7.95	0.79	18.98	33
1860	20	QPSK	1/99	13.63	V	7.95	0.79	20.79	33
1880	20	QPSK	1/99	14	V	7.95	0.79	21.16	33
1900	20	QPSK	1/0	12.88	V	7.95	0.79	20.04	33
1860	20	QPSK	1/99	13.7	H	7.95	0.79	20.86	33
1880	20	QPSK	1/99	14.04	H	7.95	0.79	21.2	33
1900	20	QPSK	1/0	12.94	H	7.95	0.79	20.1	33
1860	20	16-QAM	1/99	13.32	V	7.95	0.79	20.48	33
1880	20	16-QAM	1/99	11.91	V	7.95	0.79	19.07	33
1900	20	16-QAM	1/0	13.24	V	7.95	0.79	20.4	33
1860	20	16-QAM	1/99	13.45	H	7.95	0.79	20.61	33

1880	20	16-QAM	1/99	12.07	H	7.95	0.79	19.23	33
1900	20	16-QAM	1/0	13.38	H	7.95	0.79	20.54	33

**EIRP for LTE Band 4**

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
1710.7	1.4	QPSK	1/0	11.36	V	7.95	0.79	18.52	30
1732.5	1.4	QPSK	1/0	12.15	V	7.95	0.79	19.31	30
1754.3	1.4	QPSK	1/0	12.91	V	7.95	0.79	20.07	30
1710.7	1.4	QPSK	1/0	13.72	H	7.95	0.79	20.88	30
1732.5	1.4	QPSK	1/0	13.43	H	7.95	0.79	20.59	30
1754.3	1.4	QPSK	1/0	13.88	H	7.95	0.79	21.04	30
1710.7	1.4	16-QAM	1/5	12.01	V	7.95	0.79	19.17	30
1732.5	1.4	16-QAM	1/0	12.98	V	7.95	0.79	20.14	30
1754.3	1.4	16-QAM	1/0	14.12	V	7.95	0.79	21.28	30
1710.7	1.4	16-QAM	1/5	12.18	H	7.95	0.79	19.34	30
1732.5	1.4	16-QAM	1/0	13.4	H	7.95	0.79	20.56	30
1754.3	1.4	16-QAM	1/0	13.17	H	7.95	0.79	20.33	30
1711.5	3	QPSK	1/0	13.99	V	7.95	0.79	21.15	30
1732.5	3	QPSK	1/0	13.33	V	7.95	0.79	20.49	30
1753.5	3	QPSK	1/0	13.69	V	7.95	0.79	20.85	30
1711.5	3	QPSK	1/0	14.01	H	7.95	0.79	21.17	30
1732.5	3	QPSK	1/0	13.39	H	7.95	0.79	20.55	30
1753.5	3	QPSK	1/0	14.03	H	7.95	0.79	21.19	30
1711.5	3	16-QAM	1/0	12.78	V	7.95	0.79	19.94	30
1732.5	3	16-QAM	1/0	13.88	V	7.95	0.79	21.04	30
1753.5	3	16-QAM	1/0	13.74	V	7.95	0.79	20.9	30
1711.5	3	16-QAM	1/0	13.72	H	7.95	0.79	20.88	30
1732.5	3	16-QAM	1/0	13.96	H	7.95	0.79	21.12	30
1753.5	3	16-QAM	1/0	14.22	H	7.95	0.79	21.38	30
1712.5	5	QPSK	1/0	12.85	V	7.95	0.79	20.01	30
1732.5	5	QPSK	1/0	13.8	V	7.95	0.79	20.96	30
1752.5	5	QPSK	1/24	12.88	V	7.95	0.79	20.04	30
1712.5	5	QPSK	1/0	12.94	H	7.95	0.79	20.1	30
1732.5	5	QPSK	1/0	14.04	H	7.95	0.79	21.2	30
1752.5	5	QPSK	1/24	14.05	H	7.95	0.79	21.21	30
1712.5	5	16-QAM	1/0	13.75	V	7.95	0.79	20.91	30
1732.5	5	16-QAM	1/0	13.92	V	7.95	0.79	21.08	30
1752.5	5	16-QAM	1/24	14.2	V	7.95	0.79	21.36	30

1712.5	5	16-QAM	1/0	14.71	H	7.95	0.79	21.87	30
1732.5	5	16-QAM	1/0	13.97	H	7.95	0.79	21.13	30
1752.5	5	16-QAM	1/24	14.32	H	7.95	0.79	21.48	30
1715	10	QPSK	1/0	12.19	V	7.95	0.79	19.35	30
1732.5	10	QPSK	1/49	12.57	V	7.95	0.79	19.73	30
1750	10	QPSK	1/0	13.43	V	7.95	0.79	20.59	30
1715	10	QPSK	1/0	13.07	H	7.95	0.79	20.23	30
1732.5	10	QPSK	1/49	12.74	H	7.95	0.79	19.9	30
1750	10	QPSK	1/0	13.58	H	7.95	0.79	20.74	30
1715	10	16-QAM	1/0	11.48	V	7.95	0.79	18.64	30
1732.5	10	16-QAM	1/49	12.45	V	7.95	0.79	19.61	30
1750	10	16-QAM	1/0	13.52	V	7.95	0.79	20.68	30
1715	10	16-QAM	1/0	11.71	H	7.95	0.79	18.87	30
1732.5	10	16-QAM	1/49	13.19	H	7.95	0.79	20.35	30
1750	10	16-QAM	1/0	14.1	H	7.95	0.79	21.26	30
1717.5	15	QPSK	1/0	12.98	V	7.95	0.79	20.14	30
1732.5	15	QPSK	1/74	11.85	V	7.95	0.79	19.01	30
1747.5	15	QPSK	1/0	13.04	V	7.95	0.79	20.2	30
1717.5	15	QPSK	1/0	13.01	H	7.95	0.79	20.17	30
1732.5	15	QPSK	1/74	11.89	H	7.95	0.79	19.05	30
1747.5	15	QPSK	1/0	13.11	H	7.95	0.79	20.27	30
1717.5	15	16-QAM	1/0	13.51	V	7.95	0.79	20.67	30
1732.5	15	16-QAM	1/74	13.22	V	7.95	0.79	20.38	30
1747.5	15	16-QAM	1/0	12.94	V	7.95	0.79	20.1	30
1717.5	15	16-QAM	1/0	13.6	H	7.95	0.79	20.76	30
1732.5	15	16-QAM	1/74	13.36	H	7.95	0.79	20.52	30
1747.5	15	16-QAM	1/0	12.97	H	7.95	0.79	20.13	30
1720	20	QPSK	1/99	11.64	V	7.95	0.79	18.8	30
1732.5	20	QPSK	1/99	13.24	V	7.95	0.79	20.4	30
1745	20	QPSK	1/0	11.92	V	7.95	0.79	19.08	30
1720	20	QPSK	1/99	13.64	H	7.95	0.79	20.8	30
1732.5	20	QPSK	1/99	14.2	H	7.95	0.79	21.36	30
1745	20	QPSK	1/0	12.92	H	7.95	0.79	20.08	30
1720	20	16-QAM	1/99	12.36	V	7.95	0.79	19.52	30
1732.5	20	16-QAM	1/99	11.55	V	7.95	0.79	18.71	30
1745	20	16-QAM	1/0	12.91	V	7.95	0.79	20.07	30
1720	20	16-QAM	1/99	13.34	H	7.95	0.79	20.5	30

1732.5	20	16-QAM	1/99	12.58	H	7.95	0.79	19.74	30
1745	20	16-QAM	1/0	13.91	H	7.95	0.79	21.07	30



**EIRP for LTE Band 7**

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
2502.5	5	QPSK	1/0	12.69	V	8.23	1.12	19.8	33
2535	5	QPSK	1/0	11.58	V	8.23	1.12	18.69	33
2567.5	5	QPSK	1/24	10.4	V	8.23	1.12	17.51	33
2502.5	5	QPSK	1/0	13.67	H	8.23	1.12	20.78	33
2535	5	QPSK	1/0	12.48	H	8.23	1.12	19.59	33
2567.5	5	QPSK	1/24	11.51	H	8.23	1.12	18.62	33
2502.5	5	16-QAM	1/0	12.62	V	8.23	1.12	19.73	33
2535	5	16-QAM	1/0	10.64	V	8.23	1.12	17.75	33
2567.5	5	16-QAM	1/24	11.66	V	8.23	1.12	18.77	33
2502.5	5	16-QAM	1/0	13.62	H	8.23	1.12	20.73	33
2535	5	16-QAM	1/0	11.64	H	8.23	1.12	18.75	33
2567.5	5	16-QAM	1/24	12.66	H	8.23	1.12	19.77	33
2505	10	QPSK	1/0	10.82	V	8.23	1.12	17.93	33
2535	10	QPSK	1/49	11.82	V	8.23	1.12	18.93	33
2565	10	QPSK	1/0	13.05	V	8.23	1.12	20.16	33
2505	10	QPSK	1/0	11.82	H	8.23	1.12	18.93	33
2535	10	QPSK	1/49	12.82	H	8.23	1.12	19.93	33
2565	10	QPSK	1/0	14.05	H	8.23	1.12	21.16	33
2505	10	16-QAM	1/0	12.05	V	8.23	1.12	19.16	33
2535	10	16-QAM	1/49	12.51	V	8.23	1.12	19.62	33
2565	10	16-QAM	1/0	11.08	V	8.23	1.12	18.19	33
2505	10	16-QAM	1/0	13.05	H	8.23	1.12	20.16	33
2535	10	16-QAM	1/49	13.51	H	8.23	1.12	20.62	33
2565	10	16-QAM	1/0	12.08	H	8.23	1.12	19.19	33
2507.5	15	QPSK	1/0	11.32	V	8.23	1.12	18.43	33
2535	15	QPSK	1/74	11.98	V	8.23	1.12	19.09	33
2562.5	15	QPSK	1/0	14.18	V	8.23	1.12	21.29	33
2507.5	15	QPSK	1/0	12.32	H	8.23	1.12	19.43	33
2535	15	QPSK	1/74	12.98	H	8.23	1.12	20.09	33
2562.5	15	QPSK	1/0	15.18	H	8.23	1.12	22.29	33
2507.5	15	16-QAM	1/0	11.78	V	8.23	1.12	18.89	33
2535	15	16-QAM	1/74	10.08	V	8.23	1.12	17.19	33
2562.5	15	16-QAM	1/0	12.31	V	8.23	1.12	19.42	33

2507.5	15	16-QAM	1/0	12.72	H	8.23	1.12	19.83	33
2535	15	16-QAM	1/74	11.05	H	8.23	1.12	18.16	33
2562.5	15	16-QAM	1/0	13.31	H	8.23	1.12	20.42	33
2510	20	QPSK	1/99	12.95	V	8.23	1.12	20.06	33
2535	20	QPSK	1/99	10.06	V	8.23	1.12	17.17	33
2560	20	QPSK	1/0	10.45	V	8.23	1.12	17.56	33
2510	20	QPSK	1/99	13.92	H	8.23	1.12	21.03	33
2535	20	QPSK	1/99	10.22	H	8.23	1.12	17.33	33
2560	20	QPSK	1/0	11.45	H	8.23	1.12	18.56	33
2510	20	16-QAM	1/99	10.22	V	8.23	1.12	17.33	33
2535	20	16-QAM	1/99	10.19	V	8.23	1.12	17.3	33
2560	20	16-QAM	1/0	12.74	V	8.23	1.12	19.85	33
2510	20	16-QAM	1/99	10.77	H	8.23	1.12	17.88	33
2535	20	16-QAM	1/99	11.19	H	8.23	1.12	18.3	33
2560	20	16-QAM	1/0	13.78	H	8.23	1.12	20.89	33

**EIRP for LTE Band 12**

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
699.7	1.4	QPSK	1/0	14.19	V	6.6	0.47	20.32	34.77
707.5	1.4	QPSK	1/0	12.89	V	6.6	0.47	19.02	34.77
715.3	1.4	QPSK	1/24	12.65	V	6.6	0.47	18.78	34.77
699.7	1.4	QPSK	1/0	15.17	H	6.6	0.47	21.3	34.77
707.5	1.4	QPSK	1/0	13.79	H	6.6	0.47	19.92	34.77
715.3	1.4	QPSK	1/24	13.76	H	6.6	0.47	19.89	34.77
699.7	1.4	16-QAM	1/0	13.54	V	6.6	0.47	19.67	34.77
707.5	1.4	16-QAM	1/0	13.33	V	6.6	0.47	19.46	34.77
715.3	1.4	16-QAM	1/24	14.58	V	6.6	0.47	20.71	34.77
699.7	1.4	16-QAM	1/0	14.54	H	6.6	0.47	20.67	34.77
707.5	1.4	16-QAM	1/0	14.33	H	6.6	0.47	20.46	34.77
715.3	1.4	16-QAM	1/24	15.51	H	6.6	0.47	21.64	34.77
700.5	3	QPSK	1/0	12.55	V	6.6	0.47	18.68	34.77
707.5	3	QPSK	1/49	12.15	V	6.6	0.47	18.28	34.77
714.5	3	QPSK	1/0	13.65	V	6.6	0.47	19.78	34.77
700.5	3	QPSK	1/0	13.55	H	6.6	0.47	19.68	34.77
707.5	3	QPSK	1/49	13.08	H	6.6	0.47	19.21	34.77
714.5	3	QPSK	1/0	14.65	H	6.6	0.47	20.78	34.77
700.5	3	16-QAM	1/0	12.67	V	6.6	0.47	18.8	34.77
707.5	3	16-QAM	1/49	11.42	V	6.6	0.47	17.55	34.77
714.5	3	16-QAM	1/0	11.44	V	6.6	0.47	17.57	34.77
700.5	3	16-QAM	1/0	13.67	H	6.6	0.47	19.8	34.77
707.5	3	16-QAM	1/49	12.42	H	6.6	0.47	18.55	34.77
714.5	3	16-QAM	1/0	12.44	H	6.6	0.47	18.57	34.77
701.5	5	QPSK	1/0	15.25	V	6.6	0.47	21.38	34.77
707.5	5	QPSK	1/74	14.94	V	6.6	0.47	21.07	34.77
713.5	5	QPSK	1/0	13.06	V	6.6	0.47	19.19	34.77
701.5	5	QPSK	1/0	16.25	H	6.6	0.47	22.38	34.77
707.5	5	QPSK	1/74	15.94	H	6.6	0.47	22.07	34.77
713.5	5	QPSK	1/0	14.06	H	6.6	0.47	20.19	34.77
701.5	5	16-QAM	1/0	13.08	V	6.6	0.47	19.21	34.77
707.5	5	16-QAM	1/74	14.11	V	6.6	0.47	20.24	34.77
713.5	5	16-QAM	1/0	13.53	V	6.6	0.47	19.66	34.77
701.5	5	16-QAM	1/0	14.02	H	6.6	0.47	20.15	34.77

707.5	5	16-QAM	1/74	15.08	H	6.6	0.47	21.21	34.77
713.5	5	16-QAM	1/0	14.53	H	6.6	0.47	20.66	34.77
704.0	10	QPSK	1/99	13.78	V	6.6	0.47	19.91	34.77
707.5	10	QPSK	1/99	14.17	V	6.6	0.47	20.3	34.77
711.0	10	QPSK	1/0	14.01	V	6.6	0.47	20.14	34.77
704.0	10	QPSK	1/99	14.75	H	6.6	0.47	20.88	34.77
707.5	10	QPSK	1/99	15.1	H	6.6	0.47	21.23	34.77
711.0	10	QPSK	1/0	15.01	H	6.6	0.47	21.14	34.77
704.0	10	16-QAM	1/99	12.17	V	6.6	0.47	18.3	34.77
707.5	10	16-QAM	1/99	12.8	V	6.6	0.47	18.93	34.77
711.0	10	16-QAM	1/0	13.32	V	6.6	0.47	19.45	34.77
704.0	10	16-QAM	1/99	13.17	H	6.6	0.47	19.3	34.77
707.5	10	16-QAM	1/99	13.8	H	6.6	0.47	19.93	34.77
711.0	10	16-QAM	1/0	14.36	H	6.6	0.47	20.49	34.77

**EIRP for LTE Band 25**

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
1850.7	1.4	QPSK	1/0	11.36	V	7.95	0.79	18.52	33
1882.5	1.4	QPSK	1/0	12.15	V	7.95	0.79	19.31	33
1914.3	1.4	QPSK	1/0	12.91	V	7.95	0.79	20.07	33
1850.7	1.4	QPSK	1/0	12.34	H	7.95	0.79	19.5	33
1882.5	1.4	QPSK	1/0	13.05	H	7.95	0.79	20.21	33
1914.3	1.4	QPSK	1/0	14.02	H	7.95	0.79	21.18	33
1850.7	1.4	16-QAM	1/5	11.01	V	7.95	0.79	18.17	33
1882.5	1.4	16-QAM	1/0	12.5	V	7.95	0.79	19.66	33
1914.3	1.4	16-QAM	1/0	13.15	V	7.95	0.79	20.31	33
1850.7	1.4	16-QAM	1/5	12.01	H	7.95	0.79	19.17	33
1882.5	1.4	16-QAM	1/0	13.5	H	7.95	0.79	20.66	33
1914.3	1.4	16-QAM	1/0	14.08	H	7.95	0.79	21.24	33
1851.5	3	QPSK	1/0	13.99	V	7.95	0.79	21.15	33
1882.5	3	QPSK	1/0	12.85	V	7.95	0.79	20.01	33
1913.5	3	QPSK	1/0	13.69	V	7.95	0.79	20.85	33
1851.5	3	QPSK	1/0	14.04	H	7.95	0.79	21.2	33
1882.5	3	QPSK	1/0	13.84	H	7.95	0.79	21	33
1913.5	3	QPSK	1/0	13.75	H	7.95	0.79	20.91	33
1851.5	3	16-QAM	1/0	13.72	V	7.95	0.79	20.88	33
1882.5	3	16-QAM	1/0	12.96	V	7.95	0.79	20.12	33
1913.5	3	16-QAM	1/0	13.22	V	7.95	0.79	20.38	33
1851.5	3	16-QAM	1/0	12.72	H	7.95	0.79	19.88	33
1882.5	3	16-QAM	1/0	13.96	H	7.95	0.79	21.12	33
1913.5	3	16-QAM	1/0	14.22	H	7.95	0.79	21.38	33
1852.5	5	QPSK	1/0	12.85	V	7.95	0.79	20.01	33
1882.5	5	QPSK	1/0	13.8	V	7.95	0.79	20.96	33
1912.5	5	QPSK	1/24	12.88	V	7.95	0.79	20.04	33
1852.5	5	QPSK	1/0	13.85	H	7.95	0.79	21.01	33
1882.5	5	QPSK	1/0	14.8	H	7.95	0.79	21.96	33

1912.5	5	QPSK	1/24	13.88	H	7.95	0.79	21.04	33
1852.5	5	16-QAM	1/0	12.75	V	7.95	0.79	19.91	33
1882.5	5	16-QAM	1/0	12.92	V	7.95	0.79	20.08	33
1912.5	5	16-QAM	1/24	13.2	V	7.95	0.79	20.36	33
1852.5	5	16-QAM	1/0	13.69	H	7.95	0.79	20.85	33
1882.5	5	16-QAM	1/0	13.89	H	7.95	0.79	21.05	33
1912.5	5	16-QAM	1/24	14.2	H	7.95	0.79	21.36	33
1855.0	10	QPSK	1/0	11.19	V	7.95	0.79	18.35	33
1882.5	10	QPSK	1/49	11.57	V	7.95	0.79	18.73	33
1910.0	10	QPSK	1/0	12.43	V	7.95	0.79	19.59	33
1855.0	10	QPSK	1/0	12.16	H	7.95	0.79	19.32	33
1882.5	10	QPSK	1/49	12.5	H	7.95	0.79	19.66	33
1910.0	10	QPSK	1/0	13.43	H	7.95	0.79	20.59	33
1855.0	10	16-QAM	1/0	12.48	V	7.95	0.79	19.64	33
1882.5	10	16-QAM	1/49	11.45	V	7.95	0.79	18.61	33
1910.0	10	16-QAM	1/0	12.52	V	7.95	0.79	19.68	33
1855.0	10	16-QAM	1/0	13.48	H	7.95	0.79	20.64	33
1882.5	10	16-QAM	1/49	12.45	H	7.95	0.79	19.61	33
1910.0	10	16-QAM	1/0	13.56	H	7.95	0.79	20.72	33
1857.5	15	QPSK	1/0	12.98	V	7.95	0.79	20.14	33
1882.5	15	QPSK	1/74	11.85	V	7.95	0.79	19.01	33
1907.5	15	QPSK	1/0	13.04	V	7.95	0.79	20.2	33
1857.5	15	QPSK	1/0	11.98	H	7.95	0.79	19.14	33
1882.5	15	QPSK	1/74	12.85	H	7.95	0.79	20.01	33
1907.5	15	QPSK	1/0	13.09	H	7.95	0.79	20.25	33
1857.5	15	16-QAM	1/0	13.41	V	7.95	0.79	20.57	33
1882.5	15	16-QAM	1/74	13.21	V	7.95	0.79	20.37	33
1907.5	15	16-QAM	1/0	12.94	V	7.95	0.79	20.1	33
1857.5	15	16-QAM	1/0	13.51	H	7.95	0.79	20.67	33
1882.5	15	16-QAM	1/74	13.26	H	7.95	0.79	20.42	33
1907.5	15	16-QAM	1/0	12.94	H	7.95	0.79	20.1	33

1860.0	20	QPSK	1/99	12.64	V	7.95	0.79	19.8	33
1882.5	20	QPSK	1/99	13.24	V	7.95	0.79	20.4	33
1905.0	20	QPSK	1/0	11.92	V	7.95	0.79	19.08	33
1860.0	20	QPSK	1/99	13.64	H	7.95	0.79	20.8	33
1882.5	20	QPSK	1/99	14.2	H	7.95	0.79	21.36	33
1905.0	20	QPSK	1/0	12.92	H	7.95	0.79	20.08	33
1860.0	20	16-QAM	1/99	12.36	V	7.95	0.79	19.52	33
1882.5	20	16-QAM	1/99	11.55	V	7.95	0.79	18.71	33
1905.0	20	16-QAM	1/0	12.91	V	7.95	0.79	20.07	33
1860.0	20	16-QAM	1/99	13.34	H	7.95	0.79	20.5	33
1882.5	20	16-QAM	1/99	12.58	H	7.95	0.79	19.74	33
1905.0	20	16-QAM	1/0	13.91	H	7.95	0.79	21.07	33

Note: Above is the worst mode data.

### **6.3. PEAK-TO-AVERAGE RATIO**

#### **6.3.1 MEASUREMENT METHOD**

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 D01v03 - Section 5.7:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics /CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

#### **6.3.2 PROVISIONS APPLICABLE**

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.



### 6.3.3 MEASUREMENT RESULT

#### LTE Band 2 Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.07	<13	PASS
		1	3	4.12	<13	PASS
		1	5	3.78	<13	PASS
		3	0	4.13	<13	PASS
		3	2	4.1	<13	PASS
		3	3	4.06	<13	PASS
		6	0	4.55	<13	PASS
	MCH	1	0	4.07	<13	PASS
		1	3	4.2	<13	PASS
		1	5	4.13	<13	PASS
		3	0	4.32	<13	PASS
		3	2	4.33	<13	PASS
		3	3	4.36	<13	PASS
		6	0	4.93	<13	PASS
	HCH	1	0	5.1	<13	PASS
		1	3	5.17	<13	PASS
		1	5	5.29	<13	PASS
		3	0	5.41	<13	PASS
		3	2	5.36	<13	PASS
		3	3	5.43	<13	PASS
		6	0	5.57	<13	PASS
16QAM	LCH	1	0	4.36	<13	PASS
		1	3	4.52	<13	PASS
		1	5	4.41	<13	PASS
		3	0	4.62	<13	PASS
		3	2	4.62	<13	PASS
		3	3	4.56	<13	PASS
		6	0	5.09	<13	PASS
	MCH	1	0	4.51	<13	PASS
		1	3	4.72	<13	PASS
		1	5	4.57	<13	PASS
		3	0	4.82	<13	PASS
		3	2	4.79	<13	PASS

		3	3	4.83	<13	PASS
		6	0	5.43	<13	PASS
	HCH	1	0	5.7	<13	PASS
		1	3	5.57	<13	PASS
		1	5	5.55	<13	PASS
		3	0	5.74	<13	PASS
		3	2	5.86	<13	PASS
		3	3	5.8	<13	PASS
		6	0	6.11	<13	PASS

**Channel Bandwidth: 3 MHz**

Channel Bandwidth: 3 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.03	<13	PASS
		1	7	4.37	<13	PASS
		1	14	3.97	<13	PASS
		8	0	4.87	<13	PASS
		8	4	4.91	<13	PASS
		8	7	4.77	<13	PASS
		15	0	4.89	<13	PASS
	MCH	1	0	3.95	<13	PASS
		1	7	4.88	<13	PASS
		1	14	4.17	<13	PASS
		8	0	5.25	<13	PASS
		8	4	5.25	<13	PASS
		8	7	5.28	<13	PASS
		15	0	5.33	<13	PASS
	HCH	1	0	4.89	<13	PASS
		1	7	5.34	<13	PASS
		1	14	5.3	<13	PASS
		8	0	5.5	<13	PASS
		8	4	5.56	<13	PASS
		8	7	5.57	<13	PASS
		15	0	5.64	<13	PASS
16QAM	LCH	1	0	4.64	<13	PASS
		1	7	4.92	<13	PASS