

TEST REPORT

Product Name : WL Stick
Model Number : S2-WL-ST(USB), G2-WL-ST(USB)
FCC ID : 2AWE8-S2-WL-ST-USB

Prepared for : Ginlong Technologies Co., Ltd.
Address : No.57 Jintong Road, Binhai Industrial Park, Xiangshan
Ningbo, Zhejiang 315712 P.R.China

Prepared by : EMTEK (NINGBO) CO., LTD.
Address : No. 8, Building 8, Lane 216, Qingyi Road, Ningbo Hi-Tech
Zone, Ningbo, Zhejiang, ChinaJ

Tel: +86-574-27907998
Fax: +86-574-27721538

Report Number : ENB2303160247W00201R
Date(s) of Tests : August 05, 2023 to August 08, 2023
Date of Issue : August 09, 2023

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	5
4	TEST METHODOLOGY	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	6
4.2	MEASUREMENT EQUIPMENT USED.....	6
4.3	DESCRIPTION OF TEST MODES.....	8
4.4	TEST SOFTWARE.....	9
5	FACILITIES AND ACCREDITATIONS	10
5.1	FACILITIES.....	10
5.2	LABORATORY ACCREDITATIONS AND LISTINGS.....	10
6	TEST SYSTEM UNCERTAINTY	11
7	SETUP OF EQUIPMENT UNDER TEST	12
7.1	RADIO FREQUENCY TEST SETUP 1.....	12
7.2	RADIO FREQUENCY TEST SETUP 2.....	12
7.3	CONDUCTED EMISSION TEST SETUP.....	13
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	14
7.5	SUPPORT EQUIPMENT.....	14
8	TEST REQUIREMENTS	15
8.1	DTS (6DB) BANDWIDTH.....	15
8.2	MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER.....	22
8.3	MAXIMUM POWER SPECTRAL DENSITY.....	31
8.4	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS.....	38
8.5	RADIATED SPURIOUS EMISSION.....	45
8.6	CONDUCTED EMISSIONS TEST.....	57
8.7	ANTENNA APPLICATION.....	60

1 TEST RESULT CERTIFICATION

Applicant : Ginlong Technologies Co., Ltd.
 Address : No.57 Jintong Road, Binhai Industrial Park, Xiangshan Ningbo, Zhejiang
 315712 P.R.China
 Manufacturer : Ginlong Technologies Co., Ltd.
 Address : No.57 Jintong Road, Binhai Industrial Park, Xiangshan Ningbo, Zhejiang
 315712 P.R.China
 EUT : WL Stick
 Model Name : S2-WL-ST(USB), G2-WL-ST(USB)
 Trademark : Solis

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by EMTEK (NINGBO) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test : August 05, 2023 to August 09, 2023

Prepared by : 
 June Gao /Engineer

Reviewer : 
 Vinay /Supervisor

Approve & Authorized Signer : 
 Tony wei/Manager



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product	WL Stick
Model Number	S2-WL-ST(USB), G2-WL-ST(USB) Note: The two models differ only in name. PCB design schematic designs and so on are the same. We choose model S2-WL-ST(USB) for RF test.
Sample Number	ENB2303160247W002-1-1
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth)
Data Rate	802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11 n: MCS0~7, up to 150Mbps;
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/ CCK /16QAM/64QAM for 802.11g/n;
Operating Frequency Range	<input checked="" type="checkbox"/> 2412-2462MHz for 802.11b/g/n(HT20); <input checked="" type="checkbox"/> 2422-2462MHz for 802.11n(HT40)
Number of Channels	<input checked="" type="checkbox"/> 11 channels for 802.11b/g n(HT20); <input checked="" type="checkbox"/> 9 Channels for 802.11n(HT40)
Transmit Power Max	16.74 dBm
Smart system	<input checked="" type="checkbox"/> SISO for802.11 b/g/n <input type="checkbox"/> MIMO for802.11n
Antenna Type	PCB Antenna
Antenna Gain	3.42 dBi
Power supply	DC 5V for USB
Test Power	AC 120V/60Hz
Temperature Range	-40℃~+85℃
Date of Received	March 16, 2023

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
	NOTE1:N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AWE8-S2-WL-ST-USB filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	R & S	ESCI	101107	July 06, 2023	1 Year
L.I.S.N	R & S	ENV216	101193	July 06, 2023	1 Year
RF Cable	TIMES	2M(N-N)	605236-0001	May 31, 2023	1 Year
Conduction Test Room 2#	SKET	6.5*5*4m	/	Apr 17, 2023	3 Year

4.2.2 Radiated Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	R&S	ESR7	102480	Apr 28, 2023	1 Year
Antenna Multiple	Schwarzbeck	VULB 9163	01499	May 21, 2022	2 Year
Pre-Amplifier	JS Denki	PA09K03-40	JSPA21019	Apr 28, 2023	1 Year
Low Frequency Notch Filter RF Switching	JS Denki	JSDSW-F	JSDSW2211D02	Apr 28, 2023	1 Year
6dB Attenuator	Mini-Circuits	UNAT-6+	11542	July 06, 2023	1 Year
RF Cable	Rosenberger	L17-C001-7000	/	May 31, 2023	1 Year
RF Cable	Rosenberger	L17-C001-3500	/	May 31, 2023	1 Year
RF Cable	Rosenberger	L17-C001-1500	/	May 31, 2023	1 Year
RF Cable	Rosenberger	/	/	May 31, 2023	1 Year
RF Cable	Rosenberger	/	/	May 31, 2023	1 Year
RF Cable	Rosenberger	L08-C446-1500	/	May 31, 2023	1 Year
EXA Signal Analyzer	KEYSIGHT	N9010B	MY60242467	Feb 28, 2023	1 Year
Horn Antenna	Schwarzbeck	BBHA 9120 D	02588	May 21, 2022	2 Year
Pre-Amplifier	JS Denki	PA0118-50	JSPA21022	Apr 28, 2023	1 Year
RF Cable	Rosenberger	LA2-C125-3500	/	May 31, 2023	1 Year
RF Cable	Rosenberger	LA2-C125-1500	/	May 31, 2023	1 Year
RF Cable	Rosenberger	LU7-C1511-1200	/	May 31, 2023	1 Year
RF Cable	Rosenberger	LA2-C199-6500	/	May 31, 2023	1 Year
High Frequency Notch FilterRf Switching	JS Denki	JSDSW-F	202083582	Apr 28, 2023	1 Year
Horn Antenna	Schwarzbeck	BBHA 9170	01190	May 21, 2022	2 Year
3-Meter Anechoic Chamber 2#	SKET	9*6*6m	/	June 19, 2022	3 Year

4.2.3 Radio Frequency Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EXG Analog Singnal Generator	Keysight	N5173B	MY61253062	July 05, 2023	1 Year

MXG Vector Singnal Generator	Keysight	N5182B	MY61350131	July 05, 2023	1 Year
Frepency Extender	Keysight	N5183BX07	MY61500104	July 05, 2023	1 Year
EXA Signal Anaalyzer	Keysight	N9010B	MY62060219	July 05, 2023	1 Year
WIRELESS CONNECTIVITY TESTER	ROHDE & SCHWARZ	CMW 270	1201.0002K75-102608-Pb	July 05, 2023	1 Year
Up/Down -Converter	ROHDE & SCHWARZ	CMW-Z800A	1211.4530.02	/	/
RF Control Unit	Tonscend	JS0806-2(V.6E)	21L8060521	March 01, 2023	1 Year
DC Power Supply	KEFUNA	KDP3603	2004D3062946	July 07, 2023	1 Year
Attenuator 10dB	talent Microwave	TA10A2-S-18	N/A	July 07, 2023	1 Year
Attenuator 20dB	talent Microwave	TA20A2-S-18	N/A	July 07, 2023	1 Year



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b:1 Mbps;802.11g: 6 Mbps;802.11n(HT20): MCS0;802.11n(HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		

Frequency and Channel list for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

Test Frequency and Channel for 802.11b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and Channel for 802.11n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

4.4 TEST SOFTWARE

Item	Software
Radiated Emission:	EspRFTestTool_v2.8_Manual (V2.8)
Conducted Emission	EspRFTestTool_v2.8_Manual (V2.8)



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
EMTEK (NINGBO) CO., LTD.

No. 8, Building 8, Lane 216, Qingyi Road, Ningbo Hi-Tech Zone, Ningbo, Zhejiang, China
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 32.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description
EMC Lab.

: **Accredited by CNAS**
The Certificate Registration Number is L6666.
The Laboratory has been assessed and proved to be in compliance
with CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)

Designation by FCC
Designation Number: CN1354
Test Firm Registration Number: 427606

Accredited by A2LA
The certificate is valid until August 4, 2023

Accredited by Industry Canada
The Conformity Assessment Body Identifier is CN0114

Name of Firm : EMTEK (NINGBO) CO., LTD.
Site Location : No. 8, Building 8, Lane 216, Qingyi Road, Ningbo Hi-Tech Zone,
Ningbo, Zhejiang, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	± 1.0 dB
Conducted Emissions Test	± 2.0 dB
Radiated Emission Test	± 2.0 dB
Power Density	± 2.0 dB
Occupied Bandwidth Test	± 1.0 dB
Band Edge Test	± 3 dB
All emission, radiated	± 3 dB
Antenna Port Emission	± 3 dB
Temperature	± 0.5 °C
Humidity	± 3 %

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antennaplane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

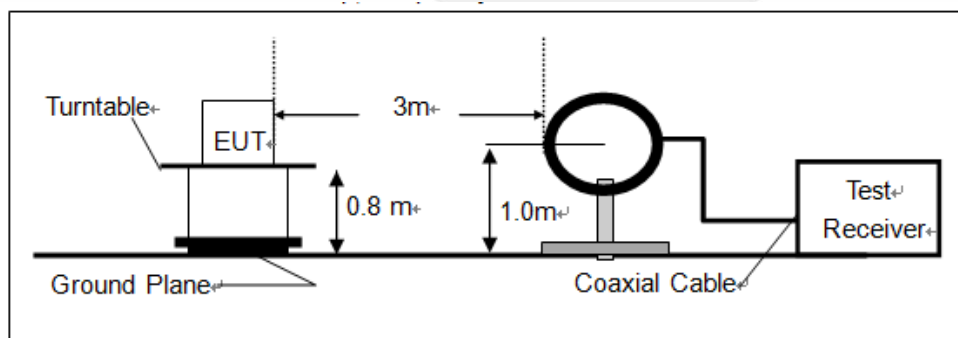

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

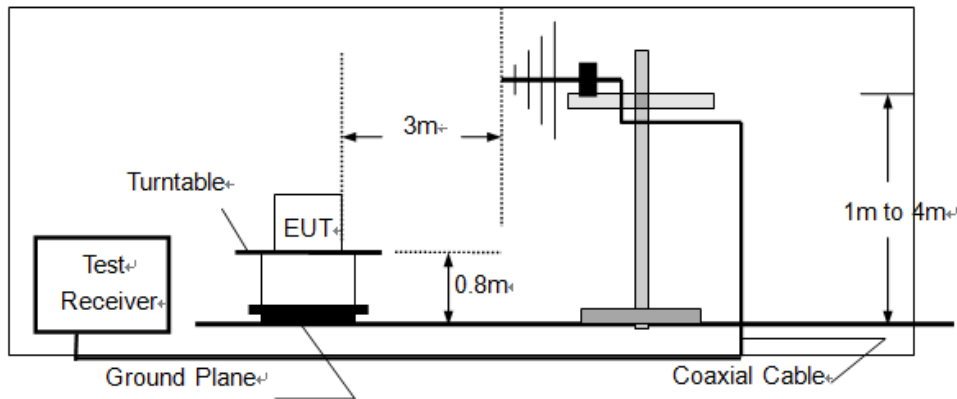

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

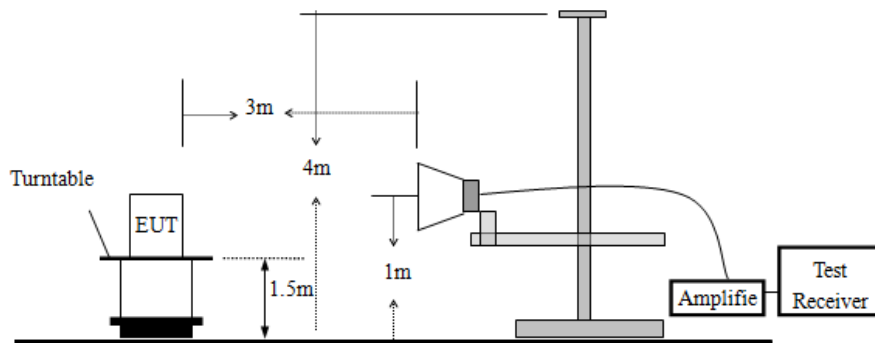


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

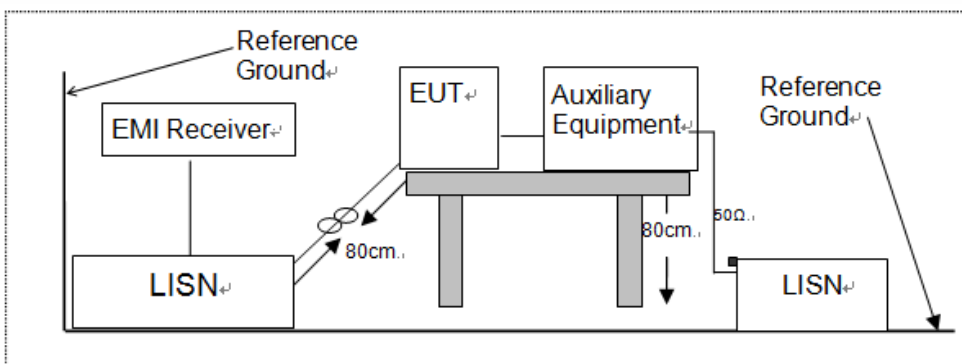

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

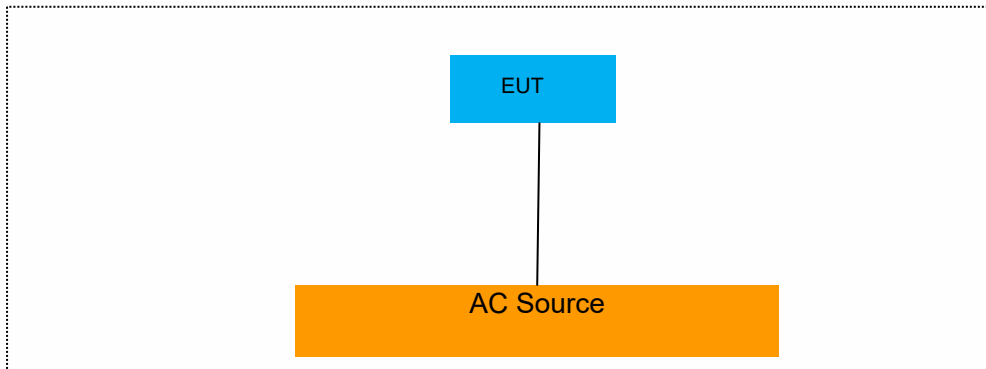

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. Unless otherwise denoted as EUT in [Remark] column, device(s) used in tested system is a support equipment

8 TEST REQUIREMENTS

8.1 DTS (6DB) BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part15.247 (a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Measure and record the results in the test report.

8.1.5 Test Results


Temperature:	26°C
Relative Humidity:	49%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
802.11b	1	2412	8.760	>500	PASS
	6	2437	9.120	>500	PASS
	11	2462	9.080	>500	PASS
802.11g	1	2412	16.440	>500	PASS
	6	2437	16.480	>500	PASS
	11	2462	16.440	>500	PASS
802.11n (HT20)	1	2412	17.560	>500	PASS
	6	2437	17.560	>500	PASS
	11	2462	17.560	>500	PASS
802.11n (HT40)	3	2422	33.440	>500	PASS
	6	2437	33.600	>500	PASS
	9	2452	33.520	>500	PASS


Test Model DTS (6dB) Bandwidth
802.11b
Channel 1: 2412MHz

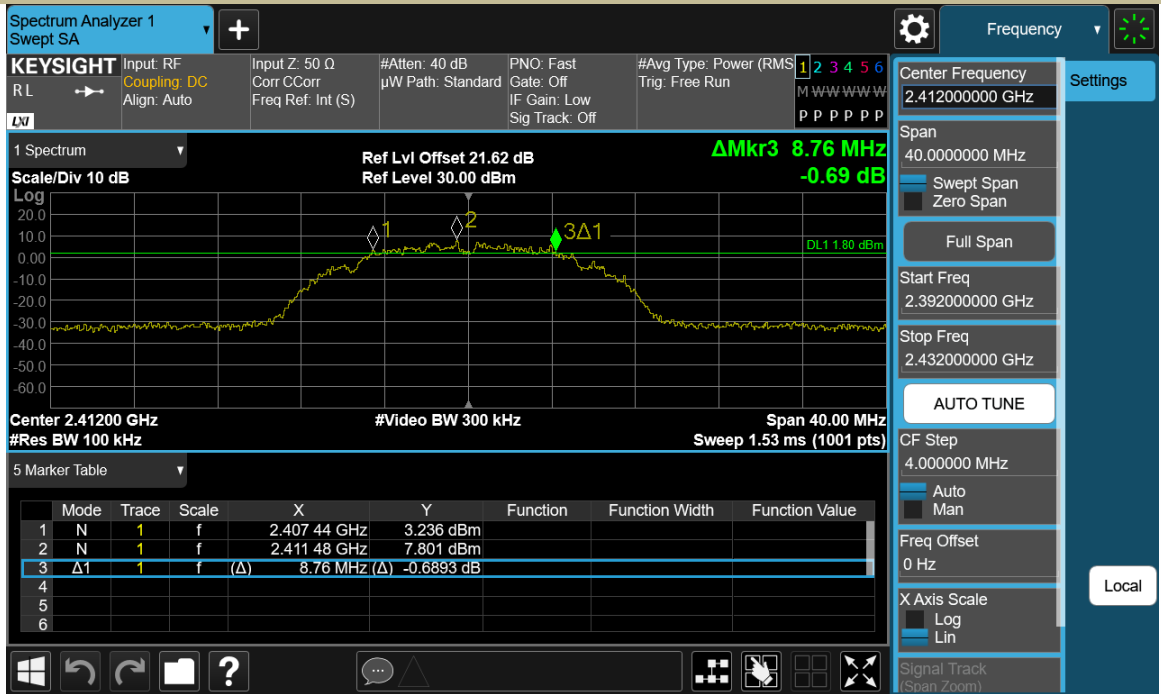

Test Model DTS (6dB) Bandwidth
802.11b
Channel 6: 2437MHz

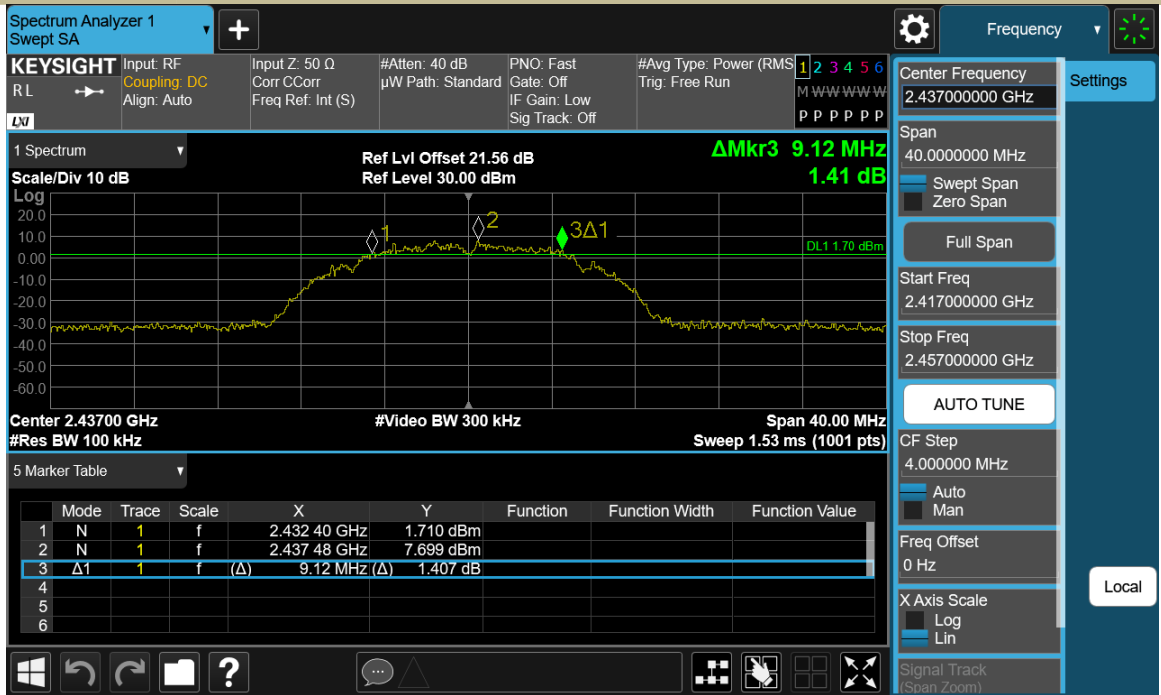

Test Model DTS (6dB) Bandwidth
802.11b
Channel 11: 2462MHz

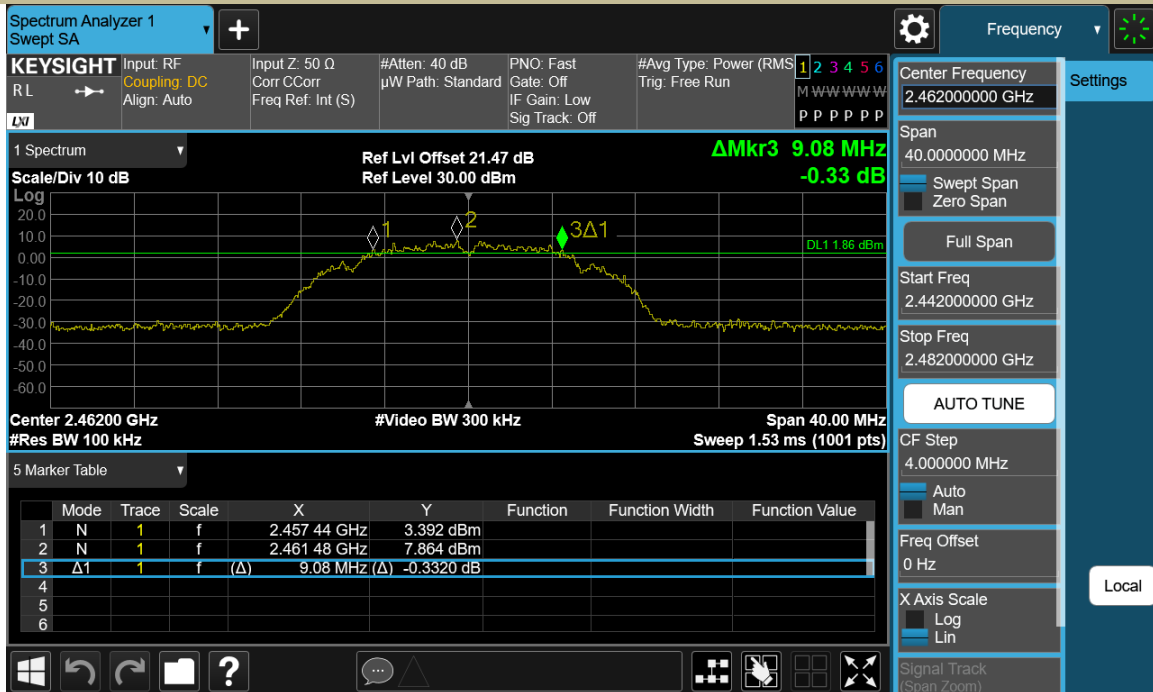

Test Model DTS (6dB) Bandwidth
802.11g
Channel 1: 2412MHz




Test Model DTS (6dB) Bandwidth
802.11g
Channel 6: 2437MHz




Test Model DTS (6dB) Bandwidth
802.11g
Channel 11: 2462MHz



Test Model DTS (6dB) Bandwidth
802.11n (HT20)
Channel 1: 2412MHz

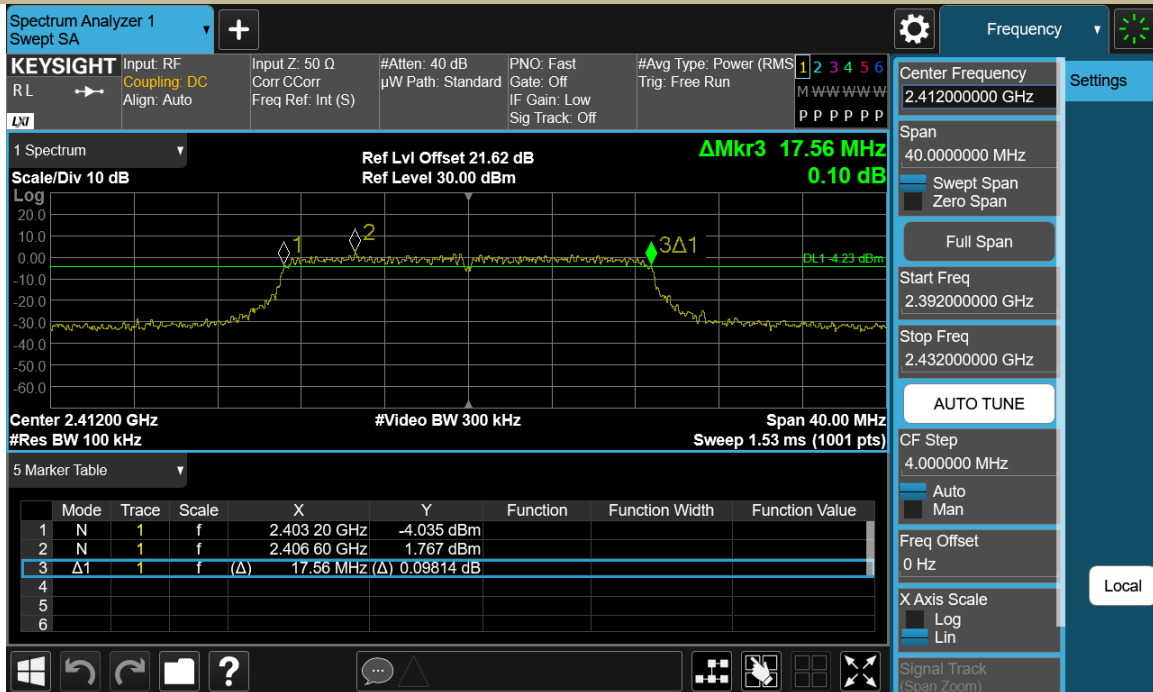


Test Model DTS (6dB) Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

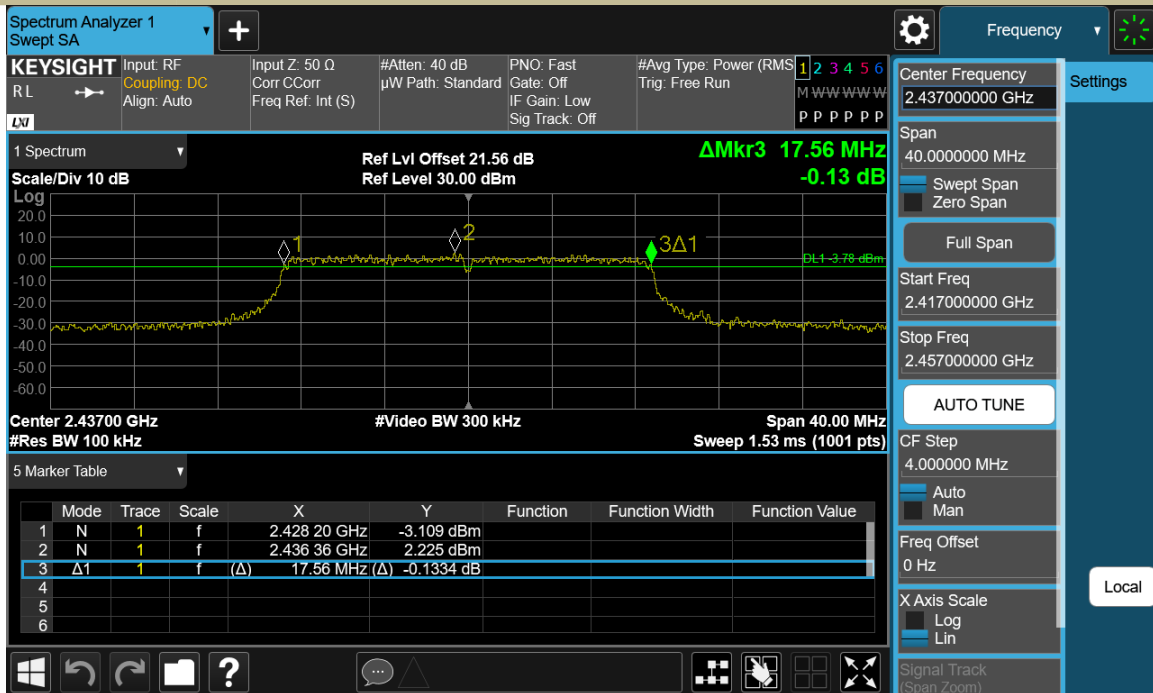


Test Model

DTS (6dB) Bandwidth
802.11n (HT20)
Channel 11: 2462MHz

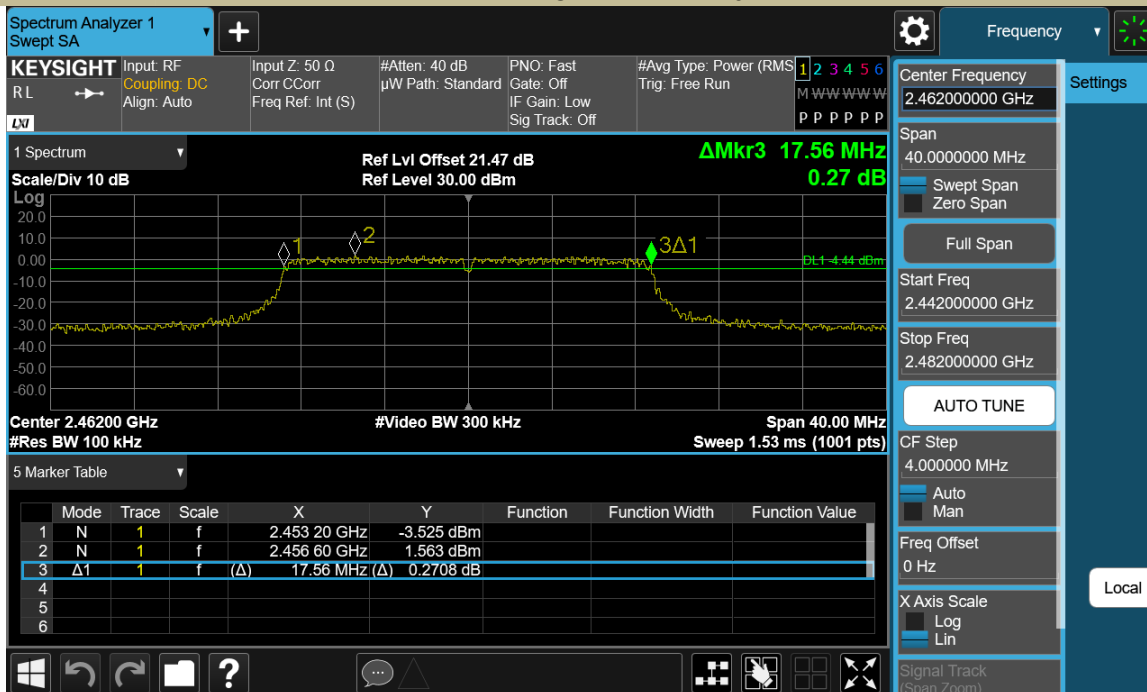


Test Model

DTS (6dB) Bandwidth
802.11n (HT40)
Channel 3: 2422MHz

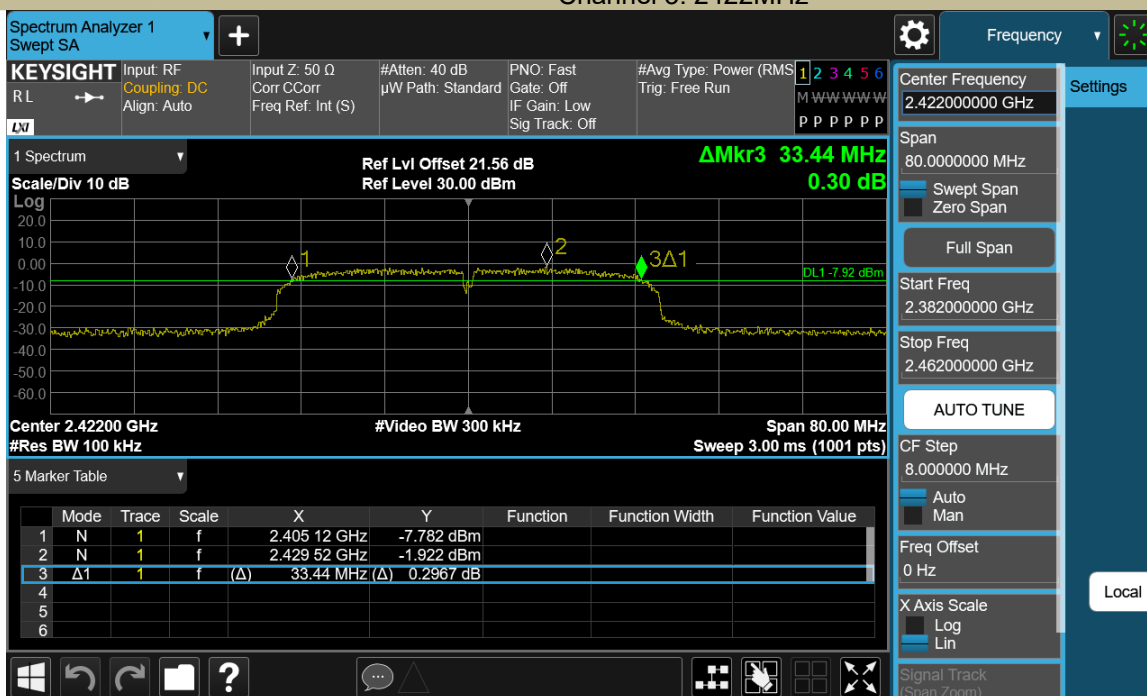

Test Model DTS (6dB) Bandwidth
802.11n (HT40)
Channel 6: 2437MHz

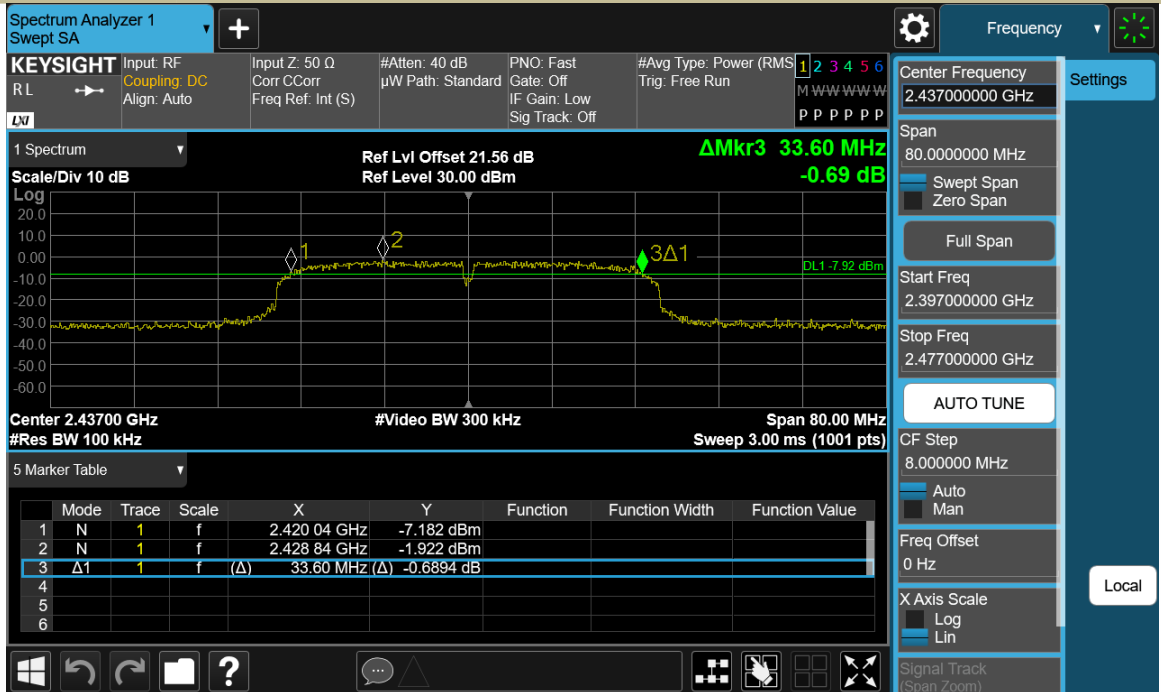

Test Model DTS (6dB) Bandwidth
802.11n (HT40)
Channel 9: 2452MHz



8.2 MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part15.247 (b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

8.2.5 Test Results

Temperature:	26°C
Relative Humidity:	49%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11b	1	2412	16.46	30	PASS
	6	2437	16.73	30	PASS
	11	2462	16.74	30	PASS
802.11g	1	2412	14.94	30	PASS
	6	2437	15.46	30	PASS
	11	2462	15.38	30	PASS
802.11n (HT20)	1	2412	14.91	30	PASS
	6	2437	15.33	30	PASS
	11	2462	15.30	30	PASS
802.11n (HT40)	3	2422	14.42	30	PASS
	6	2437	14.75	30	PASS
	9	2452	14.65	30	PASS

Test Model Duty cycle
802.11b
Channel 1: 2412MHz

KEYSIGHT Input: RF Input Z: 50 Ω #Atten: 20 dB PNO: Fast #Avg Type: Power (RMS)
 RL → Coupling: DC Corr CCorr μW Path: Standard Gate: Off Trig: Video
 Align: Auto Freq Ref: Int (S) IF Gain: Low Sig Track: Off Trig Delay: -2.000 ms

Center Frequency: 2.41200000 GHz
 Span: 0.00000000 Hz
 Start Freq: 2.41200000 GHz
 Stop Freq: 2.41200000 GHz
 Center: 2.41200000 GHz #Video BW 8.0 MHz Span 0 Hz
 Res BW 8 MHz Sweep 19.0 ms (1001 pts)

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1							
2							
3							
4							
5							
6							


Test Model Duty cycle
802.11g
Channel 1: 2412MHz

KEYSIGHT Input: RF Input Z: 50 Ω #Atten: 20 dB PNO: Fast #Avg Type: Power (RMS)
 RL → Coupling: DC Corr CCorr μW Path: Standard Gate: Off Trig: Video
 Align: Auto Freq Ref: Int (S) IF Gain: Low Sig Track: Off Trig Delay: -2.000 ms


Center Frequency: 2.41200000 GHz
 Span: 0.00000000 Hz
 Start Freq: 2.41200000 GHz
 Stop Freq: 2.41200000 GHz
 Center: 2.41200000 GHz #Video BW 8.0 MHz Span 0 Hz
 Res BW 8 MHz Sweep 19.0 ms (1001 pts)

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1							
2							
3							
4							
5							
6							


Test Model Duty cycle
802.11n(HT20)
Channel 1: 2412MHz

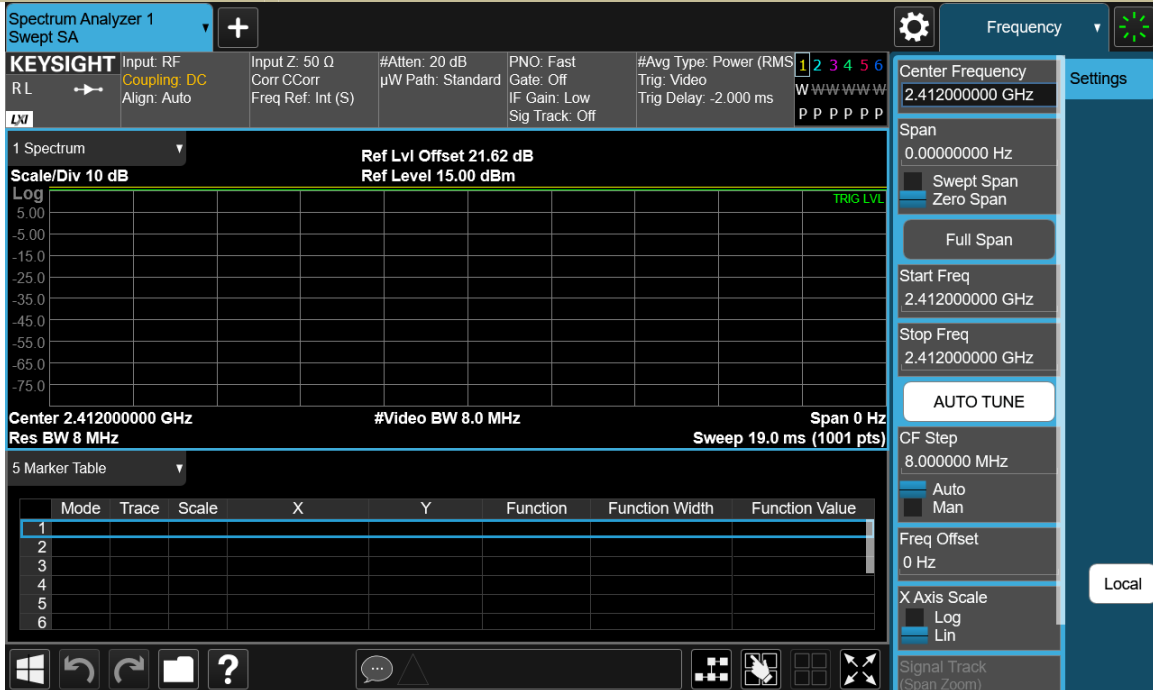


Test Model Duty cycle
802.11n(HT40)
Channel 1: 2422MHz

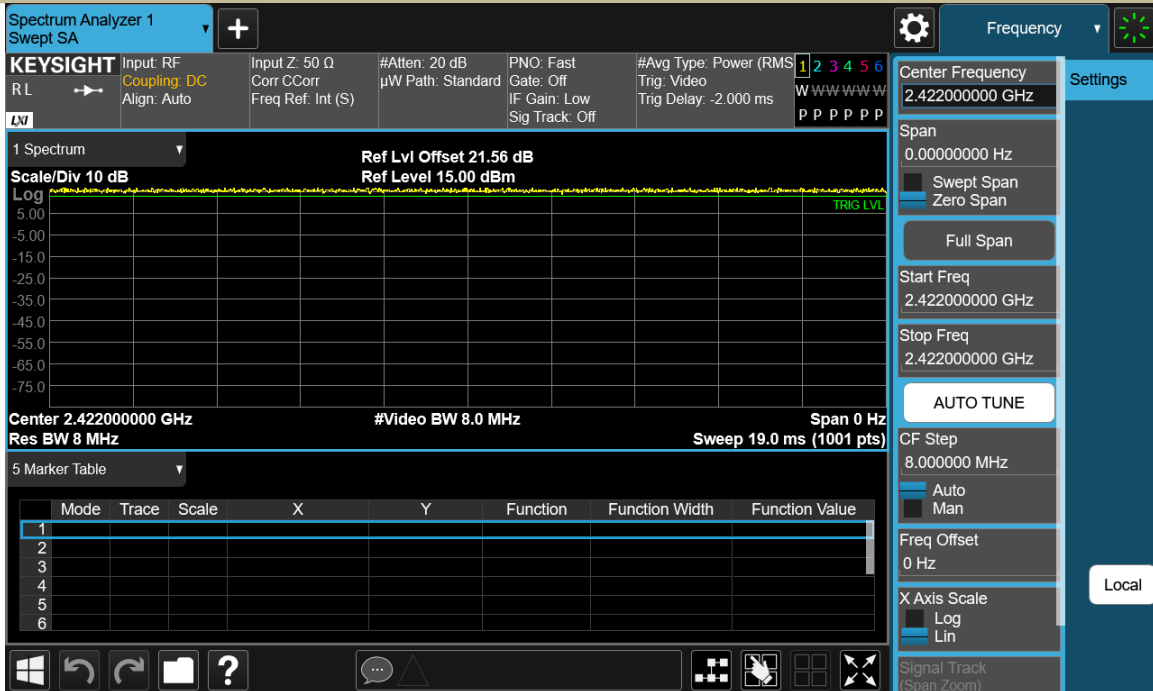


Test Model MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER
802.11b
Channel 1: 2412MHz

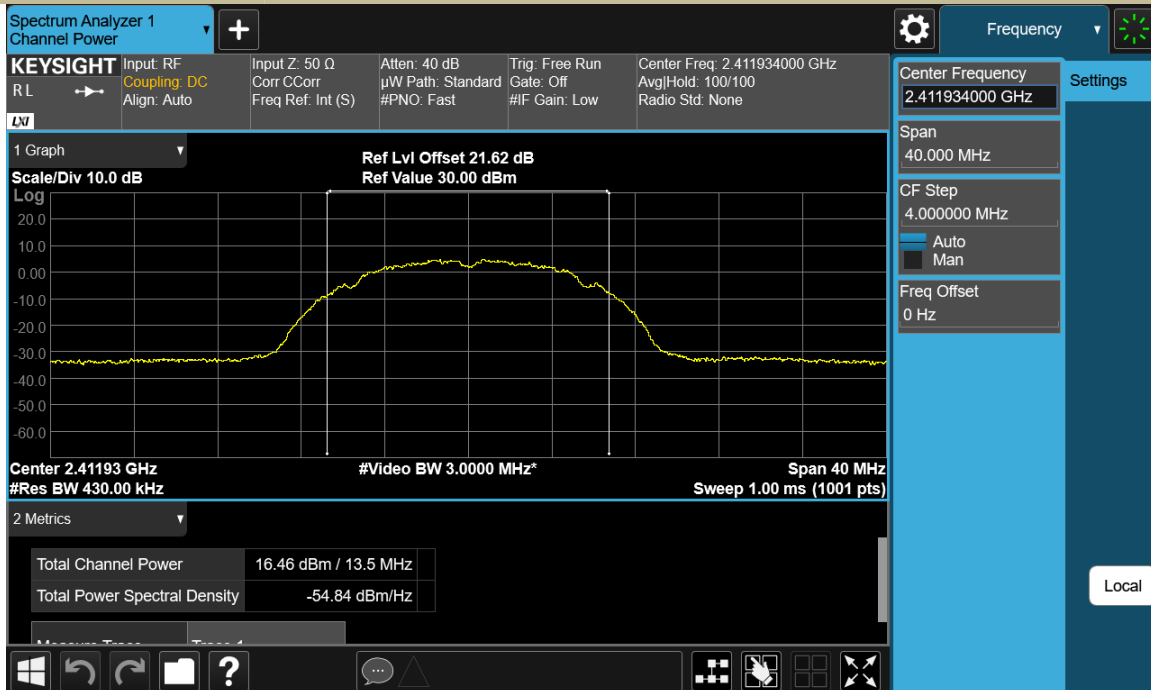


Test Model MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER
802.11b
Channel 6: 2437MHz

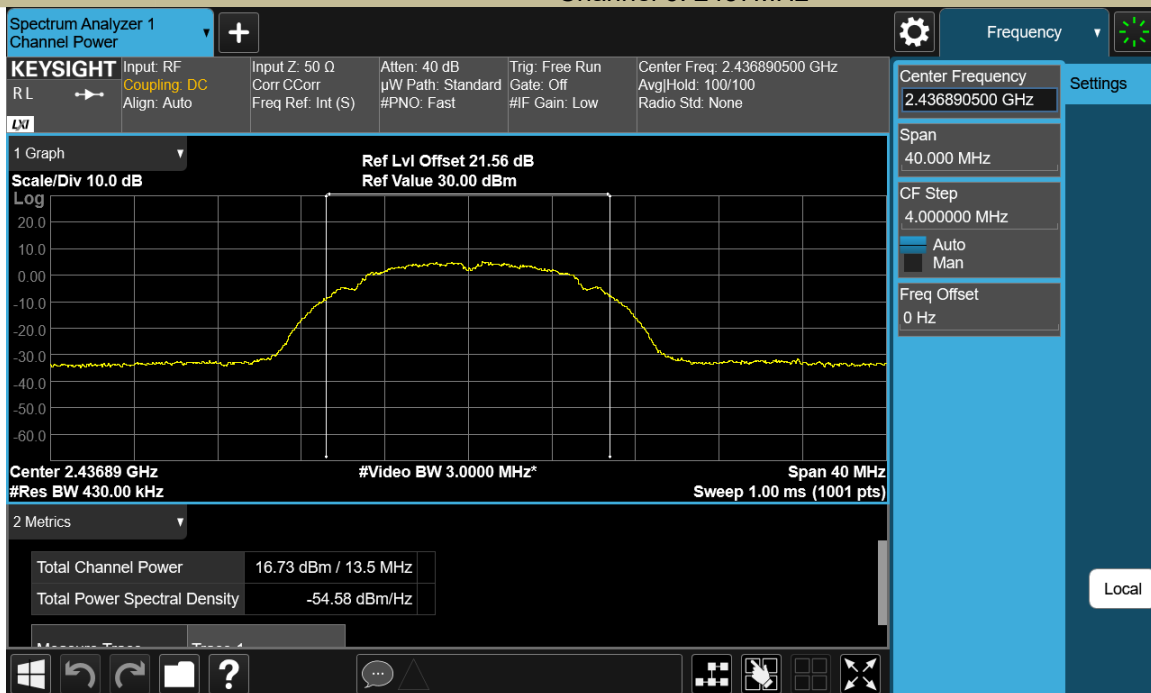


Test Model: MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER
802.11b
Channel 11: 2462MHz

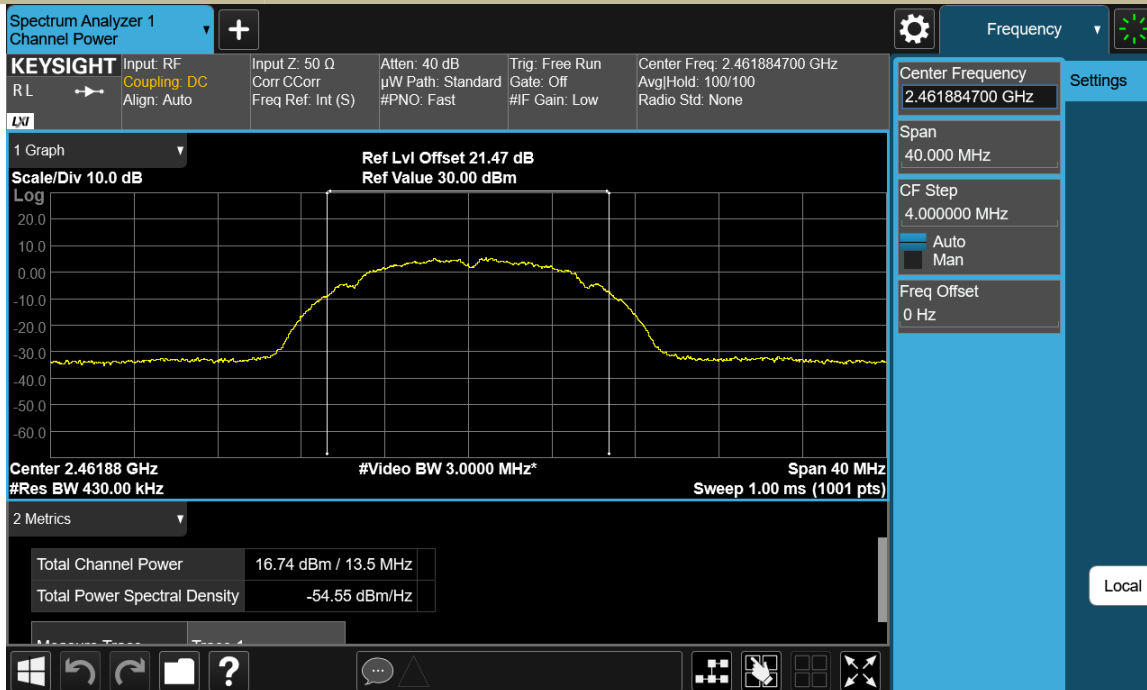


Test Model: MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER
802.11g
Channel 1: 2412MHz

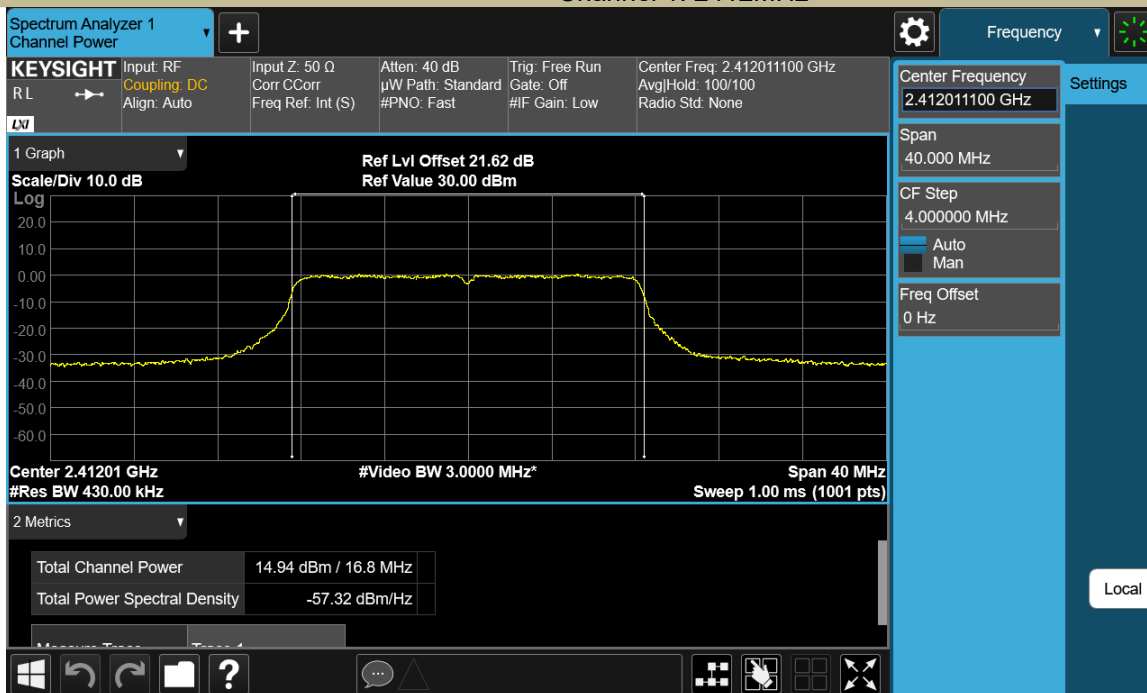


Test Model MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER
802.11g
Channel 6: 2437MHz

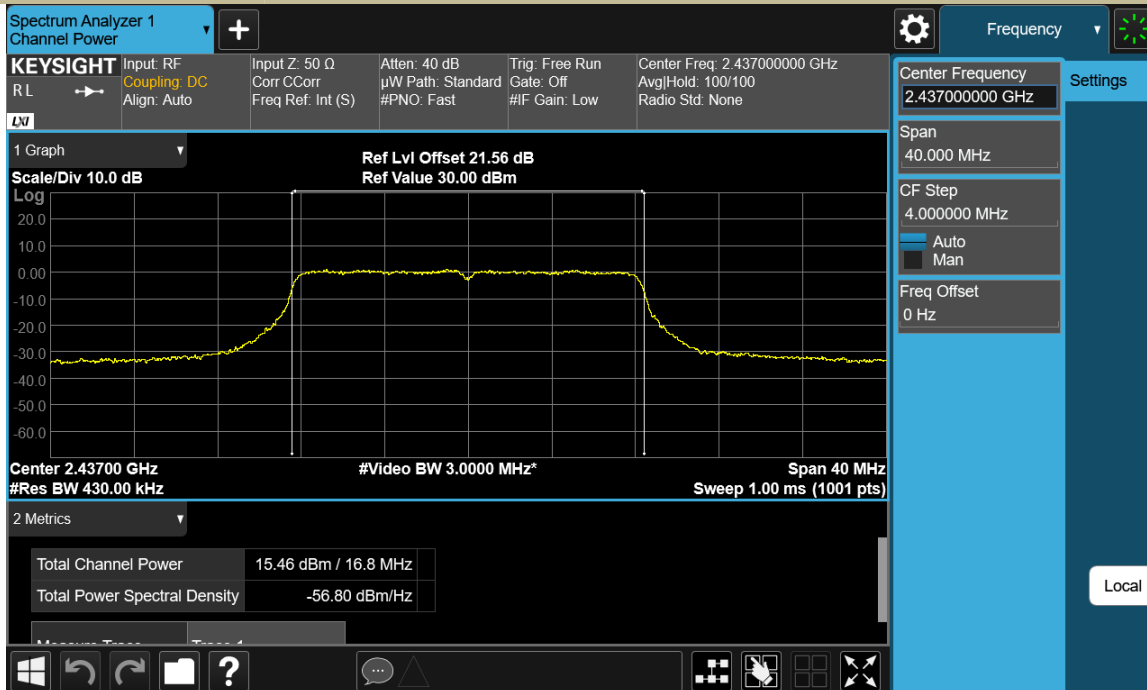


Test Model MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER
802.11g
Channel 11: 2462MHz

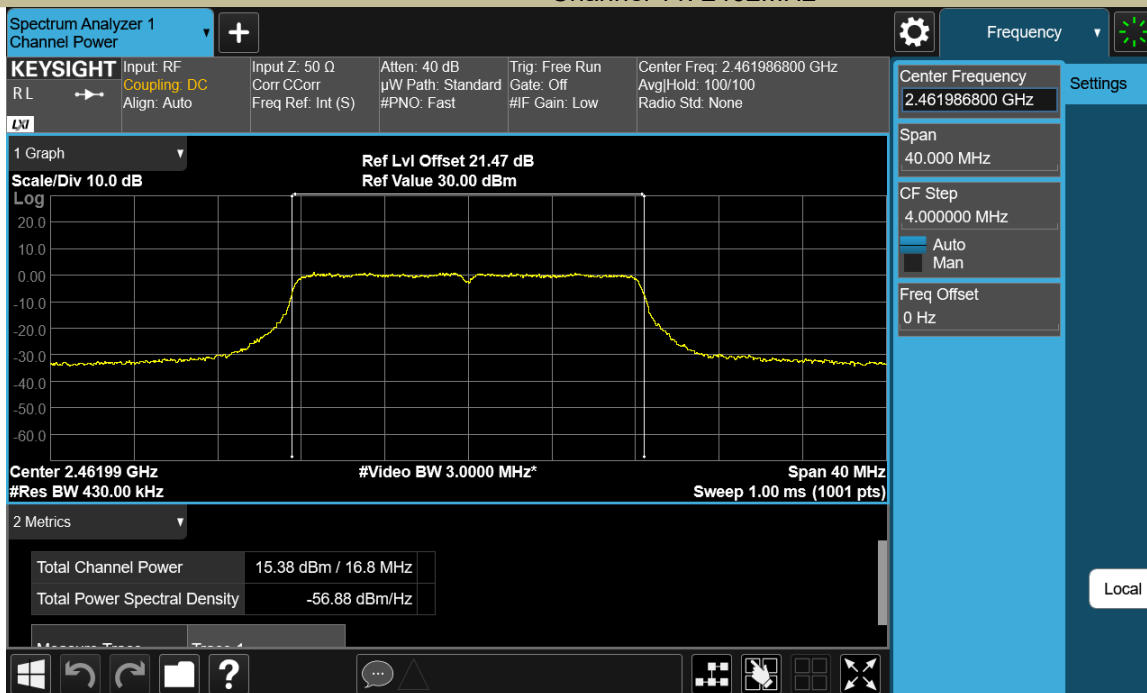


Test Model: MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER
802.11n(HT20)
Channel 1: 2412MHz

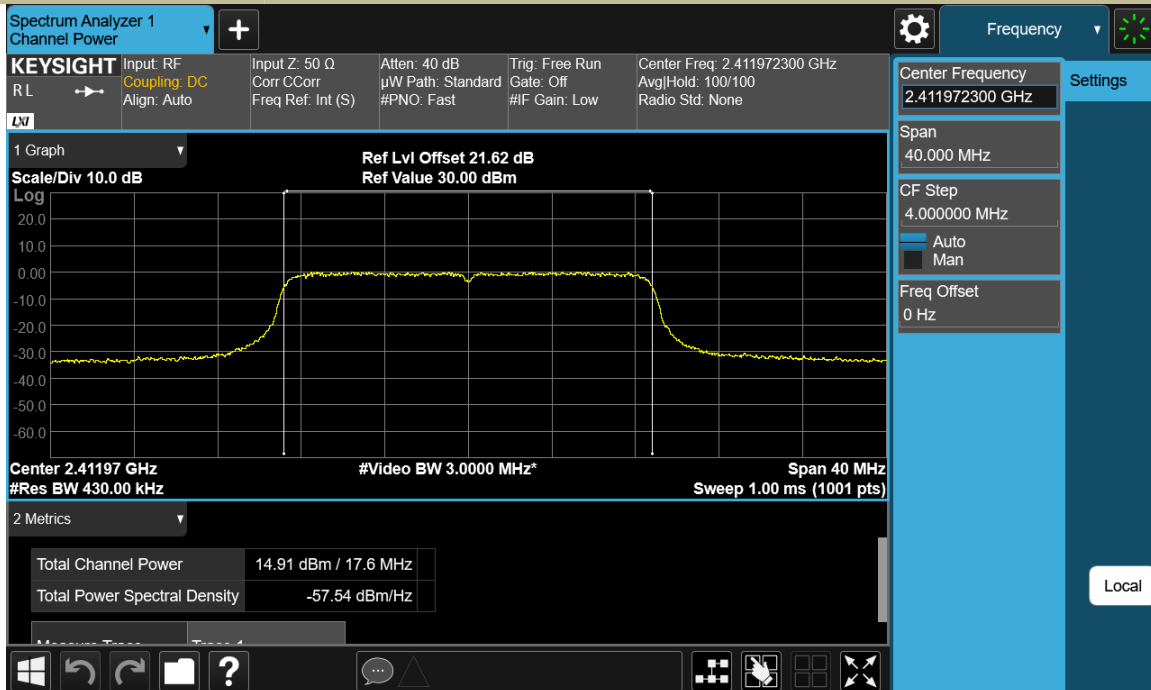


Test Model: MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER
802.11n(HT20)
Channel 6: 2437MHz

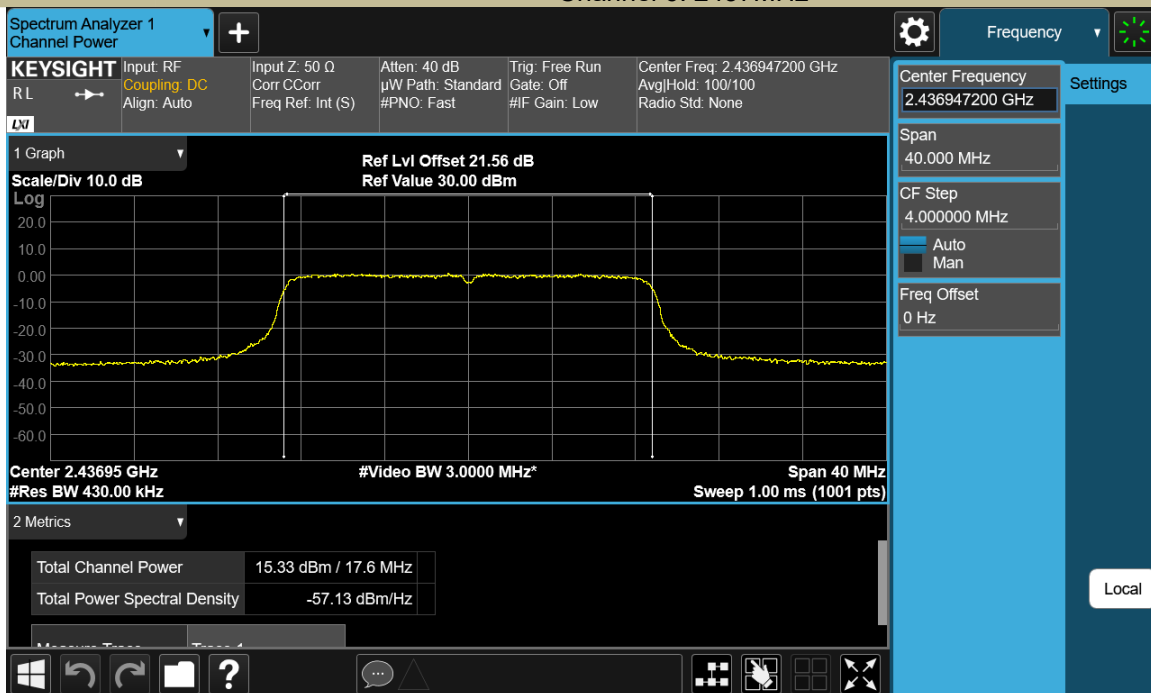


MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER
802.11n(HT20)
Channel 11: 2462MHz

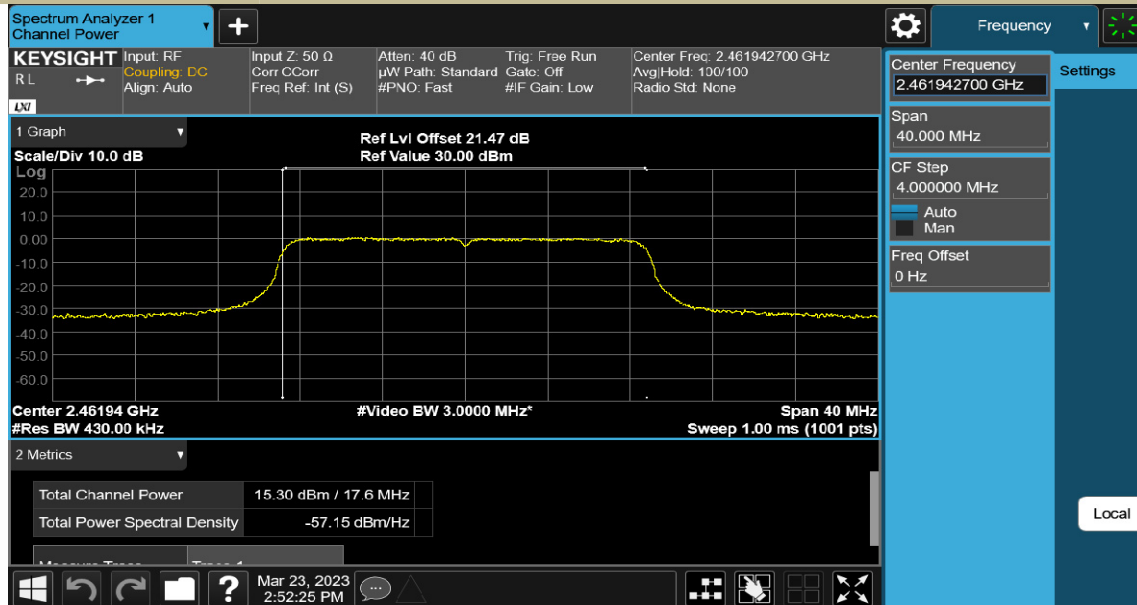


MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER
802.11n(HT40)
Channel 3: 2422MHz

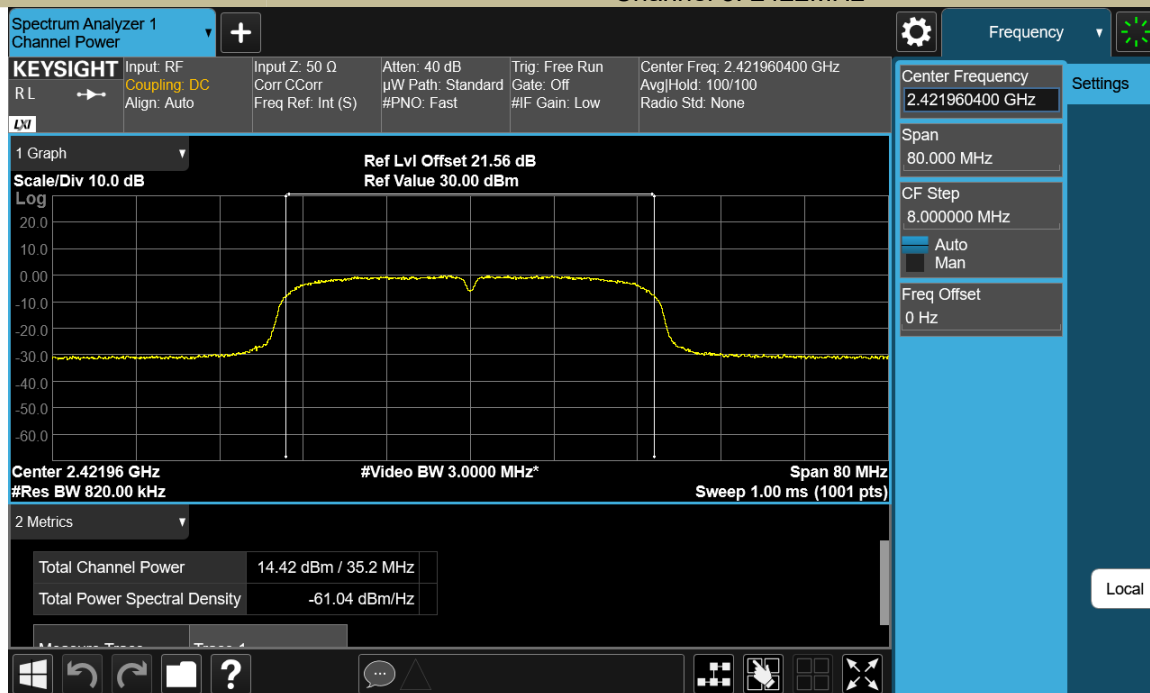

Test Model **MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER**
802.11n(HT40)
Channel 6: 2437MHz

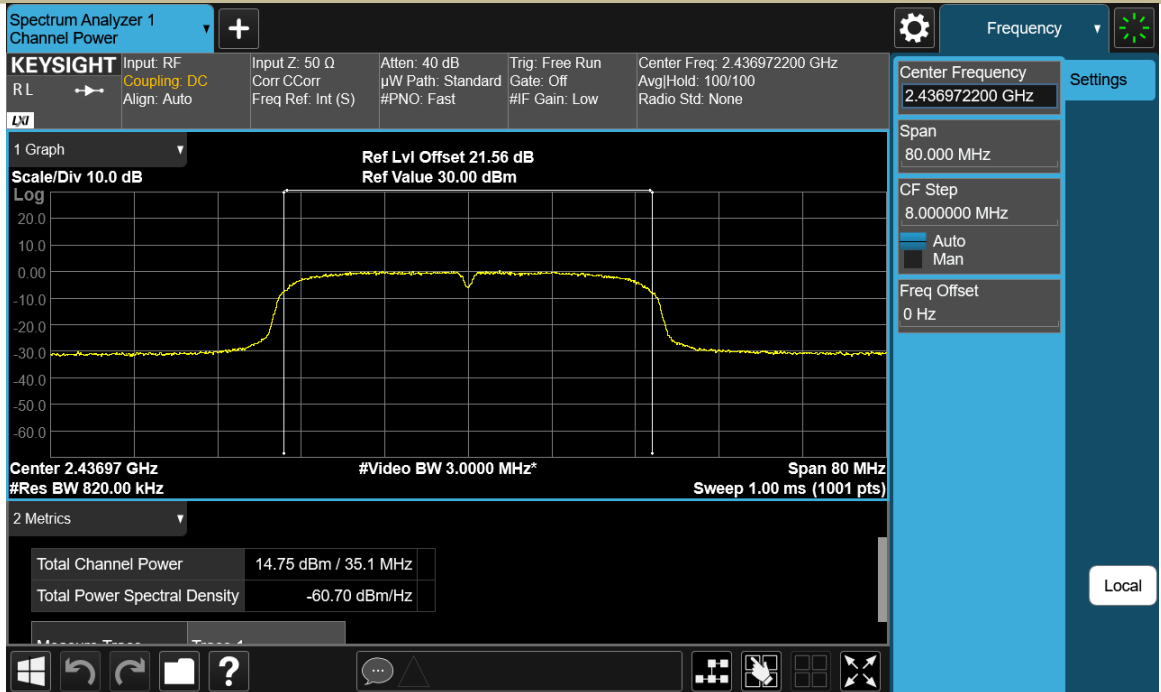

Test Model **MAXIMUM CONDUCTED(AVERAGE) OUTPUT POWER**
802.11n(HT40)
Channel 9: 2452MHz

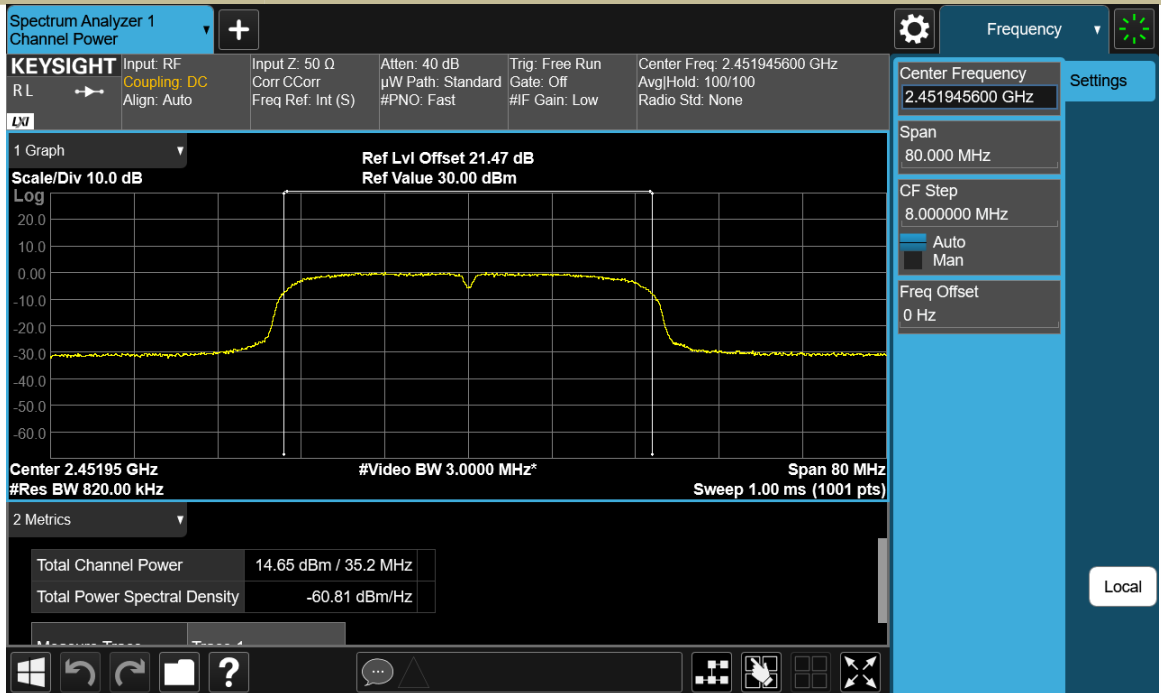

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to:10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.


Note: If antenna Gain exceeds 6 dBi, then PSD Limit=8-(Gain- 6)

8.3.5 Test Results


Temperature:	26°C
Relative Humidity:	49%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	1	2412	-11.46	8	PASS
	6	2437	-11.38	8	PASS
	11	2462	-11.6	8	PASS
802.11g	1	2412	-14.75	8	PASS
	6	2437	-14.78	8	PASS
	11	2462	-15.46	8	PASS
802.11n (HT20)	1	2412	-14.64	8	PASS
	6	2437	-14.47	8	PASS
	11	2462	-15.38	8	PASS
802.11n (HT40)	3	2422	-16.87	8	PASS
	6	2437	-17.46	8	PASS
	9	2452	-17.93	8	PASS


Test Model Power Spectral Density 802.11b Channel 1: 2412MHz

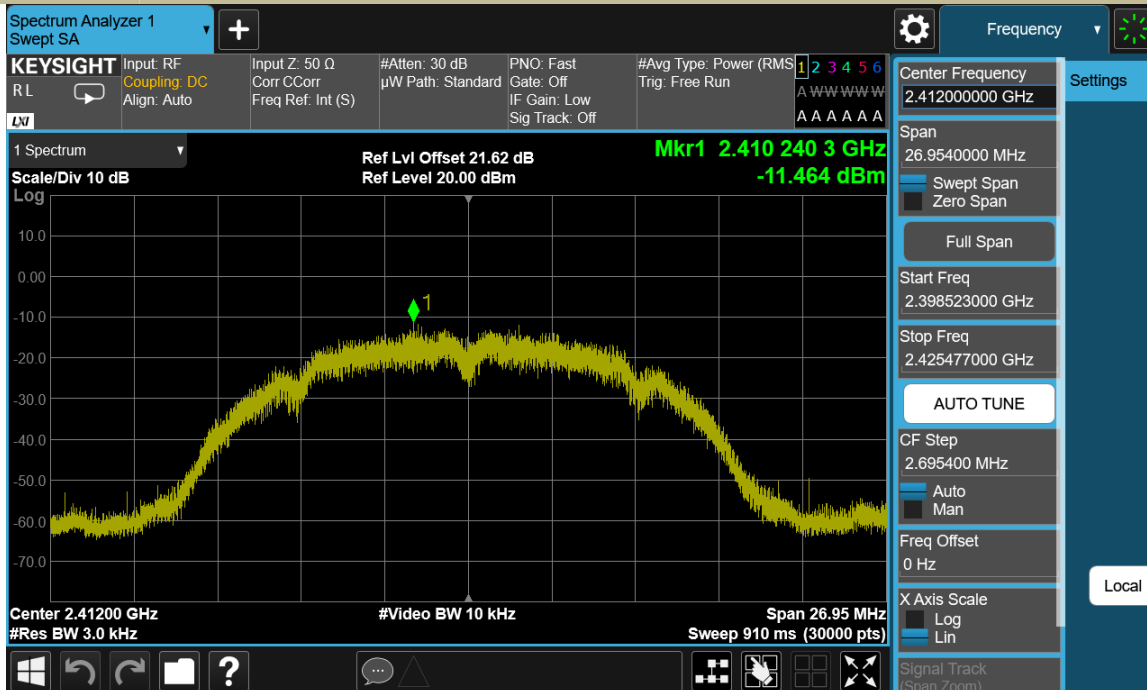


Test Model Power Spectral Density 802.11b Channel 6: 2437MHz

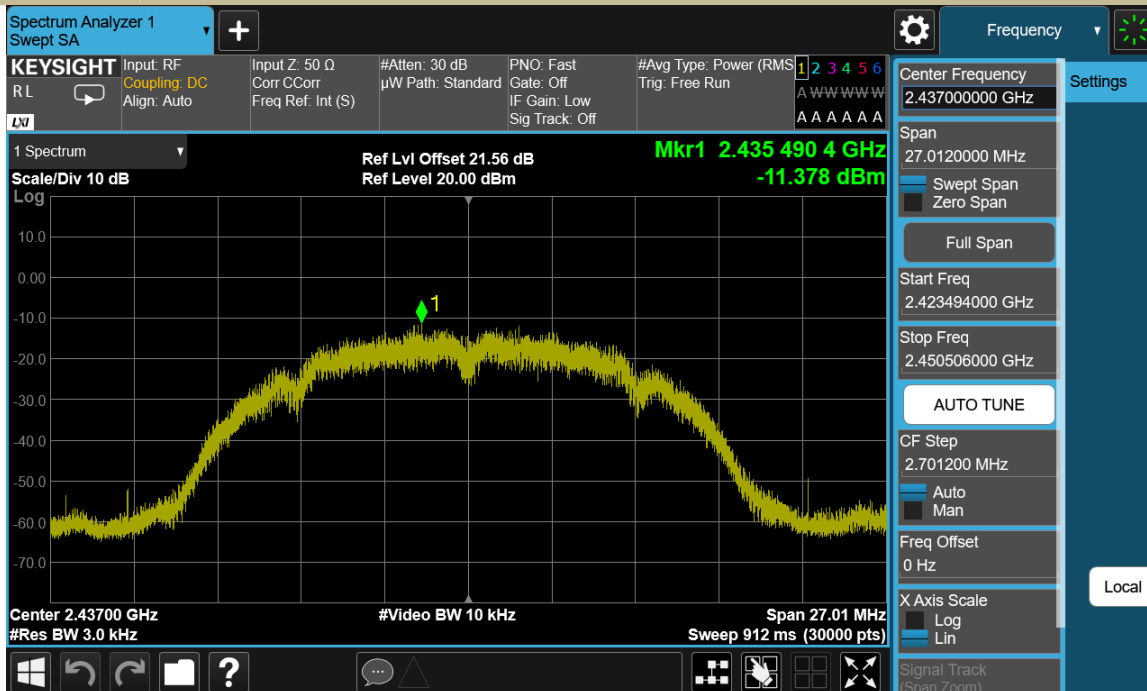

Test Model Power Spectral Density 802.11b Channel 11: 2462MHz

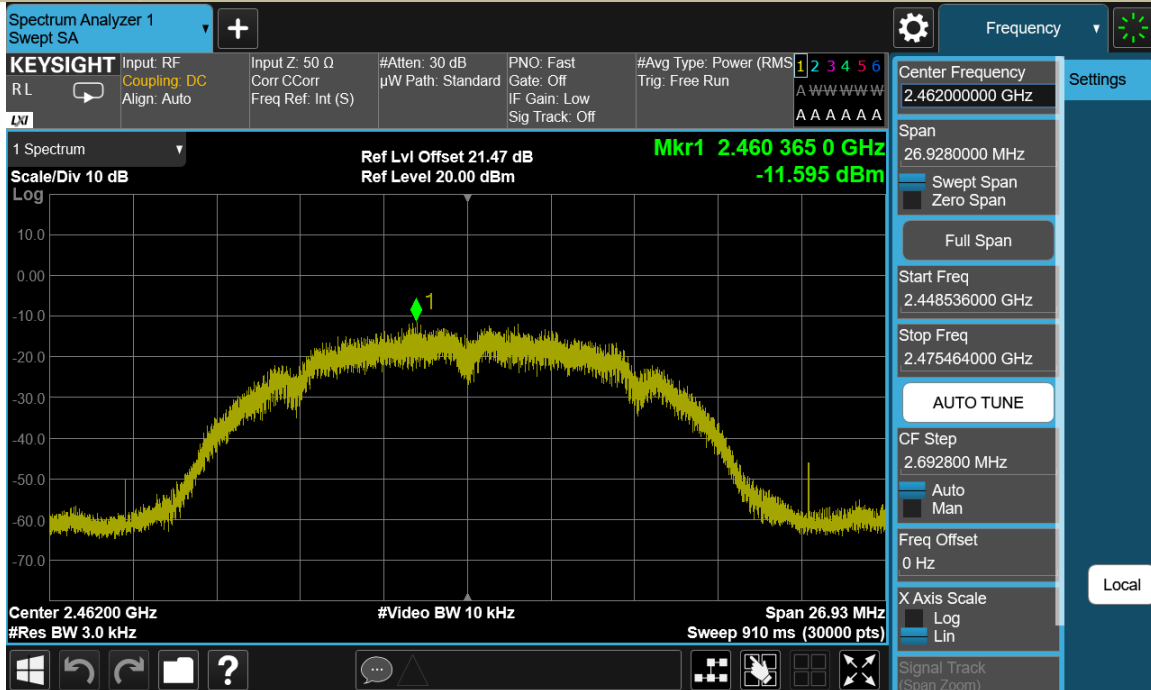


Test Model Power Spectral Density 802.11g Channel 1: 2412MHz

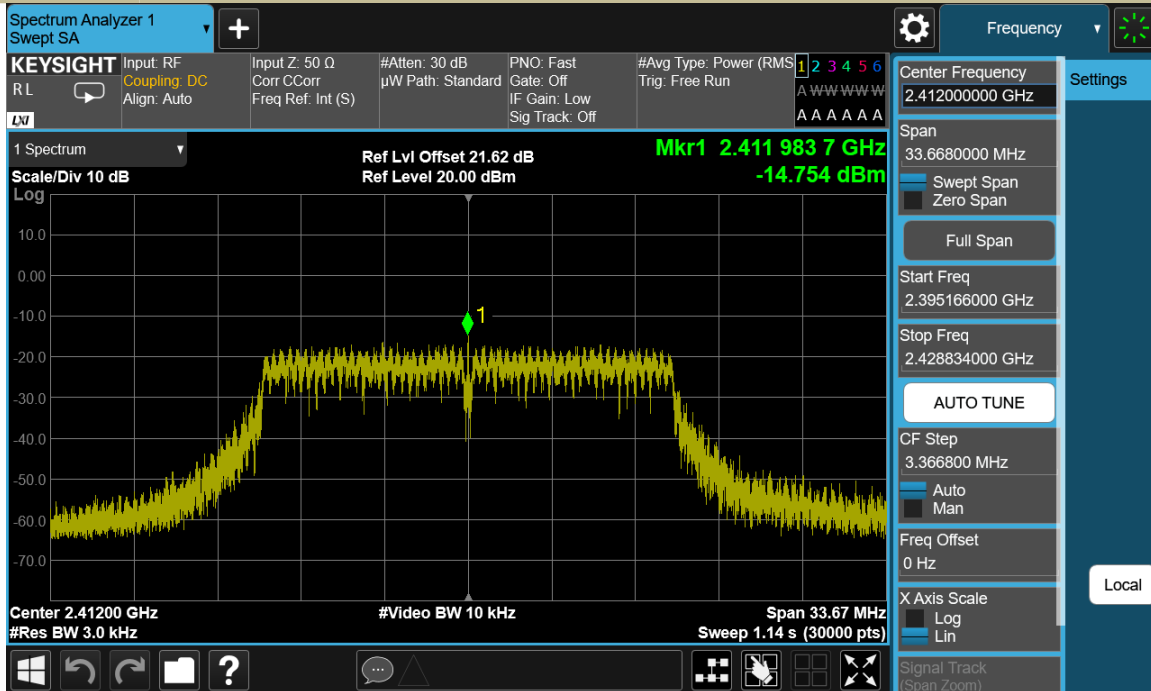


Test Model

Power Spectral Density
802.11g
Channel 6: 2437MHz

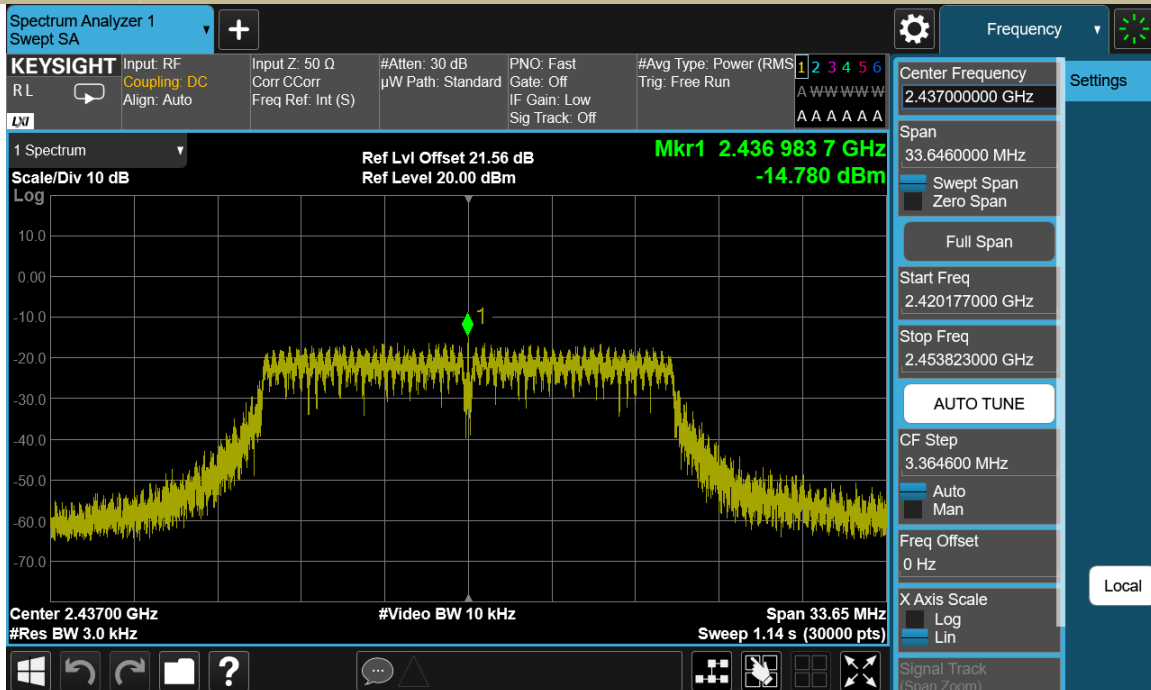


Test Model


Power Spectral Density
802.11g
Channel 11: 2462MHz

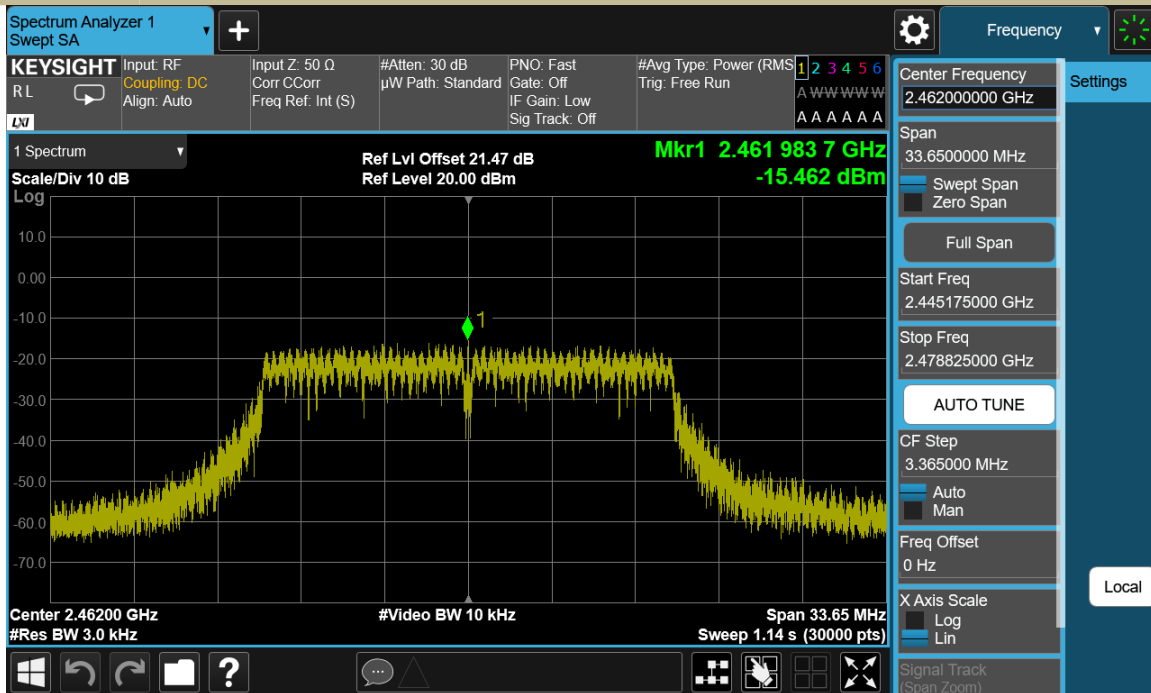


Test Model Power Spectral Density
802.11n (HT20)
Channel 1: 2412MHz

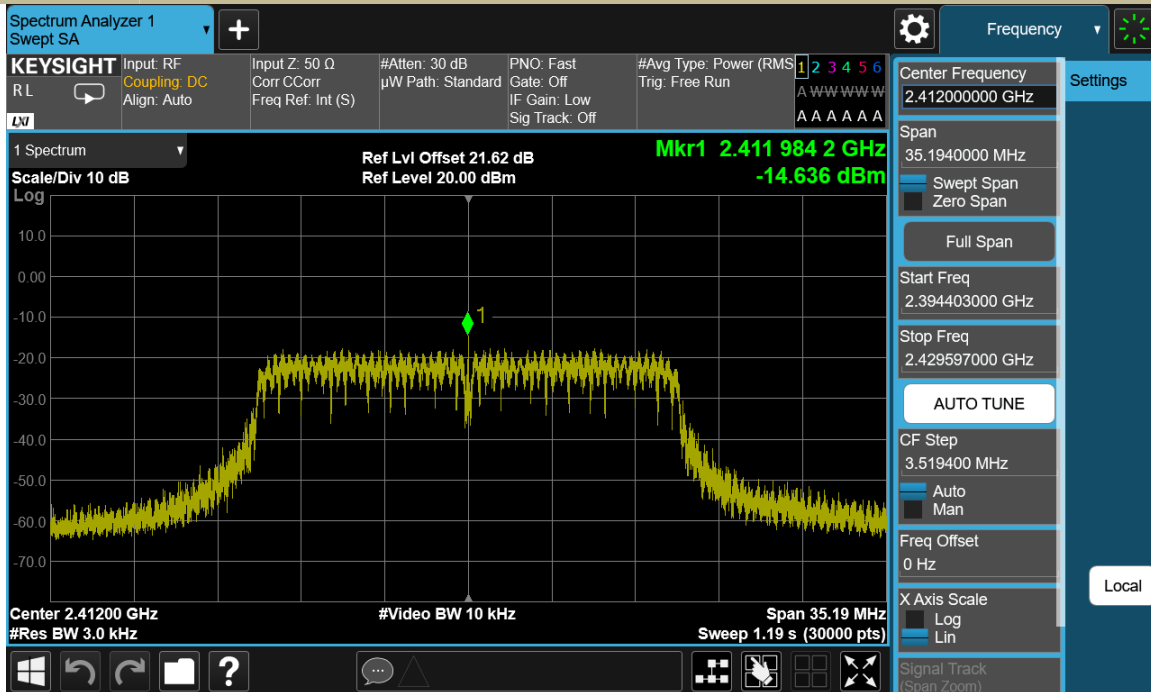


Test Model Power Spectral Density
802.11n (HT20)
Channel 6: 2437MHz

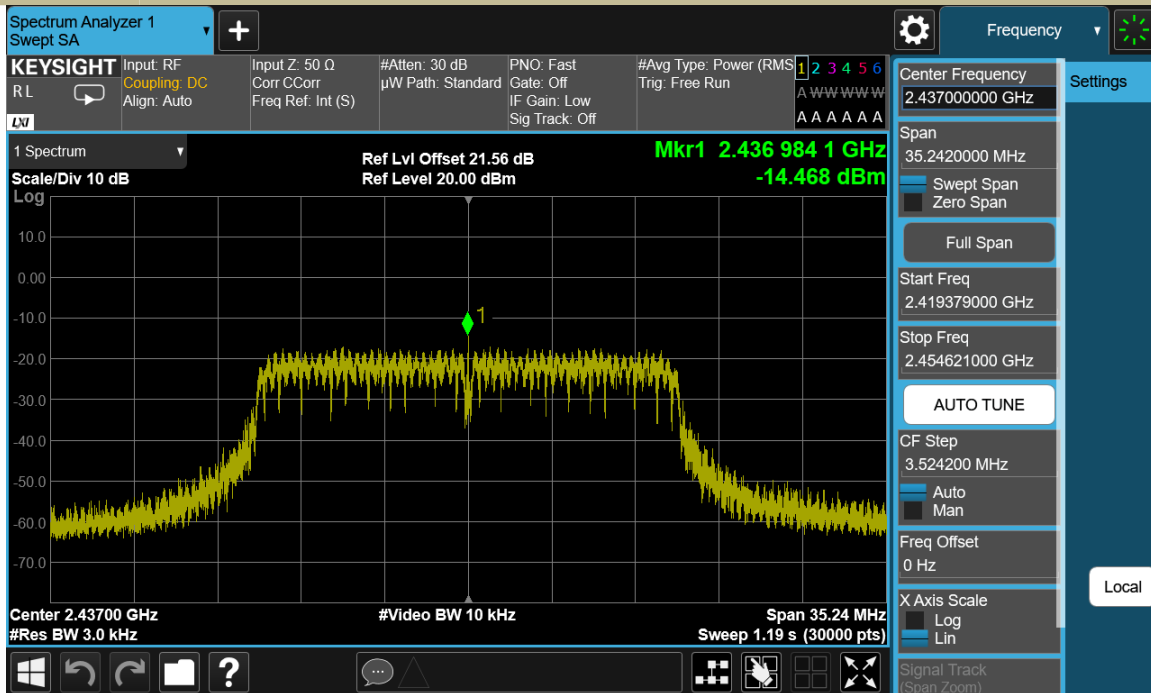


Test Model Power Spectral Density
802.11n (HT20)
Channel 11: 2462MHz

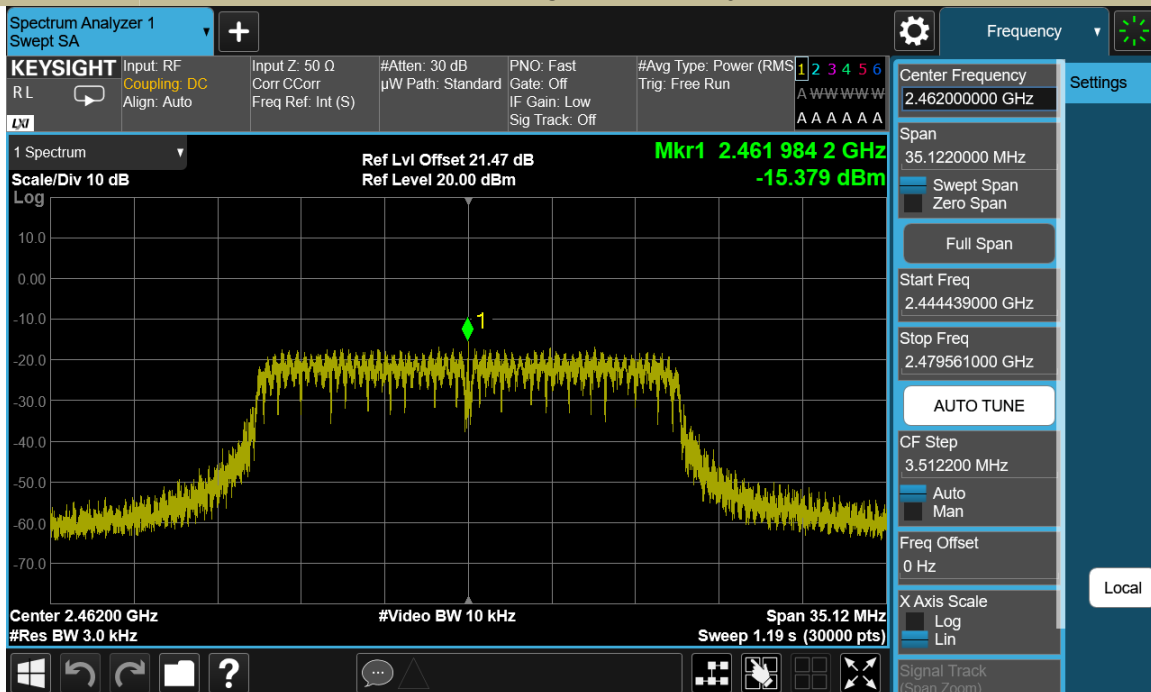


Test Model Power Spectral Density
802.11n (HT40)
Channel 3: 2422MHz

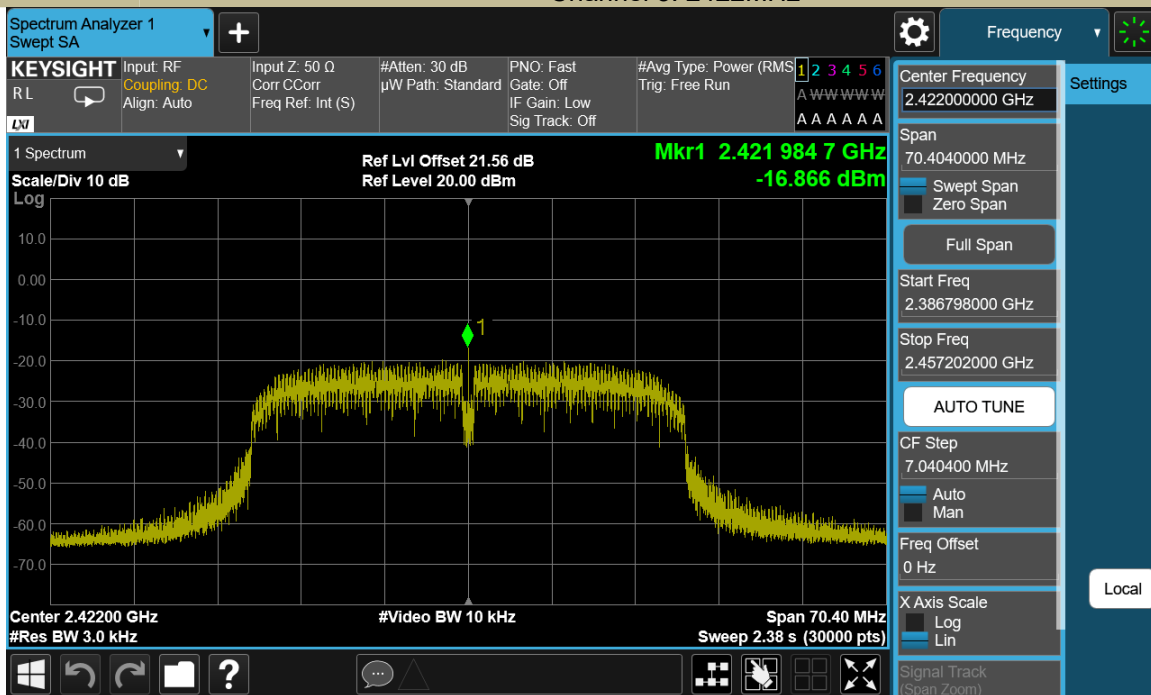

Test Model Power Spectral Density
802.11n (HT40)
Channel 6: 2437MHz

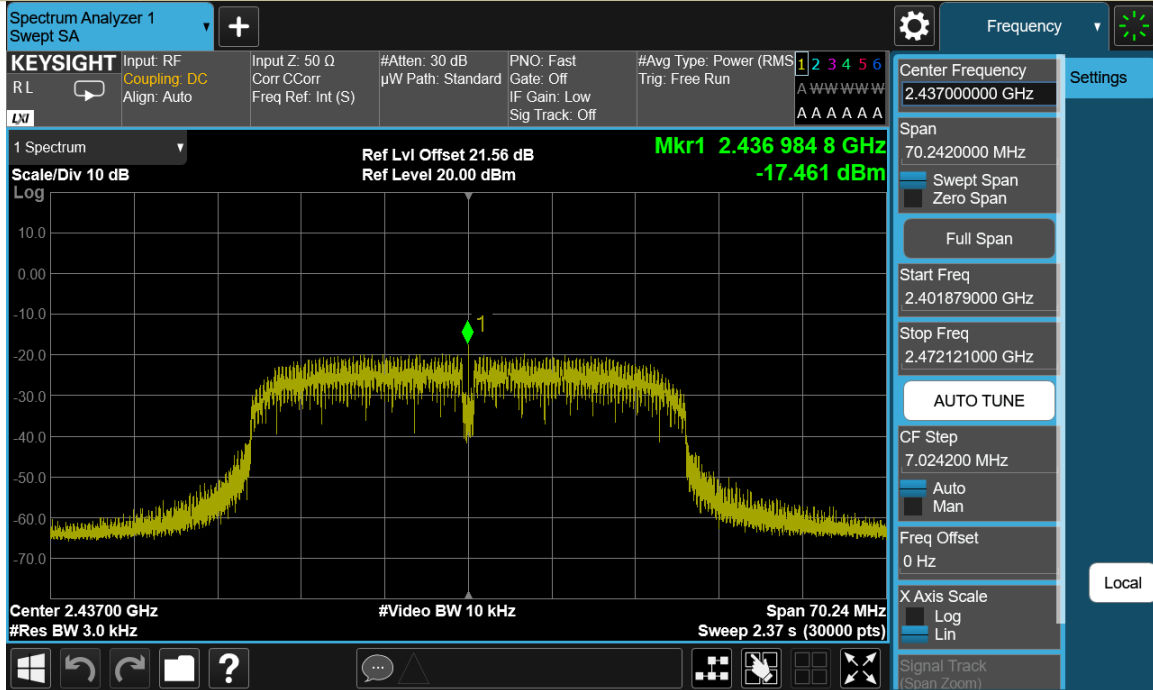

Test Model Power Spectral Density
802.11n (HT40)
Channel 9: 2452MHz

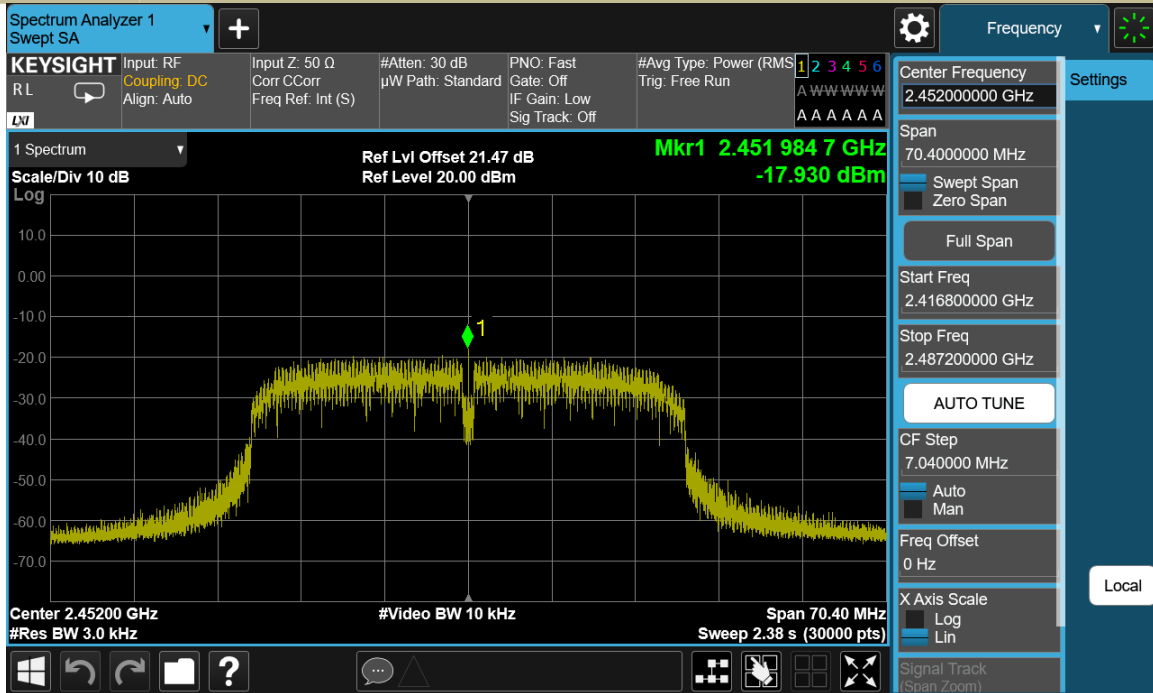

8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW =300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements . Report the three highest emissions relative to the limit.


8.4.5 Test Results


All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

PSD(Power Spectral Density)
802.11b
Channel 1: 2412MHz

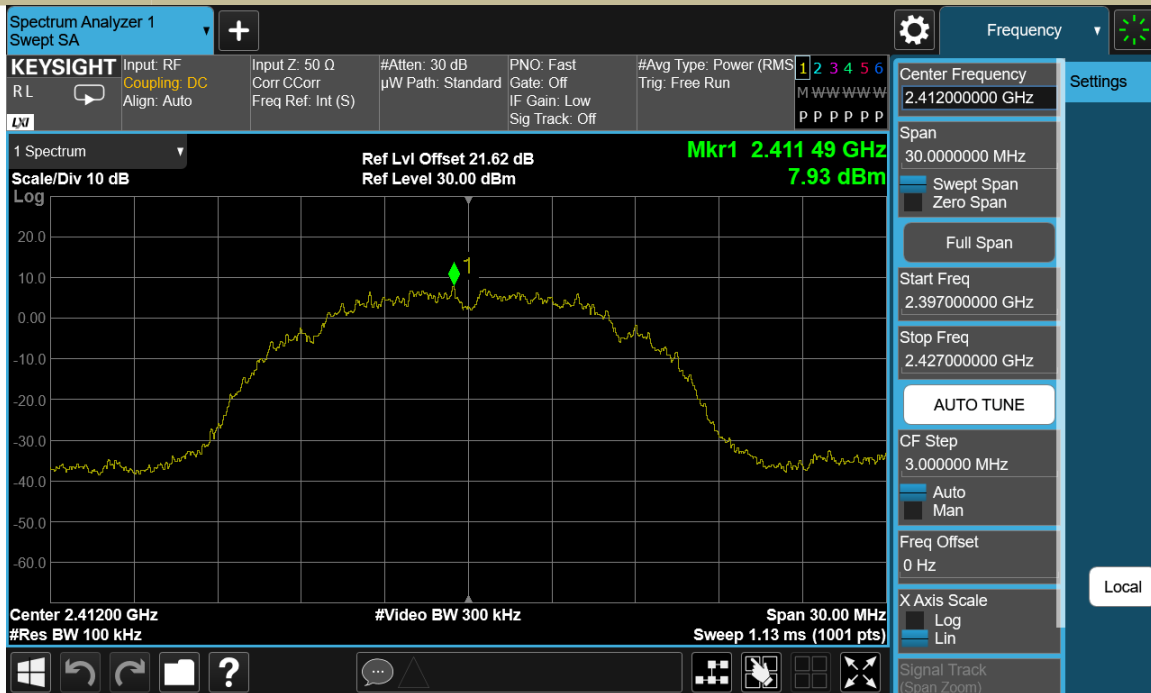


Unwanted Emissions In Non-Restricted Frequency Bands
802.11b
Channel 1: 2412MH

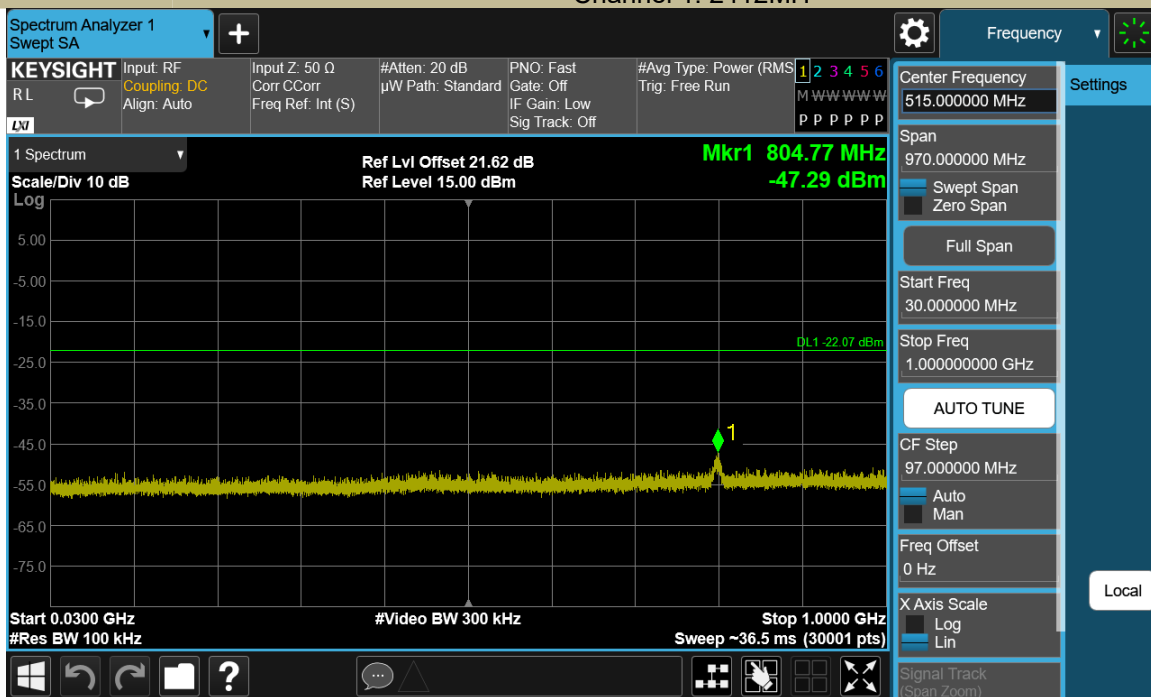


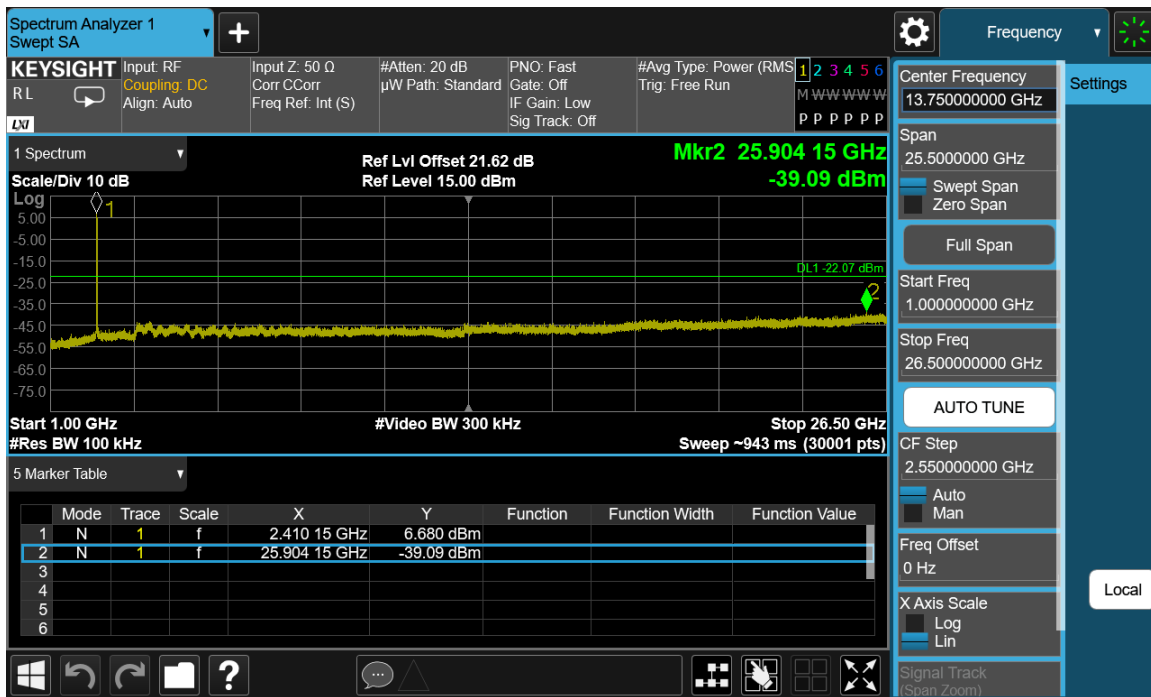


Test Model Band edge
802.11b
Channel 1: 2412MH

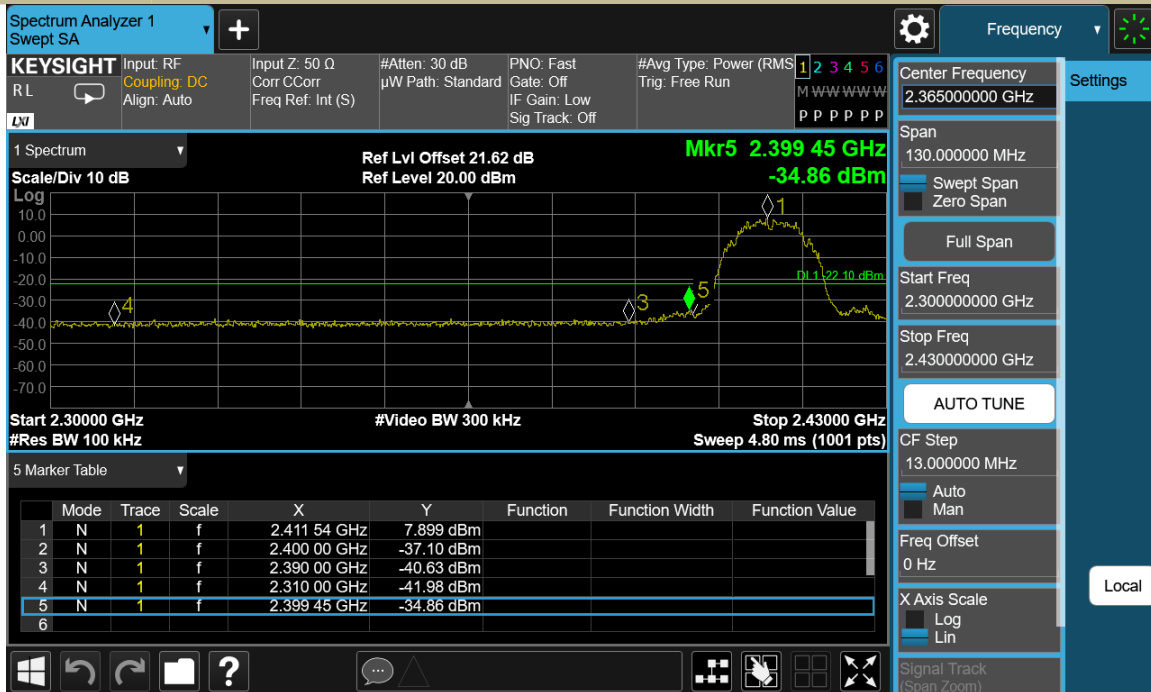


Test Model PSD(Power Spectral Density)
802.11b
Channel 6: 2437MHz

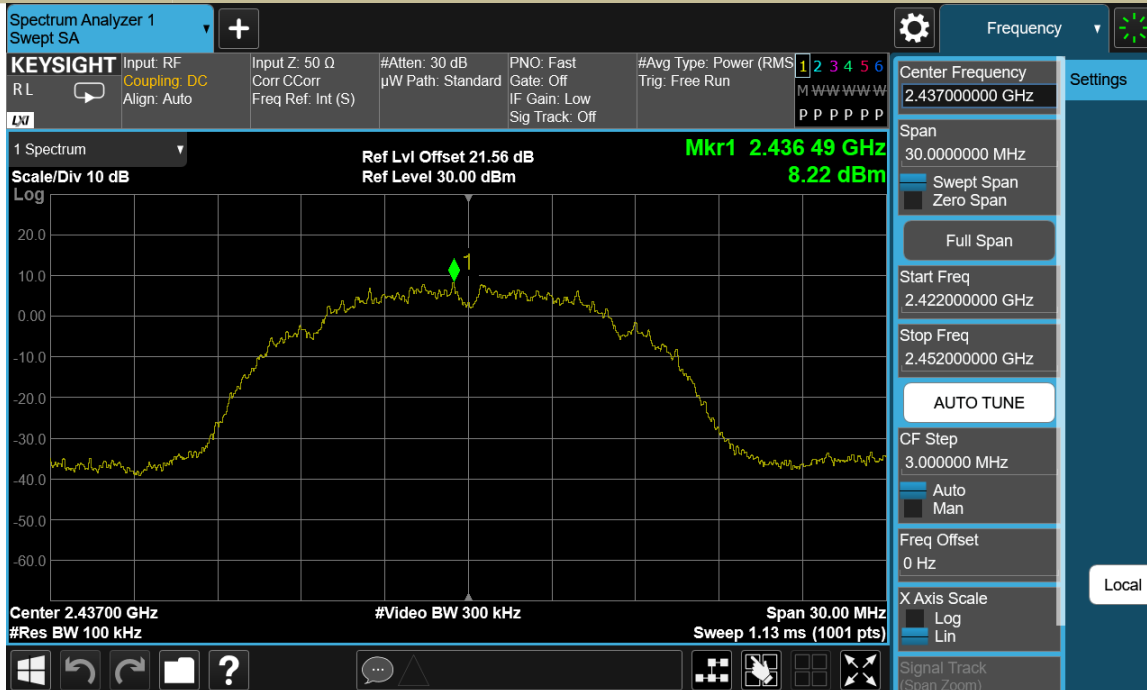


Test Model Unwanted Emissions In Non-Restricted Frequency Bands
802.11b
Channel 11: 2437MHz

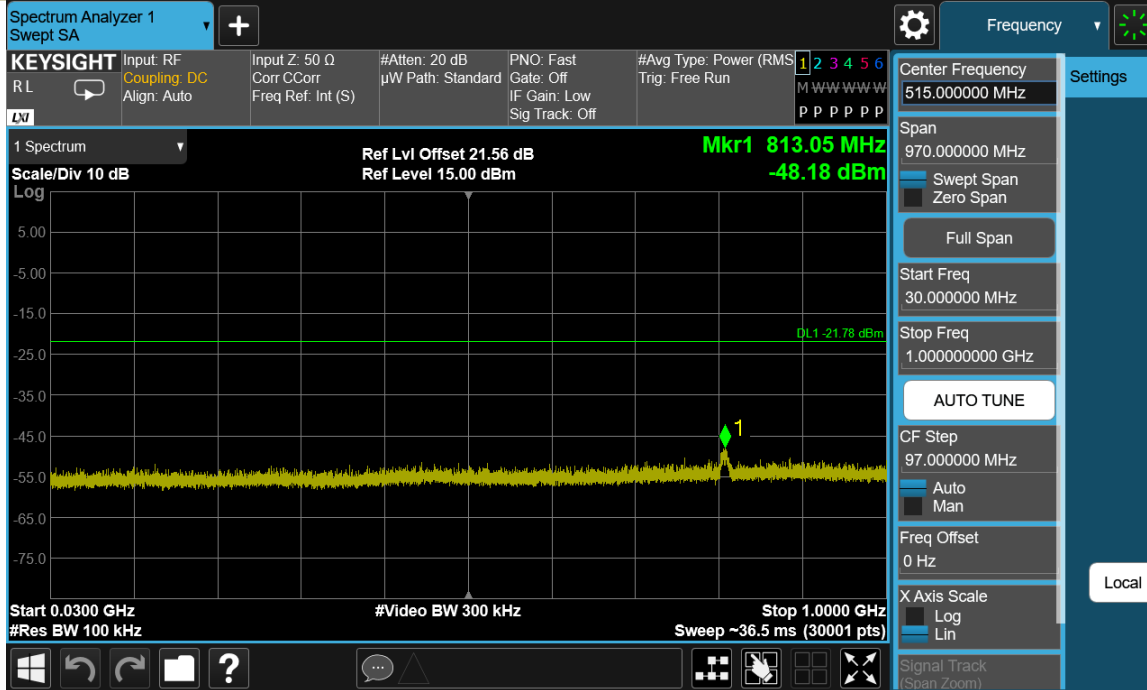


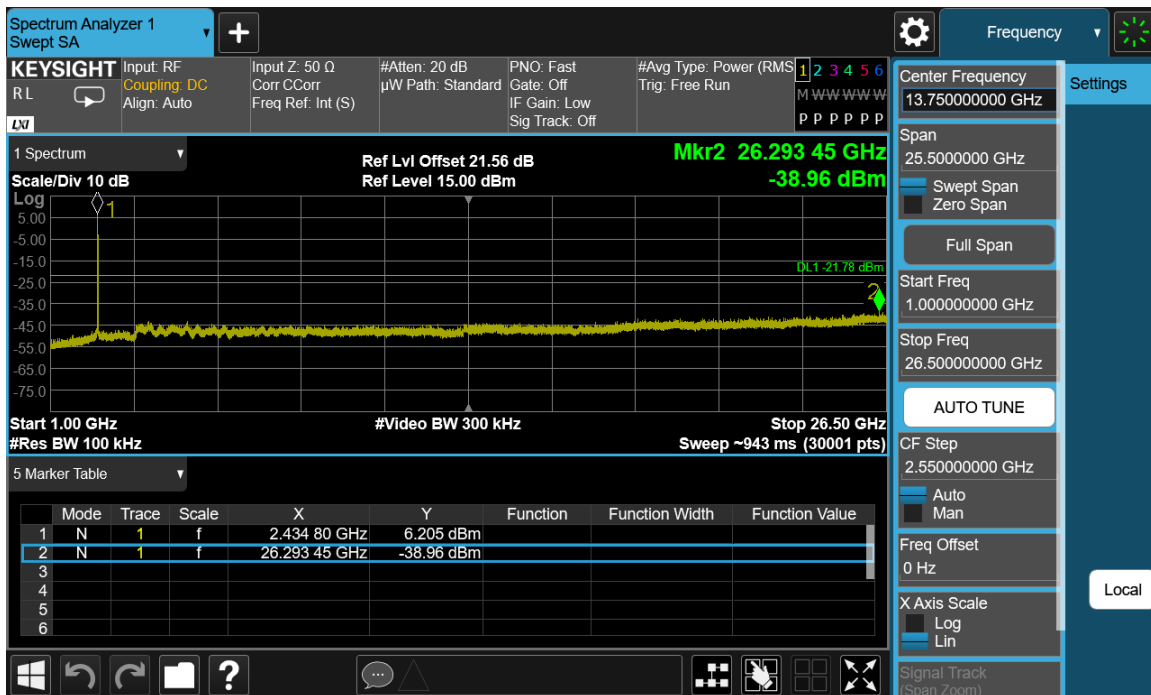


Test Model PSD(Power Spectral Density)
 802.11b
 Channel 1: 2462MHz

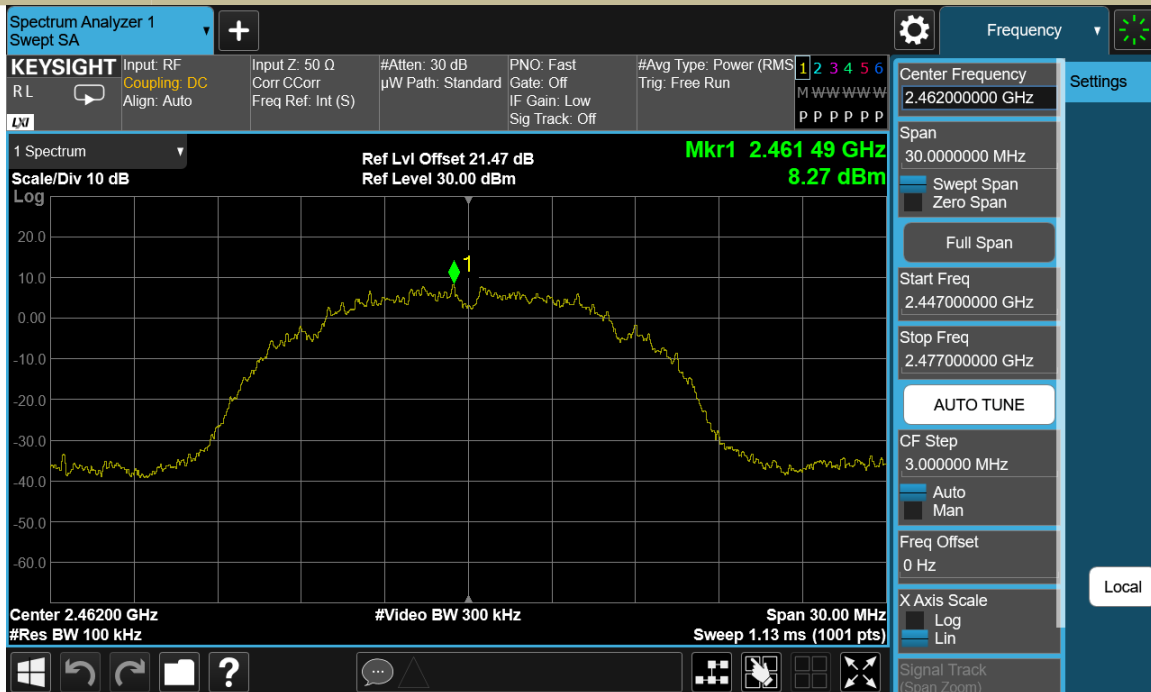

Unwanted Emissions In Non-Restricted Frequency Bands
802.11b
Channel 1: 2462MH

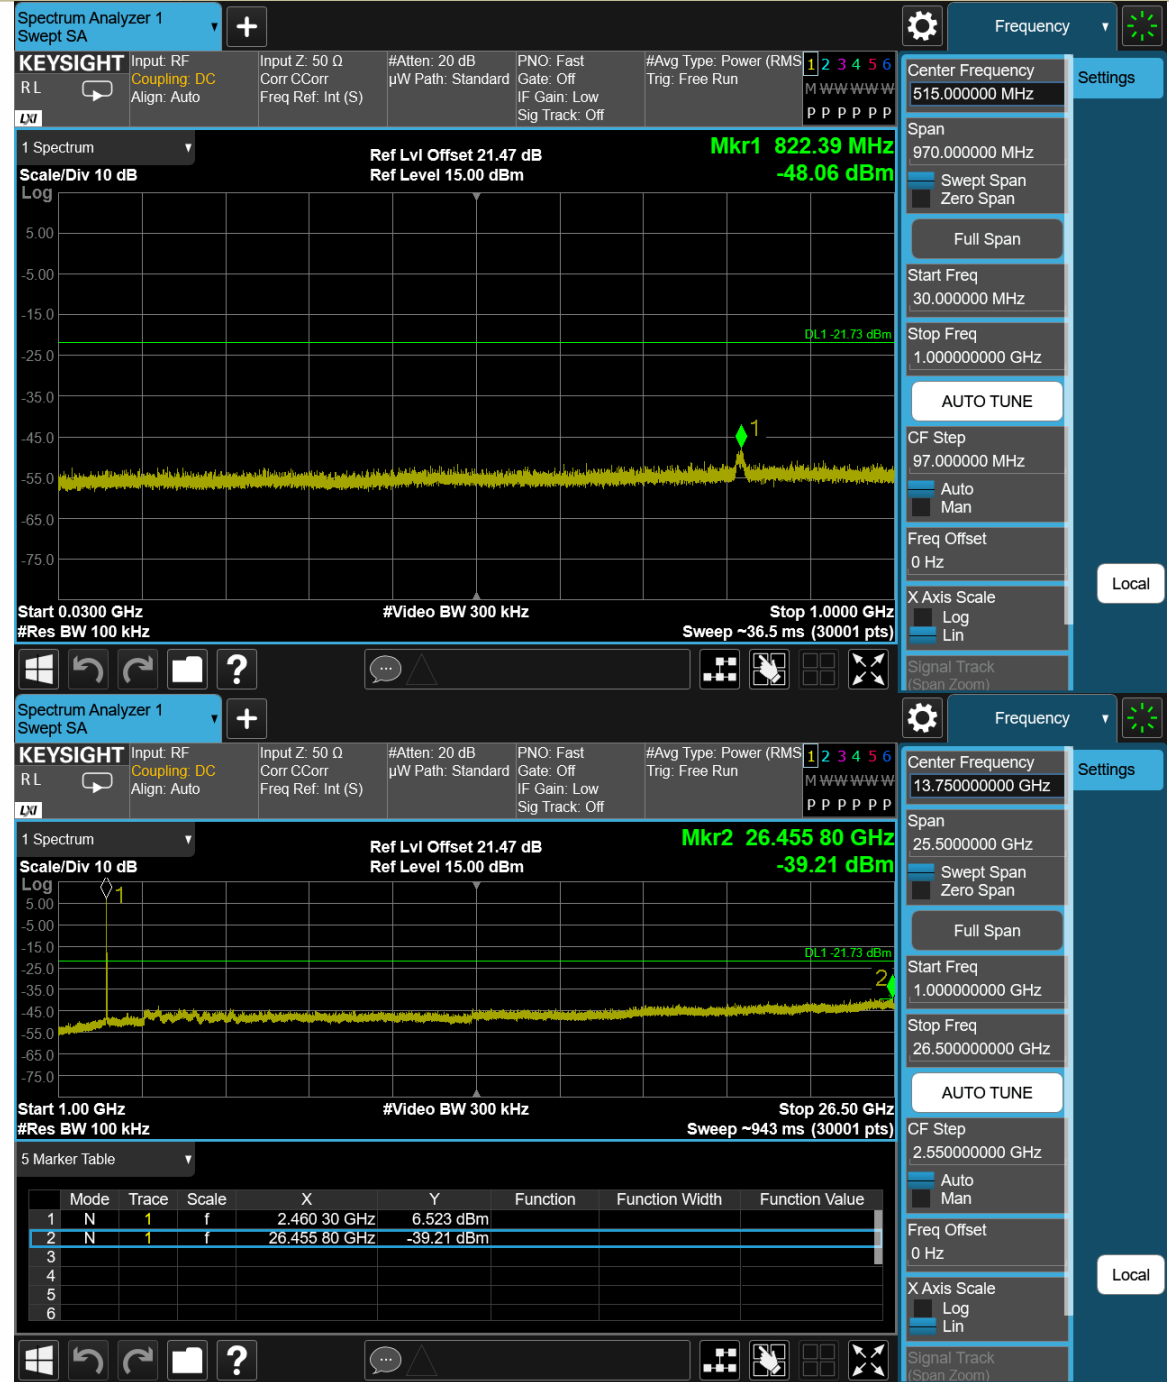

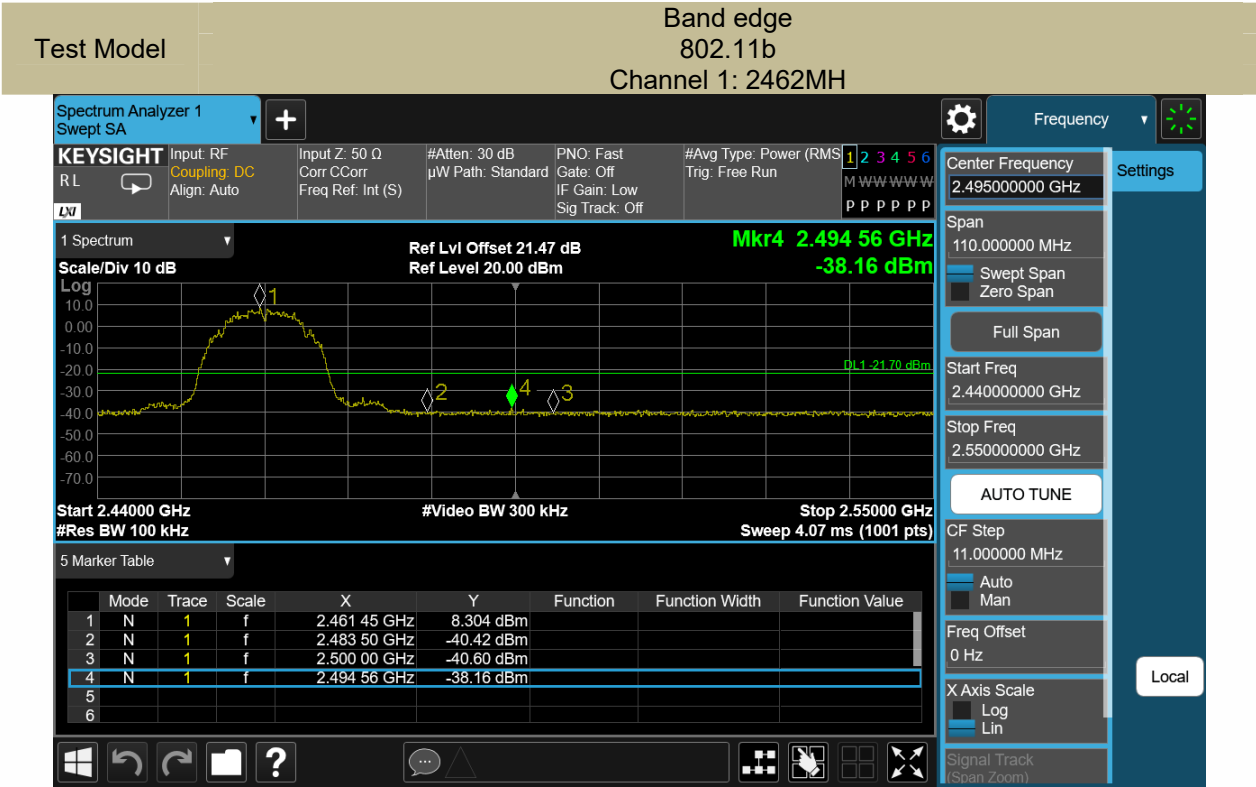

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V}/\text{m}$)	300
0.490-1.705	24000/F(KHz)	20 log ($\mu\text{V}/\text{m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz), 200Hz for $f < 150$ KHz (9KHz to 150KHz), 9KHz for $f < 30$ MHz (150KHz to 30KHz)

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

Temperature:	17°C
Relative Humidity:	68%
ATM Pressure:	1011 mbar

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})(\text{dB})$;

Limit line=Specific limits(dBuV) + distance extrapolation factor

- Spurious Emission Above 1GHz(1GHz to 25GHz)
- All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Test mode: 802.11 b Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824.000	V	51.15	35.61	74.00	54.00	-22.85	-18.39
7236.500	V	43.61	28.54	74.00	54.00	-30.39	-25.46
17997.50	V	54.84	37.01	74.00	54.00	-19.16	-16.99
4824.000	H	54.01	39.66	74.00	54.00	-19.99	-14.34
7236.000	H	43.47	28.75	74.00	54.00	-30.53	-25.25
17969.00	H	55.44	39.06	74.00	54.00	-18.56	-14.94

Test mode: 802.11 b Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4874.000	V	52.20	36.54	74.00	54.00	-21.80	-17.46
7311.000	V	43.50	28.91	74.00	54.00	-30.50	-25.09
17932.50	V	55.15	38.49	74.00	54.00	-18.85	-15.51
4874.000	H	54.89	37.05	74.00	54.00	-19.11	-16.95
7311.000	H	42.84	27.59	74.00	54.00	-31.16	-26.41
17970.50	H	55.02	39.87	74.00	54.00	-18.98	-14.13

Test mode: 802.11 b Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924.000	V	52.64	35.61	74.00	54.00	-21.36	-18.39
7386.000	V	43.49	28.32	74.00	54.00	-30.51	-25.68
17976.50	V	54.62	38.97	74.00	54.00	-19.38	-15.03
4924.000	H	53.90	38.56	74.00	54.00	-20.10	-15.44
7386.000	H	44.73	29.34	74.00	54.00	-29.27	-24.66
17964.50	H	55.28	38.74	74.00	54.00	-18.72	-15.26

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Test mode: 802.11 b Frequency: Channel 1: 2412MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2385.500	H	58.06	74.00	42.05	54.00
2335.360	V	58.26	74.00	42.66	54.00

Test mode: 802.11 b Frequency: Channel 11: 2462MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2495.718	H	58.85	74.00	42.59	54.00
2498.416	V	59.65	74.00	43.21	54.00

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Spurious Emission in Restricted Band 2310-2390MHz
 802.11b
 Channel 1: 2412MHz
 Polarity: H

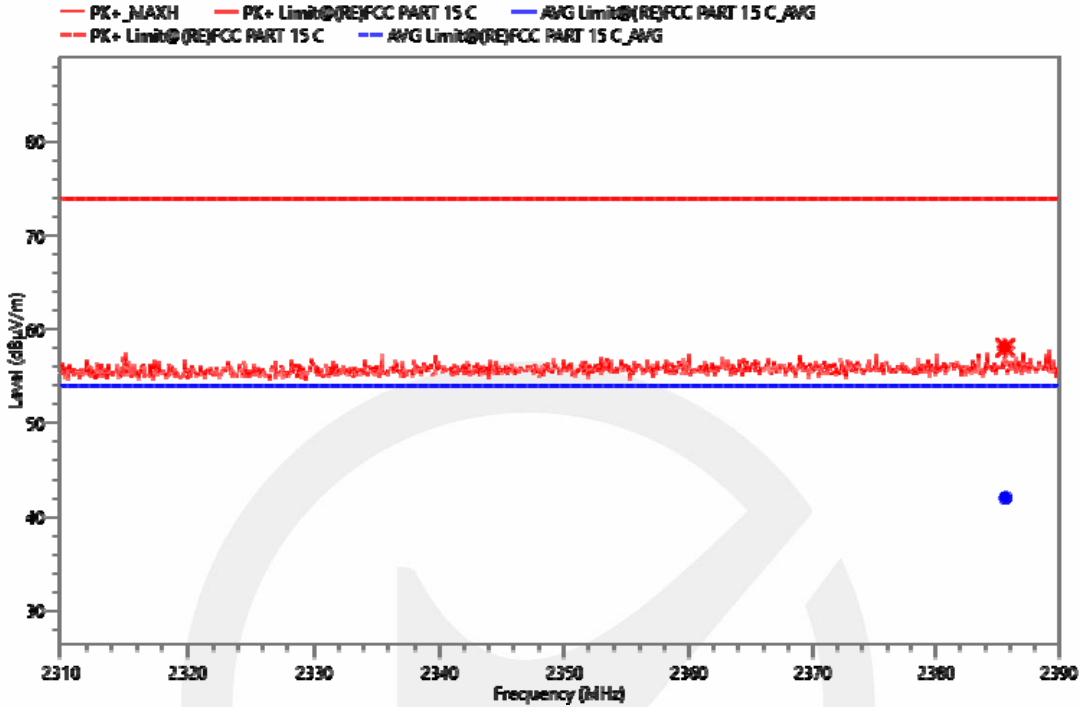


Spurious Emission in Restricted Band 2310-2390MHz
 802.11b
 Channel 1: 2412MHz
 Polarity: V

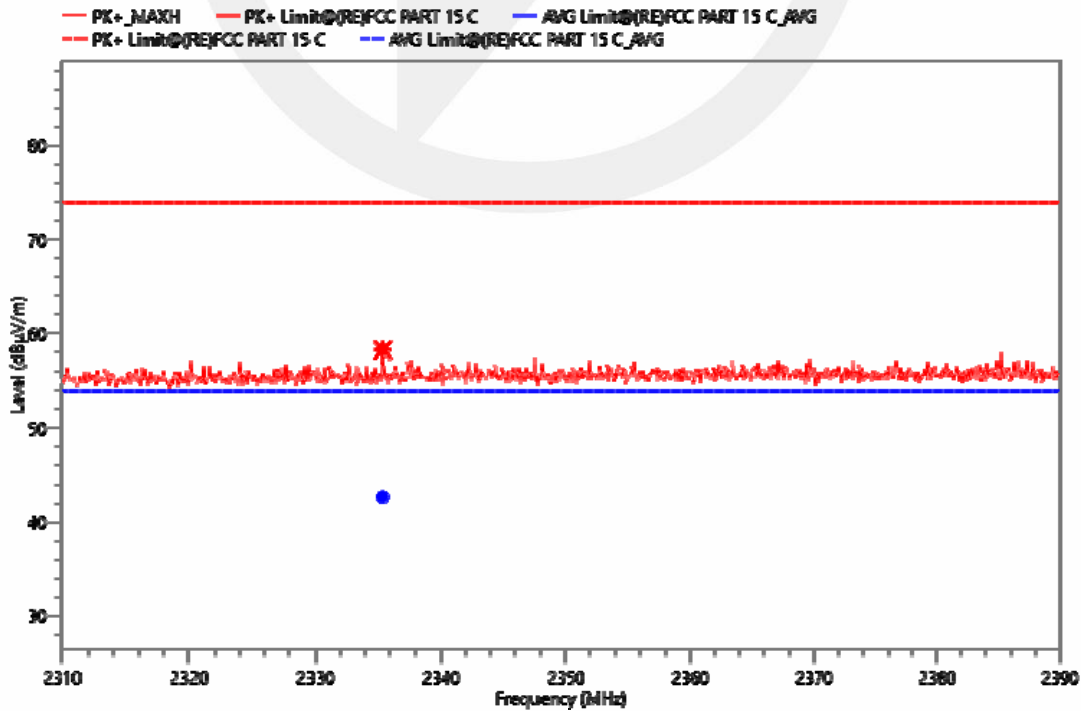

Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz	
	802.11b	
	Channel 11: 2462MHz	Polarity: H

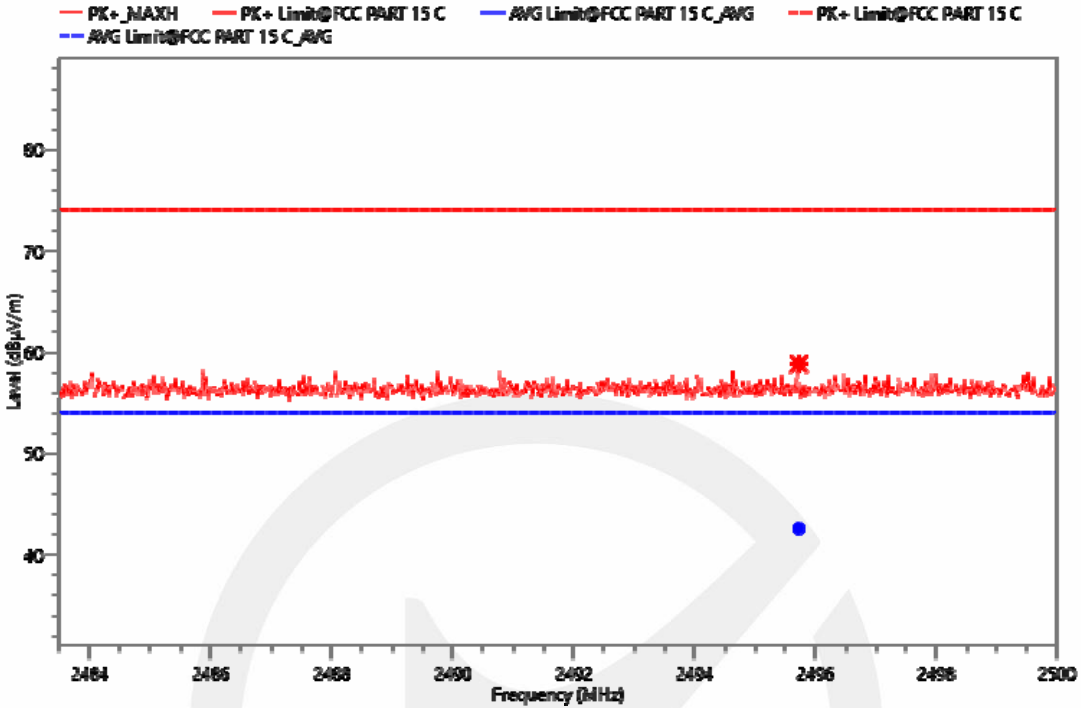


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz	
	802.11b	
	Channel 11: 2462MHz	Polarity: V

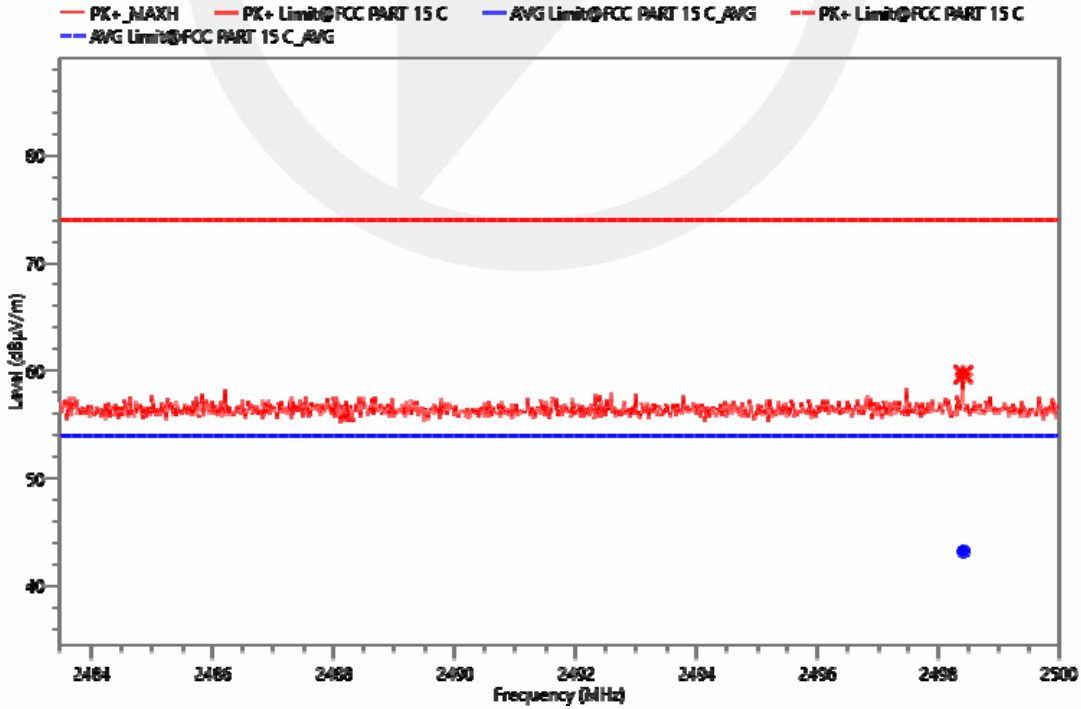


- Spurious Emission below 1GHz (30MHz to 1GHz)
- All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Project Information			
Mode:	TX2412 MHz	Voltage:	AC 120V/60Hz
Environment:	Temp: 17°C; Humi:70%	Engineer:	Jackson Xue

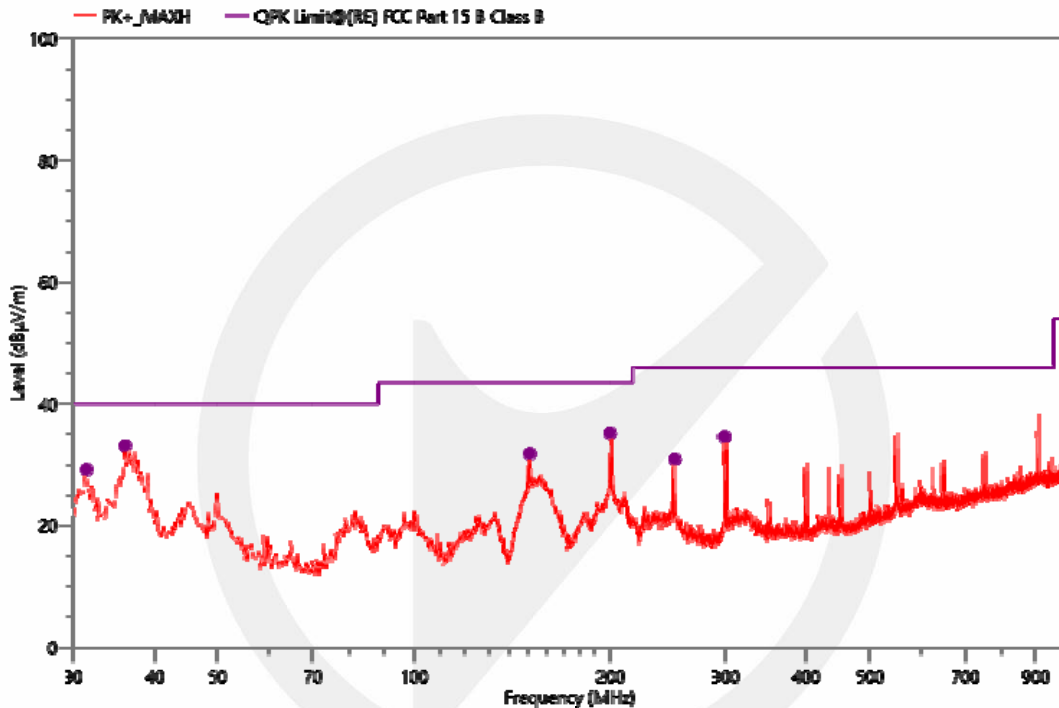


Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Verdict
31.455	54.46	29.21	40.00	10.79	QPK	100	V	163.4	-25.25	PASS
36.111	57.99	33.12	40.00	6.88	QPK	100	V	163.4	-24.87	PASS
150.377	58.71	31.80	43.50	11.70	QPK	100	V	184.5	-26.91	PASS
199.265	59.93	35.21	43.50	8.29	QPK	100	V	283.5	-24.72	PASS
251.257	53.65	30.94	46.00	15.06	QPK	100	V	240.8	-22.71	PASS
298.787	56.92	34.60	46.00	11.40	QPK	100	V	269.1	-22.32	PASS

Project Information			
Mode:	TX2412 MHz	Voltage:	AC 120V/60Hz
Environment:	Temp: 19°C; Humi:70%	Engineer:	Jackson Xue

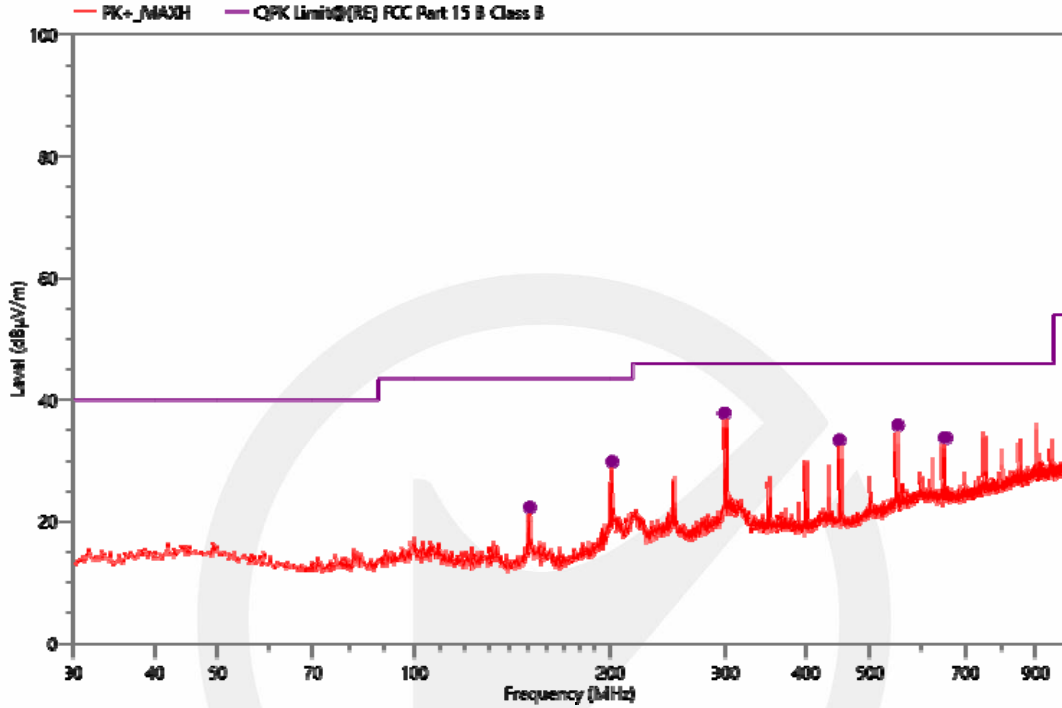


Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Verdict
150.377	49.27	22.36	43.50	21.14	QPK	200	H	122.4	-26.91	PASS
200.817	54.51	29.87	43.50	13.63	QPK	200	H	130.7	-24.64	PASS
298.787	60.13	37.81	46.00	8.19	QPK	100	H	340.6	-22.32	PASS
448.070	52.72	33.41	46.00	12.59	QPK	200	H	122.4	-19.31	PASS
552.442	52.01	35.87	46.00	10.13	QPK	200	H	0	-16.14	PASS
652.837	48.79	33.76	46.00	12.24	QPK	100	H	114.0	-15.03	PASS

Project Information			
Mode:	TX2437 MHz	Voltage:	AC 120V/60Hz
Environment:	Temp: 19°C; Humi:70%	Engineer:	Jackson Xue

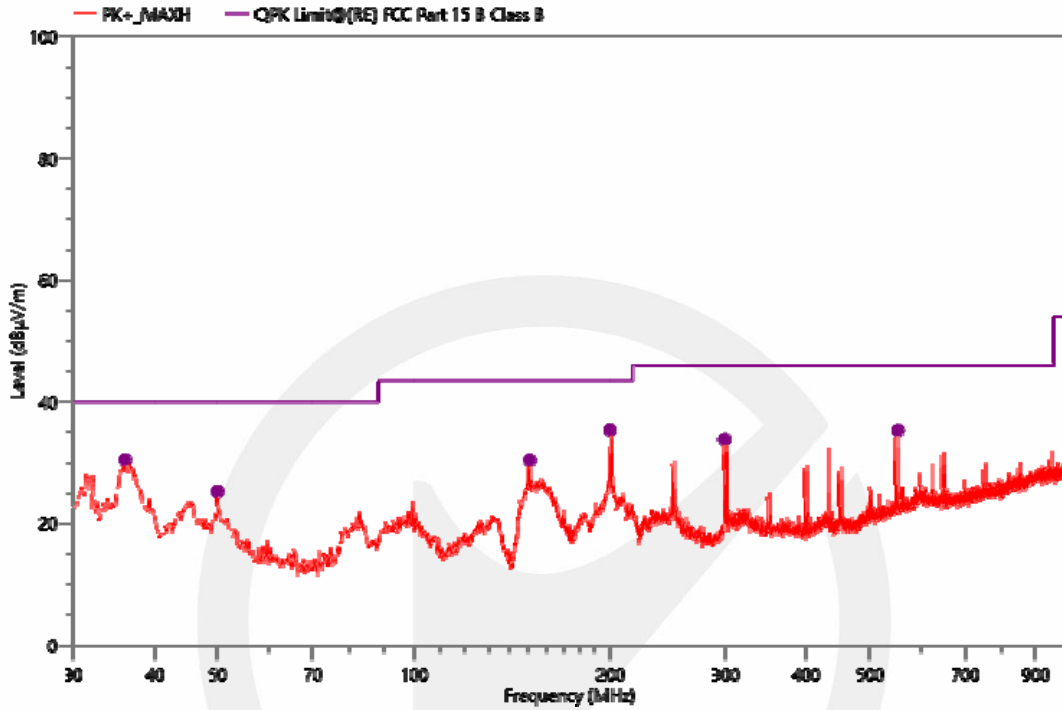


Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Verdict
36.111	55.34	30.47	40.00	9.53	QPK	100	V	64.8	-24.87	PASS
49.982	49.46	25.30	40.00	14.70	QPK	100	V	264.7	-24.16	PASS
150.377	57.32	30.41	43.50	13.09	QPK	100	V	208.4	-26.91	PASS
199.168	60.13	35.40	43.50	8.10	QPK	100	V	310.9	-24.73	PASS
298.787	56.18	33.86	46.00	12.14	QPK	100	V	220.8	-22.32	PASS
552.442	51.46	35.32	46.00	10.68	QPK	100	V	294.6	-16.14	PASS

Project Information			
Mode:	TX2437 MHz	Voltage:	AC 120V/60Hz
Environment:	Temp: 19°C; Humi:70%	Engineer:	Jackson Xue

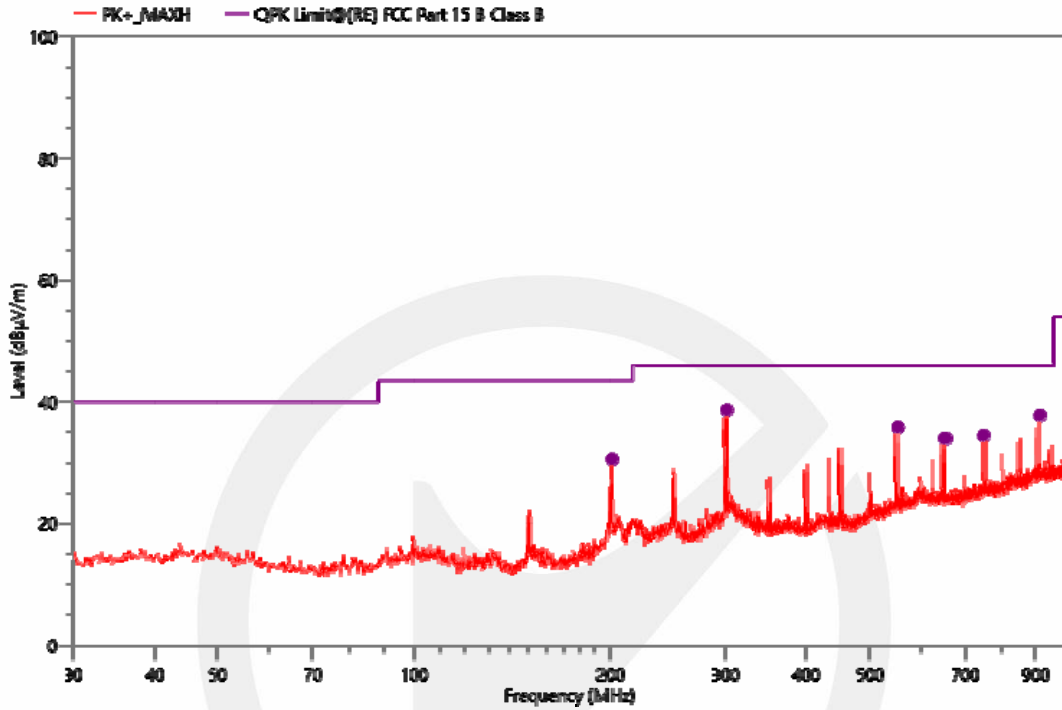


Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Verdict
200.817	55.23	30.59	43.50	12.91	QPK	100	H	128.8	-24.64	PASS
301.212	60.90	38.66	46.00	7.34	QPK	100	H	345.1	-22.24	PASS
552.442	51.98	35.84	46.00	10.16	QPK	200	H	358.0	-16.14	PASS
652.837	49.02	33.99	46.00	12.01	QPK	100	H	113.3	-15.03	PASS
746.927	48.79	34.48	46.00	11.52	QPK	100	H	136.4	-14.31	PASS
913.185	49.29	37.78	46.00	8.22	QPK	100	H	30.3	-11.51	PASS

Project Information			
Mode:	TX2462 MHz	Voltage:	AC 120V/60Hz
Environment:	Temp: 19°C; Humi:70%	Engineer:	Jackson Xue

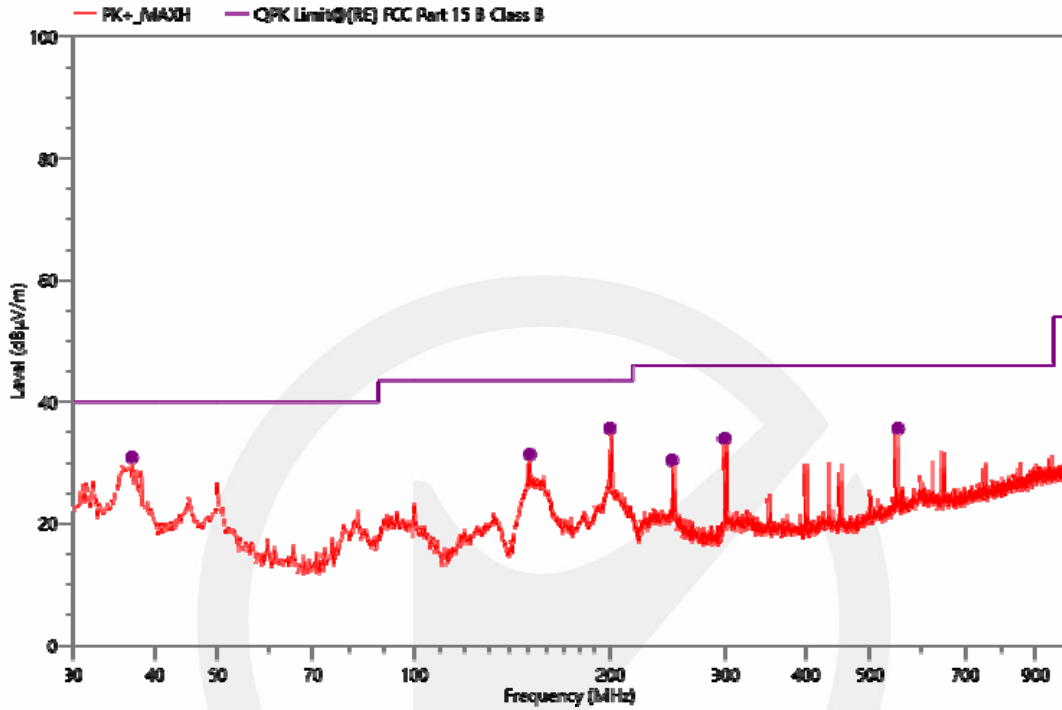

Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Verdict
36.984	55.71	30.91	40.00	9.09	QPK	100	V	134.5	-24.8	PASS
150.377	58.27	31.36	43.50	12.14	QPK	100	V	171.2	-26.91	PASS
199.168	60.40	35.67	43.50	7.83	QPK	100	V	290.5	-24.73	PASS
248.832	53.19	30.42	46.00	15.58	QPK	100	V	250.6	-22.77	PASS
298.787	56.30	33.98	46.00	12.02	QPK	100	V	221.5	-22.32	PASS
552.442	51.79	35.65	46.00	10.35	QPK	100	V	292.5	-16.14	PASS

Project Information			
Mode:	TX2462 MHz	Voltage:	AC 120V/60Hz
Environment:	Temp: 19°C; Humi:70%	Engineer:	Jackson Xue

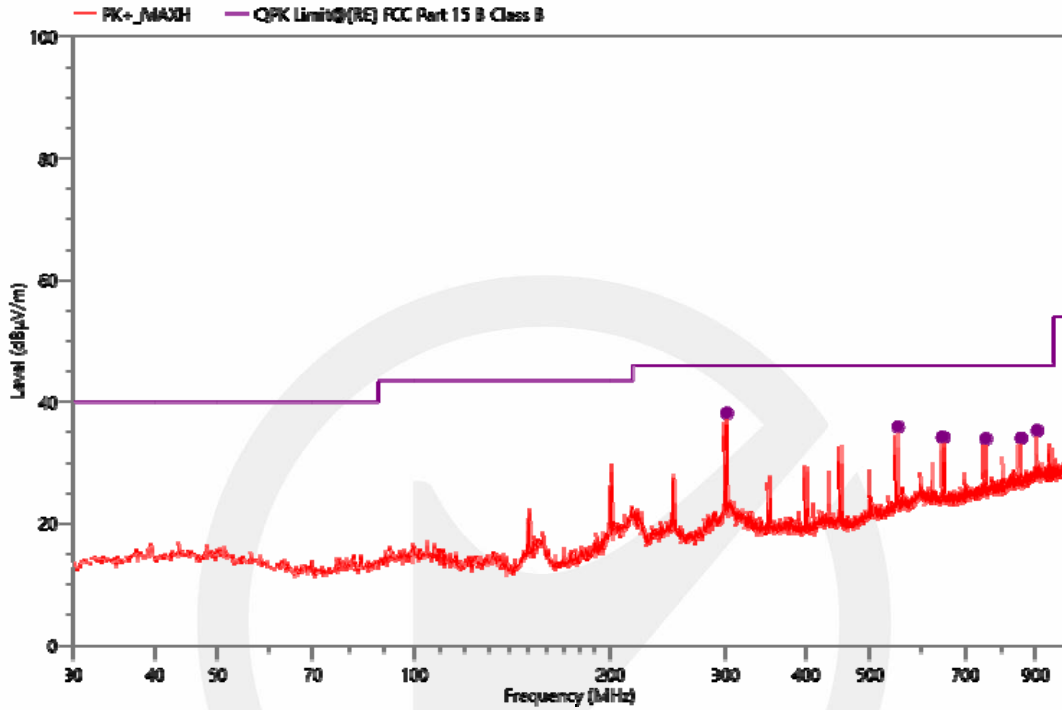

Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Verdict
301.212	60.39	38.15	46.00	7.85	QPK	100	H	168.0	-22.24	PASS
552.442	52.07	35.93	46.00	10.07	QPK	200	H	359.5	-16.14	PASS
647.308	49.26	34.21	46.00	11.79	QPK	100	H	111.3	-15.05	PASS
753.232	48.16	33.94	46.00	12.06	QPK	100	H	119.7	-14.22	PASS
854.015	46.96	34.06	46.00	11.94	QPK	100	H	118.5	-12.9	PASS
904.261	46.88	35.31	46.00	10.69	QPK	200	H	80.7	-11.57	PASS

8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 7.3conducted emission test setup

8.6.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass


All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Project Information			
Mode:	TX2412	Voltage:	AC120V/60Hz
Environment:	Temp: 19°C; Humi:30%	Engineer:	Allen Tang

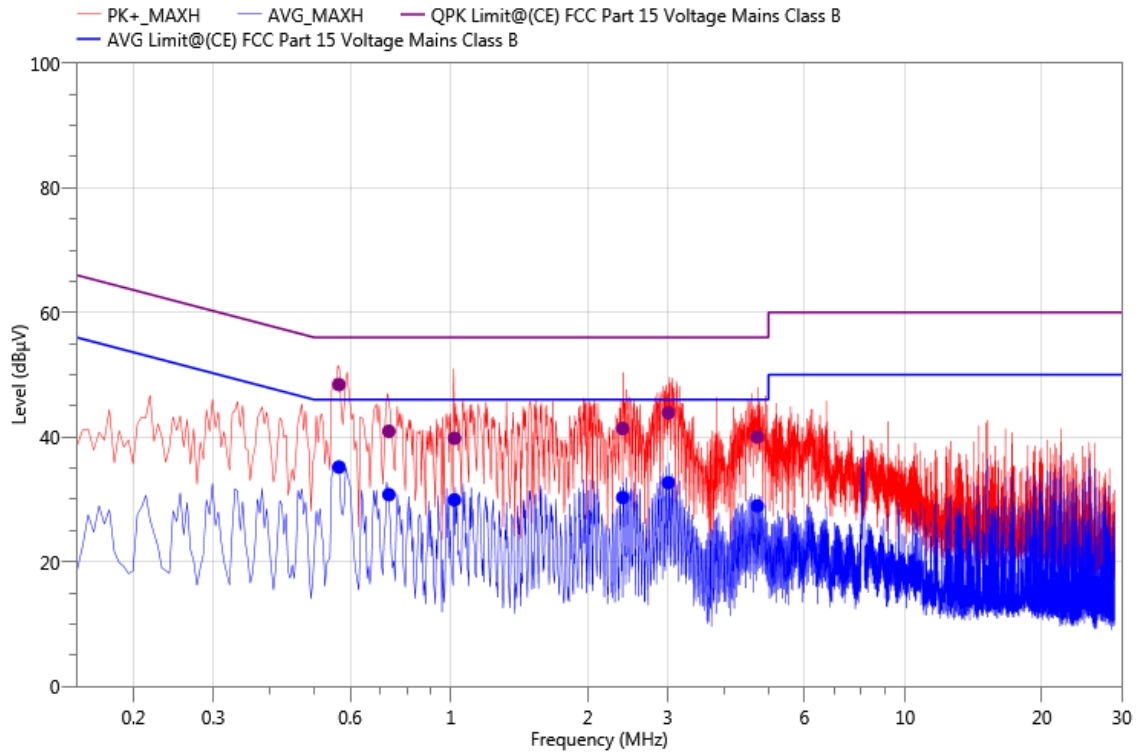

Freq. (MHz)	Reading (dBµV)	Meas. (dBµV)	Limit (dBµV)	Margin (dB)	Det.	Line	Corr. (dB)	Verdict
0.57	38.33	48.42	56.00	7.58	QPK	L1	10.09	PASS
0.57	25.10	35.19	46.00	10.81	AVG	L1	10.09	PASS
0.73	30.85	40.93	56.00	15.07	QPK	L1	10.08	PASS
0.73	20.68	30.76	46.00	15.24	AVG	L1	10.08	PASS
1.02	29.74	39.80	56.00	16.2	QPK	L1	10.06	PASS
1.02	19.85	29.91	46.00	16.09	AVG	L1	10.06	PASS
2.39	31.17	41.37	56.00	14.63	QPK	L1	10.2	PASS
2.39	20.09	30.29	46.00	15.71	AVG	L1	10.2	PASS
3.01	33.67	43.92	56.00	12.08	QPK	L1	10.25	PASS
3.01	22.42	32.67	46.00	13.33	AVG	L1	10.25	PASS
4.73	29.72	40.02	56.00	15.98	QPK	L1	10.3	PASS
4.73	18.65	28.95	46.00	17.05	AVG	L1	10.3	PASS

Project Information			
Mode:	TX2412	Voltage:	AC120V/60Hz
Environment:	Temp: 19°C; Humi:30%	Engineer:	Allen Tang

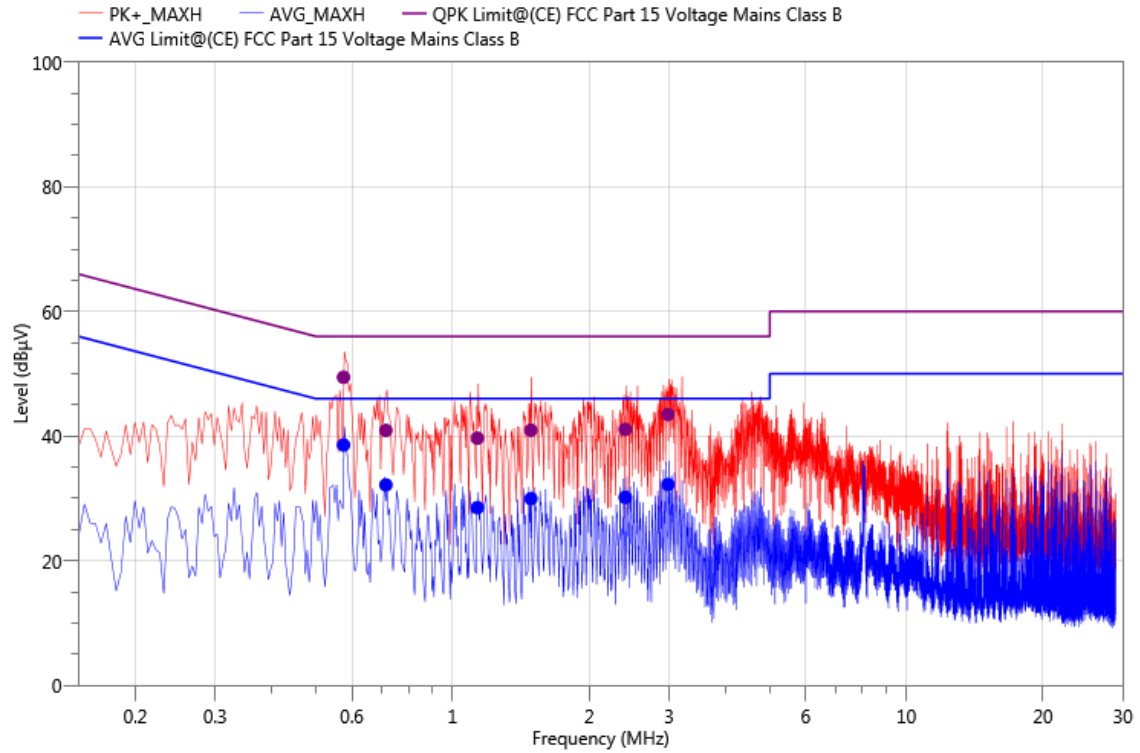

Freq. (MHz)	Reading (dBµV)	Meas. (dBµV)	Limit (dBµV)	Margin (dB)	Det.	Line	Corr. (dB)	Verdict
0.58	39.35	49.44	56.00	6.56	QPK	N	10.09	PASS
0.58	28.48	38.57	46.00	7.43	AVG	N	10.09	PASS
0.71	30.83	40.91	56.00	15.09	QPK	N	10.08	PASS
0.71	22.08	32.16	46.00	13.84	AVG	N	10.08	PASS
1.13	29.59	39.67	56.00	16.33	QPK	N	10.08	PASS
1.13	18.43	28.51	46.00	17.49	AVG	N	10.08	PASS
1.49	30.82	40.94	56.00	15.06	QPK	N	10.12	PASS
1.49	19.83	29.95	46.00	16.05	AVG	N	10.12	PASS
2.40	30.88	41.08	56.00	14.92	QPK	N	10.2	PASS
2.40	19.97	30.17	46.00	15.83	AVG	N	10.2	PASS
2.98	33.23	43.48	56.00	12.52	QPK	N	10.25	PASS
2.98	21.98	32.23	46.00	13.77	AVG	N	10.25	PASS

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS.

The EUT has 1 antenna: one an PCB antenna for WIFI 2.4G, the gain is 3.42 dBi.

- Note:
- Antenna uses a permanently attached antenna which is not replaceable.
 - Not using a standard antenna jack or electrical connector for antenna replacement
 - The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

*** End of Report ***

声明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效；
This report will be void without authorized signature or special seal for testing report.
2. 未经许可本报告不得部分复制；
This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责；
The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用；
The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外；
The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检测报告若有异议，请于收到报告之日起 20 日内提出；
Objections shall be raised within 20 days from the date receiving the report.