

## APPLICATION CERTIFICATION FCC Part 15C

On Behalf of

Neo-Neon (Viet Nam) Development Co., Ltd

Bluetooth LED Low Voltage Outfits

Model No.: APP-XM-3D-CH0073-6FT-12V-RGBW, APP-XM-CH0031-12V-RGBW

FCC ID: 2AWEL-APPXM3DCH0073

Prepared for : Neo-Neon (Viet Nam) Development Co., Ltd  
Address : GIA LE INDUSTRIAL ZONE, DONG XUAN  
COMMUNAL, DONG HUNG DISTRICT, THAI BINH  
PROVINCE, VIETNAM

Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : 1/F., Building A, Changyuan New Material Port, Science &  
Industry Park, Nanshan District, Shenzhen, Guangdong, P.R.  
China

Tel: (0755) 26503290

Fax: (0755) 26503396

Report No. : ATE20200494  
Date of Test : May 13-14, 2020  
Date of Report : May 28, 2020

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels.....	5
1.3. Special Accessory and Auxiliary Equipment .....	6
1.4. Description of Test Facility .....	6
1.5. Measurement Uncertainty.....	6
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>7</b>
<b>3. OPERATION OF EUT DURING TESTING .....</b>	<b>8</b>
3.1. Operating Mode.....	8
3.2. Configuration and peripherals .....	8
<b>4. TEST PROCEDURES AND RESULTS .....</b>	<b>9</b>
<b>5. 6DB BANDWIDTH TEST.....</b>	<b>10</b>
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(2).....	10
5.3. EUT Configuration on Test .....	10
5.4. Operating Condition of EUT .....	10
5.5. Test Procedure .....	10
5.6. Test Result .....	11
<b>6. MAXIMUM PEAK OUTPUT POWER TEST .....</b>	<b>13</b>
6.1. Block Diagram of Test Setup.....	13
6.2. The Requirement For Section 15.247(b)(3).....	13
6.3. EUT Configuration on Test .....	13
6.4. Operating Condition of EUT .....	13
6.5. Test Procedure .....	13
6.6. Test Result .....	14
<b>7. POWER SPECTRAL DENSITY TEST.....</b>	<b>16</b>
7.1. Block Diagram of Test Setup.....	16
7.2. The Requirement For Section 15.247(e).....	16
7.3. EUT Configuration on Test .....	16
7.4. Operating Condition of EUT .....	16
7.5. Test Procedure .....	17
7.6. Test Result .....	17
<b>8. BAND EDGE COMPLIANCE TEST .....</b>	<b>20</b>
8.1. Block Diagram of Test Setup.....	20
8.2. The Requirement For Section 15.247(d) .....	20
8.3. EUT Configuration on Test .....	20
8.4. Operating Condition of EUT .....	20
8.5. Test Procedure .....	21
8.6. Test Result .....	21
<b>9. RADIATED SPURIOUS EMISSION TEST .....</b>	<b>27</b>
9.1. Block Diagram of Test Setup.....	27
9.2. The Limit For Section 15.247(d) .....	28
9.3. Restricted bands of operation .....	30
9.4. Configuration of EUT on Test.....	30

9.5.	Operating Condition of EUT .....	31
9.6.	Test Procedure .....	31
9.7.	Data Sample.....	32
9.8.	Test Result .....	32
<b>10.</b>	<b>POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>45</b>
10.1.	Block Diagram of Test Setup.....	45
10.2.	Test System Setup.....	45
10.3.	Test Limits .....	46
10.4.	Configuration of EUT on Test.....	46
10.5.	Operating Condition of EUT .....	46
10.6.	Test Procedure .....	46
10.7.	Data Sample.....	47
10.8.	Test Result .....	47
<b>11.</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>52</b>
11.1.	The Requirement .....	52
11.2.	Antenna Construction .....	52

## Test Report Certification

Applicant : Neo-Neon (Viet Nam) Development Co., Ltd  
Manufacturer : Neo-Neon (Viet Nam) Development Co., Ltd  
EUT Description : Bluetooth LED Low Voltage Outfits  
Model No. : APP-XM-3D-CH0073-6FT-12V-RGBW,  
APP-XM-CH0031-12V-RGBW

Measurement Procedure Used:

### FCC Rules and Regulations Part 15 Subpart C Section 15.247 ANSI C63.10: 2013

The EUT was tested according to DTS test procedure of August 24, 2018 KDB558074 D01 DTS Meas Guidance v05 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test : May 13-14, 2020  
Date of Report : May 28, 2020

Prepared by : \_\_\_\_\_  
(Bob Wang, Engineer)

Approved & Authorized Signer : \_\_\_\_\_  
(Sean Liu, Manager)

*Bob Wang*

(Bob Wang, Engineer)



*Sean Liu*

(Sean Liu, Manager)

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Model Number : APP-XM-3D-CH0073-6FT-12V-RGBW,  
 APP-XM-CH0031-12V-RGBW  
 (Note: These samples are same except their appearance is different. So we prepare APP-XM-3D-CH0073-6FT-12V-RGBW for test only.)

Bluetooth version : V4.0  
 Frequency Range : 2402MHz-2480MHz  
 Number of Channels : 40  
 Antenna Gain(Max) : 2dBi  
 Antenna type : Integral Antenna  
 Modulation mode : GFSK  
 Power supply : DC 12V (Power by Adapter)  
 Adapter : Model: RKPO-UL121000D  
 Input: AC 100-240V; 50/60Hz  
 Output: DC 12V; 1000mA

Trade Mark : n.a.  
 Applicant : Neo-Neon (Viet Nam) Development Co., Ltd  
 Address : GIA LE INDUSTRIAL ZONE, DONG XUAN COMMUNAL, DONG HUNG DISTRICT, THAI BINH PROVINCE, VIETNAM

Manufacturer : Neo-Neon (Viet Nam) Development Co., Ltd  
 Address : GIA LE INDUSTRIAL ZONE, DONG XUAN COMMUNAL, DONG HUNG DISTRICT, THAI BINH PROVINCE, VIETNAM

## 1.2. Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 1.3.Special Accessory and Auxiliary Equipment

N/A

### 1.4.Description of Test Facility

EMC Lab	:	Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358
		Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2
		Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193
		Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	:	Shenzhen Accurate Technology Co., Ltd.
Site Location	:	1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

### 1.5.Measurement Uncertainty

Radiated emission expanded uncertainty (9kHz-30MHz)	:	U=2.66dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	:	U=4.28dB, k=2
Radiated emission expanded uncertainty (1G-18GHz)	:	U=4.98dB, k=2
Radiated emission expanded uncertainty (18G-26.5GHz)	:	U=5.06dB, k=2
Conduction Emission Expanded Uncertainty (Mains ports, 9kHz-30MHz)	:	U=2.72dB, k=2
Conduction Emission Expanded Uncertainty (Telecommunication ports, 150kHz-30MHz)	:	U=2.94dB, k=2
Power disturbance Expanded Uncertainty	:	U=2.92dB, k=2
Harmonic current expanded uncertainty	:	U=0.512%, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 04, 2020	One Year
EMI Test Receiver	Rohde&Schwarz	ESR	101817	Jan. 04, 2020	One Year
Spectrum Analyzer	Rohde&Schwarz	FSV-40	101495	Jan. 04, 2020	One Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 04, 2020	One Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 04, 2020	One Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 04, 2020	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 04, 2020	One Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 04, 2020	One Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 04, 2020	One Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 04, 2020	One Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 04, 2020	One Year
RF Coaxial Cable (Conducted Emission)	SUHNER	N-2m	No.2	Jan. 04, 2020	One Year
RF Coaxial Cable (Radiated Emission)	RESENBERGER	N-12m	No.11	Jan. 04, 2020	One Year
RF Coaxial Cable (Radiated Emission)	RESENBERGER	N-0.5m	No.12	Jan. 04, 2020	One Year
RF Coaxial Cable (Radiated Emission)	SUHNER	N-2m	No.13	Jan. 04, 2020	One Year
RF Coaxial Cable (Radiated Emission)	SUHNER	N-0.5m	No.15	Jan. 04, 2020	One Year
RF Coaxial Cable (Radiated Emission)	SUHNER	N-2m	No.16	Jan. 04, 2020	One Year
RF Coaxial Cable (Radiated Emission)	RESENBERGER	N-6m	No.17	Jan. 04, 2020	One Year
Conducted Emission Measurement Software: ES-K1 V1.71					
Radiated Emission Measurement Software: EZ_EMV V1.1.4.2					

### 3. OPERATION OF EUT DURING TESTING

#### 3.1. Operating Mode

The mode is used: **Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz


High Channel: 2480MHz

Note: The equipment under test (EUT) was tested under new battery.

The Bluetooth has been tested under continuous transmission mode.

Its duty cycle setting is greater than 98%.

#### 3.2. Configuration and peripherals

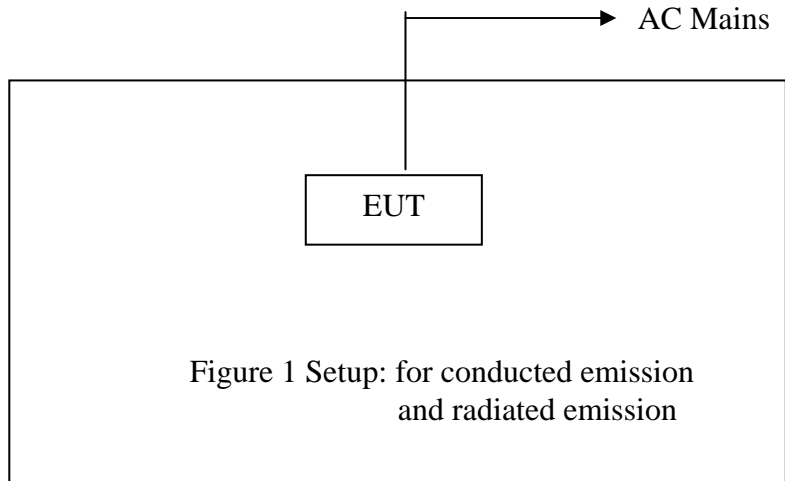




#### 4. TEST PROCEDURES AND RESULTS

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

## 5. 6DB BANDWIDTH TEST

### 5.1. Block Diagram of Test Setup

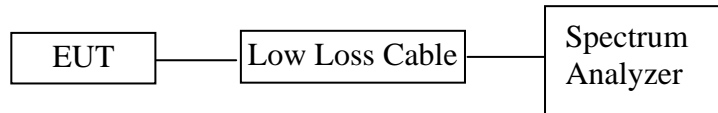

### 5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.3. EUT Configuration on Test

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

### 5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.


5.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

5.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### 5.6. Test Result

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	Result
0	2402	0.720	0.5	Pass
19	2440	0.750	0.5	Pass
39	2480	0.780	0.5	Pass


The spectrum analyzer plots are attached as below.

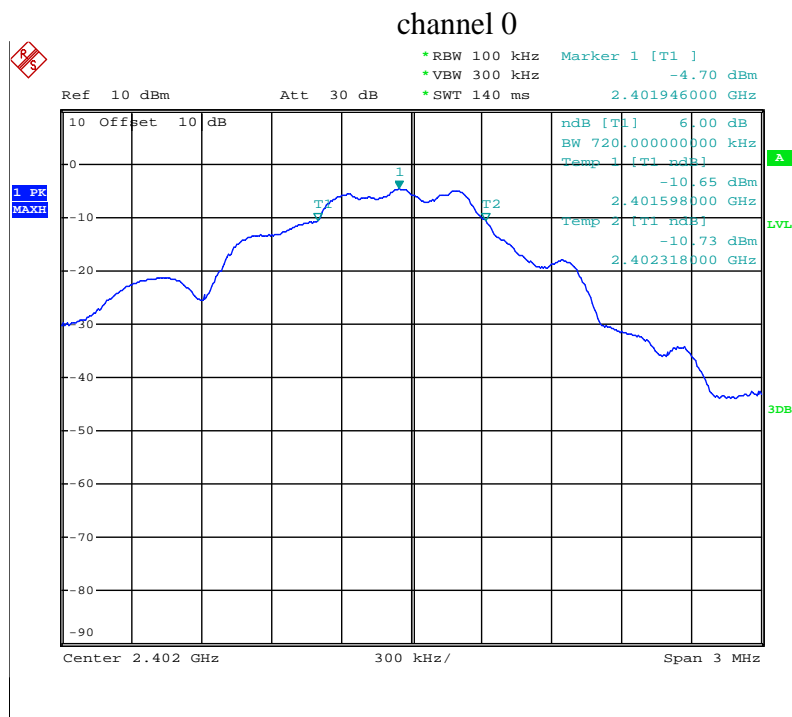



## 6. MAXIMUM PEAK OUTPUT POWER TEST

### 6.1. Block Diagram of Test Setup

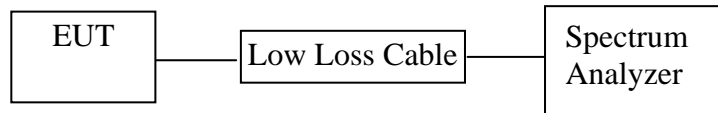

### 6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

### 6.3. EUT Configuration on Test

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

### 6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.


6.5.2. Set RBW of spectrum analyzer to 3 MHz and VBW to 10MHz.

6.5.3. Measurement the maximum peak output power.


### 6.6. Test Result

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Result
0	2402	-4.47	30	Pass
19	2440	-4.34	30	Pass
39	2480	-4.31	30	Pass


The spectrum analyzer plots are attached as below.

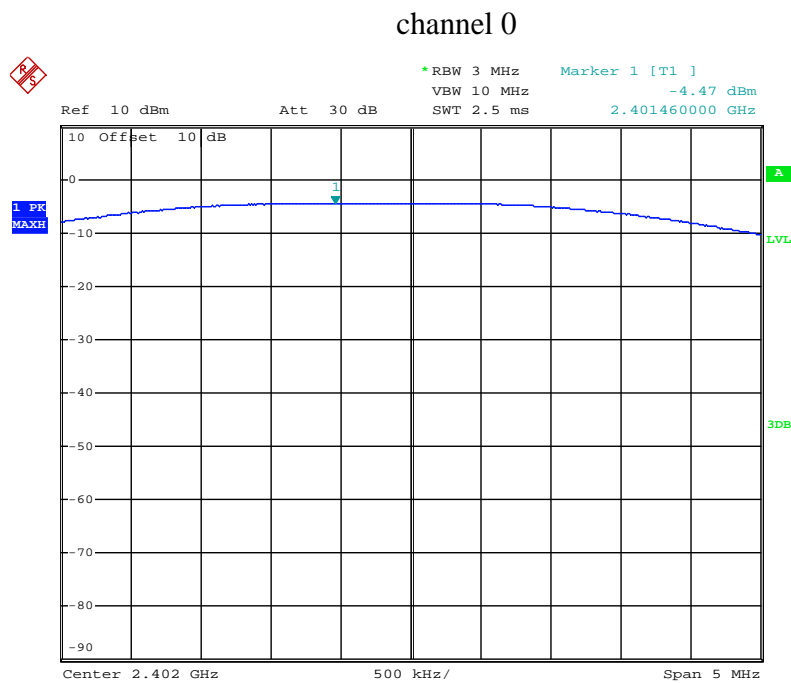

## channel 19

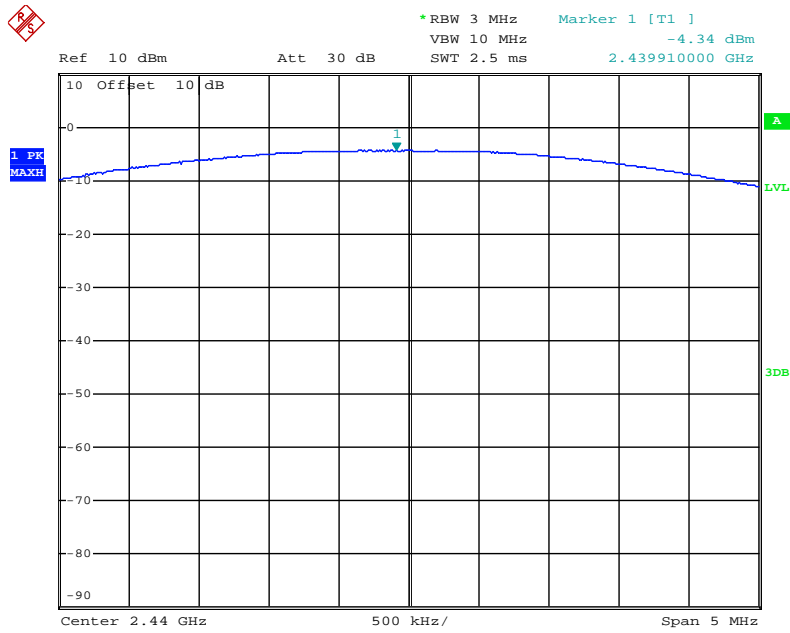


## channel 39

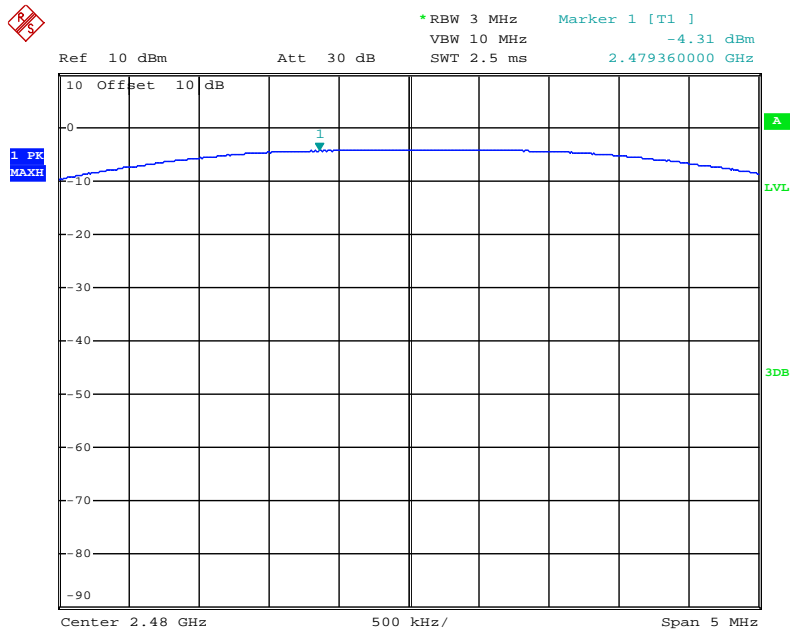

## 7. POWER SPECTRAL DENSITY TEST

### 7.1. Block Diagram of Test Setup

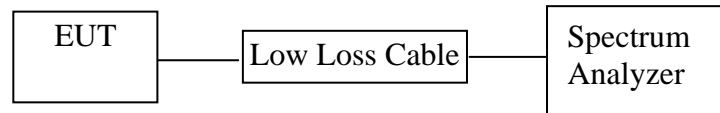

### 7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.3. EUT Configuration on Test

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.



## 7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Measurement Procedure PKPSD:

7.5.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.


7.5.4. Measurement the maximum power spectral density.

## 7.6. Test Result


Channel	Frequency (MHz)	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
0	2402	-14.61	8	Pass
19	2440	-13.31	8	Pass
39	2480	-15.39	8	Pass

The spectrum analyzer plots are attached as below.


channel 0

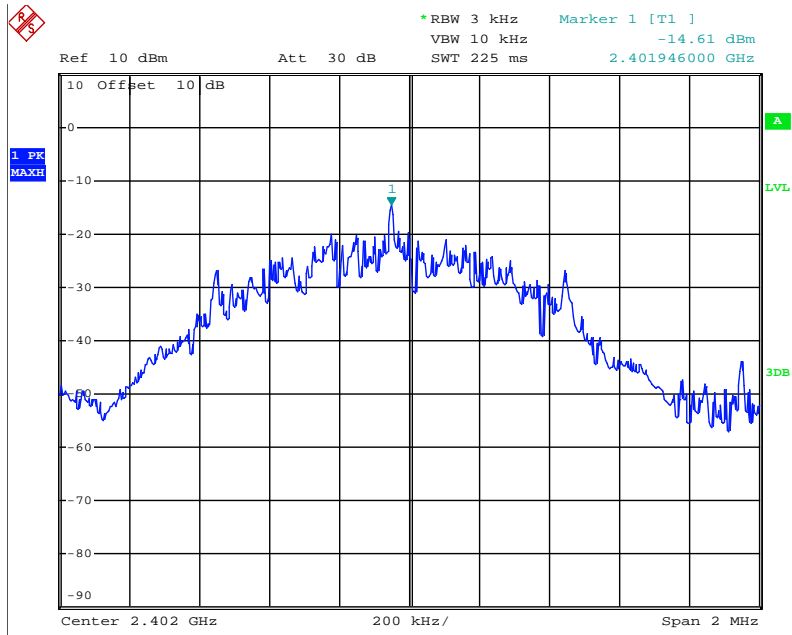

channel 19

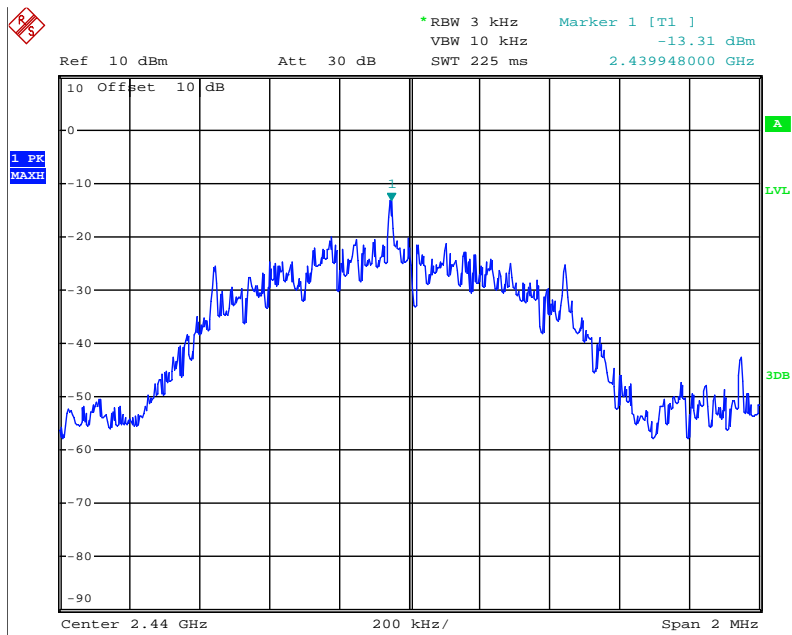


channel 39

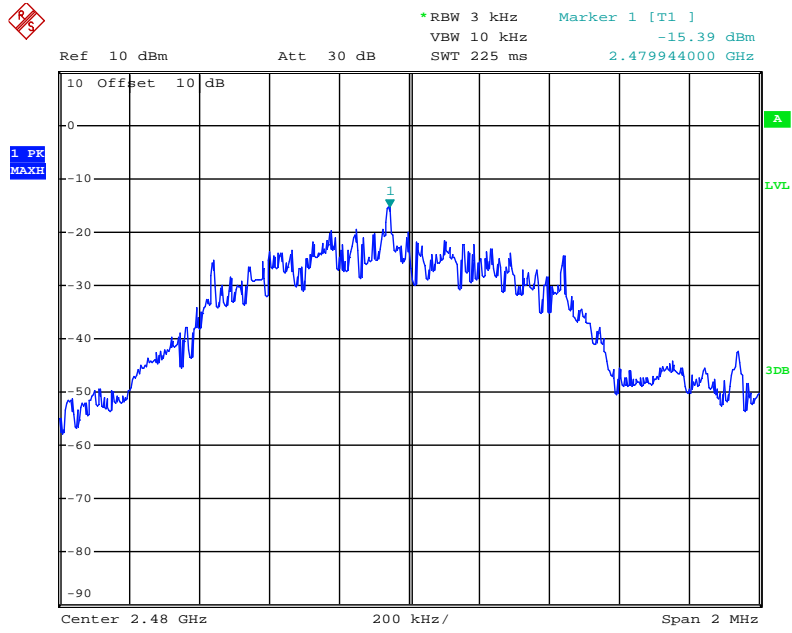

## 8. BAND EDGE COMPLIANCE TEST

### 8.1. Block Diagram of Test Setup

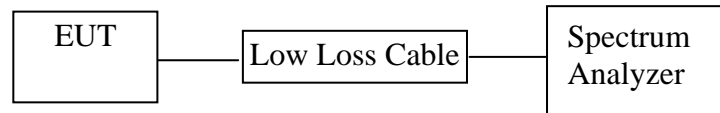

### 8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 8.3. EUT Configuration on Test

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

## 8.5. Test Procedure

### Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

### Radiate Band Edge:

8.5.3. The EUT is placed on a turntable, which is 0.1m above the ground plane and worked at highest radiated power.

8.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

8.5.7. RBW=1MHz, VBW=1MHz

8.5.8. The band edges was measured and recorded.


## 8.6. Test Result

### Conducted Band Edge Result


Channel	Frequency	Delta peak to band emission	Limit(dBc)	Result
0	2.402GHz	43.04	>20	Pass
39	2.480GHz	53.83	>20	Pass

The spectrum analyzer plots are attached as below.

### channel 0

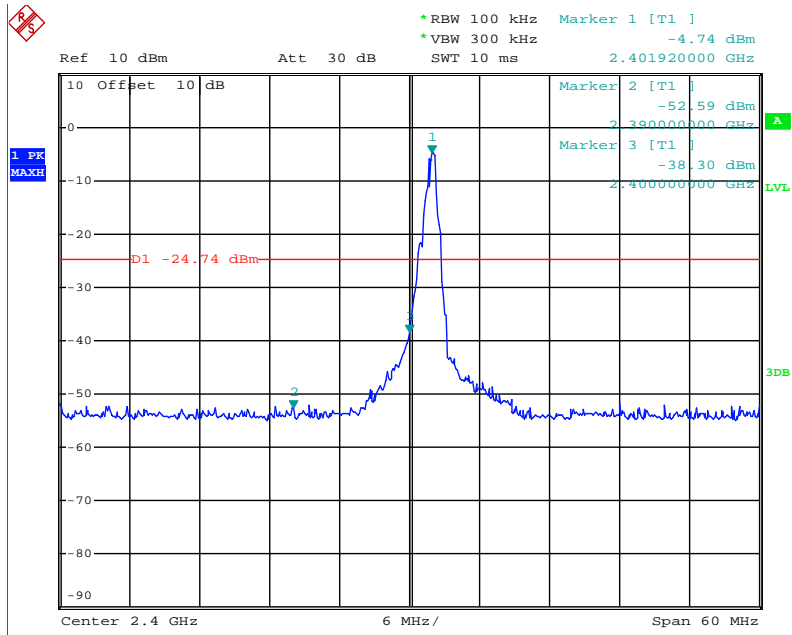

### channel 39

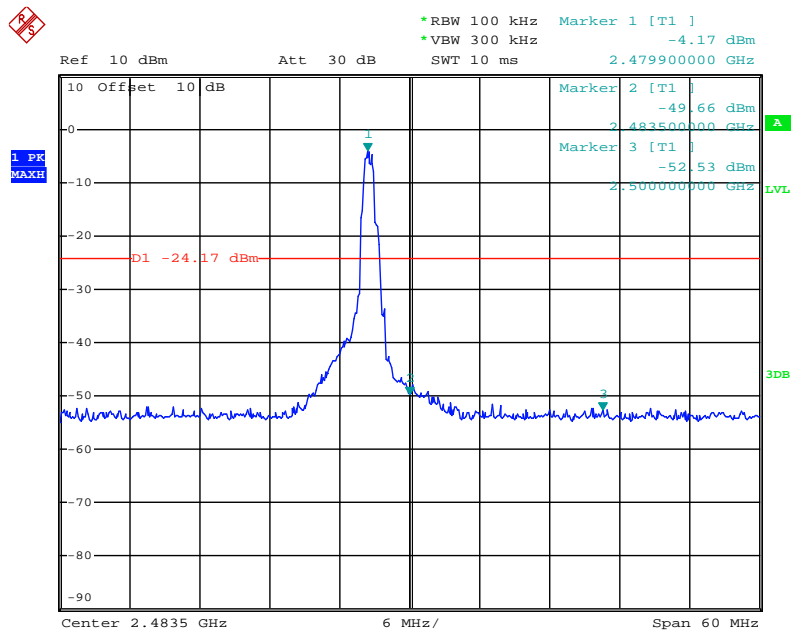

### Radiated Band Edge Result



### ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: fcc #92  
Standard: FCC PK  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Bluetooth LED Low Voltage Outfits  
Mode: TX2402MHz  
Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 20/05/14/  
Time: 16/05/12  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20200493

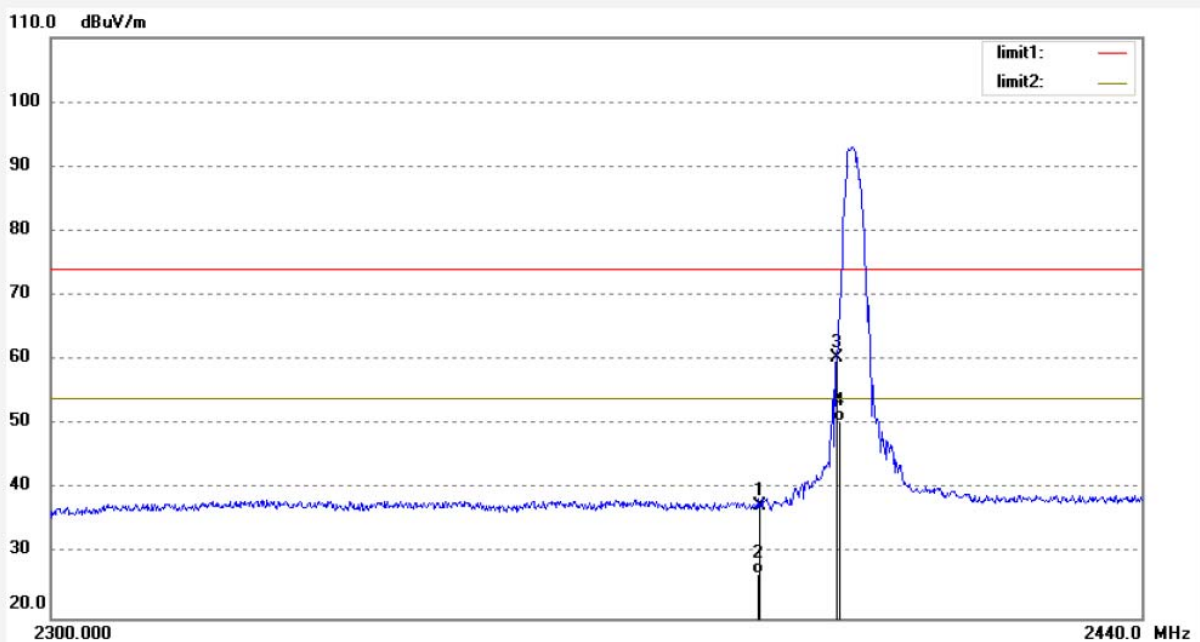

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	43.70	-6.32	37.38	74.00	-36.62	peak	150	312	
2	2390.000	33.12	-6.32	26.80	54.00	-27.20	AVG	150	115	
3	2400.000	66.77	-6.27	60.50	74.00	-13.50	peak	150	93	
4	2400.000	56.77	-6.27	50.50	54.00	-3.50	AVG	150	100	



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: fcc #91	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 20/05/14/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 16/03/43
EUT: Bluetooth LED Low Voltage Outfits	Engineer Signature:
Mode: TX2402MHz	Distance: 3m
Model: APP-XM-3D-CH0073-6FT-12V-RGBW	
Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd	

Note: Report NO.:ATE20200493

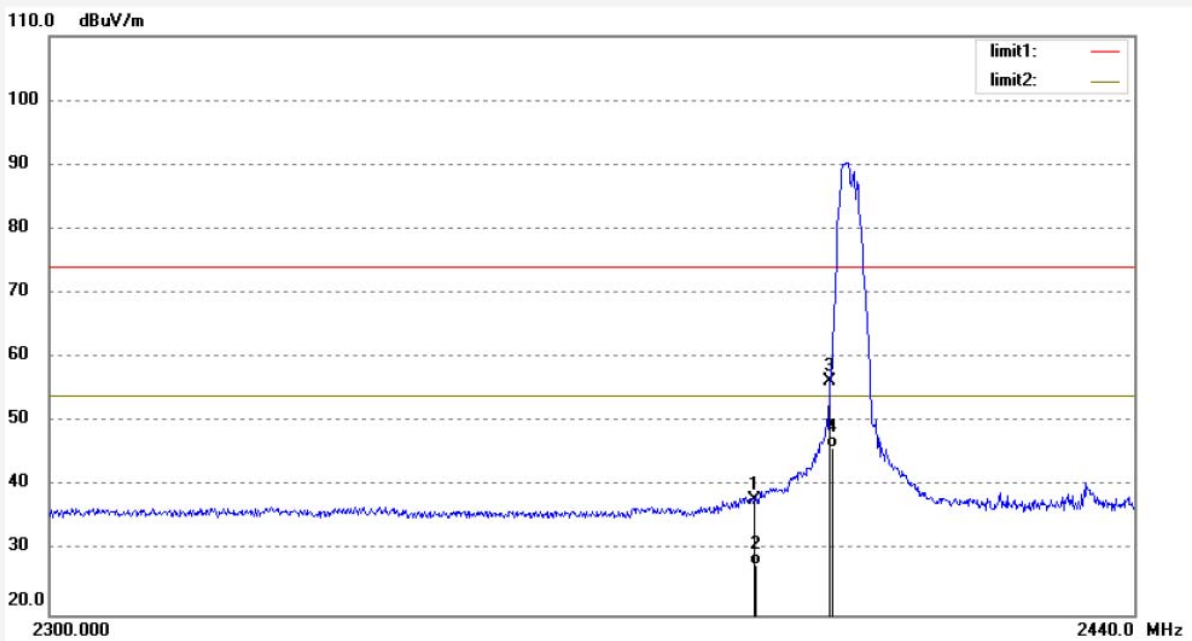

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	44.27	-6.32	37.95	74.00	-36.05	peak	200	196	
2	2390.000	34.12	-6.32	27.80	54.00	-26.20	AVG	200	215	
3	2400.000	62.62	-6.27	56.35	74.00	-17.65	peak	200	96	
4	2400.000	52.35	-6.27	46.08	54.00	-7.92	AVG	200	103	





**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: fcc #90  
Standard: FCC PK  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Bluetooth LED Low Voltage Outfits  
Mode: TX2480MHz  
Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 20/05/14/  
Time: 16/02/14  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20200493

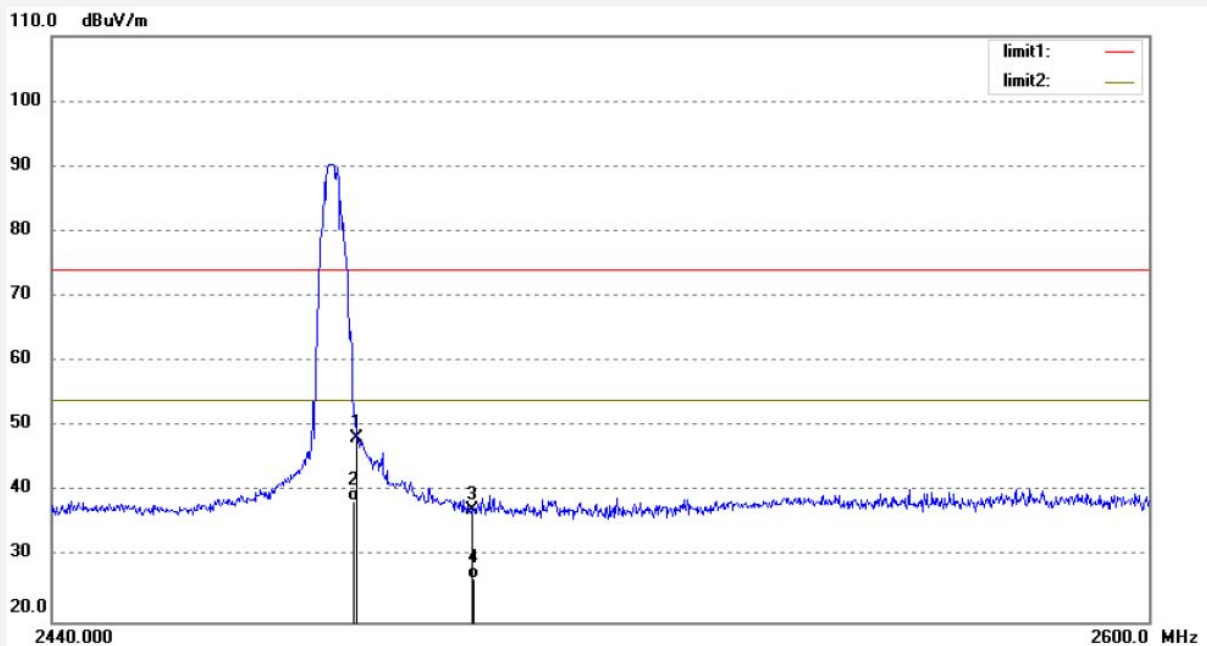

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	54.09	-5.89	48.20	74.00	-25.80	peak	200	192	
2	2483.500	44.35	-5.89	38.46	54.00	-15.54	AVG	200	156	
3	2500.000	42.99	-5.81	37.18	74.00	-36.82	peak	200	93	
4	2500.000	32.55	-5.81	26.74	54.00	-27.26	AVG	200	103	




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: fcc #89	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 20/05/14/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 16/00/23
EUT: Bluetooth LED Low Voltage Outfits	Engineer Signature:
Mode: TX2480MHz	Distance: 3m
Model: APP-XM-3D-CH0073-6FT-12V-RGBW	
Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd	

Note: Report NO.:ATE20200493

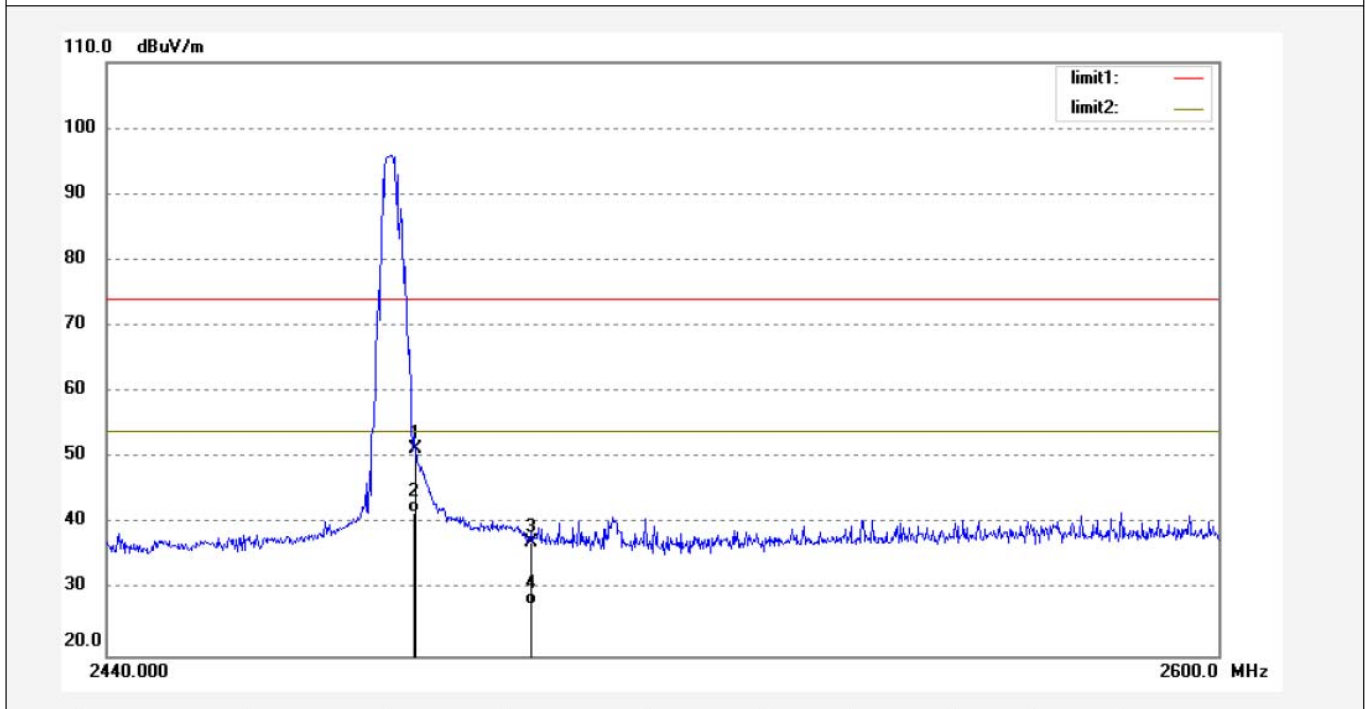

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	57.39	-5.89	51.50	74.00	-22.50	peak	150	245	
2	2483.500	47.68	-5.89	41.79	54.00	-12.21	AVG	150	321	
3	2500.000	42.97	-5.81	37.16	74.00	-36.84	peak	150	96	
4	2500.000	33.54	-5.81	27.73	54.00	-26.27	AVG	150	108	

Note:


1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

## 9. RADIATED SPURIOUS EMISSION TEST

### 9.1. Block Diagram of Test Setup


#### 9.1.1. Block diagram of connection between the EUT and peripherals

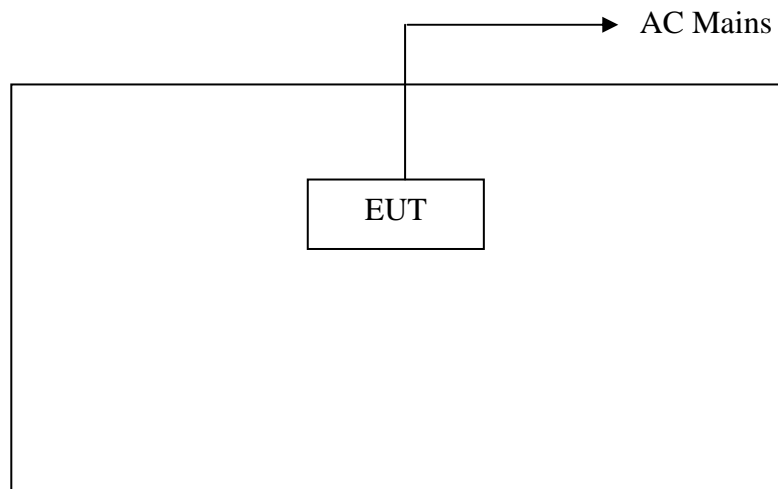


Setup: Transmitting mode

#### 9.1.2. Semi-Anechoic Chamber Test Setup Diagram


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

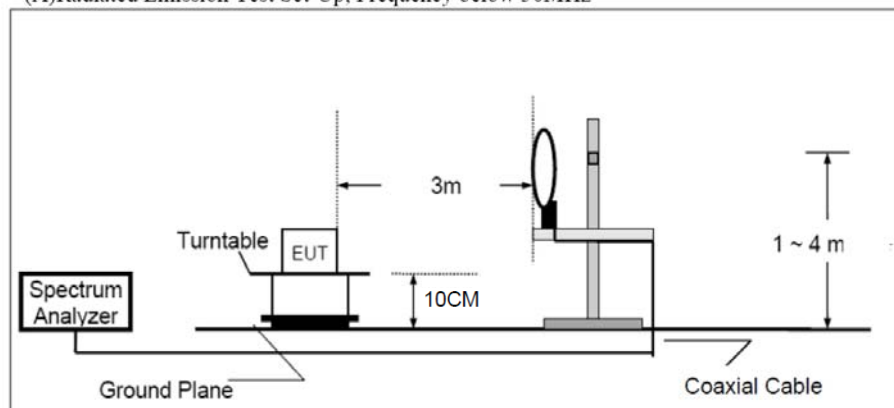

(B) Radiated Emission Test Set-Up, Frequency 30MHz-1GHz

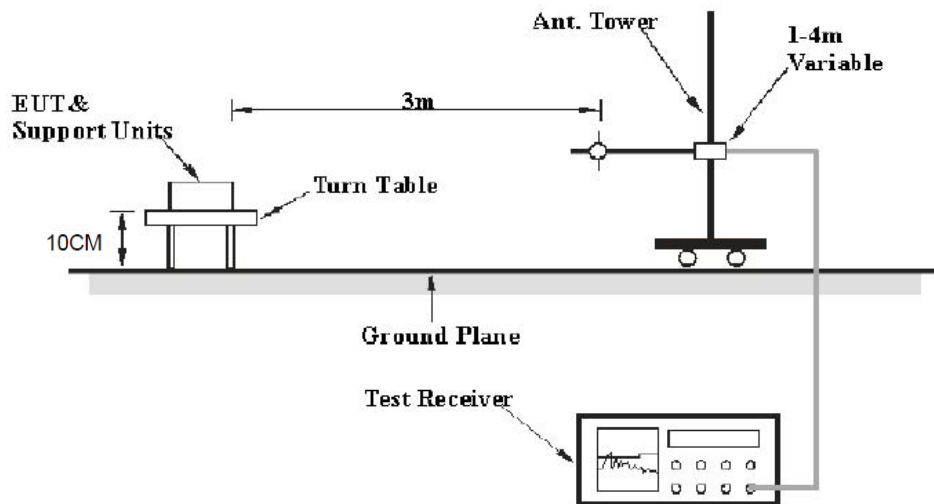

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

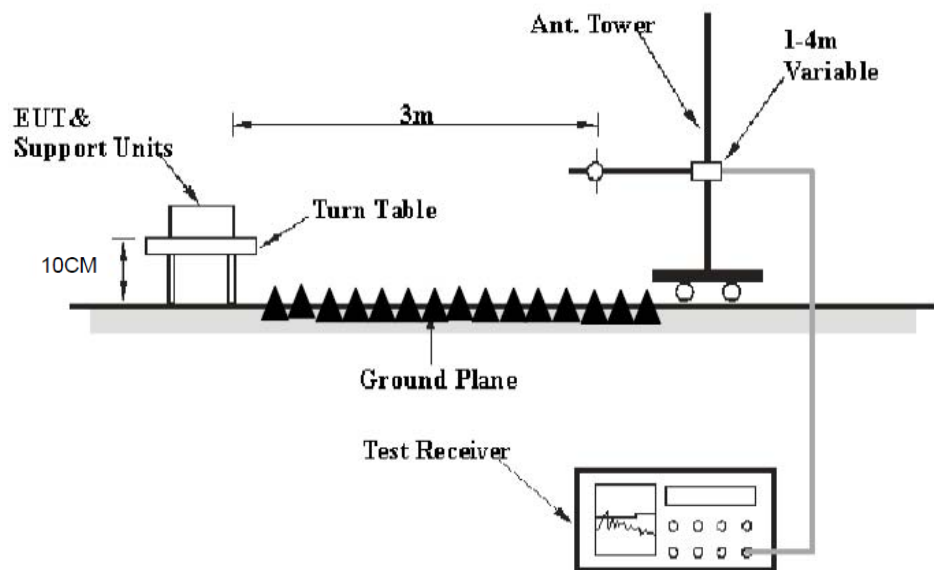

## 9.2. The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated

emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 9.3. Restricted bands of operation

#### 9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 9.4.Configuration of EUT on Test

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 9.5. Operating Condition of EUT

9.5.1. Setup the EUT and simulator as shown as Section 9.1.

9.5.2. Turn on the power of all equipment.

9.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 9.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.1 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 0.1 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading.

### 9.7.Data Sample

Frequency (MHz)	Reading (dB $\mu$ v)	Factor (dB/m)	Result (dB $\mu$ v/m)	Limit (dB $\mu$ v/m)	Margin (dB)	Remark
X.XX	43.85	-22.22	21.63	43.5	-21.87	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB $\mu$ v) = Uncorrected Analyzer/Receiver reading

Factor (dB/m) = Antenna factor + Cable Loss – Amplifier gain

Result(dB $\mu$ v/m) = Reading(dB $\mu$ v) + Factor(dB/m)

Limit (dB $\mu$ v/m) = Limit stated in standard

Margin (dB) = Result(dB $\mu$ v/m) - Limit (dB $\mu$ v/m)

QP = Quasi-peak Reading

Calculation Formula:

Margin(dB) = Result (dB $\mu$ V/m)–Limit(dB $\mu$ V/m)

Result(dB $\mu$ V/m)= Reading(dB $\mu$ V)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

### 9.8.Test Result

**Pass.**

Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz and 18 to 26.5GHz.

The spectrum analyzer plots are attached as below.



## Below 1GHz


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: fcc #77

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth LED Low Voltage Outfits

Mode: TX2402MHz

Model: APP-XM-3D-CH0073-6FT-12V-RGBW

Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 20/05/14/

Time: 14/41/25

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20200493

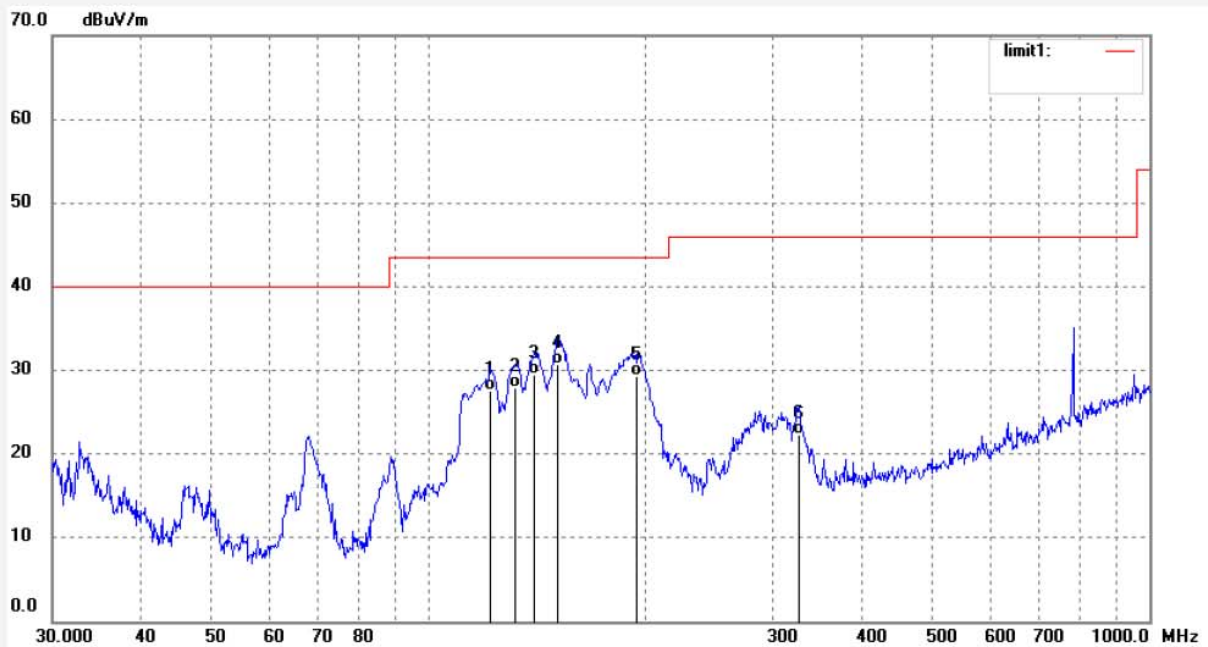

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	121.4622	54.98	-27.48	27.50	43.50	-16.00	QP	100	309	
2	131.2235	55.68	-27.74	27.94	43.50	-15.56	QP	100	115	
3	140.2829	57.36	-27.95	29.41	43.50	-14.09	QP	100	41	
4	151.0252	58.61	-27.96	30.65	43.50	-12.85	QP	100	92	
5	194.4985	53.98	-24.69	29.29	43.50	-14.21	QP	100	321	
6	326.0079	42.68	-20.35	22.33	46.00	-23.67	QP	100	106	



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: fcc #78  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Bluetooth LED Low Voltage Outfits  
Mode: TX2402MHz  
Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 20/05/14/  
Time: 14/43/10  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20200493

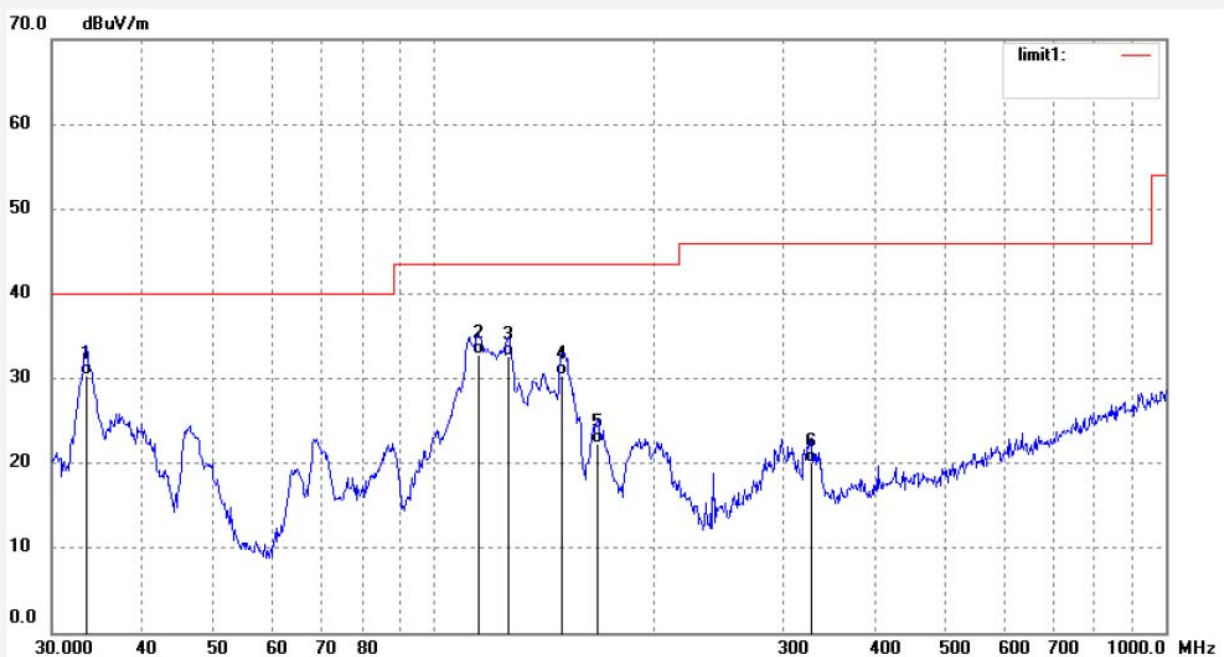

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.4520	51.39	-21.06	30.33	40.00	-9.67	QP	200	103	
2	114.8224	60.20	-27.36	32.84	43.50	-10.66	QP	200	218	
3	126.2486	60.22	-27.62	32.60	43.50	-10.90	QP	200	93	
4	149.4415	58.36	-28.05	30.31	43.50	-13.19	QP	200	215	
5	167.2249	48.68	-26.29	22.39	43.50	-21.11	QP	200	63	
6	327.1553	40.35	-20.31	20.04	46.00	-25.96	QP	200	321	



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: fcc #79  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: Bluetooth LED Low Voltage Outfits  
 Mode: TX2440MHz  
 Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
 Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 20/05/14/  
 Time: 14/43/20  
 Engineer Signature:  
 Distance: 3m

Note: Report NO.:ATE20200493

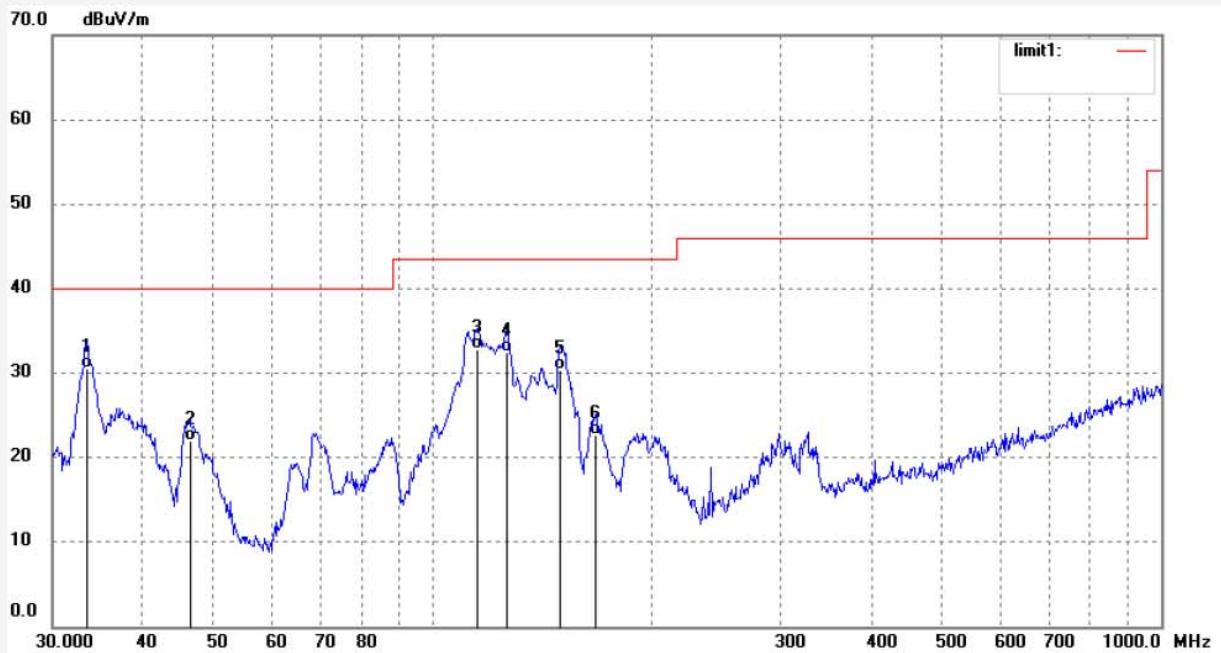

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.4520	51.68	-21.06	30.62	40.00	-9.38	QP	200	163	
2	46.3806	46.87	-24.92	21.95	40.00	-18.05	QP	200	214	
3	114.8224	60.20	-27.36	32.84	43.50	-10.66	QP	200	96	
4	126.2486	60.01	-27.62	32.39	43.50	-11.11	QP	200	118	
5	149.4415	58.39	-28.05	30.34	43.50	-13.16	QP	200	62	
6	167.2249	48.96	-26.29	22.67	43.50	-20.83	QP	200	103	



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: fcc #80  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Bluetooth LED Low Voltage Outfits  
Mode: TX2440MHz  
Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 20/05/14/  
Time: 14/44/53  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20200493

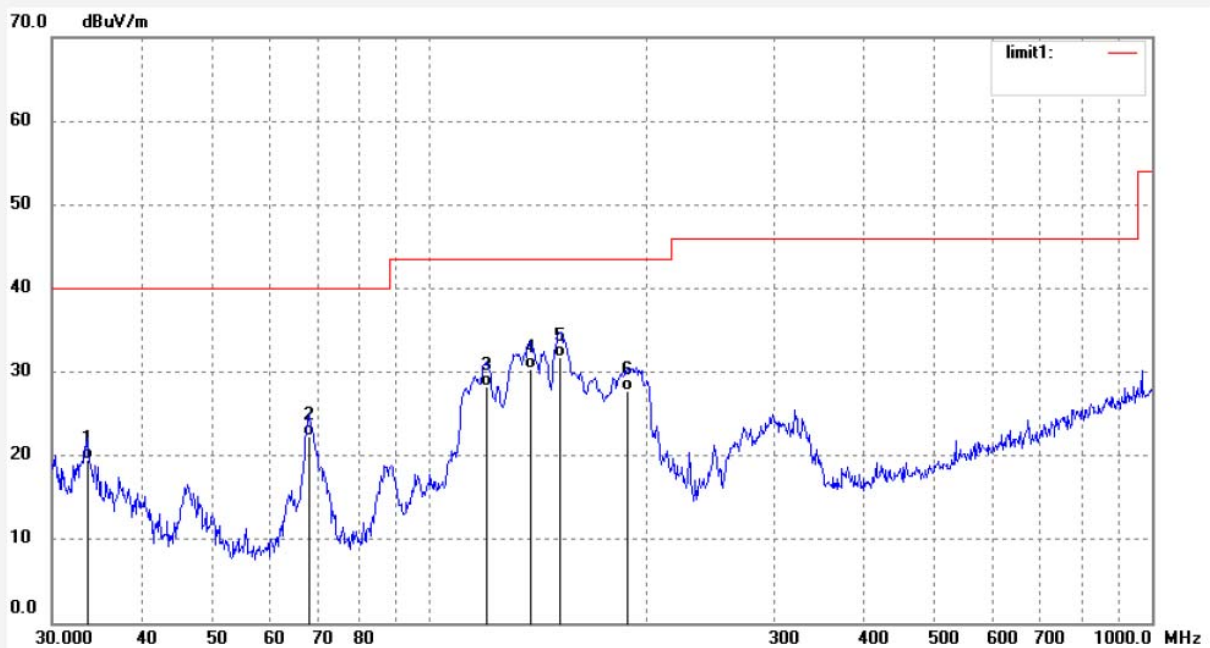

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.5700	40.68	-21.09	19.59	40.00	-20.41	QP	100	130	
2	68.0241	49.70	-27.41	22.29	40.00	-17.71	QP	100	218	
3	119.7672	55.78	-27.43	28.35	43.50	-15.15	QP	100	93	
4	137.3565	58.32	-27.89	30.43	43.50	-13.07	QP	100	225	
5	151.5567	59.66	-27.92	31.74	43.50	-11.76	QP	100	163	
6	187.7831	52.98	-25.30	27.68	43.50	-15.82	QP	100	208	

Job No.: fcc #81

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth LED Low Voltage Outfits

Mode: TX2480MHz

Model: APP-XM-3D-CH0073-6FT-12V-RGBW

Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 20/05/14/

Time: 14/45/02

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20200493

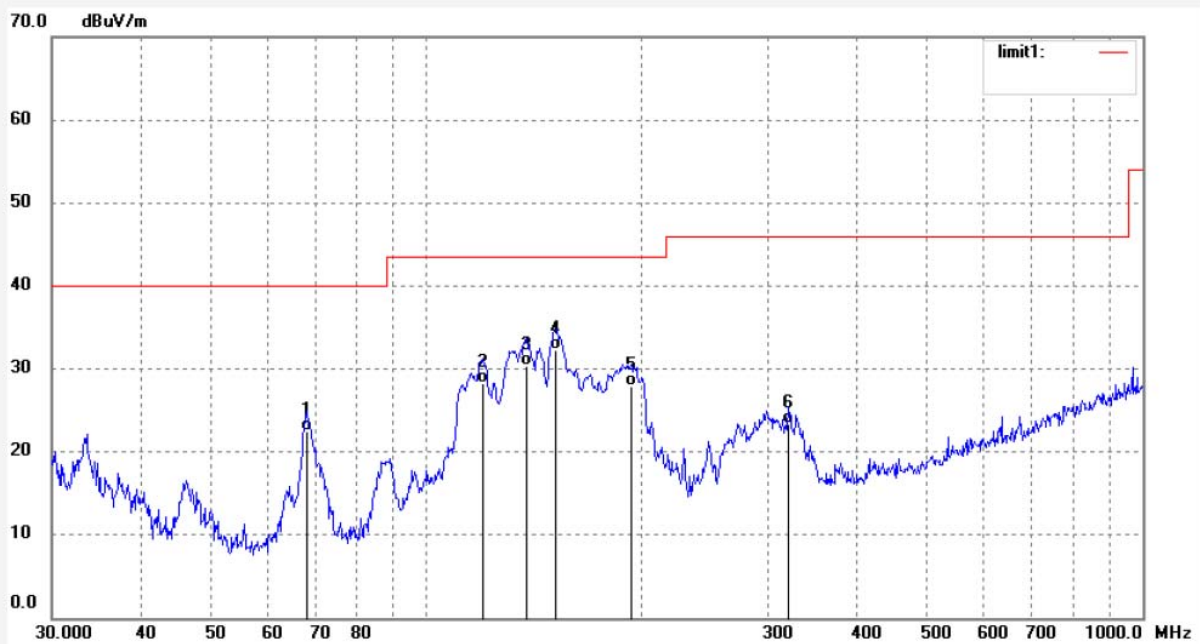

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	68.0241	49.89	-27.41	22.48	40.00	-17.52	QP	100	204	
2	119.7672	55.69	-27.43	28.26	43.50	-15.24	QP	100	320	
3	138.3250	58.30	-27.91	30.39	43.50	-13.11	QP	100	161	
4	151.5567	60.22	-27.92	32.30	43.50	-11.20	QP	100	258	
5	193.1365	52.67	-24.81	27.86	43.50	-15.64	QP	100	93	
6	320.3306	43.98	-20.61	23.37	46.00	-22.63	QP	100	109	



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: fcc #82

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: Bluetooth LED Low Voltage Outfits

Mode: TX2480MHz

Model: APP-XM-3D-CH0073-6FT-12V-RGBW

Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 20/05/14/

Time: 14/46/25

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20200493

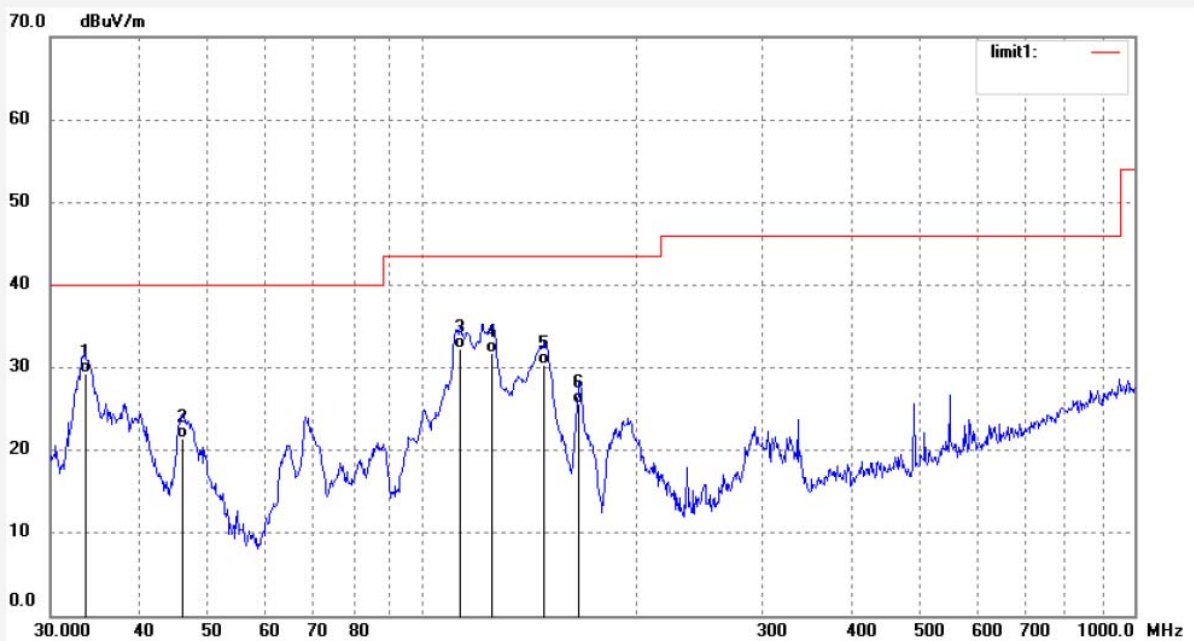

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.5700	50.32	-21.09	29.23	40.00	-10.77	QP	200	146	
2	46.0557	46.25	-24.80	21.45	40.00	-18.55	QP	200	95	
3	112.8229	59.68	-27.32	32.36	43.50	-11.14	QP	200	306	
4	125.3645	59.30	-27.59	31.71	43.50	-11.79	QP	200	314	
5	148.3951	58.36	-28.05	30.31	43.50	-13.19	QP	200	63	
6	166.0540	51.98	-26.42	25.56	43.50	-17.94	QP	200	109	

Above 1GHz



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: fcc #83  
Standard: FCC PK  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Bluetooth LED Low Voltage Outfits  
Mode: TX2402MHz  
Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 20/05/14/  
Time: 15/51/36  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20200493

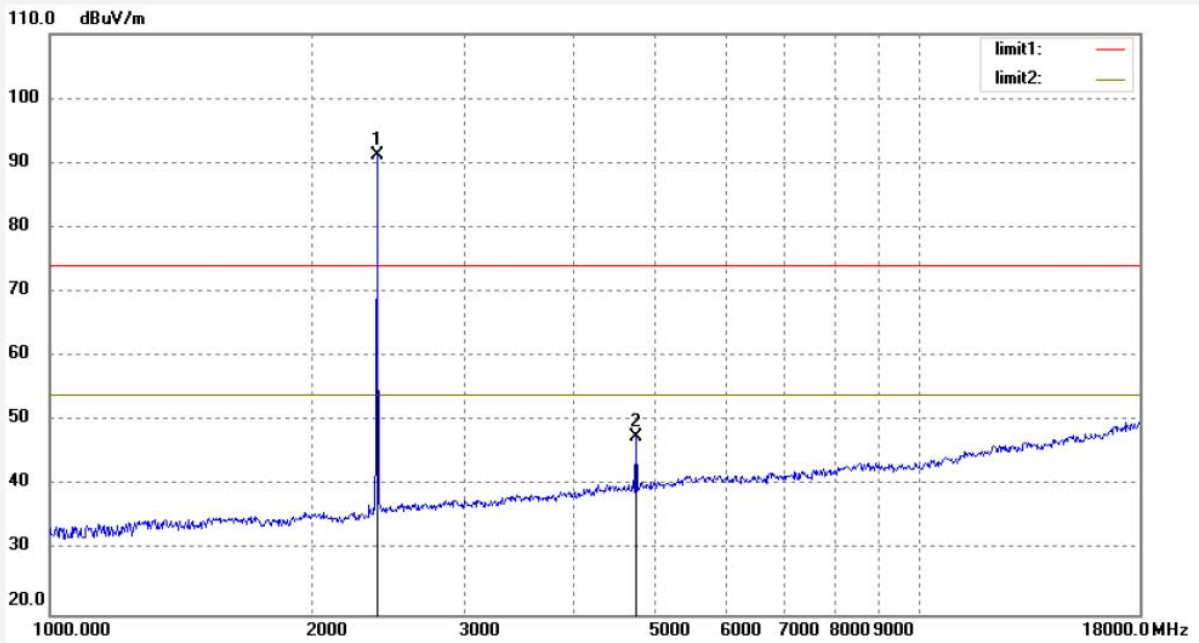

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	97.66	-6.37	91.29			peak	200	66	
2	4804.000	46.83	0.70	47.53	74.00	-26.47	peak	250	109	



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: fcc #84  
Standard: FCC PK  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Bluetooth LED Low Voltage Outfits  
Mode: TX2402MHz  
Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 20/05/14/  
Time: 15/53/06  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20200493

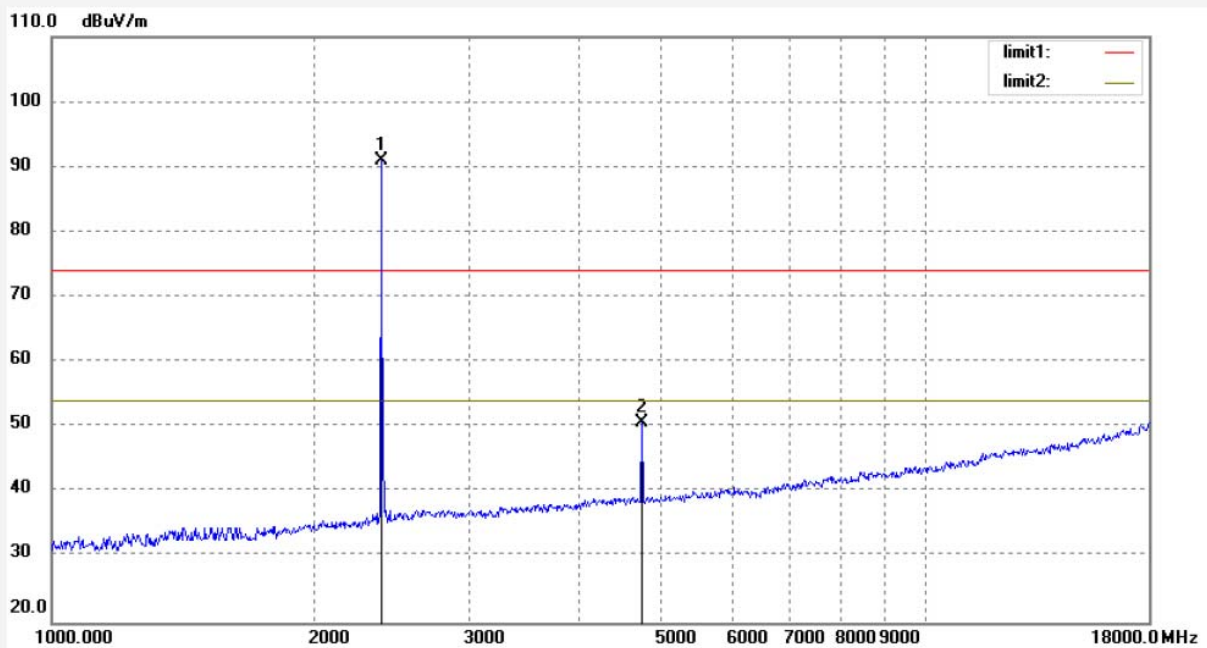

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	97.31	-6.37	90.94	74.00		peak	150	71	
2	4804.000	50.00	0.70	50.70	74.00	-23.30	peak	150	108	





**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: fcc #85  
Standard: FCC PK  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Bluetooth LED Low Voltage Outfits  
Mode: TX2440MHz  
Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 20/05/14/  
Time: 15/54/31  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20200493

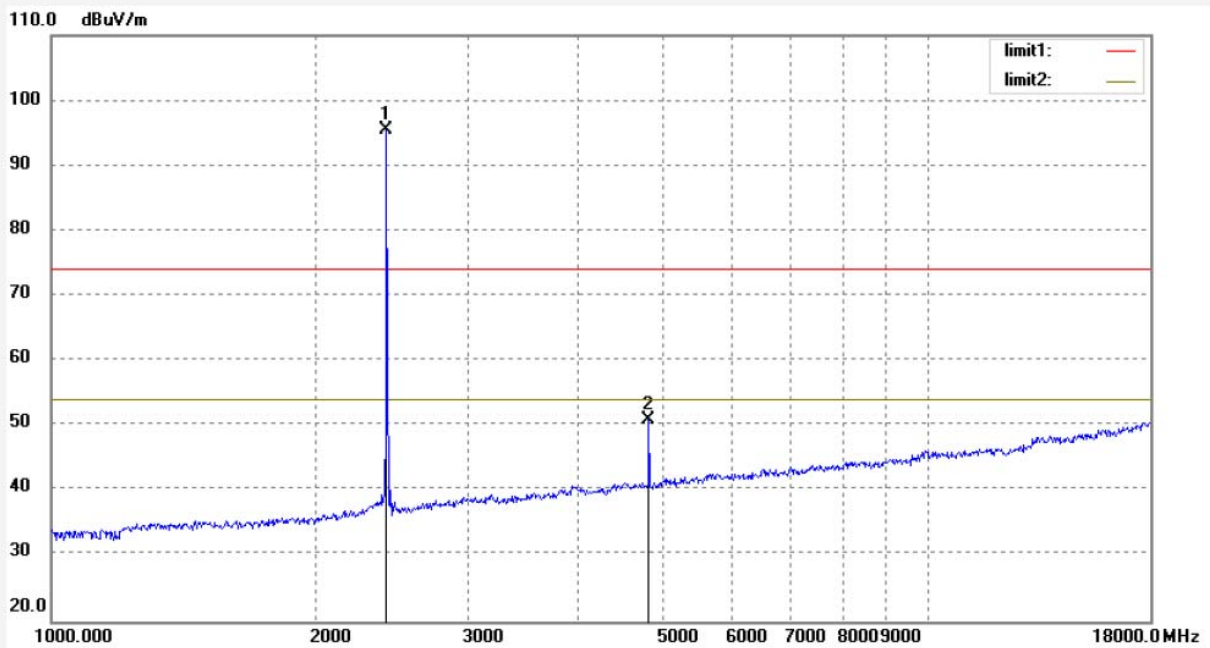


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	101.79	-6.20	95.59			peak	150	61	
2	4880.000	49.88	1.07	50.95	74.00	-23.05	peak	150	147	

Job No.: fcc #86  
 Standard: FCC PK  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: Bluetooth LED Low Voltage Outfits  
 Mode: TX2440MHz  
 Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
 Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 20/05/14/  
 Time: 15/55/36  
 Engineer Signature:  
 Distance: 3m

Note: Report NO.:ATE20200493

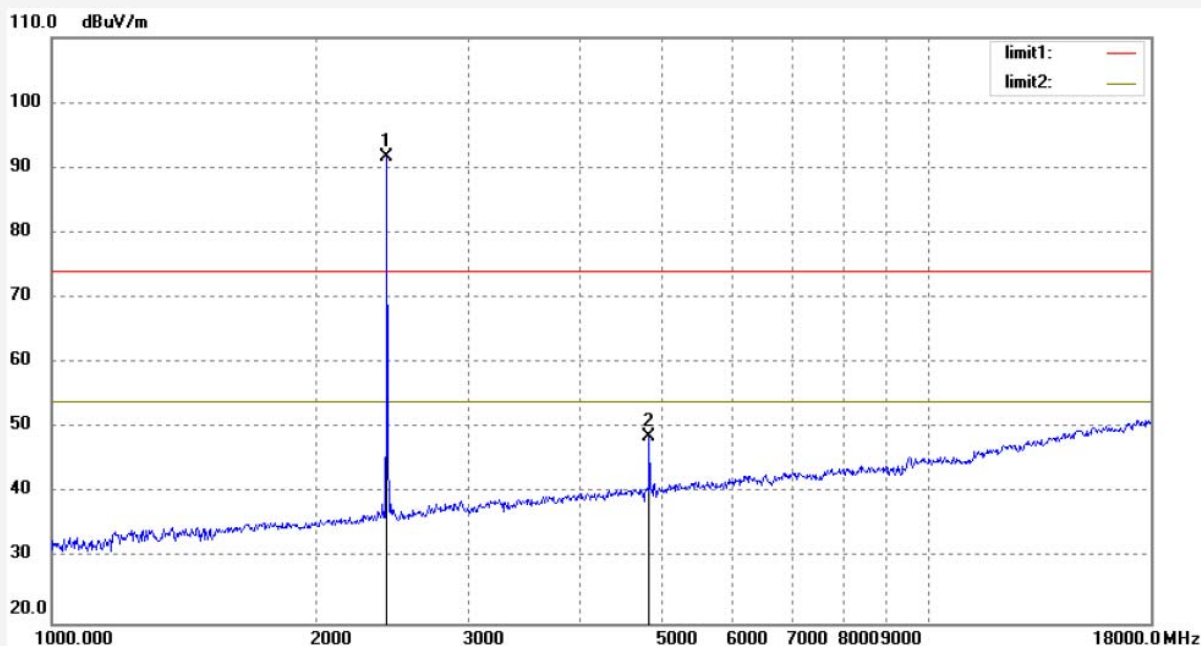


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	97.91	-6.20	91.71			peak	200	118	
2	4880.000	47.61	1.07	48.68	74.00	-25.32	peak	200	107	

Job No.: fcc #87  
 Standard: FCC PK  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: Bluetooth LED Low Voltage Outfits  
 Mode: TX2480MHz  
 Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
 Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 20/05/14/  
 Time: 15/57/01  
 Engineer Signature:  
 Distance: 3m

Note: Report NO.:ATE20200493

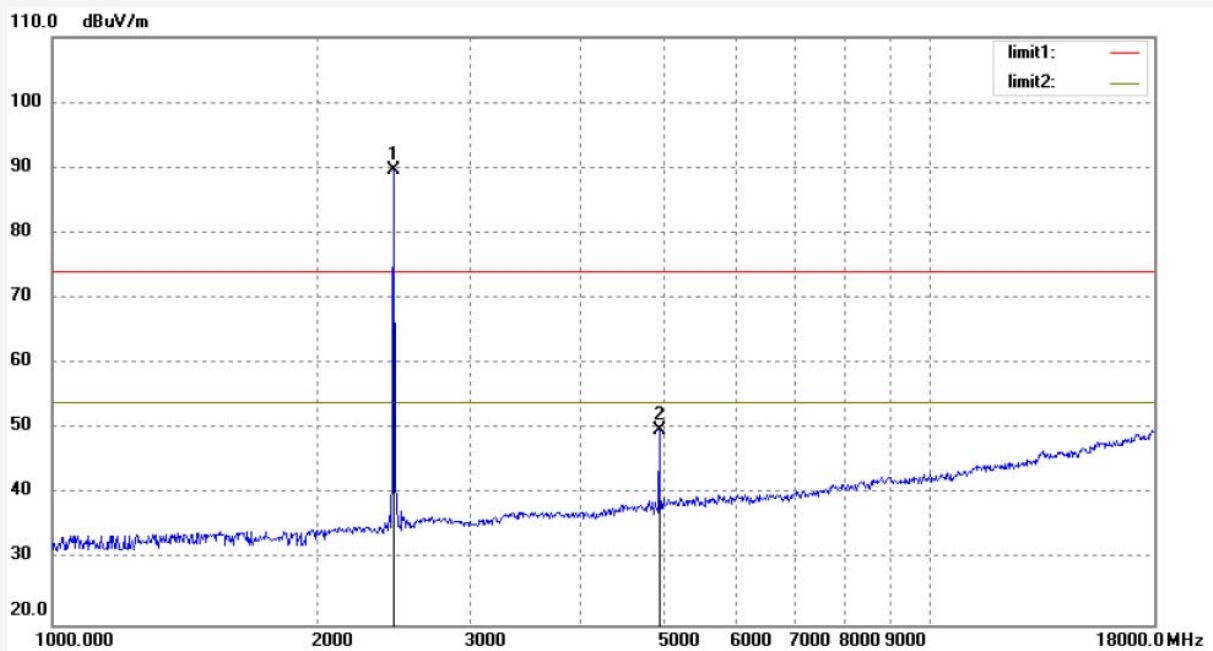


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	95.65	-6.04	89.61			peak	200	106	
2	4960.000	48.25	1.50	49.75	74.00	-24.25	peak	200	93	

Job No.: fcc #88  
 Standard: FCC PK  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: Bluetooth LED Low Voltage Outfits  
 Mode: TX2480MHz  
 Model: APP-XM-3D-CH0073-6FT-12V-RGBW  
 Manufacturer: Neo-Neon(Viet Mam)Development Co.,Ltd

Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 20/05/14/  
 Time: 15/58/44  
 Engineer Signature:  
 Distance: 3m


Note: Report NO.:ATE20200493

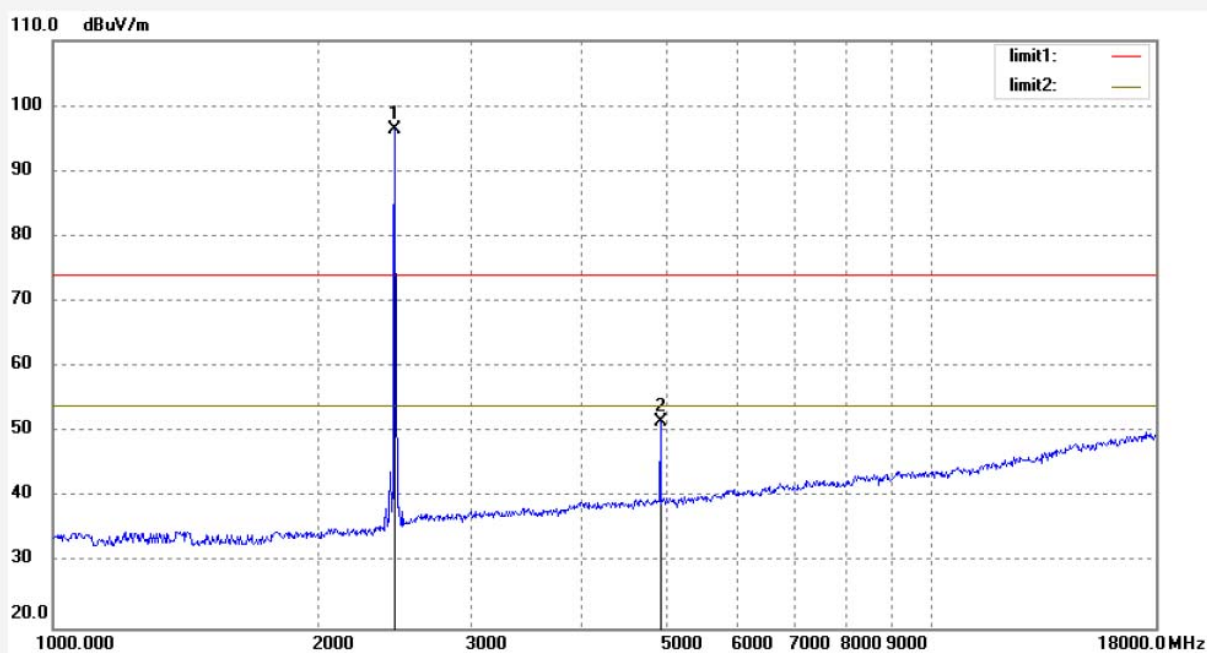


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	102.50	-6.04	96.46			peak	150	85	
2	4960.000	50.16	1.50	51.66	74.00	-22.34	peak	150	109	

## 10. POWER LINE CONDUCTED EMISSION TEST

### 10.1. Block Diagram of Test Setup

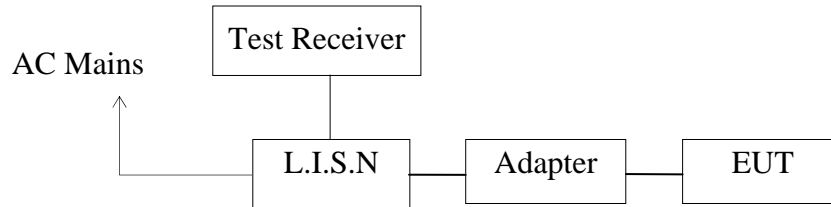

### 10.2. Test System Setup

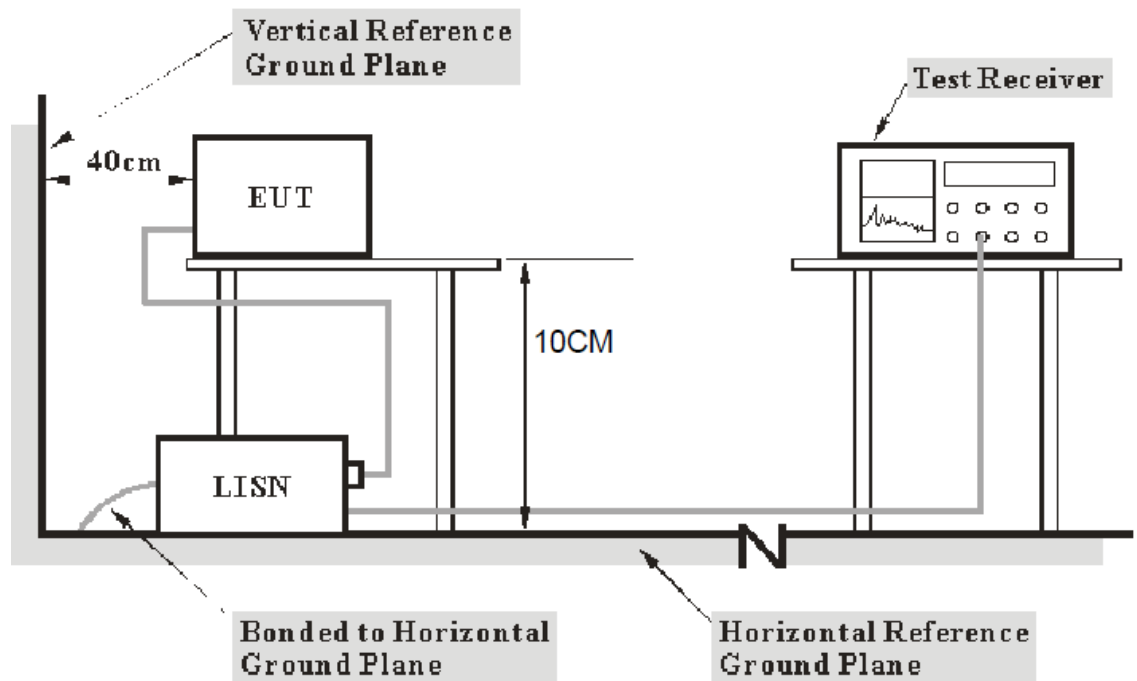

- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 10CM from EUT and at the least 80 cm from other units and other metal planes support units.

### 10.3. Test Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.  
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 10.4. Configuration of EUT on Test

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 10.5. Operating Condition of EUT

10.5.1. Setup the EUT and simulator as shown as Section 10.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in test mode and measure it.

### 10.6. Test Procedure

The EUT is put on the plane 0.1m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 10.7.Data Sample

Frequency (MHz)	Transducer value (dB)	QuasiPeak Level (dBμV)	Average Level (dBμV)	QuasiPeak Limit (dBμV)	Average Limit (dBμV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	10.5	51.1	34.2	56.0	46.0	4.9	11.8	Pass

Frequency(MHz) = Emission frequency in MHz

Transducer value(dB) = Insertion loss of LISN + Cable Loss

Level(dBμV) = Quasi-peak Reading/Average Reading + Transducer value

Limit (dBμV) = Limit stated in standard

Calculation Formula:

Margin = Limit (dBμV) - Level (dBμV)

### 10.8.Test Result

**Pass.**

The frequency range from 150kHz to 30MHz is checked.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

Emissions attenuated more than 20 dB below the permissible value are not reported.

All data was recorded in the Quasi-peak and average detection mode.

The spectral diagrams are attached as below.


**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: Bluetooth LED Low Voltage Outfits  
 Manufacturer: Neo-Neon(Viet Mam)Development Co., Ltd  
 Operating Condition: BT Communication  
 Test Site: 1#Shielding Room  
 Operator: Frank  
 Test Specification: L 120V/60Hz  
 Comment: Report NO.:ATE20200493  
 Start of Test: 2020-5-13 / 9:31:04  
 M/N:APP-XM-3D-CH0073-6FT-12V-RGBW

**SCAN TABLE: "V 150K-30MHz fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						

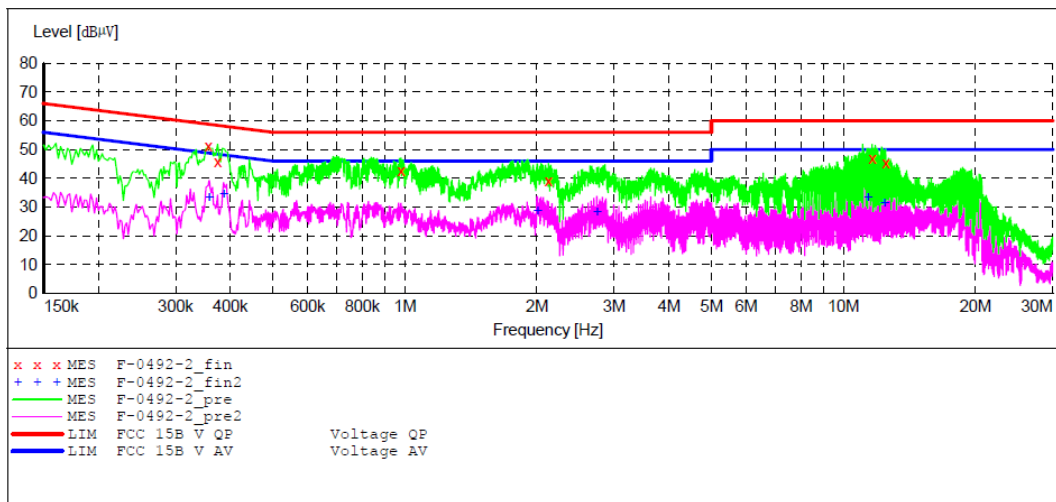

**MEASUREMENT RESULT: "F-0492-2\_fin"**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.356000	51.30	10.9	59	7.5	QP	L1	GND
0.374000	45.90	10.9	58	12.5	QP	L1	GND
0.980000	42.70	11.1	56	13.3	QP	L1	GND
2.125000	39.10	11.3	56	16.9	QP	L1	GND
11.630000	46.80	11.6	60	13.2	QP	L1	GND
12.490000	45.20	11.6	60	14.8	QP	L1	GND

**MEASUREMENT RESULT: "F-0492-2\_fin2"**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.358000	33.20	10.9	49	15.6	AV	L1	GND
0.386000	34.40	11.0	48	13.7	AV	L1	GND
2.005000	28.70	11.3	46	17.3	AV	L1	GND
2.740000	28.40	11.3	46	17.6	AV	L1	GND
11.385000	33.30	11.6	50	16.7	AV	L1	GND
12.425000	31.50	11.6	50	18.5	AV	L1	GND




ACCURATE TECHNOLOGY CO., LTD

**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: Bluetooth LED Low Voltage Outfits  
 Manufacturer: Neo-Neon(Viet Nam)Development Co., Ltd  
 Operating Condition: BT Communication  
 Test Site: 1#Shielding Room  
 Operator: Frank  
 Test Specification: N 120V/60Hz  
 Comment: Report NO.:ATE20200493  
 Start of Test: 2020-5-13 / 9:28:06  
 M/N:APP-XM-3D-CH0073-6FT-12V-RGBW

**SCAN TABLE: "V 150K-30MHZ fin"**

Short Description:		_SUB_STD_VTERM2 1.70						
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer		
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008		
			Average					

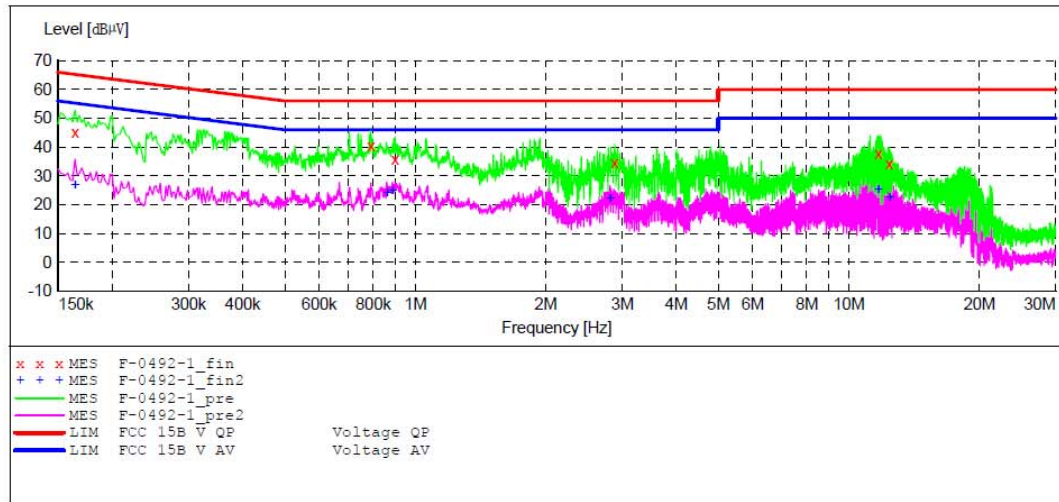

**MEASUREMENT RESULT: "F-0492-1\_fin"**

2020-5-13 9:30

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.164000	45.00	10.8	65	20.3	QP	N	GND
0.790000	40.50	11.1	56	15.5	QP	N	GND
0.898000	35.90	11.1	56	20.1	QP	N	GND
2.885000	34.70	11.3	56	21.3	QP	N	GND
11.710000	37.60	11.6	60	22.4	QP	N	GND
12.420000	34.30	11.6	60	25.7	QP	N	GND

**MEASUREMENT RESULT: "F-0492-1\_fin2"**

2020-5-13 9:30

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.164000	26.60	10.8	55	28.7	AV	N	GND
0.860000	23.90	11.1	46	22.1	AV	N	GND
0.886000	24.80	11.1	46	21.2	AV	N	GND
2.815000	22.20	11.3	46	23.8	AV	N	GND
11.710000	25.10	11.6	50	24.9	AV	N	GND
12.420000	22.40	11.6	50	27.6	AV	N	GND


ACCURATE TECHNOLOGY CO.,LTD

**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: Bluetooth LED Low Voltage Outfits  
 Manufacturer: Neo-Neon(Viet Mam)Development Co., Ltd  
 Operating Condition: BT Communication  
 Test Site: 1#Shielding Room  
 Operator: Frank  
 Test Specification: N 240V/60Hz  
 Comment: Report NO.:ATE20200493  
 Start of Test: 2020-5-13 / 9:36:44  
 M/N:APP-XM-3D-CH0073-6FT-12V-RGBW

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

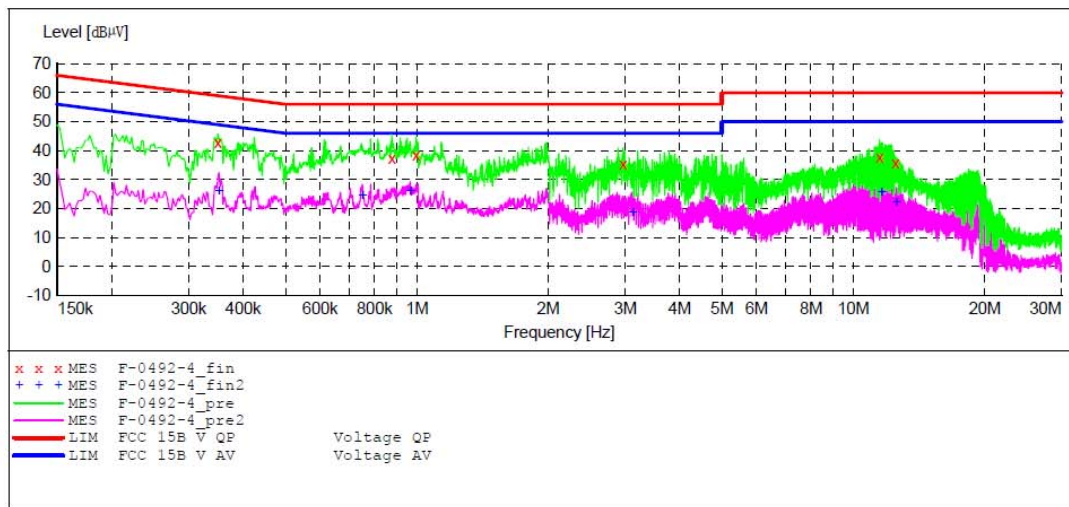

**MEASUREMENT RESULT: "F-0492-4\_fin"**

2020-5-13 9:38

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.350000	42.60	10.9	59	16.4	QP	N	GND
0.876000	37.30	11.1	56	18.7	QP	N	GND
0.996000	38.50	11.1	56	17.5	QP	N	GND
2.970000	35.50	11.3	56	20.5	QP	N	GND
11.500000	37.60	11.6	60	22.4	QP	N	GND
12.495000	35.80	11.6	60	24.2	QP	N	GND

**MEASUREMENT RESULT: "F-0492-4\_fin2"**

2020-5-13 9:38

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.352000	26.00	10.9	49	22.9	AV	N	GND
0.750000	24.50	11.1	46	21.5	AV	N	GND
0.966000	26.00	11.1	46	20.0	AV	N	GND
3.130000	18.70	11.3	46	27.3	AV	N	GND
11.610000	25.50	11.6	50	24.5	AV	N	GND
12.535000	22.00	11.6	50	28.0	AV	N	GND


**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: Bluetooth LED Low Voltage Outfits  
 Manufacturer: Neo-Neon (Viet Nam) Development Co., Ltd  
 Operating Condition: BT Communication  
 Test Site: 1#Shielding Room  
 Operator: Frank  
 Test Specification: L 240V/60Hz  
 Comment: Report NO.:ATE20200493  
 Start of Test: 2020-5-13 / 9:33:57  
 M/N:APP-XM-3D-CH0073-6FT-12V-RGBW

**SCAN TABLE: "V 150K-30MHz fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak Average	1.0 s	9 kHz	NSLK8126 2008

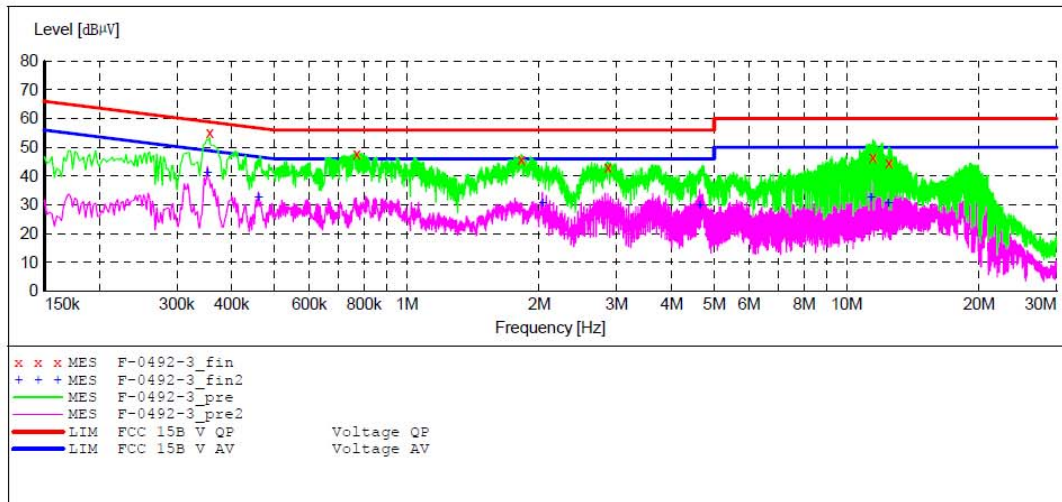

**MEASUREMENT RESULT: "F-0492-3\_fin"**

2020-5-13 9:35

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.356000	55.00	10.9	59	3.8	QP	L1	GND
0.768000	47.60	11.1	56	8.4	QP	L1	GND
1.820000	45.70	11.2	56	10.3	QP	L1	GND
2.865000	43.10	11.3	56	12.9	QP	L1	GND
11.480000	46.40	11.6	60	13.6	QP	L1	GND
12.480000	44.60	11.6	60	15.4	QP	L1	GND

**MEASUREMENT RESULT: "F-0492-3\_fin2"**

2020-5-13 9:35

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.352000	40.90	10.9	49	8.0	AV	L1	GND
0.460000	32.30	11.0	47	14.4	AV	L1	GND
2.035000	30.70	11.3	46	15.3	AV	L1	GND
4.630000	29.90	11.4	46	16.1	AV	L1	GND
11.360000	32.60	11.6	50	17.4	AV	L1	GND
12.445000	30.70	11.6	50	19.3	AV	L1	GND


## 11. ANTENNA REQUIREMENT

### 11.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 11.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Max Antenna gain of EUT is 2dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

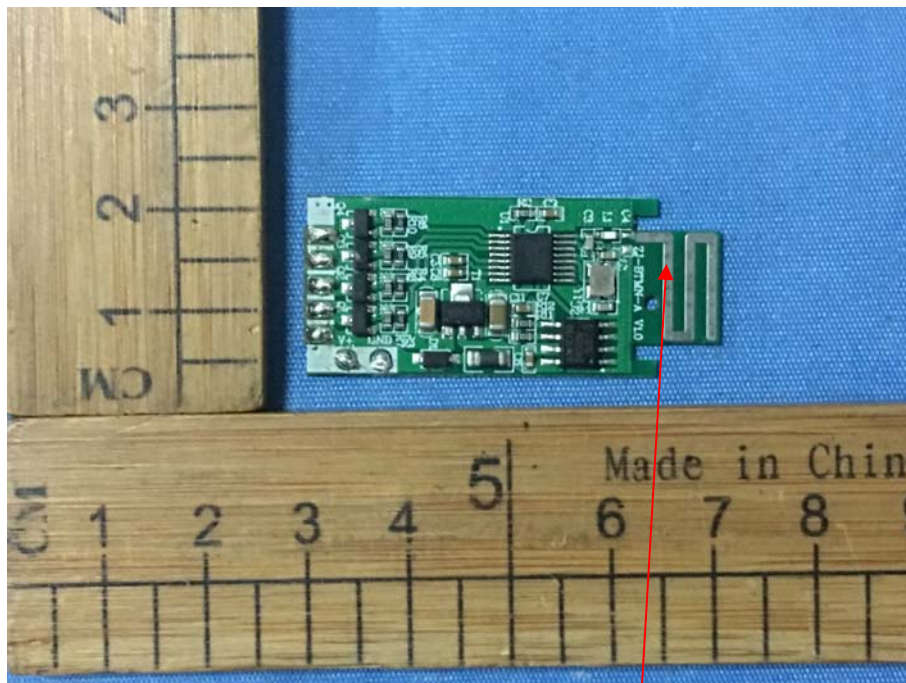

Antenna

\*\*\*\*\* End of Test Report \*\*\*\*\*