



RF TEST REPORT

Report No.: 20230817G09967X-W9

Product Name: LTE Smart Phone

Model No.: SH4650

FCC ID: 2AWF6-SH4650

Applicant: START USA, INC.

Address: 6860 Dallas Parkway, Suite 200, Plano, TX 75024, USA

Dates of Testing: 04/23/2023 - 06/16/2023

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 124 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product: LTE Smart Phone

Brand Name: START, Consumer Cellular, Verve, IRIS

Trade Name: START, Consumer Cellular, Verve, IRIS

Marketing Name: Roadrunner

Applicant.....: START USA, INC.

Applicant Address.....: 6860 Dallas Parkway, Suite 200, Plano, TX 75024, USA

Manufacturer: THINKSTART ELECTRONIC TECHNOLOGY CO., LTD.

Manufacturer Address: Unit A1-403, Kexing Science Park, 15 Keyuan Road,
Nanshan District, Shenzhen, CHINA

Test Standards: 47 CFR Part 15 Subpart E 15.407
ANSI C63.10-2013

Test Result.....: Pass

Tested by: Kim Li 2023.09.01
Kim Li, Test Engineer

Reviewed by: Chris You 2023.09.01
Chris You, Senior Engineer

Approved by: Yang Fan 2023.09.01
Yang Fan, Manager



Table of Contents

1. GENERAL INFORMATION	5
1.1. EUT Description	5
1.2. Test Standards and Results.....	6
1.3. Channel List	7
1.4. Test environment and mode	9
1.5. Table for Supporting Units.....	10
1.6. Laboratory Facilities	11
2. 47 CFR PART 15E REQUIREMENTS	12
2.1. Antenna requirement.....	12
2.2. Maximum Conducted Output Power	13
2.3. Power spectral density (PSD)	15
2.4. Emission Bandwidth and Occupied Bandwidth.....	17
2.5. Frequency Stability	19
2.6. Radiated Band Edge and Spurious Emission.....	21
2.7. AC Power Line Conducted Emission	40
3. LIST OF MEASURING EQUIPMENT	44
4. UNCERTAINTY OF EVALUATION	45
APPENDIX A	46



Change History		
Issue	Date	Reason for change
1.0	2023.09.01	First edition



1. GENERAL INFORMATION

1.1. EUT Description

Product Name	LTE Smart Phone
Model No.	SH4650
Hardware Version	SH4650HV1.0
Software Version	SH4650SV1.0.5
EUT supports Radios application	WLAN5.0GHz 802.11a/n/ac
Product Type	Client devices
Modulation Type	802.11a/n: OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: up to 150 Mbps 802.11ac: up to 433.333 Mbps
Frequency Range	UNII-1: 5150 ~ 5250MHz, UNII-2a: 5250 ~ 5350MHz UNII-2c: 5470 ~ 5725MHz, UNII-3: 5725 ~ 5850MHz
Channel Bandwidth	802.11a: 20MHz 802.11n: 20MHz/40MHz 802.11ac: 20MHz/40MHz/80MHz
Channel Number	UNII-1: 4 for 802.11a, 802.11n(HT20), 802.11ac(VHT20) 2 for 802.11n(HT40), 802.11ac(VHT40) 1 for 802.11ac(VHT80)
	UNII-2a: 4 for 802.11a, 802.11n(HT20), 802.11ac(VHT20) 2 for 802.11n(HT40), 802.11ac(VHT40) 1 for 802.11ac(VHT80)
	UNII-2c: 11 for 802.11a, 802.11n(HT20), 802.11ac(VHT20) 5 for 802.11n(HT40), 802.11ac(VHT40)) 2 for 802.11ac(VHT80)
	UNII-3: 5 for 802.11a, 802.11n(HT20), 802.11ac(VHT20) 2 for 802.11n(HT40), 802.11ac(VHT40)) 1 for 802.11ac(VHT80)
Antenna Type	Internal Antenna
Antenna Gain	0.8dBi
Output Power (Max.)	UNII-1: 11.57dBm; UNII-2a: 11.13dBm UNII-2c: 14.44dBm; UNII-3: 14.47dBm
Power supply	Rechargeable Li-ion Polymer Battery DC3.85V/4000mAh

Note 1: This report is based on the 20230417G03483X-W9 report. The following 3 points have been updated:

1. Phase in 2nd source: WTR-3925-2-106BWL PSP-TR-03-0.
2. Phase in 2nd source: 1W ACC speaker, and change the horn pad of the SUB board.



3. Change the main RF PA and external speaker as well as other hardware and software of the small auxiliary board.

This change does not involve Bluetooth and WIFI, so no Bluetooth and WIFI test is required.

1.2. Test Standards and Results

The objective of the report is to perform testing according to below standards for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E §15.407	Radio Frequency Devices
2	KDB789033 D02 General UNII Test Procedures New Rules v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test detailed items/section required by FCC rules and results are as below:

No.	FCC Rule	Description	Result
1	15.203 15.407(a)	Antenna Requirement	PASS
2	15.407(a)(1)(iv) 15.407 (a)(2) 15.407(a)(3)(i)	Maximum Conducted Output Power	PASS
3	15.407(a)(12)	26dB Emission Bandwidth 99% Occupied Bandwidth	PASS
4	15.407(e)	6dB Emission Bandwidth	PASS
5	15.407(a)(1)(iv) 15.407 (a)(2) 15.407(a)(3)(i)	Power spectral density (PSD)	PASS
6	15.207	AC Power Line Conducted Emission	PASS
7	15.205 15.209 15.407(b)(1) 15.407(b)(2) 15.407(b)(3) 15.407(b)(4)	Radiated Band Edges and Spurious Emission	PASS
8	15.407(g)	Frequency Stability	PASS

1.3. Channel List

Operated band in 5150 MHz ~ 5250MHz

4 channels are provided for 802.11a, 802.11n-HT20 and 802.11ac-VHT20.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	44	5220
40	5200	48	5240

2 channels are provided for 802.11n-HT40 and 802.11ac-VHT40.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
38	5190	46	5230

1 channels are provided for 802.11ac-VHT80.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
42	5210	/	/

Operated band in 5250 MHz ~ 5350MHz

4 channels are provided for 802.11a, 802.11n-HT20 and 802.11ac-VHT20.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
52	5260	60	5300
56	5280	64	5320

2 channels are provided for 802.11n-HT40 and 802.11ac-VHT40.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
54	5270	62	5310

1 channels are provided for 802.11ac-VHT80.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
58	5290	/	/

Operated band in 5470 MHz ~ 5725MHz

11 channels are provided for 802.11a, 802.11n-HT20 and 802.11ac-VHT20.

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
100	5500	116	5580	132	5660
104	5520	120	5600	136	5680
108	5540	124	5620	140	5700
112	5560	128	5640	/	/

5 channels are provided for 802.11n-HT40 and 802.11ac-VHT40.

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
102	5510	118	5590	134	5670
110	5550	126	5630	/	/



2 channels are provided for 802.11ac-VHT80.

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
106	5530	122	5610	/	/

Operated band in 5725 MHz ~ 5850MHz

5 channels are provided for 802.11a, 802.11n-HT20 and 802.11ac-VHT20.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

2 channels are provided for 802.11n-HT40 and 802.11ac-VHT40.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
151	5755	159	5795

1 channel are provided for 802.11ac-VHT80

Channel	Frequency(MHz)	Channel	Frequency(MHz)
155	5775	/	/

1.4. Test environment and mode

During the measurement, the environmental conditions were within the listed ranges:

Operating Environment	
Temperature	15°C - 35°C
Humidity	30% -60%
Atmospheric Pressure	86KPa-106KPa
Test mode:	
Continuously transmitting mode	Keeps the EUT in 100% duty cycle transmitting with modulation in SISO, duty cycle factor is not required.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

For Frequency band 5150 ~ 5250 MHz				
Test Mode	Frequency(MHz)			Data rate
	LCH	MCH	HCH	
802.11a	5180	5220	5240	6 Mbps
802.11n-HT20/ac-VHT20				MCS 0
802.11n-HT40/ac-VHT40	5190	/	5230	MCS 0
802.11ac-VHT80	5210	/	/	MCS 0

Note: After scanning all modulation types and data rates for all test patterns, the above list was found to be the worst case.

For Frequency band 5250 ~ 5350 MHz				
Test Mode	Frequency(MHz)			Data rate
	LCH	MCH	HCH	
802.11a	5260	5300	5320	6 Mbps
802.11n-HT20/ac-VHT20				MCS 0
802.11n-HT40/ac-VHT40	5270	/	5310	MCS 0
802.11ac-VHT80	5290	/	/	MCS 0

Note: After scanning all modulation types and data rates for all test patterns, the above list was found to be the worst case.

For Frequency band 5470 ~ 5725 MHz				
Test Mode	Frequency(MHz)			Data rate
	LCH	MCH	HCH	
802.11a	5500	5600	5700	6 Mbps
802.11n-HT20/ac-VHT20				MCS 0
802.11n-HT40/ac-VHT40	5510	5590	5670	MCS 0
802.11ac-VHT80	5530	/	5610	MCS 0

Note: After scanning all modulation types and data rates for all test patterns, the above list was found to be the worst case.



For Frequency band 5725 ~ 5850 MHz				
Test Mode	Frequency(MHz)			Data rate
	LCH	MCH	HCH	
802.11a	5745	5785	5825	6 Mbps
802.11n-HT20/ac-VHT20				MCS 0
802.11n-HT40/ac-VHT40	5755	/	5795	MCS 0
802.11ac-VHT80	5775	/	/	MCS 0

Note: After scanning all modulation types and data rates for all test patterns, the above list was found to be the worst case.

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation modes or test configuration modes mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX 802.11a SISO Mode
Mode 2	TX 802.11n-HT20 SISO Mode
Mode 3	TX 802.11n-HT40 SISO Mode
Mode 4	TX 802.11ac-VHT20 SISO Mode
Mode 5	TX 802.11ac-VHT40 SISO Mode
Mode 6	TX 802.11ac-VHT80 SISO Mode
Mode 7	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 7	TX Mode
For Radiated Test	
Final Test Mode	Description
Mode 1	TX 802.11a SISO Mode
Mode 2	TX 802.11n-HT20 SISO Mode
Mode 3	TX 802.11n-HT40 SISO Mode
Mode 4	TX 802.11ac-VHT20 SISO Mode
Mode 5	TX 802.11ac-VHT40 SISO Mode
Mode 6	TX 802.11ac-VHT80 SISO Mode

1.5. Table for Supporting Units

No.	Equipment	Brand Name	Model Name	Manufacturer	Serial No.	Note
1	Laptop	HP	TPN-Q221	HP	5CD14347QB	FCC DOC



1.6. Laboratory Facilities

FCC-Registration No.: 406086

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until Sep 30, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Sep 30, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.



2. 47 CFR Part 15E Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

According to FCC 15.407(a)(1): For client devices in the 5.15-5.25 GHz band, If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to FCC 15.407(a)(3): For the band 5.725-5.850 GHz, If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

2.1.2. Antenna Information

Antenna General Information:

No.	EUT	Ant. Type	Operating frequency range	Ant. Gain
1	LTE Smart Phone	Internal	UNII-1, UNII-2a, UNII-2c, UNII-3	0.8dBi

2.1.3. Result: comply

The EUT has a unique antenna connector. Please refer to the EUT internal photos.

2.2. Maximum Conducted Output Power

2.2.1. Limit of Maximum Conducted Output Power

FCC Part 15.407(a)

The maximum conducted output power should not exceed:


Band	EUT Category	Limit
U-NII-1	<input type="checkbox"/> Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21dBm) at any elevation angle above 30 degrees as measured from the horizon)
	<input type="checkbox"/> Fixed point-to-point Access device	1 Watt (30 dBm)
	<input type="checkbox"/> Indoor Access Point	1 Watt (30 dBm)
	<input checked="" type="checkbox"/> Mobile and portable client device	250mW (24 dBm)
U-NII-2A	<input checked="" type="checkbox"/>	250mW (24 dBm) or 11dBm+10logB* Whichever is less.
U-NII-2C	<input checked="" type="checkbox"/>	250mW (24 dBm) or 11dBm+10logB* Whichever is less.
U-NII-3	<input checked="" type="checkbox"/>	1 Watt (30 dBm)

Note: B* is the 26 dB emission bandwidth in MHz.

2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3. Test Setup

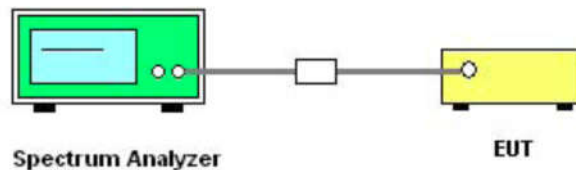

2.2.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.E.2.b and ANSI C63.10-2013 Section 12.3.2.2.
2. The RF output of EUT was connected to spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Power is calculated by integrating over the spectrum of the entire 99% OBW signal using the instrument's band power measurement feature.
4. Set span to encompass the entire 99% OBW of the signal.
5. Set RBW = 1MHz, VBW \geq 3MHz, Sweep time = Auto, Detector = power averaging (RMS).



6. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Replace the EUT center frequency and repeat steps 3~7.

2.2.5. Test Results of Maximum Conducted Output Power

Please refer to APPENDIX A for detail

2.3. Power spectral density (PSD)

2.3.1. Limit of Power Spectral Density

FCC Part 15.407(a)


The maximum power spectral density should not exceed:

Band	EUT Category	Limit
U-NII-1	<input type="checkbox"/> Outdoor Access Point	17 dBm/MHz
	<input type="checkbox"/> Fixed point-to-point Access device	
	<input type="checkbox"/> Indoor Access Point	
	<input checked="" type="checkbox"/> Mobile and portable client device	
U-NII-2A	<input checked="" type="checkbox"/>	11 dBm/MHz
U-NII-2C	<input checked="" type="checkbox"/>	11 dBm/MHz
U-NII-3	<input checked="" type="checkbox"/>	30dBm/500kHz

2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.3.3. Test Setup

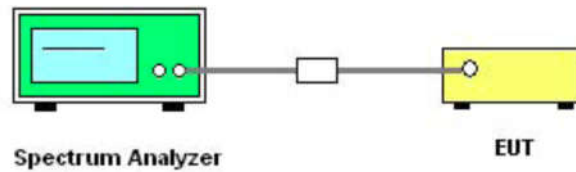

2.3.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.F and ANSI C63.10-2013 Section 12.5.
2. The RF output of EUT was connected to spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set span to encompass the entire 99% OBW of the signal.
4. For U-NII-1 Band: Set RBW = 1MHz, VBW \geq 3MHz, Sweep time = Auto, Detector = power averaging (RMS).
5. For U-NII-3 Band: Set RBW = 500kHz, VBW \geq 3MHz, Sweep time = Auto, Detector = power averaging (RMS).
6. Number of points in sweep $\geq 2 \times$ span / RBW.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.



9. Replace the EUT center frequency and repeat steps 3~8.

2.3.5. Test Result of Power Spectral Density

Please refer to APPENDIX A for detail

2.4. Emission Bandwidth and Occupied Bandwidth

2.4.1. Limit of Emission Bandwidth and Occupied Bandwidth


26dB Emission Bandwidth and 99% Occupied Bandwidth no Bandwidth limit.

The minimum 6dB bandwidth of U-NII-3 shall be at least 500 kHz.

2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3. Test Description

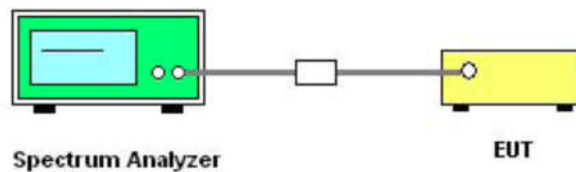

2.4.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.C.D and ANSI C63.10-2013 Section 12.4.
2. The RF output of EUT was connected to spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Use the spectrum analyzer “Channel Bandwidth” function to easurement the 26dB EBW, 6dB EBW and 99% OBW.
4. Set center frequency to the nominal EUT channel center frequency.
5. Set span = 1.5 times to 5.0 times the OBW or EBW.
6. For 26dB EBW and 99% OBW Measurement:
Set RBW = approximately 1% EBW or 1.5 times to 5.0 times the OBW, $VBW \geq 3 \times RBW$.
7. For 6dB EBW Measurement:
Set RBW =100kHz, $VBW \geq 3 \times RBW$.
8. Set Detector = Peak, Trace mode = max hold and Sweep time = auto couple.
9. Allow the trace to stabilize.
10. Replace the EUT center frequency and repeat steps 3~9.



2.4.5. Test Results of Emission Bandwidth and Occupied Bandwidth

Please refer to APPENDIX A for detail

2.5. Frequency Stability


2.5.1. Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.5.3. Test Setup

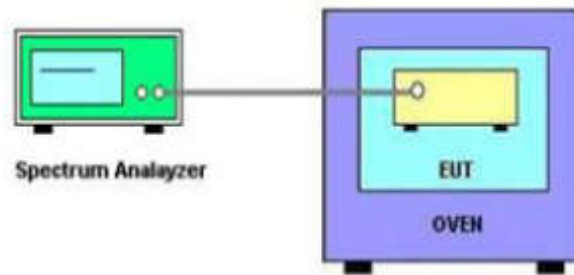

2.5.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.A.3 and ANSI C63.10-2013 Section 6.8.
2. The EUT is installed in an environment test chamber with external power source, was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set the chamber to operate at 50°C and external power source to output at nominal voltage of EUT.
5. A sufficient stabilization period at each temperatures in used prior to each frequency measurement.
6. The test shall be performed under -30°C to 50°C and 85% to 115% of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
7. Replace the EUT center frequency and repeat steps 3~6.



2.5.5. Test Result of Frequency Stability

Please refer to APPENDIX A for detail

2.6. Radiated Band Edge and Spurious Emission

2.6.1. Limit of Radiated Band Edges and Spurious Emission

Radiated emission which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level ($\mu\text{V/m}$).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

FCC Part 15.407(b)			
Frequency Band (MHz)	Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength @3m (dB $\mu\text{V/m}$)
5150 - 5250	Outside of the 5.15~5.35 GHz	-27	68.2
5250 - 5350	Outside of the 5.15~5.35 GHz	-27	68.2
5470 - 5725	Outside of the 5.47~5.725 GHz	-27	68.2
5725 - 5850	< 5650	-27	68.2
	5650~5700	-27~10	68.2~105.2
	5700~5720	10~15.6	105.2~110.8
	5720~5725	15.6~27	110.8~122.2
	5850~5855	27~15.6	122.2~110.8
	5855~5875	15.6~10	110.8~105.2
	5875~5925	10~-27	105.2~68.2
	> 5925	-27	68.2

Note:

- 1) $\text{EIRP}[\text{dBm}] = \text{E}[\text{dB}\mu\text{V/m}] + 20 \log (d[\text{m}]) - 104.77$, d is the measurement distance in m.
- 2) $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dBuV/m}$, for $\text{EIRP}[\text{dBm}] = -27\text{dBm}$.
 $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 105.2 \text{ dBuV/m}$, for $\text{EIRP}[\text{dBm}] = 10\text{dBm}$.
 $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 110.8 \text{ dBuV/m}$, for $\text{EIRP}[\text{dBm}] = 15.6\text{dBm}$.
 $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 122.2 \text{ dBuV/m}$, for $\text{EIRP}[\text{dBm}] = 27\text{dBm}$.



Applicable To	Limit	
KDB 789033 D02 General UNII Test Procedures New Rules v02r01	Field Strength at 3m	
	PK: 68.2(dBµV/m)	AV: 54 (dBµV/m)

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41	/	/	/


Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
²Above 38.6.

2.6.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.6.3. Test Setup


For radiated emissions from 9 kHz to 30 MHz

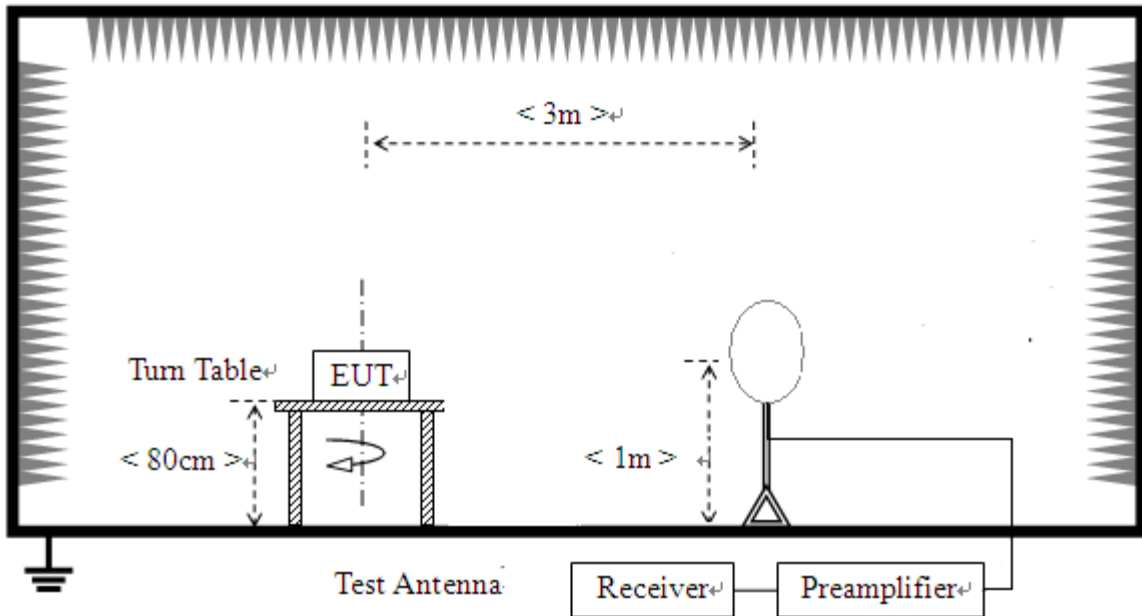

For radiated emissions from 30MHz to 1GHz

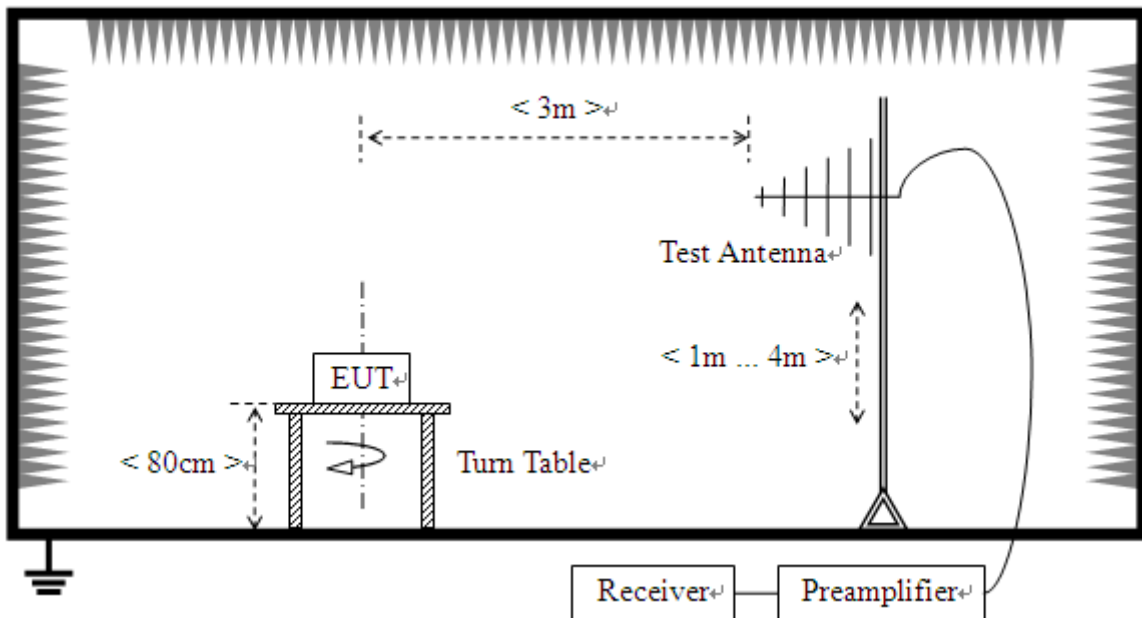

For radiated emissions above 1GHz

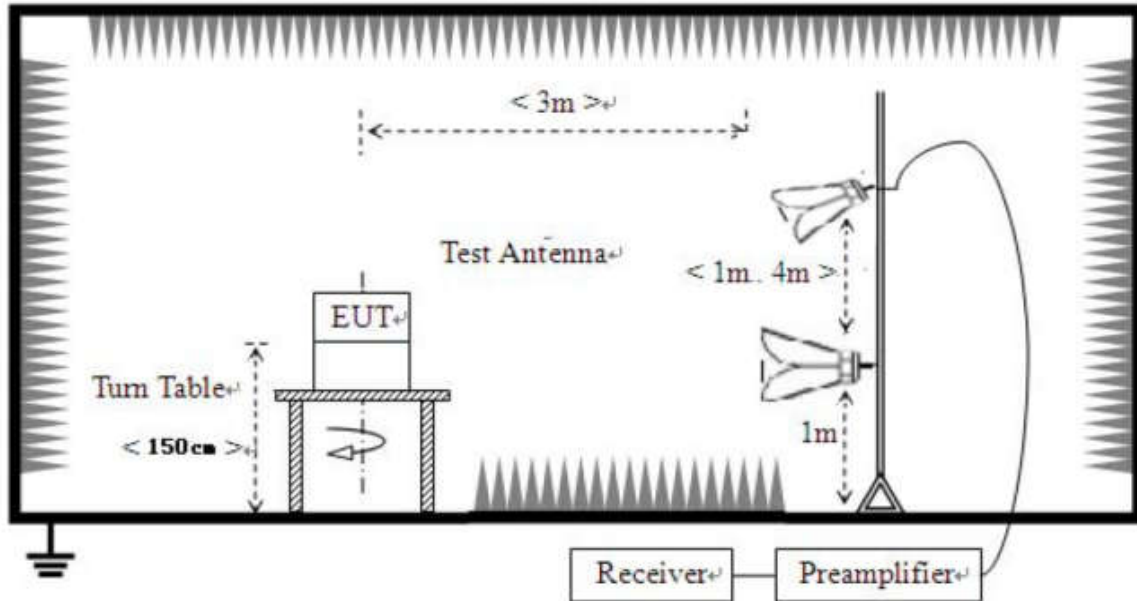

2.6.4. Test Procedures

1. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
6. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.



2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

2.6.5. Test Result of Radiated Band Edge and Spurious Emission


NOTE 1: For 9 kHz to 30MHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

NOTE 2: For 30MHz to 1GHz, All of the EUT Configure mode were tested and found 802.11a 5180MHz channel is the worst mode, the worst case is recorded in this report.

NOTE 3: For 1GHz to 40GHz, All EUT configuration modes were tested, and this report only reflects the worst-case low channel and high channel of 20M bandwidth/40M bandwidth/80M bandwidth.

NOTE 4: Antenna height and turntable angle are the worst positions, the worst case is recorded in this report.

For 30MHz to 1000 MHz

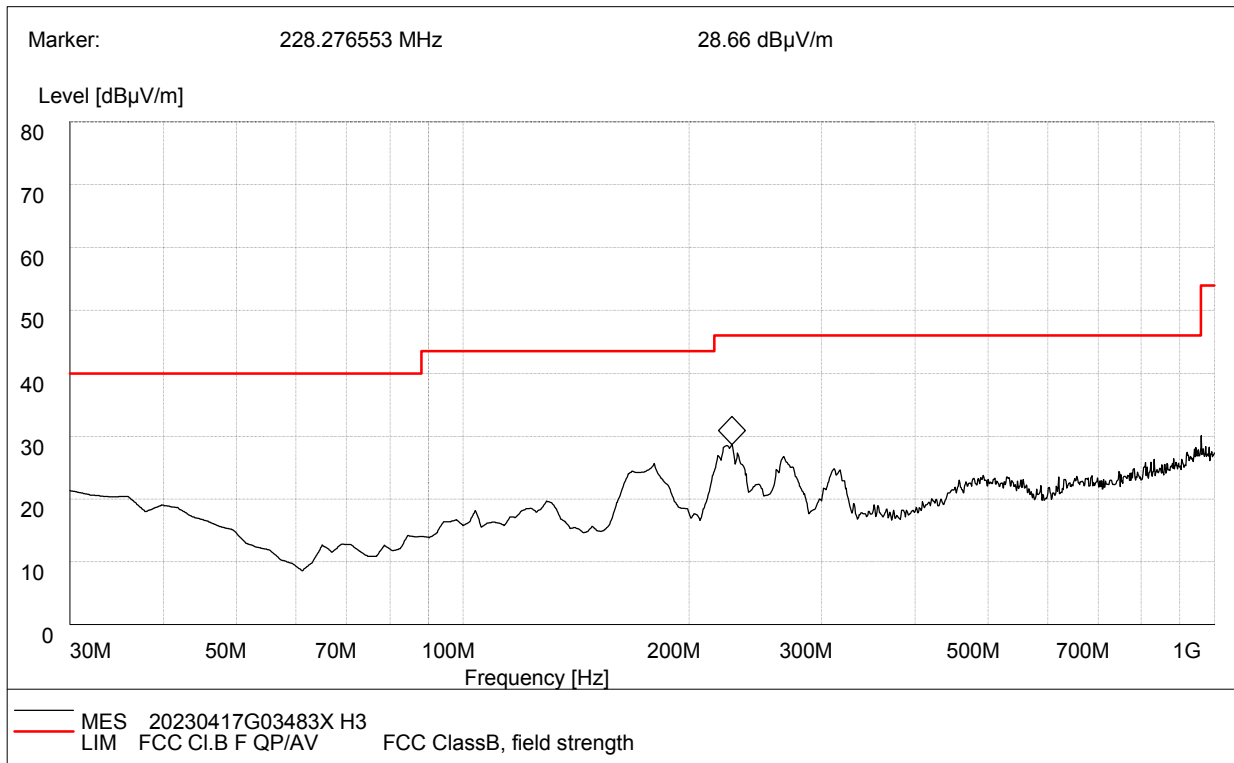


Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Corr.Factor (dB/m)	Antenna height (cm)	Limit (dB µ V/m)	Margin (dB)	Polarity
30.000000	20.32	120.000	19.3	100.0	40.0	19.68	Horizontal
35.830000	19.38	120.000	16.7	100.0	40.0	20.62	Horizontal
129.130000	19.65	120.000	12.3	100.0	43.5	23.85	Horizontal
179.670000	24.60	120.000	11.9	100.0	43.5	18.90	Horizontal
228.460000	27.66	120.000	11.9	100.0	46.0	18.34	Horizontal
267.490000	25.78	120.000	15.1	100.0	46.0	20.22	Horizontal

Test Result : Pass

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

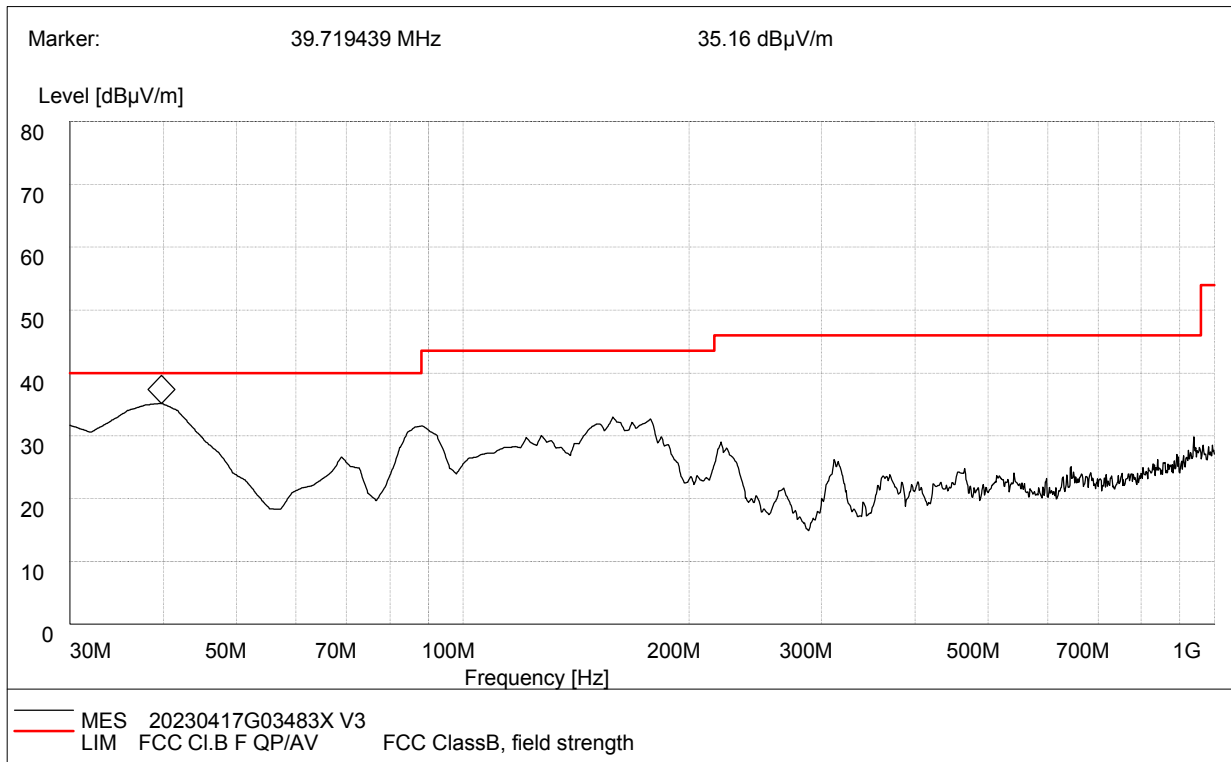

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Corr.Factor (dB/m)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Polarity
39.450000	34.16	120.000	16.7	100.0	40.0	5.84	Vertical
86.240000	30.36	120.000	8.5	100.0	40.0	9.64	Vertical
158.320000	31.98	120.000	12.4	100.0	43.5	11.52	Vertical
177.790000	31.67	120.000	11.9	100.0	43.5	11.83	Vertical
220.500000	28.02	120.000	11.9	100.0	46.0	17.98	Vertical
311.860000	25.19	120.000	15.7	100.0	46.0	20.81	Vertical

Test Result : Pass

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

**For 1GHz to 40 GHz**

U-NII-1_802.11n-HT20_5180MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	57.90	68.20	-10.30	1.40	180	57.46	0.44	Horizontal	Peak
5150.00	49.61	54.00	-4.39	1.40	180	49.17	0.44	Horizontal	Average
10360.00	52.44	68.20	-15.76	1.40	180	41.98	10.46	Horizontal	Peak
10360.00	43.94	54.00	-10.06	1.40	180	33.48	10.46	Horizontal	Average
5150.00	57.07	68.20	-11.13	1.70	260	56.63	0.44	Vertical	Peak
5150.00	49.81	54.00	-4.19	1.70	260	49.37	0.44	Vertical	Average
10360.00	53.04	68.20	-15.16	1.70	260	42.58	10.46	Vertical	Peak
10360.00	44.12	54.00	-9.88	1.70	260	33.66	10.46	Vertical	Average

U-NII-1_802.11n-HT20_5240MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	58.34	68.20	-9.86	1.40	180	58.09	0.25	Horizontal	Peak
5350.00	49.78	54.00	-4.22	1.40	180	49.53	0.25	Horizontal	Average
10480.00	52.99	68.20	-15.21	1.40	180	41.99	11.00	Horizontal	Peak
10480.00	43.23	54.00	-10.77	1.40	180	32.23	11.00	Horizontal	Average
5350.00	58.07	68.20	-10.13	1.70	260	57.82	0.25	Vertical	Peak
5350.00	49.70	54.00	-4.30	1.70	260	49.45	0.25	Vertical	Average
10480.00	52.65	68.20	-15.55	1.70	260	41.65	11.00	Vertical	Peak
10480.00	43.59	54.00	-10.41	1.70	260	32.59	11.00	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



U-NII-1_802.11n-HT40_5190MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	57.58	68.20	-10.62	1.40	180	57.14	0.44	Horizontal	Peak
5150.00	49.74	54.00	-4.26	1.40	180	49.30	0.44	Horizontal	Average
10380.00	53.36	68.20	-14.84	1.40	180	42.83	10.53	Horizontal	Peak
10380.00	43.73	54.00	-10.27	1.40	180	33.20	10.53	Horizontal	Average
5150.00	58.21	68.20	-9.99	1.70	260	57.77	0.44	Vertical	Peak
5150.00	50.42	54.00	-3.58	1.70	260	49.98	0.44	Vertical	Average
10380.00	52.44	68.20	-15.76	1.70	260	41.91	10.53	Vertical	Peak
10380.00	43.47	54.00	-10.53	1.70	260	32.94	10.53	Vertical	Average

U-NII-1_802.11n-HT40_5230MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	57.65	68.20	-10.55	1.40	180	57.40	0.25	Horizontal	Peak
5350.00	50.08	54.00	-3.92	1.40	180	49.83	0.25	Horizontal	Average
10460.00	53.33	68.20	-14.87	1.40	180	42.42	10.91	Horizontal	Peak
10460.00	43.59	54.00	-10.41	1.40	180	32.68	10.91	Horizontal	Average
5350.00	58.00	68.20	-10.20	1.70	260	57.75	0.25	Vertical	Peak
5350.00	50.77	54.00	-3.23	1.70	260	50.52	0.25	Vertical	Average
10460.00	52.90	68.20	-15.30	1.70	260	41.99	10.91	Vertical	Peak
10460.00	43.75	54.00	-10.25	1.70	260	32.84	10.91	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

**U-NII-1_802.11ac-VHT80_5210MHz**

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	57.16	68.20	-11.04	1.40	180	56.72	0.44	Horizontal	Peak
5150.00	49.07	54.00	-4.93	1.40	180	48.63	0.44	Horizontal	Average
5350.00	57.58	68.20	-10.62	1.40	180	57.33	0.25	Horizontal	Peak
5350.00	49.62	54.00	-4.38	1.40	180	49.37	0.25	Horizontal	Average
10420.00	52.44	68.20	-15.76	1.40	180	41.73	10.71	Horizontal	Peak
10420.00	43.27	54.00	-10.73	1.40	180	32.56	10.71	Horizontal	Average
5150.00	57.36	68.20	-10.84	1.70	260	56.92	0.44	Vertical	Peak
5150.00	49.72	54.00	-4.28	1.70	260	49.28	0.44	Vertical	Average
5350.00	57.64	68.20	-10.56	1.70	260	57.39	0.25	Vertical	Peak
5350.00	50.14	54.00	-3.86	1.70	260	50.89	0.25	Vertical	Average
10420.00	52.76	68.20	-15.44	1.70	260	42.05	10.71	Vertical	Peak
10420.00	42.94	54.00	-11.06	1.70	260	32.23	10.71	Vertical	Average

Remark:

1. $Emission\ Level(dBuV/m) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB)$
3. $Margin\ value = Emission\ Level - Limit\ value$
4. *The emission levels of other frequencies are very lower than the limit and not show in test report.*



U-NII-2A_802.11n-HT20_5260MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	58.60	68.20	-9.60	1.60	200	58.16	0.44	Horizontal	Peak
5150.00	50.00	54.00	-4.00	1.60	200	49.56	0.44	Horizontal	Average
10520.00	52.03	68.20	-16.17	1.60	200	40.85	11.18	Horizontal	Peak
10520.00	44.05	54.00	-9.95	1.60	200	32.87	11.18	Horizontal	Average
5150.00	57.15	68.20	-11.05	1.70	180	56.71	0.44	Vertical	Peak
5150.00	50.12	54.00	-3.88	1.70	180	49.68	0.44	Vertical	Average
10520.00	52.52	68.20	-15.68	1.70	180	41.34	11.18	Vertical	Peak
10520.00	44.18	54.00	-9.82	1.70	180	33.00	11.18	Vertical	Average

U-NII-2A_802.11n-HT20_5320MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	58.58	68.20	-9.62	1.60	200	58.33	0.25	Horizontal	Peak
5350.00	49.72	54.00	-4.28	1.60	200	49.47	0.25	Horizontal	Average
10640.00	52.40	68.20	-15.80	1.60	200	41.08	11.32	Horizontal	Peak
10640.00	43.99	54.00	-10.01	1.60	200	32.67	11.32	Horizontal	Average
5350.00	57.19	68.20	-11.01	1.70	180	56.94	0.25	Vertical	Peak
5350.00	50.28	54.00	-3.72	1.70	180	50.03	0.25	Vertical	Average
10640.00	53.00	68.20	-15.20	1.70	180	41.68	11.32	Vertical	Peak
10640.00	44.18	54.00	-9.82	1.70	180	32.86	11.32	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



U-NII-2A_802.11n-HT40_5270MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	58.77	68.20	-9.43	1.60	200	58.33	0.44	Horizontal	Peak
5150.00	50.33	54.00	-3.67	1.60	200	49.89	0.44	Horizontal	Average
10540.00	52.12	68.20	-16.08	1.60	200	40.86	11.26	Horizontal	Peak
10540.00	43.98	54.00	-10.02	1.60	200	32.72	11.26	Horizontal	Average
5150.00	57.07	68.20	-11.13	1.70	180	56.63	0.44	Vertical	Peak
5150.00	49.60	54.00	-4.40	1.70	180	49.16	0.44	Vertical	Average
10540.00	53.36	68.20	-14.84	1.70	180	42.10	11.26	Vertical	Peak
10540.00	44.56	54.00	-9.44	1.70	180	33.30	11.26	Vertical	Average

U-NII-2A_802.11n-HT40_5310MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	58.79	68.20	-9.41	1.60	200	58.54	0.25	Horizontal	Peak
5350.00	49.47	54.00	-4.53	1.60	200	49.22	0.25	Horizontal	Average
10620.00	52.47	68.20	-15.73	1.60	200	41.06	11.41	Horizontal	Peak
10620.00	44.78	54.00	-9.22	1.60	200	33.37	11.41	Horizontal	Average
5350.00	56.55	68.20	-11.65	1.70	180	56.30	0.25	Vertical	Peak
5350.00	49.69	54.00	-4.31	1.70	180	49.44	0.25	Vertical	Average
10620.00	53.43	68.20	-14.77	1.70	180	42.02	11.41	Vertical	Peak
10620.00	45.14	54.00	-8.86	1.70	180	33.73	11.41	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

**U-NII-2A_802.11ac-VHT80_5290MHz**

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	59.43	68.20	-8.77	1.60	200	58.99	0.44	Horizontal	Peak
5150.00	48.36	54.00	-5.64	1.60	200	47.92	0.44	Horizontal	Average
5350.00	58.19	68.20	-10.01	1.60	200	57.94	0.25	Horizontal	Peak
5350.00	48.66	54.00	-5.34	1.60	200	48.41	0.25	Horizontal	Average
10580.00	52.82	68.20	-15.38	1.60	200	41.38	11.44	Horizontal	Peak
10580.00	43.85	54.00	-10.15	1.60	200	32.41	11.44	Horizontal	Average
5150.00	55.74	68.20	-12.46	1.70	180	55.30	0.44	Vertical	Peak
5150.00	47.17	54.00	-6.83	1.70	180	46.73	0.44	Vertical	Average
5350.00	56.05	68.20	-12.15	1.70	180	55.80	0.25	Vertical	Peak
5350.00	47.03	54.00	-6.97	1.70	180	46.78	0.25	Vertical	Average
10580.00	52.29	68.20	-15.91	1.70	180	40.85	11.44	Vertical	Peak
10580.00	43.56	54.00	-10.44	1.70	180	32.12	11.44	Vertical	Average

Remark:

1. $Emission\ Level(dBuV/m) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB)$
3. $Margin\ value = Emission\ Level - Limit\ value$
4. *The emission levels of other frequencies are very lower than the limit and not show in test report.*



U-NII-2C_802.11n-HT20_5500MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5470.00	52.04	68.20	-16.16	1.40	190	52.08	-0.04	Horizontal	Peak
5470.00	45.96	54.00	-8.04	1.40	190	46.00	-0.04	Horizontal	Average
11000.00	53.92	68.20	-14.28	1.40	190	42.50	11.42	Horizontal	Peak
11000.00	45.20	54.00	-8.80	1.40	190	33.78	11.42	Horizontal	Average
5470.00	52.91	68.20	-15.29	1.60	220	52.95	-0.04	Vertical	Peak
5470.00	45.98	54.00	-8.02	1.60	220	46.02	-0.04	Vertical	Average
11000.00	53.67	68.20	-14.53	1.60	220	42.25	11.42	Vertical	Peak
11000.00	44.75	54.00	-9.25	1.60	220	33.33	11.42	Vertical	Average

U-NII-2C_802.11n-HT20_5700MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5725.00	52.03	68.20	-16.17	1.40	190	50.73	1.30	Horizontal	Peak
5725.00	45.50	54.00	-8.50	1.40	190	44.20	1.30	Horizontal	Average
11400.00	54.04	68.20	-14.16	1.40	190	42.57	11.47	Horizontal	Peak
11400.00	45.27	54.00	-8.73	1.40	190	33.80	11.47	Horizontal	Average
5725.00	52.86	68.20	-15.34	1.60	220	51.56	1.30	Vertical	Peak
5725.00	45.68	54.00	-8.32	1.60	220	44.38	1.30	Vertical	Average
11400.00	53.55	68.20	-14.65	1.60	220	42.08	11.47	Vertical	Peak
11400.00	44.25	54.00	-9.75	1.60	220	32.78	11.47	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



U-NII-2C_802.11n-HT40_5510MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5470.00	52.63	68.20	-15.57	1.40	190	52.67	-0.04	Horizontal	Peak
5470.00	45.44	54.00	-8.56	1.40	190	45.48	-0.04	Horizontal	Average
11020.00	54.28	68.20	-13.92	1.40	190	42.82	11.46	Horizontal	Peak
11020.00	45.63	54.00	-8.37	1.40	190	34.17	11.46	Horizontal	Average
5470.00	53.50	68.20	-14.70	1.60	220	53.54	-0.04	Vertical	Peak
5470.00	46.65	54.00	-7.35	1.60	220	46.69	-0.04	Vertical	Average
11020.00	53.54	68.20	-14.66	1.60	220	42.08	11.46	Vertical	Peak
11020.00	44.67	54.00	-9.33	1.60	220	33.21	11.46	Vertical	Average
U-NII-2C_802.11n-HT40_5670MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5725.00	53.21	68.20	-14.99	1.40	190	51.91	1.30	Horizontal	Peak
5725.00	45.09	54.00	-8.91	1.40	190	43.79	1.30	Horizontal	Average
11340.00	54.79	68.20	-13.41	1.40	190	43.37	11.42	Horizontal	Peak
11340.00	44.75	54.00	-9.25	1.40	190	33.33	11.42	Horizontal	Average
5725.00	53.79	68.20	-14.41	1.60	220	52.49	1.30	Vertical	Peak
5725.00	47.65	54.00	-6.35	1.60	220	46.35	1.30	Vertical	Average
11340.00	53.13	68.20	-15.07	1.60	220	41.71	11.42	Vertical	Peak
11340.00	45.18	54.00	-8.82	1.60	220	33.76	11.42	Vertical	Average
<p><i>Remark:</i></p> <ol style="list-style-type: none"> <i>Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)</i> <i>Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)</i> <i>Margin value = Emission Level – Limit value</i> <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i> 									



U-NII-2C_802.11ac-VHT80_5530MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5470.00	51.85	68.20	-16.35	1.40	190	51.89	-0.04	Horizontal	Peak
5470.00	45.48	54.00	-8.52	1.40	190	45.52	-0.04	Horizontal	Average
11060.00	53.57	68.20	-14.63	1.40	190	42.04	11.53	Horizontal	Peak
11060.00	45.04	54.00	-8.96	1.40	190	33.51	11.53	Horizontal	Average
5470.00	52.58	68.20	-15.62	1.60	220	52.62	-0.04	Vertical	Peak
5470.00	45.99	54.00	-8.01	1.60	220	46.03	-0.04	Vertical	Average
11060.00	53.87	68.20	-14.33	1.60	220	42.34	11.53	Vertical	Peak
11060.00	44.28	54.00	-9.72	1.60	220	32.75	11.53	Vertical	Average

U-NII-2C_802.11ac-VHT80_5610MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5725.00	51.45	68.20	-16.75	1.40	190	50.15	1.30	Horizontal	Peak
5725.00	45.59	54.00	-8.41	1.40	190	44.29	1.30	Horizontal	Average
11220.00	53.33	68.20	-14.87	1.40	190	42.28	11.05	Horizontal	Peak
11220.00	45.40	54.00	-8.60	1.40	190	34.35	11.05	Horizontal	Average
5725.00	52.98	68.20	-15.22	1.60	220	51.68	1.30	Vertical	Peak
5725.00	46.44	54.00	-7.56	1.60	220	45.14	1.30	Vertical	Average
11220.00	53.80	68.20	-14.40	1.60	220	42.75	11.05	Vertical	Peak
11220.00	44.28	54.00	-9.72	1.60	220	33.23	11.05	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



U-NII-3_802.11n-HT20_5745MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	51.45	68.20	-16.75	1.50	240	50.65	0.80	Horizontal	Peak
5700.00	54.58	105.20	-50.62	1.50	240	53.34	1.24	Horizontal	Peak
5720.00	54.54	110.80	-56.26	1.50	240	53.26	1.28	Horizontal	Peak
5725.00	53.33	122.20	-68.87	1.50	240	52.03	1.30	Horizontal	Peak
11490.00	52.60	68.20	-15.60	1.50	240	41.05	11.55	Horizontal	Peak
11490.00	43.64	54.00	-10.36	1.50	240	32.09	11.55	Horizontal	Average
5650.00	52.15	68.20	-16.05	1.30	210	51.35	0.80	Vertical	Peak
5700.00	52.89	105.20	-52.31	1.30	210	51.65	1.24	Vertical	Peak
5720.00	53.64	110.80	-57.16	1.30	210	52.36	1.28	Vertical	Peak
5725.00	54.76	122.20	-67.44	1.30	210	53.46	1.30	Vertical	Peak
11490.00	52.42	68.20	-15.78	1.30	210	40.87	11.55	Vertical	Peak
11490.00	43.72	54.00	-10.28	1.30	210	32.17	11.55	Vertical	Average

U-NII-3_802.11n-HT20_5825MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	51.39	122.20	-70.81	1.50	240	49.57	1.82	Horizontal	Peak
5855.00	54.67	110.80	-56.13	1.50	240	52.82	1.85	Horizontal	Peak
5875.00	55.00	105.20	-50.20	1.50	240	53.02	1.98	Horizontal	Peak
5925.00	53.00	68.20	-15.20	1.50	240	50.88	2.12	Horizontal	Peak
11650.00	52.11	68.20	-16.09	1.50	240	40.47	11.64	Horizontal	Peak
11650.00	43.64	54.00	-10.36	1.50	240	32.00	11.64	Horizontal	Average
5850.00	51.87	122.20	-70.33	1.30	210	50.05	1.82	Vertical	Peak
5855.00	53.37	110.80	-57.43	1.30	210	51.52	1.85	Vertical	Peak
5875.00	53.81	105.20	-51.39	1.30	210	51.83	1.98	Vertical	Peak
5925.00	54.55	68.20	-13.65	1.30	210	52.43	2.12	Vertical	Peak
11650.00	52.62	68.20	-15.58	1.30	210	40.98	11.64	Vertical	Peak
11650.00	43.91	54.00	-10.09	1.30	210	32.27	11.64	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



U-NII-3_802.11n-HT40_5755MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	51.62	68.20	-16.58	1.50	240	50.82	0.80	Horizontal	Peak
5700.00	54.30	105.20	-50.90	1.50	240	53.06	1.24	Horizontal	Peak
5720.00	54.91	110.80	-55.89	1.50	240	53.63	1.28	Horizontal	Peak
5725.00	52.95	122.20	-69.25	1.50	240	51.65	1.30	Horizontal	Peak
11510.00	51.66	68.20	-16.54	1.50	240	40.10	11.56	Horizontal	Peak
11510.00	43.44	54.00	-10.56	1.50	240	31.88	11.56	Horizontal	Average
5650.00	51.72	68.20	-16.48	1.30	210	50.92	0.80	Vertical	Peak
5700.00	53.41	105.20	-51.79	1.30	210	52.17	1.24	Vertical	Peak
5720.00	52.92	110.80	-57.88	1.30	210	51.64	1.28	Vertical	Peak
5725.00	53.81	122.20	-68.39	1.30	210	52.51	1.30	Vertical	Peak
11510.00	52.37	68.20	-15.83	1.30	210	40.81	11.56	Vertical	Peak
11510.00	44.15	54.00	-9.85	1.30	210	32.59	11.56	Vertical	Average

U-NII-3_802.11n-HT40_5795MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	51.00	122.20	-71.20	1.50	240	49.18	1.82	Horizontal	Peak
5855.00	54.52	110.80	-56.28	1.50	240	52.67	1.85	Horizontal	Peak
5875.00	53.78	105.20	-51.42	1.50	240	51.80	1.98	Horizontal	Peak
5925.00	53.22	68.20	-14.98	1.50	240	51.10	2.12	Horizontal	Peak
11590.00	51.89	68.20	-16.31	1.50	240	40.38	11.51	Horizontal	Peak
11590.00	44.00	54.00	-10.00	1.50	240	32.49	11.51	Horizontal	Average
5850.00	52.21	122.20	-69.99	1.30	210	50.39	1.82	Vertical	Peak
5855.00	53.36	110.80	-57.44	1.30	210	51.51	1.85	Vertical	Peak
5875.00	53.29	105.20	-51.91	1.30	210	51.31	1.98	Vertical	Peak
5925.00	54.31	68.20	-13.89	1.30	210	52.19	2.12	Vertical	Peak
11590.00	52.47	68.20	-15.73	1.30	210	40.96	11.51	Vertical	Peak
11590.00	43.88	54.00	-10.12	1.30	210	32.37	11.51	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



U-NII-3_802.11ac-VHT80_5775MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	51.61	68.20	-16.59	1.50	240	50.81	0.80	Horizontal	Peak
5700.00	53.94	105.20	-51.26	1.50	240	52.70	1.24	Horizontal	Peak
5720.00	54.18	110.80	-56.62	1.50	240	52.90	1.28	Horizontal	Peak
5725.00	52.68	122.20	-69.52	1.50	240	51.38	1.30	Horizontal	Peak
5850.00	51.34	122.20	-70.86	1.50	240	49.52	1.82	Horizontal	Peak
5855.00	53.26	110.80	-57.54	1.50	240	51.41	1.85	Horizontal	Peak
5875.00	52.48	105.20	-52.72	1.50	240	50.50	1.98	Horizontal	Peak
5925.00	52.07	68.20	-16.13	1.50	240	49.95	2.12	Horizontal	Peak
11550.00	51.19	68.20	-17.01	1.50	240	39.65	11.54	Horizontal	Peak
11550.00	42.35	54.00	-11.65	1.50	240	30.81	11.54	Horizontal	Average
5650.00	51.03	68.20	-17.17	1.30	210	50.23	0.80	Vertical	Peak
5700.00	52.46	105.20	-52.74	1.30	210	51.22	1.24	Vertical	Peak
5720.00	52.12	110.80	-58.68	1.30	210	50.84	1.28	Vertical	Peak
5725.00	54.28	122.20	-67.92	1.30	210	52.98	1.30	Vertical	Peak
5850.00	53.27	122.20	-68.93	1.30	210	51.45	1.82	Vertical	Peak
5855.00	53.93	110.80	-56.87	1.30	210	52.08	1.85	Vertical	Peak
5875.00	52.48	105.20	-52.72	1.30	210	50.50	1.98	Vertical	Peak
5925.00	53.98	68.20	-14.22	1.30	210	51.86	2.12	Vertical	Peak
11550.00	51.24	68.20	-16.96	1.30	210	39.70	11.54	Vertical	Peak
11550.00	42.76	54.00	-11.24	1.30	210	31.22	11.54	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

2.7. AC Power Line Conducted Emission

2.7.1. Limit of AC Power Line Conducted Emission

FCC Part 15.207:


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

2.7.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3. Test Setup

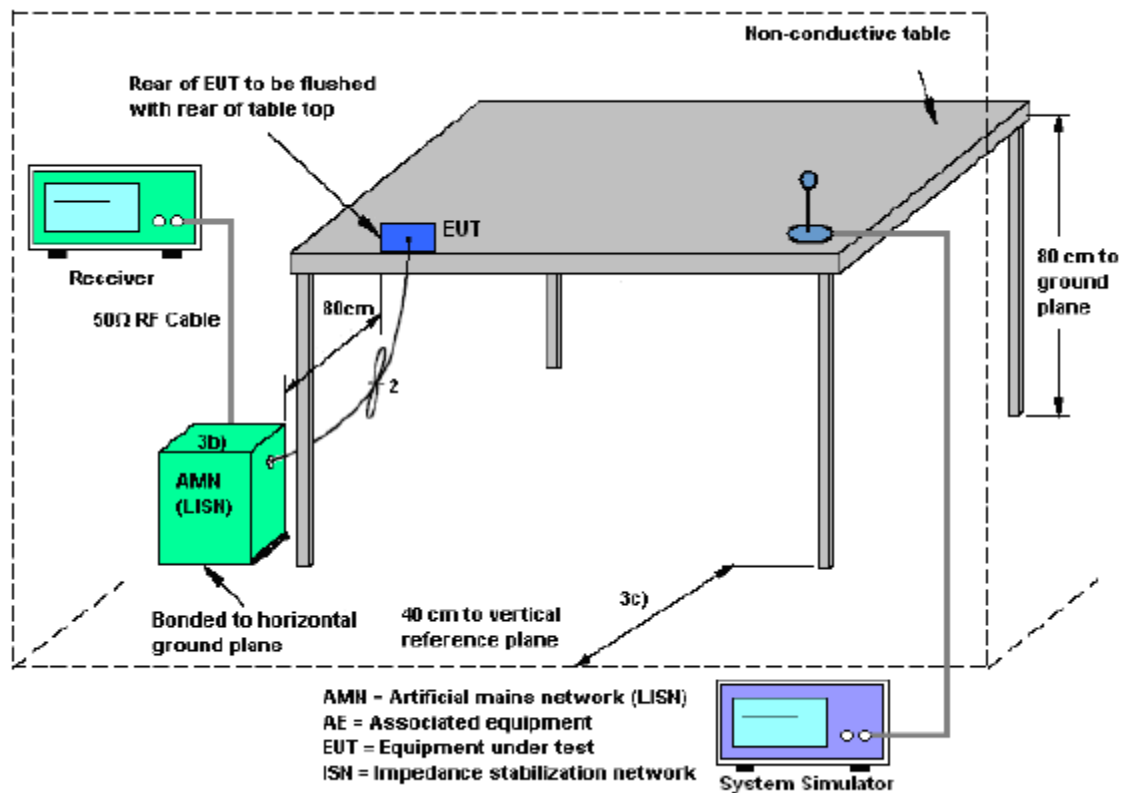

2.7.4. Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.7.5. Test Result of AC Power Line Conducted Emission

NOTE 1: The EUT configuration of the emission tests is 5G WIFI Link + Charging from Adapter.

NOTE 2: All of the EUT Configure mode were tested and found 802.11a 5180MHz channel is the worst mode, the worst case is recorded in this report.

Line Phase

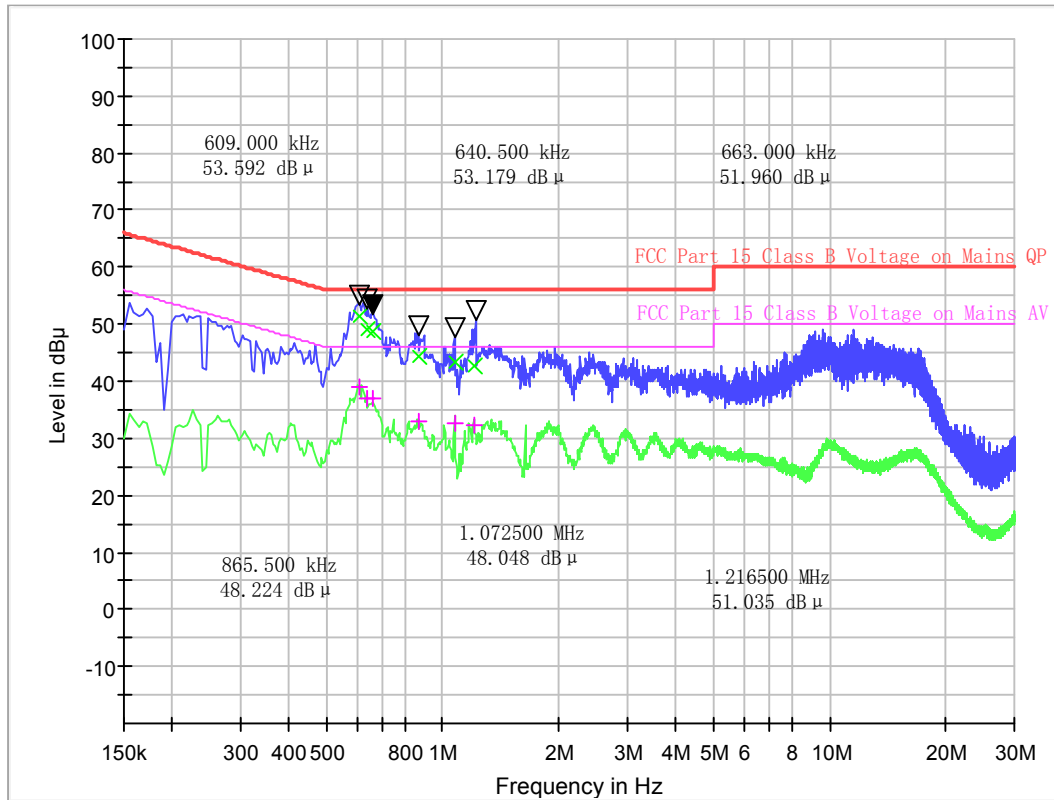


Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Corr.Factor (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dBµV)
0.609000	51.29	38.95	10.2	4.71	56.00	7.05	46.00
0.640500	49.02	36.86	10.2	6.98	56.00	9.14	46.00
0.663000	48.82	36.98	10.2	7.18	56.00	9.02	46.00
0.865500	44.52	32.97	10.2	11.48	56.00	13.03	46.00
1.072500	43.29	32.65	10.2	12.71	56.00	13.35	46.00
1.207500	42.53	32.24	10.2	13.47	56.00	13.76	46.00

Test Result : Pass

Note: Final Level = Receiver Read level + Correction factor.

Neutral Phase

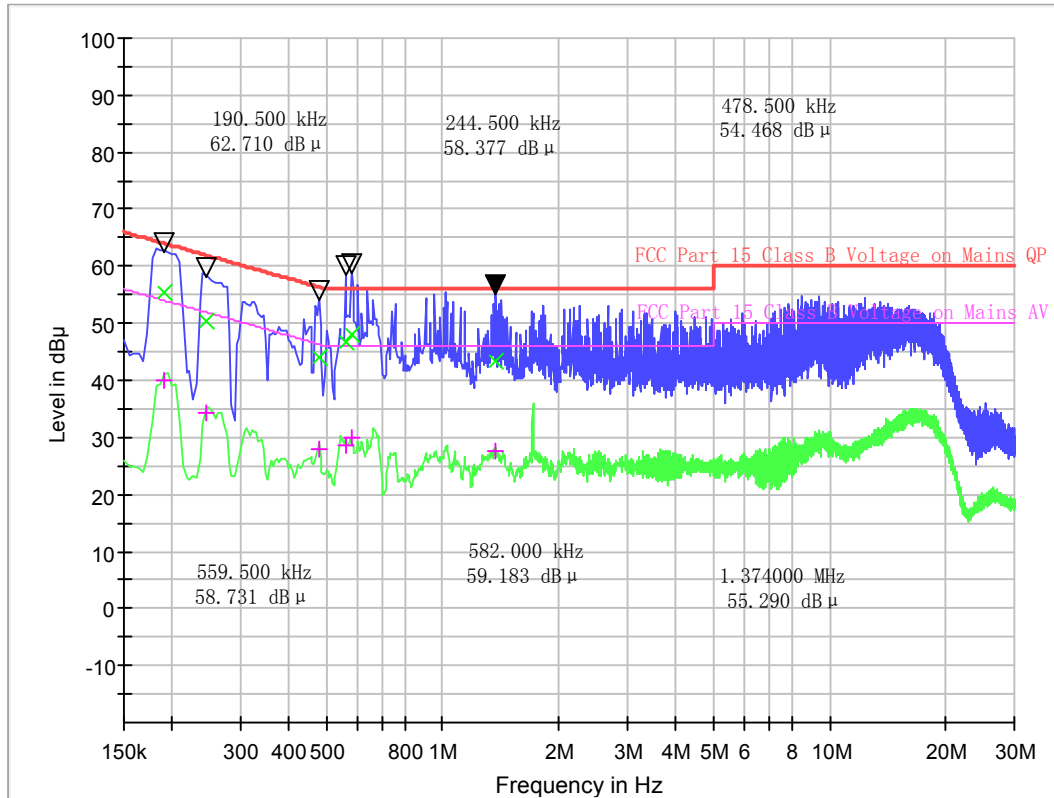

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Corr.Factor (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dBμV)
0.190500	55.37	39.89	10.2	8.64	64.01	14.12	54.01
0.244500	50.50	34.36	10.2	11.44	61.94	17.58	51.94
0.478500	44.16	27.81	10.2	12.21	56.37	18.56	46.37
0.559500	46.72	28.70	10.2	9.28	56.00	17.30	46.00
0.582000	48.09	29.94	10.2	7.91	56.00	16.06	46.00
1.374000	43.50	27.47	10.2	12.50	56.00	18.53	46.00

Test Result : Pass

Note: Final Level = Receiver Read level + Correction factor.



3. List of measuring equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2022.07.21	2023.07.20
2	5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2022.06.09	2027.06.08
3	Loop Antenna	Schwarz beck	HFH2-Z2	A0304220	2022.05.02	2025.05.01
4	Broadband antenna (30MHz~1GHz)	R&S	HL562	A0304224	2020.06.19	2023.06.18
5	EMI Horn Ant. (1-18G)	ETC	1209	A150402241	2021.01.02	2024.01.01
6	Horn antenna (18GHz~26.5GHz)	AR	AT4510	A0804450	2020.06.19	2023.06.18
7	Amplifier 30M~1GHz	MILMEGA	80RF1000-10004	A140101634	2022.12.13	2023.12.12
8	Amplifier 1G~18GHz	MILMEGA	AS0104R-800/400	A160302517	2022.12.13	2023.12.12
9	Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2023.02.20	2024.02.19
10	Test Receiver	R&S	ESIB7	A0501375	2023.03.16	2024.03.15
11	Broadband Ant.	2786	ETC	A150402240	2021.09.16	2024.03.03
12	3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2024.03.25
13	Test Receiver	KEYSIGHT	N9038A	A141202036	2022.07.21	2023.07.20
14	LISN	ROHDE&SCHWARZ	ENV216	A140701847	2022.07.21	2023.07.20
15	Cable	MATCHING PAD	W7	/	2022.07.21	2023.07.20



4. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of AC Power Line Conducted Emission Measurement (150kHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%($U=2Uc(y)$)	2.8dB
--	-------

Uncertainty of Radiated Emission Measurement (9kHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%($U=2Uc(y)$)	3.5dB
--	-------

Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2Uc(y)$)	3.91dB
--	--------

Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2Uc(y)$)	4.5dB
--	-------

Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2Uc(y)$)	4.9dB
--	-------

Uncertainty of RF Conducted Measurement (9kHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2Uc(y)$)	1.2dB
--	-------



Appendix A

Output power

Test results

U-NII-1 AVGSA Output Power				
Mode	Test Frequency (MHz)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5180	10.26	24	Pass
802.11n (20MHz)	5220	10.00	24	Pass
802.11n (20MHz)	5240	9.92	24	Pass
802.11n (40MHz)	5190	11.57	24	Pass
802.11n (40MHz)	5230	11.30	24	Pass
802.11ac (20MHz)	5180	9.64	24	Pass
802.11ac (20MHz)	5220	9.61	24	Pass
802.11ac (20MHz)	5240	9.48	24	Pass
802.11ac (40MHz)	5190	10.90	24	Pass
802.11ac (40MHz)	5230	10.60	24	Pass
802.11ac (80MHz)	5210	10.39	24	Pass
802.11a (20MHz)	5180	11.49	24	Pass
802.11a (20MHz)	5220	11.33	24	Pass
802.11a (20MHz)	5240	11.08	24	Pass



U-NII-2a AVGSA Output Power				
Mode	Test Frequency (MHz)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5260	10.89	24	Pass
802.11n (20MHz)	5300	9.81	24	Pass
802.11n (20MHz)	5320	9.48	24	Pass
802.11n (40MHz)	5270	11.13	24	Pass
802.11n (40MHz)	5310	10.89	24	Pass
802.11ac (20MHz)	5260	9.79	24	Pass
802.11ac (20MHz)	5300	9.20	24	Pass
802.11ac (20MHz)	5320	8.93	24	Pass
802.11ac (40MHz)	5270	10.36	24	Pass
802.11ac (40MHz)	5310	9.98	24	Pass
802.11ac (80MHz)	5290	9.65	24	Pass
802.11a (20MHz)	5260	10.98	24	Pass
802.11a (20MHz)	5300	10.77	24	Pass
802.11a (20MHz)	5320	10.64	24	Pass




U-NII-2c AVGSA Output Power				
Mode	Test Frequency (MHz)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5500	10.92	24	Pass
802.11n (20MHz)	5600	12.19	24	Pass
802.11n (20MHz)	5700	13.33	24	Pass
802.11n (40MHz)	5510	11.93	24	Pass
802.11n (40MHz)	5590	13.11	24	Pass
802.11n (40MHz)	5670	13.92	24	Pass
802.11ac (20MHz)	5500	10.35	24	Pass
802.11ac (20MHz)	5600	11.65	24	Pass
802.11ac (20MHz)	5700	12.65	24	Pass
802.11ac (40MHz)	5510	11.32	24	Pass
802.11ac (40MHz)	5590	12.55	24	Pass
802.11ac (40MHz)	5670	13.51	24	Pass
802.11ac (80MHz)	5530	11.27	24	Pass
802.11ac (80MHz)	5610	12.22	24	Pass
802.11a (20MHz)	5500	11.92	24	Pass
802.11a (20MHz)	5600	13.46	24	Pass
802.11a (20MHz)	5700	14.44	24	Pass




U-NII-3 AVGSA Output Power				
Mode	Test Frequency (MHz)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5745	12.84	30	Pass
802.11n (20MHz)	5785	12.82	30	Pass
802.11n (20MHz)	5825	12.86	30	Pass
802.11n (40MHz)	5755	14.03	30	Pass
802.11n (40MHz)	5795	14.17	30	Pass
802.11ac (20MHz)	5745	12.44	30	Pass
802.11ac (20MHz)	5785	12.64	30	Pass
802.11ac (20MHz)	5825	12.69	30	Pass
802.11ac (40MHz)	5755	13.61	30	Pass
802.11ac (40MHz)	5795	13.90	30	Pass
802.11ac (80MHz)	5775	13.19	30	Pass
802.11a (20MHz)	5745	14.32	30	Pass
802.11a (20MHz)	5785	14.47	30	Pass
802.11a (20MHz)	5825	14.18	30	Pass

Test plots


U-NII-1 Output Power-802.11n(20MHz)
,5180MHz,Ant1

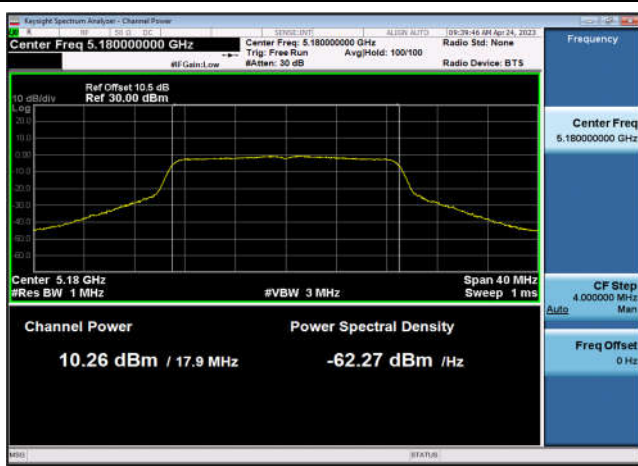


U-NII-1 Output Power-802.11n(20MHz)
,5220MHz,Ant1

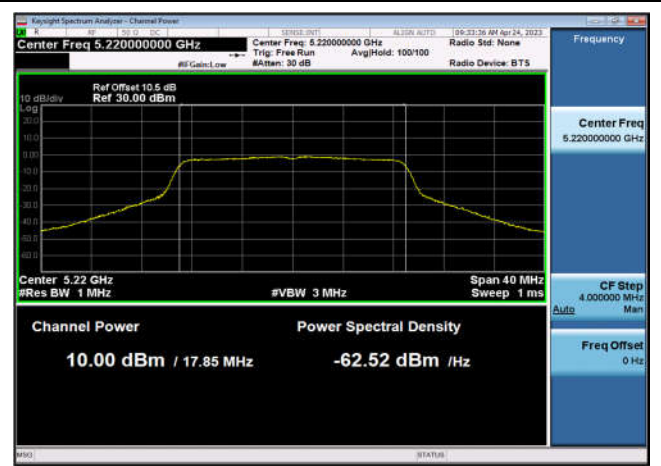


U-NII-1 Output Power-802.11n(20MHz)
,5240MHz,Ant1

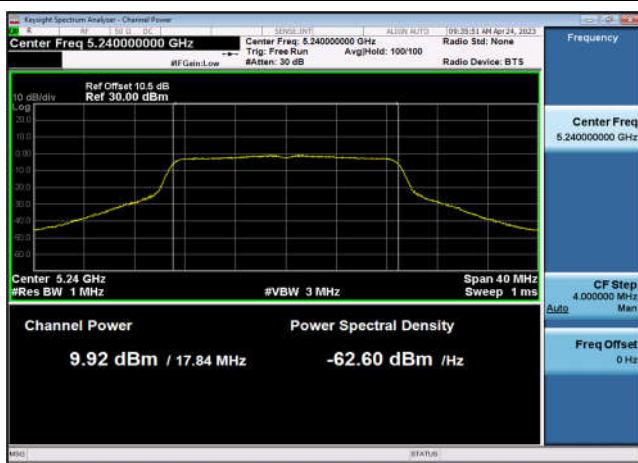


U-NII-1 Output Power-802.11n(40MHz)
,5190MHz,Ant1

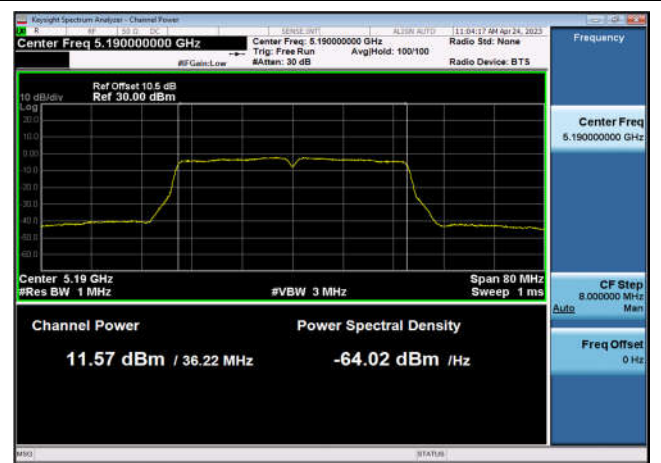

U-NII-1 Output Power-802.11n(40MHz)
,5230MHz,Ant1

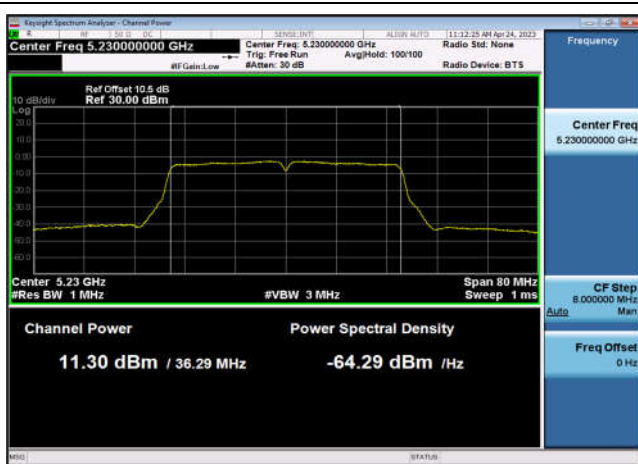


U-NII-1 Output Power-802.11a(20MHz)
,5180MHz,Ant1

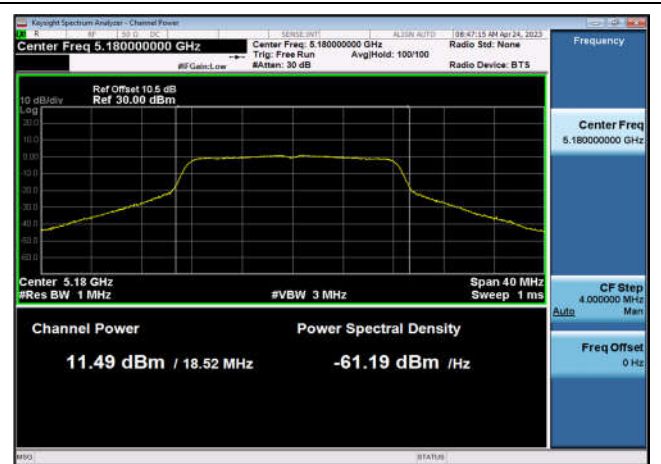





U-NII-1 Output Power-802.11a(20MHz)
,5220MHz,Ant1

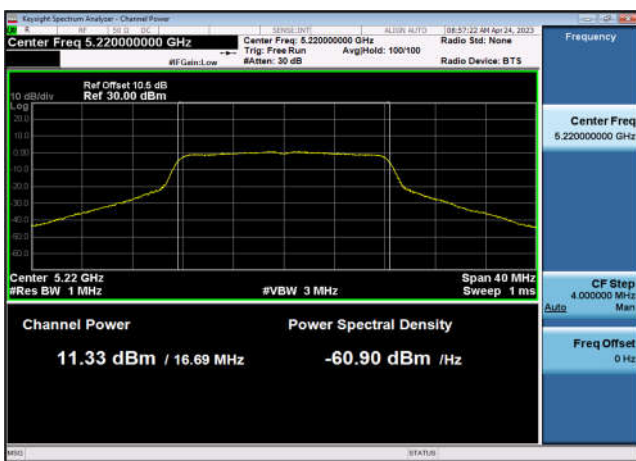


U-NII-1 Output Power-802.11a(20MHz)
,5240MHz,Ant1

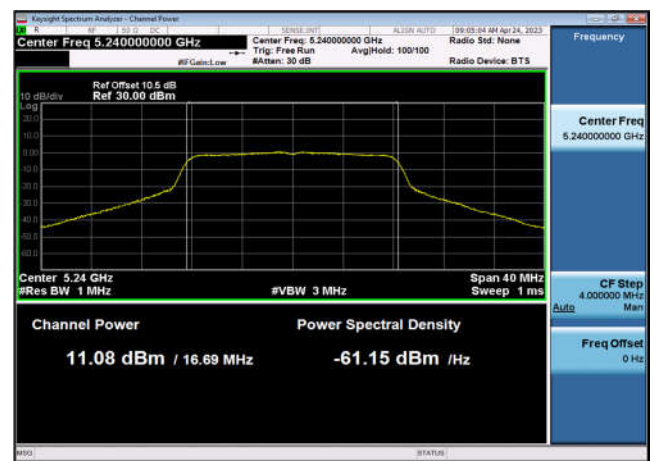


U-NII-1 Output Power-802.11ac(20MHz)
,5180MHz,Ant1

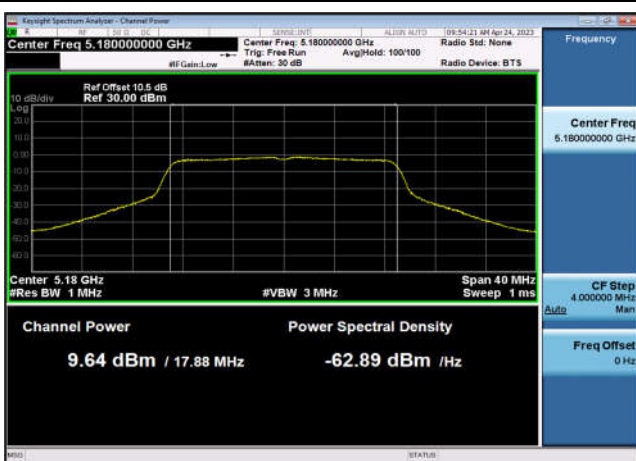

U-NII-1 Output Power-802.11ac(20MHz)
,5220MHz,Ant1

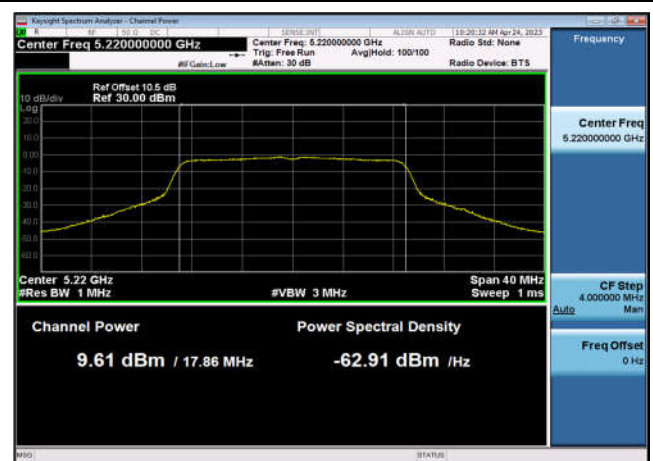

U-NII-1 Output Power-802.11ac(20MHz)
,5240MHz,Ant1

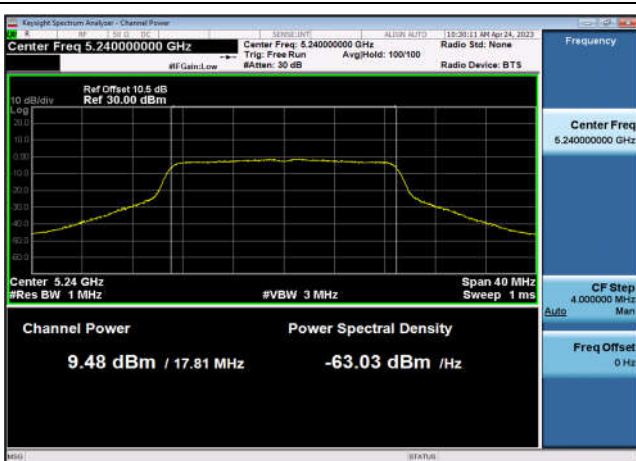


U-NII-1 Output Power-802.11ac(40MHz)
,5190MHz,Ant1







U-NII-1 Output Power-802.11ac(40MHz)
,5230MHz,Ant1

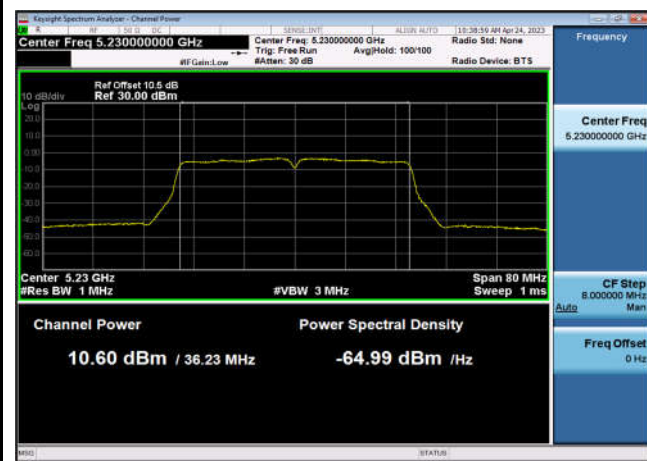

U-NII-1 Output Power-802.11ac(80MHz)
,5210MHz,Ant1

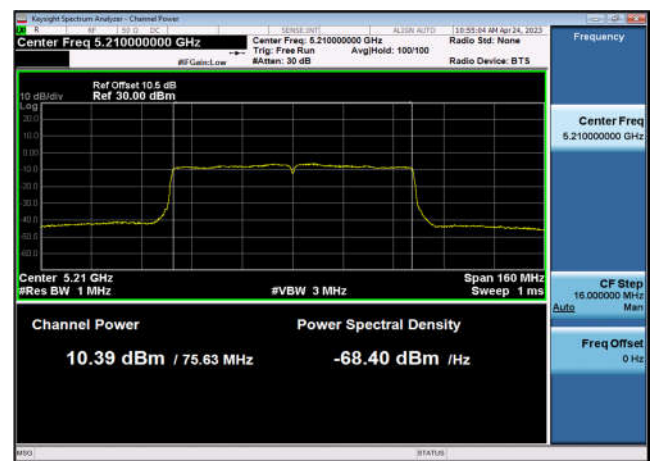


U-NII-2a Output Power-802.11n(20MHz)
,5260MHz,Ant1

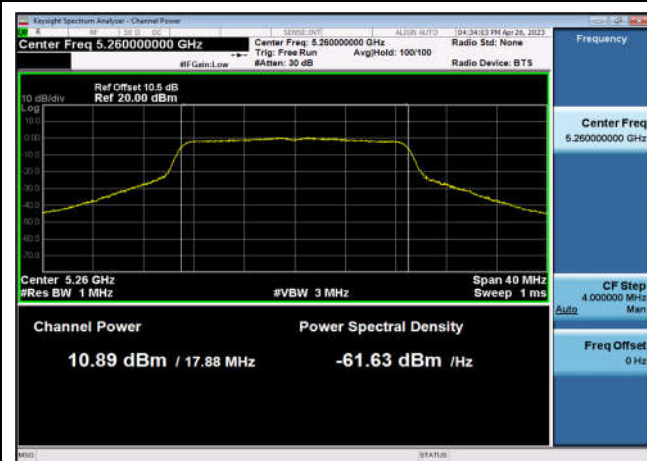

U-NII-2a Output Power-802.11n(20MHz)
,5300MHz,Ant1



U-NII-2a Output Power-802.11n(20MHz)
,5320MHz,Ant1

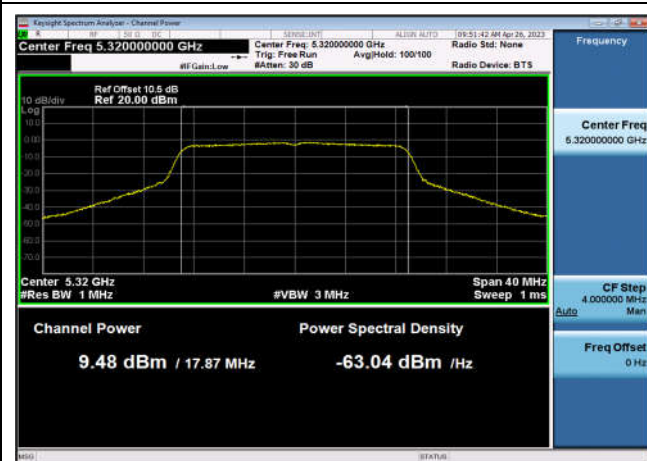


U-NII-2a Output Power-802.11n(40MHz)
,5270MHz,Ant1




U-NII-2a Output Power-802.11n(40MHz)
,5310MHz,Ant1




U-NII-2a Output Power-802.11a(20MHz)
,5260MHz,Ant1

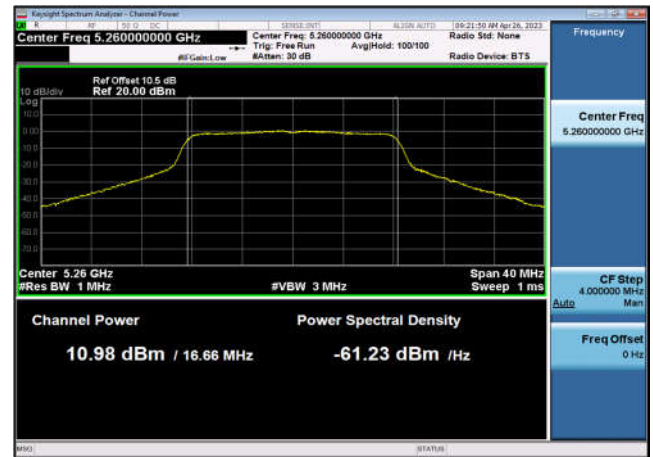

U-NII-2a Output Power-802.11a(20MHz)
,5300MHz,Ant1

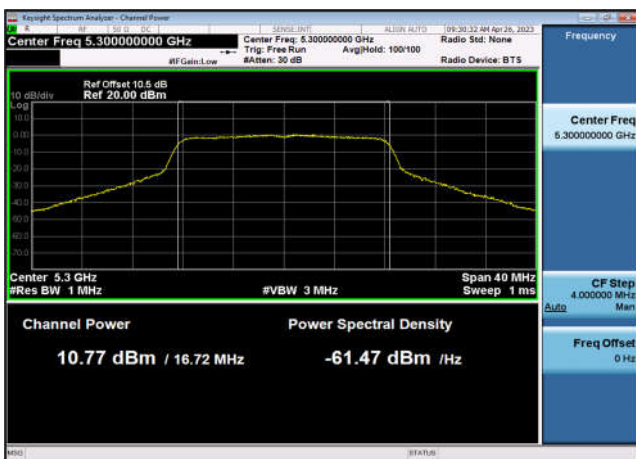


U-NII-2a Output Power-802.11a(20MHz)
,5320MHz,Ant1

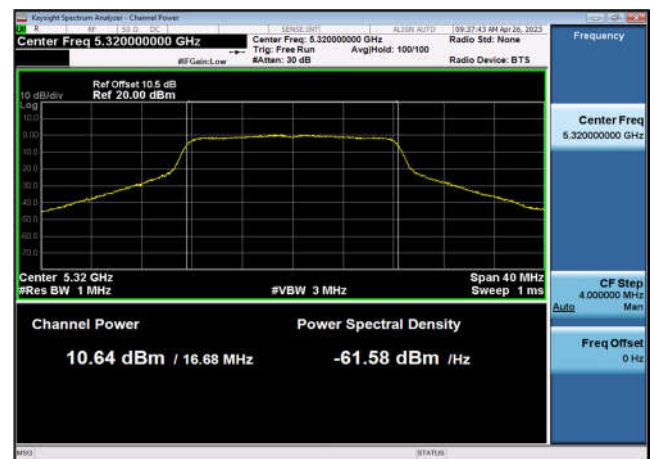

U-NII-2a Output Power-802.11ac(20MHz)
,5260MHz,Ant1



U-NII-2a Output Power-802.11ac(20MHz)
,5300MHz,Ant1

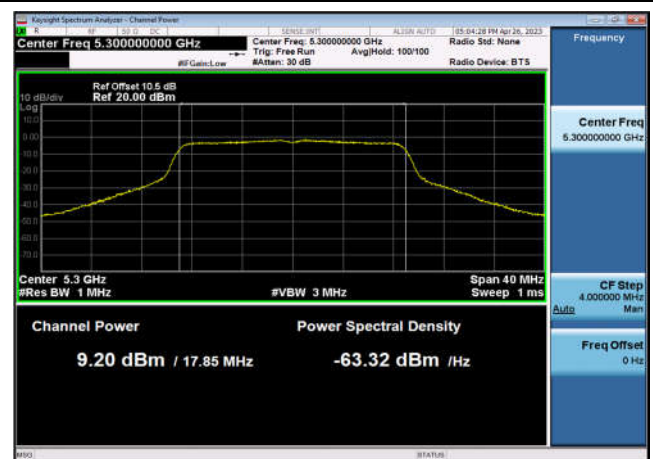




U-NII-2a Output Power-802.11ac(20MHz)
,5320MHz,Ant1




U-NII-2a Output Power-802.11ac(40MHz)
,5270MHz,Ant1



U-NII-2a Output Power-802.11ac(40MHz)
,5310MHz,Ant1

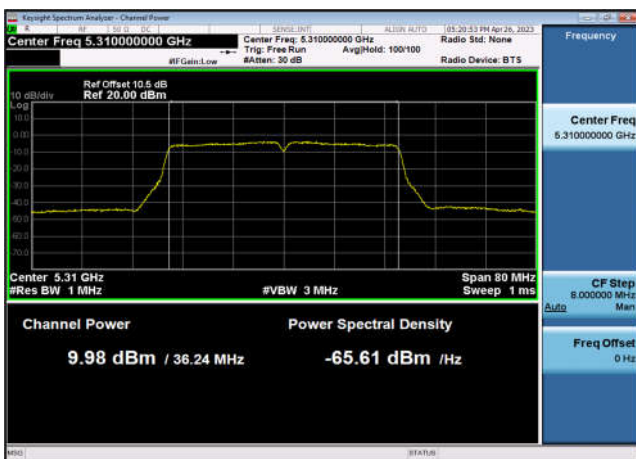


U-NII-2a Output Power-802.11ac(80MHz)
,5290MHz,Ant1

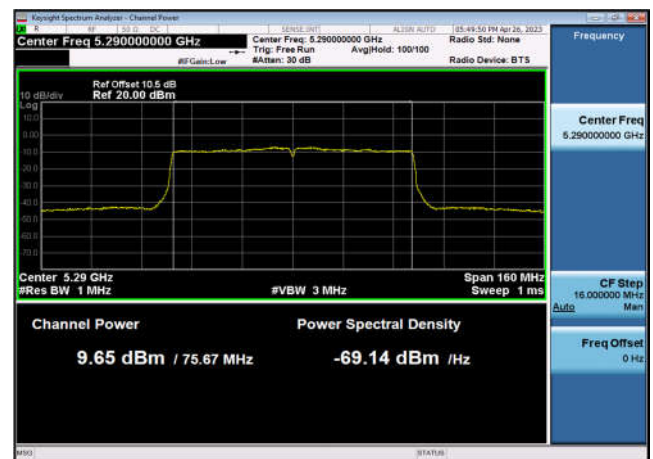


U-NII-2c Output Power-802.11n(20MHz)
,5500MHz,Ant1




U-NII-2c Output Power-802.11n(20MHz)
,5600MHz,Ant1

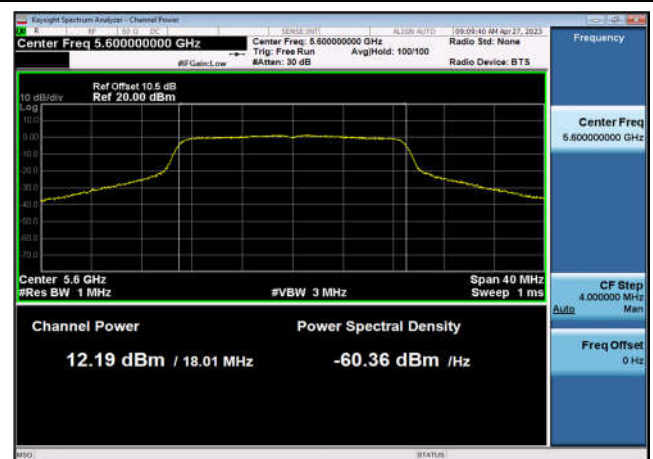


U-NII-2c Output Power-802.11n(20MHz)
,5700MHz,Ant1

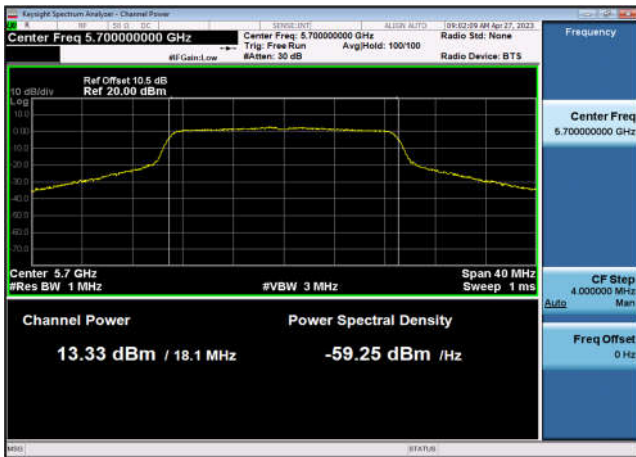


U-NII-2c Output Power-802.11n(40MHz)
,5510MHz,Ant1

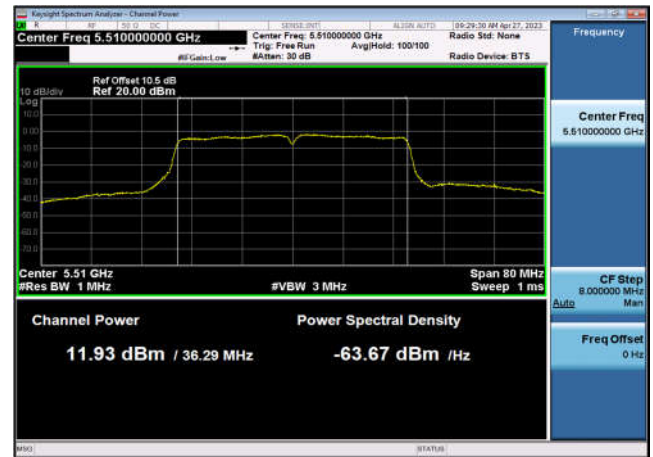


U-NII-2c Output Power-802.11n(40MHz)
,5590MHz,Ant1

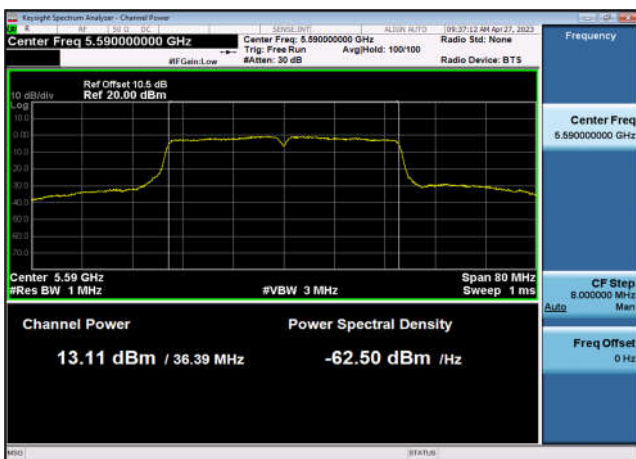


U-NII-2c Output Power-802.11n(40MHz)
,5670MHz,Ant1

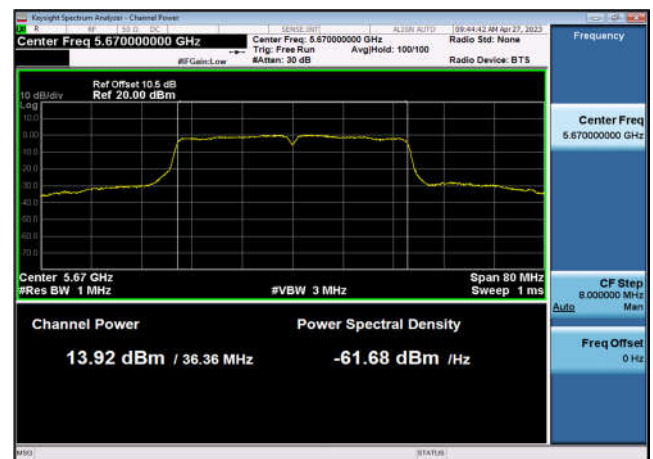

U-NII-2c Output Power-802.11a(20MHz)
,5500MHz,Ant1

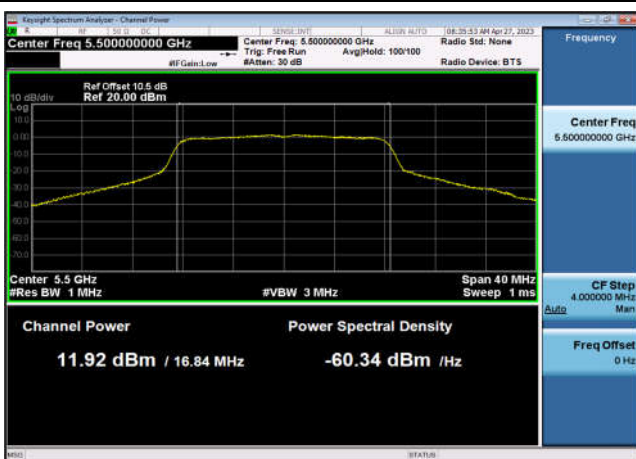


U-NII-2c Output Power-802.11a(20MHz)
,5600MHz,Ant1

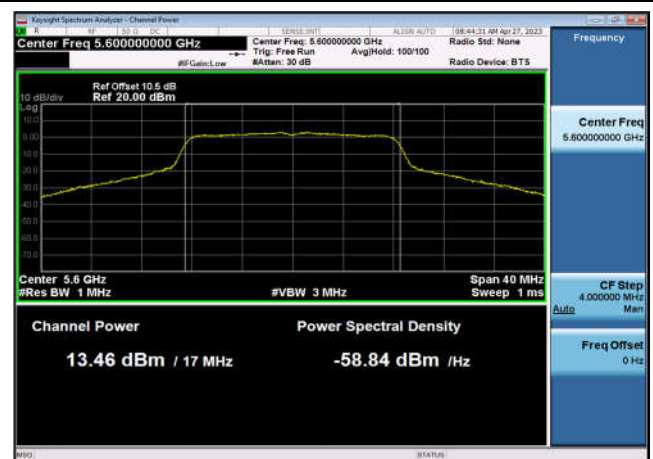




U-NII-2c Output Power-802.11a(20MHz)
,5700MHz,Ant1

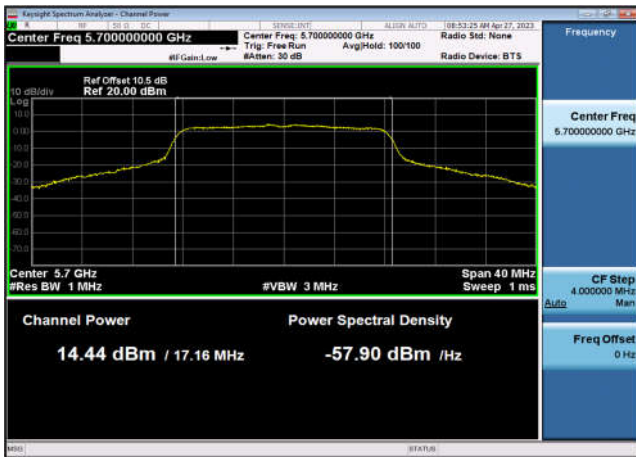

U-NII-2c Output Power-802.11ac(20MHz)
,5500MHz,Ant1



U-NII-2c Output Power-802.11ac(20MHz)
,5600MHz,Ant1

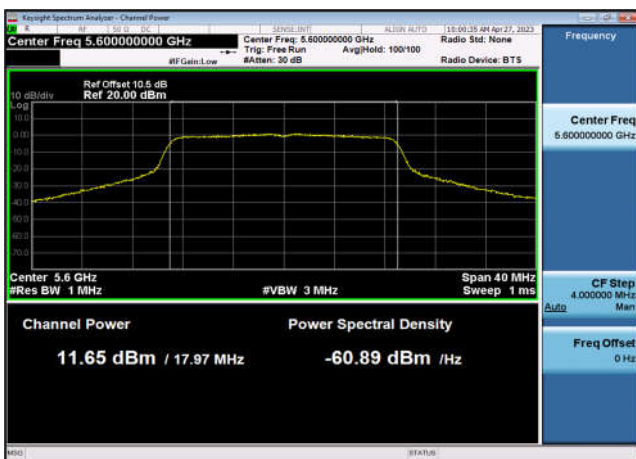


U-NII-2c Output Power-802.11ac(20MHz)
,5700MHz,Ant1



U-NII-2c Output Power-802.11ac(40MHz)
,5510MHz,Ant1




U-NII-2c Output Power-802.11ac(40MHz)
,5590MHz,Ant1

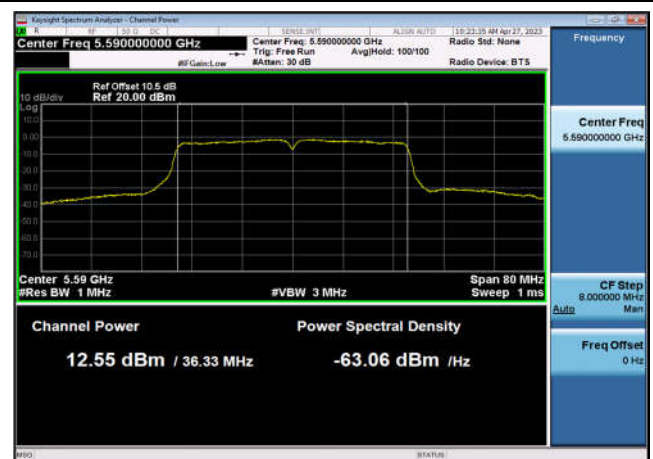



U-NII-2c Output Power-802.11ac(40MHz)
,5670MHz,Ant1

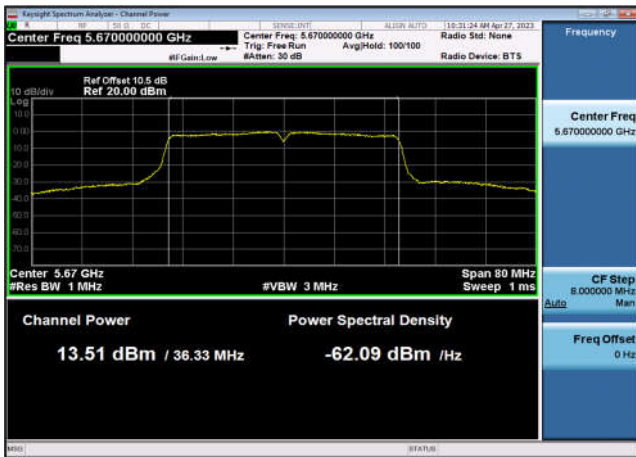


U-NII-2c Output Power-802.11ac(80MHz)
,5530MHz,Ant1




U-NII-2c Output Power-802.11ac(80MHz)
,5610MHz,Ant1




U-NII-3 Output Power-802.11n(20MHz)
,5745MHz,Ant1

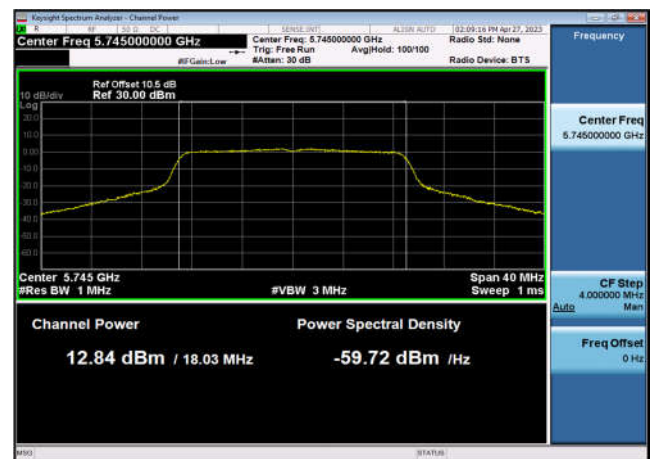

U-NII-3 Output Power-802.11n(20MHz)
,5785MHz,Ant1

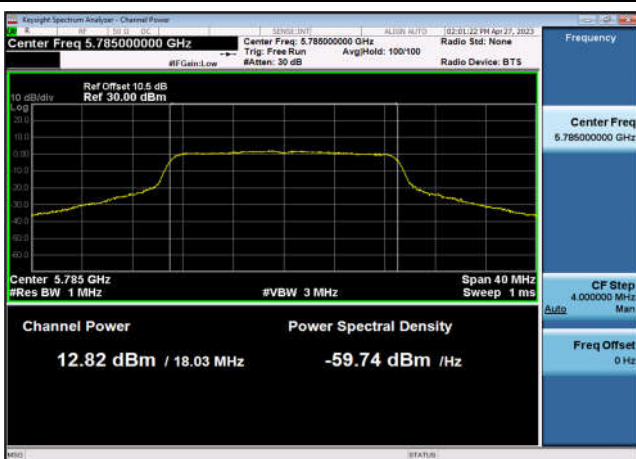


U-NII-3 Output Power-802.11n(20MHz)
,5825MHz,Ant1

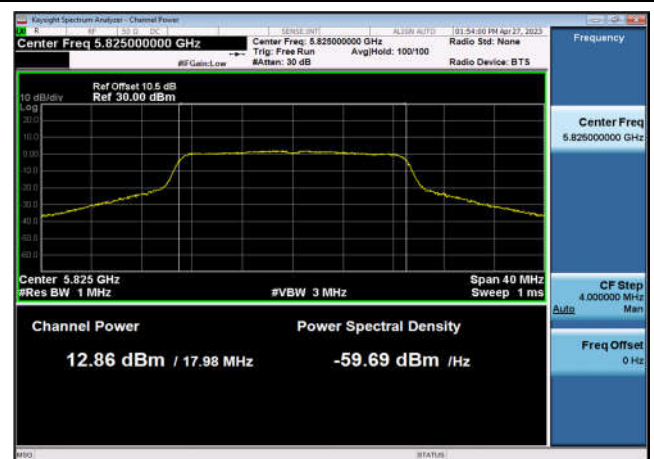





U-NII-3 Output Power-802.11n(40MHz)
,5755MHz,Ant1

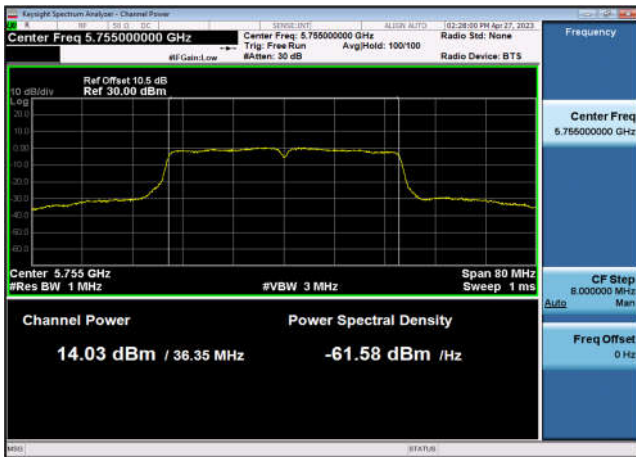


U-NII-3 Output Power-802.11n(40MHz)
,5795MHz,Ant1

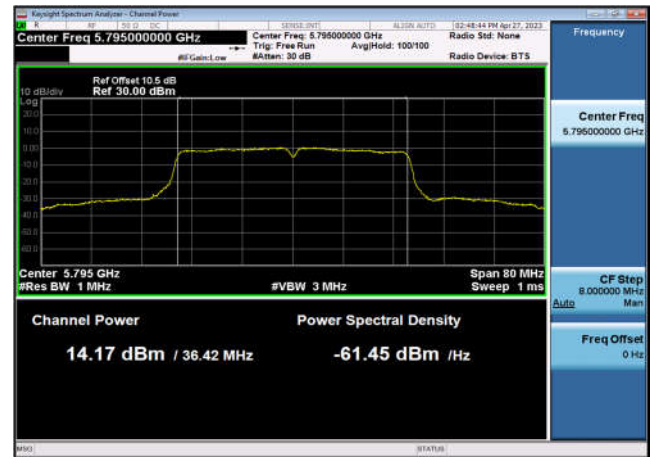


U-NII-3 Output Power-802.11a(20MHz)
,5745MHz,Ant1

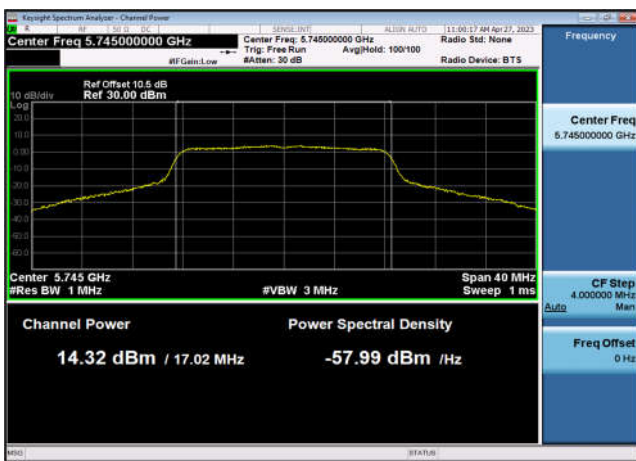


U-NII-3 Output Power-802.11a(20MHz)
,5785MHz,Ant1

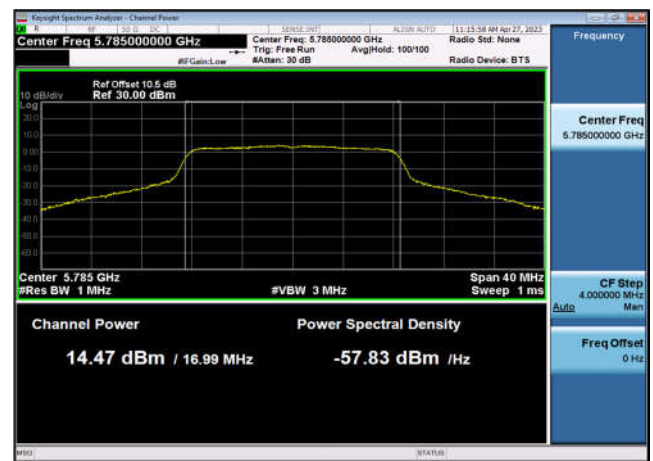

U-NII-3 Output Power-802.11a(20MHz)
,5825MHz,Ant1

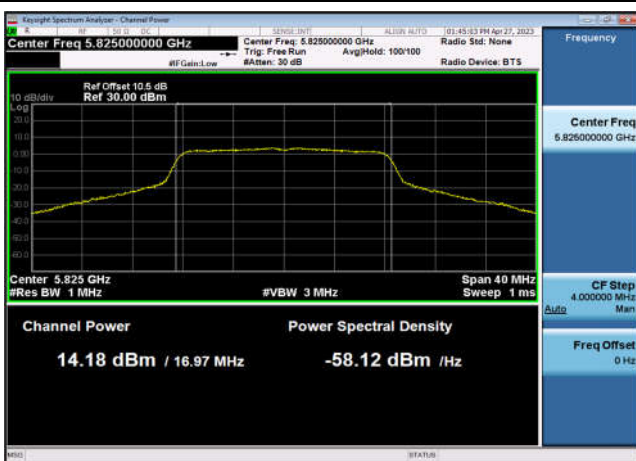


U-NII-3 Output Power-802.11ac(20MHz)
,5745MHz,Ant1

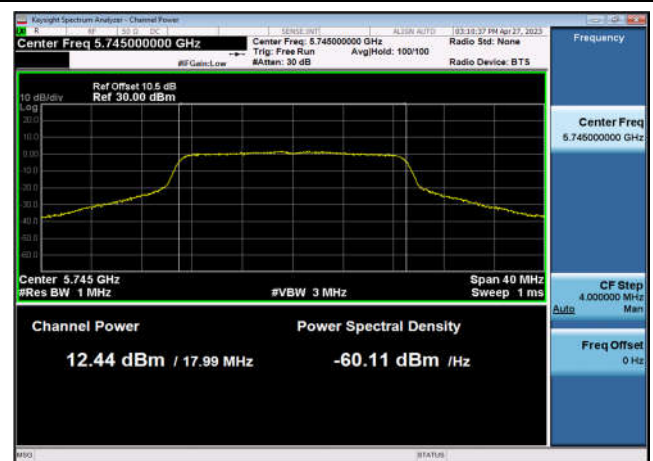




U-NII-3 Output Power-802.11ac(20MHz)
,5785MHz,Ant1

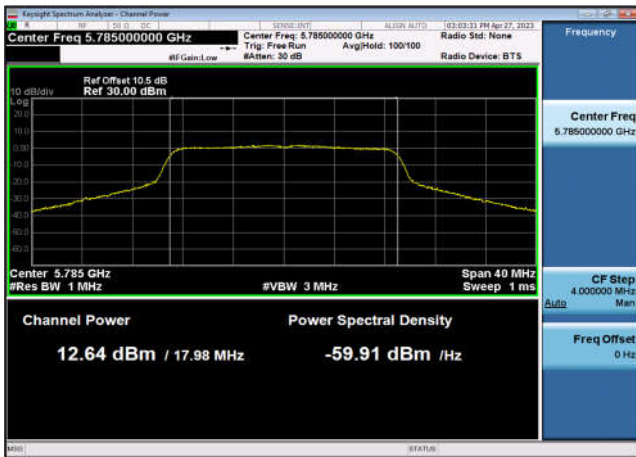


U-NII-3 Output Power-802.11ac(20MHz)
,5825MHz,Ant1

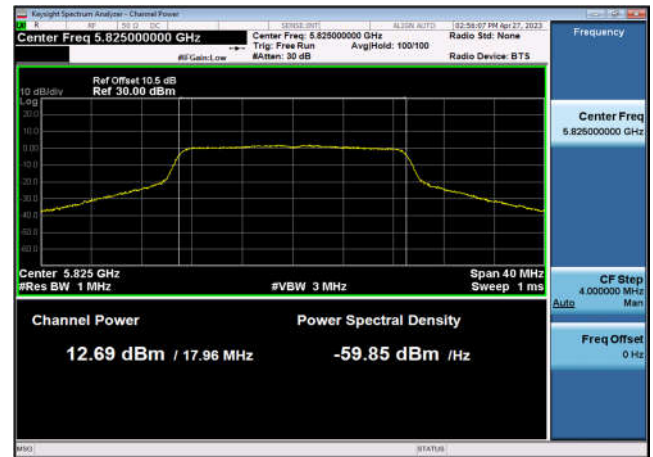


U-NII-3 Output Power-802.11ac(40MHz)
,5755MHz,Ant1



U-NII-3 Output Power-802.11ac(40MHz)
,5795MHz,Ant1

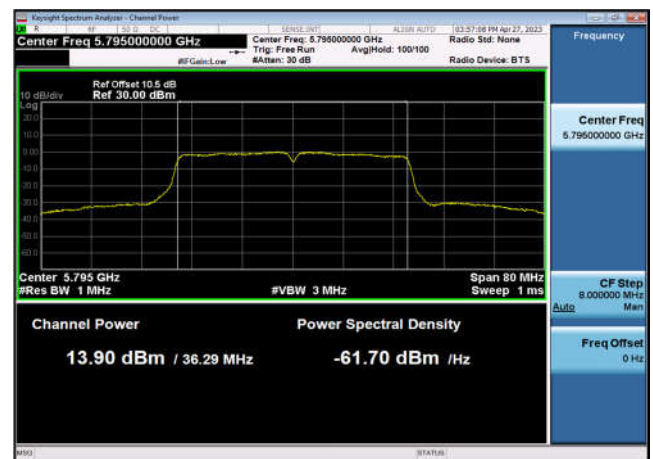

U-NII-3 Output Power-802.11ac(80MHz)
,5775MHz,Ant1

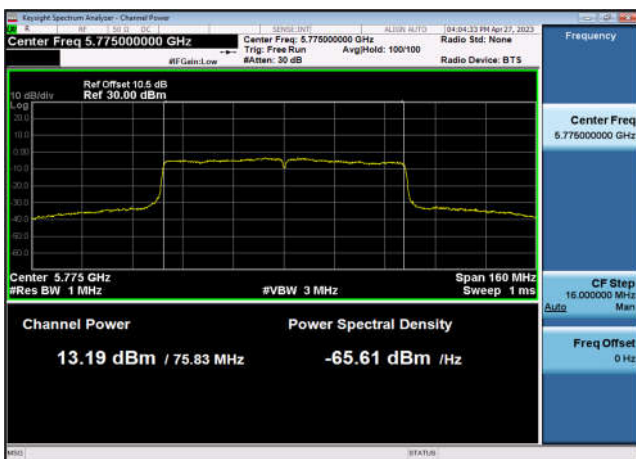

**AVGSA Power Spectral Density****Test Result and Data**

U-NII-1 AVGSA Power Spectral Density				
Mode	Test Frequency (MHz)	PSD (dBm/1MHz)	Limit (dBm/1MHz)	Result
802.11n (20MHz)	5180	-0.450	11	Pass
802.11n (20MHz)	5220	-0.588	11	Pass
802.11n (20MHz)	5240	-0.853	11	Pass
802.11n (40MHz)	5190	-1.933	11	Pass
802.11n (40MHz)	5230	-2.542	11	Pass
802.11ac (20MHz)	5180	-0.975	11	Pass
802.11ac (20MHz)	5220	-0.987	11	Pass
802.11ac (20MHz)	5240	-1.088	11	Pass
802.11ac (40MHz)	5190	-2.542	11	Pass
802.11ac (40MHz)	5230	-3.217	11	Pass
802.11ac (80MHz)	5210	-6.371	11	Pass
802.11a (20MHz)	5180	1.081	11	Pass
802.11a (20MHz)	5220	0.845	11	Pass
802.11a (20MHz)	5240	0.827	11	Pass



U-NII-2a AVGSA Power Spectral Density				
Mode	Test Frequency (MHz)	PSD (dBm/1MHz)	Limit (dBm/1MHz)	Result
802.11n (20MHz)	5260	0.438	11	Pass
802.11n (20MHz)	5300	-0.341	11	Pass
802.11n (20MHz)	5320	-0.670	11	Pass
802.11n (40MHz)	5270	-2.000	11	Pass
802.11n (40MHz)	5310	-2.319	11	Pass
802.11ac (20MHz)	5260	-0.275	11	Pass
802.11ac (20MHz)	5300	-1.024	11	Pass
802.11ac (20MHz)	5320	-1.400	11	Pass
802.11ac (40MHz)	5270	-3.039	11	Pass
802.11ac (40MHz)	5310	-3.117	11	Pass
802.11ac (80MHz)	5290	-6.441	11	Pass
802.11a (20MHz)	5260	1.087	11	Pass
802.11a (20MHz)	5300	0.938	11	Pass
802.11a (20MHz)	5320	0.756	11	Pass




U-NII-2c AVGSA Power Spectral Density				
Mode	Test Frequency (MHz)	PSD (dBm/1MHz)	Limit (dBm/1MHz)	Result
802.11n (20MHz)	5500	0.605	11	Pass
802.11n (20MHz)	5600	1.978	11	Pass
802.11n (20MHz)	5700	2.653	11	Pass
802.11n (40MHz)	5510	-1.270	11	Pass
802.11n (40MHz)	5590	-0.174	11	Pass
802.11n (40MHz)	5670	0.520	11	Pass
802.11ac (20MHz)	5500	0.359	11	Pass
802.11ac (20MHz)	5600	1.423	11	Pass
802.11ac (20MHz)	5700	2.333	11	Pass
802.11ac (40MHz)	5510	-2.004	11	Pass
802.11ac (40MHz)	5590	-0.592	11	Pass
802.11ac (40MHz)	5670	0.556	11	Pass
802.11ac (80MHz)	5530	-4.567	11	Pass
802.11ac (80MHz)	5610	-3.941	11	Pass
802.11a (20MHz)	5500	1.978	11	Pass
802.11a (20MHz)	5600	3.547	11	Pass
802.11a (20MHz)	5700	4.505	11	Pass




U-NII-3 AVGSA Power Spectral Density				
Mode	Test Frequency (MHz)	PSD (dBm/1MHz)	Limit (dBm/1MHz)	Result
802.11n (20MHz)	5745	-0.603	30	Pass
802.11n (20MHz)	5785	-0.562	30	Pass
802.11n (20MHz)	5825	-0.411	30	Pass
802.11n (40MHz)	5755	-2.375	30	Pass
802.11n (40MHz)	5795	-1.952	30	Pass
802.11ac (20MHz)	5745	-0.671	30	Pass
802.11ac (20MHz)	5785	-0.824	30	Pass
802.11ac (20MHz)	5825	-0.474	30	Pass
802.11ac (40MHz)	5755	-2.761	30	Pass
802.11ac (40MHz)	5795	-1.866	30	Pass
802.11ac (80MHz)	5775	-6.204	30	Pass
802.11a (20MHz)	5745	1.233	30	Pass
802.11a (20MHz)	5785	1.417	30	Pass
802.11a (20MHz)	5825	1.375	30	Pass

Test Plots

U-NII-1 Power spectral density-802.11
n(20MHz),5180MHz,Ant1

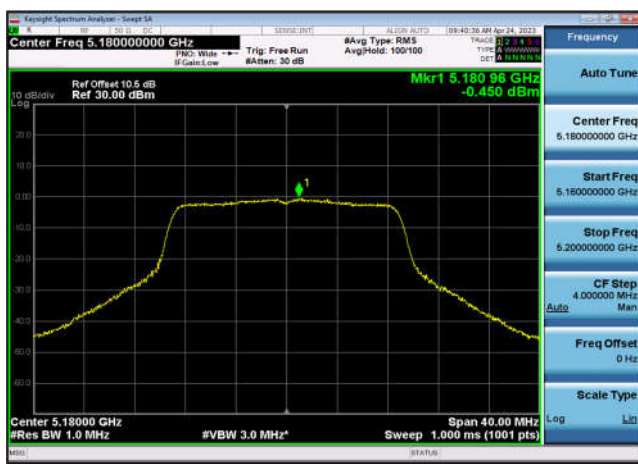

U-NII-1 Power spectral density-802.11
n(20MHz),5220MHz,Ant1

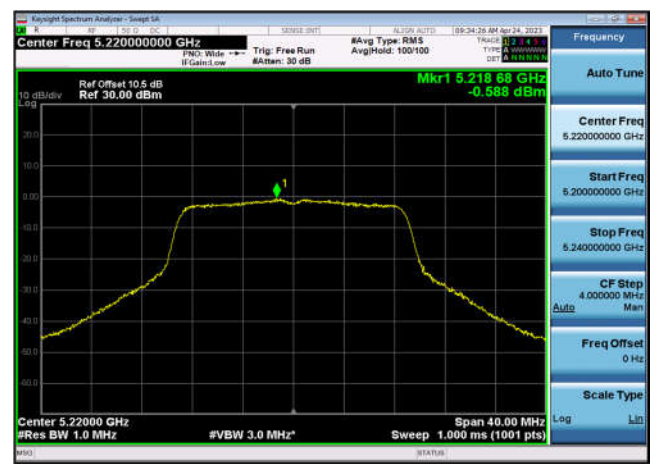


U-NII-1 Power spectral density-802.11
n(20MHz),5240MHz,Ant1




U-NII-1 Power spectral density-802.11
n(40MHz),5190MHz,Ant1




U-NII-1 Power spectral density-802.11
n(40MHz),5230MHz,Ant1

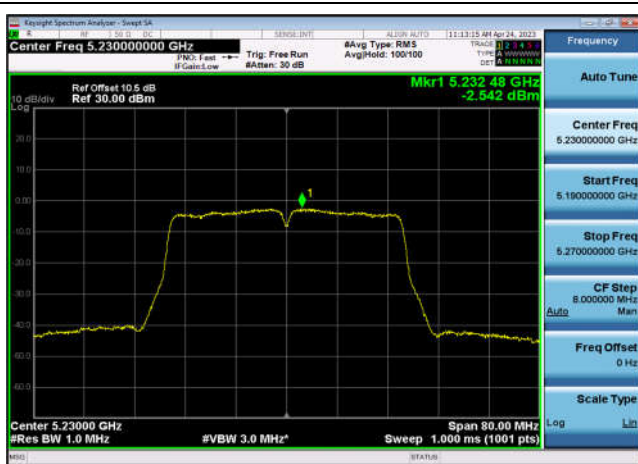


U-NII-1 Power spectral density-802.11
a(20MHz),5180MHz,Ant1

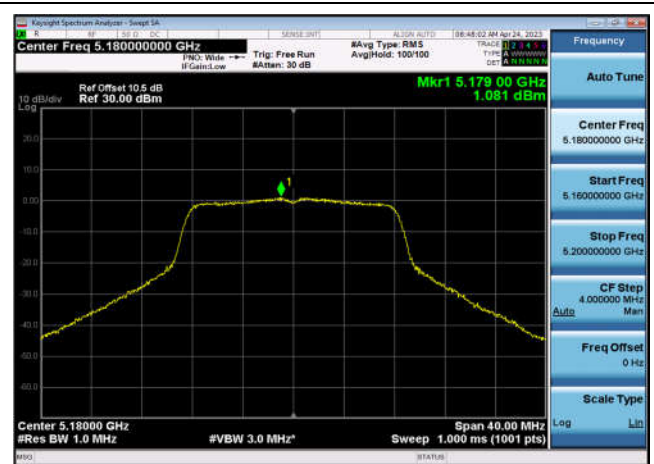


U-NII-1 Power spectral density-802.11
a(20MHz),5220MHz,Ant1

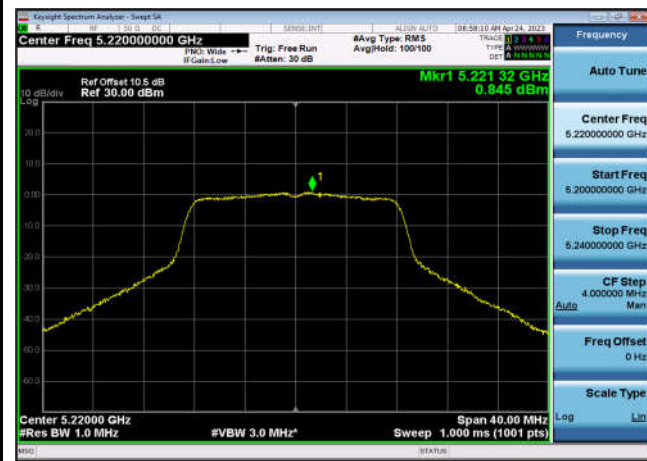


U-NII-1 Power spectral density-802.11
a(20MHz),5240MHz,Ant1

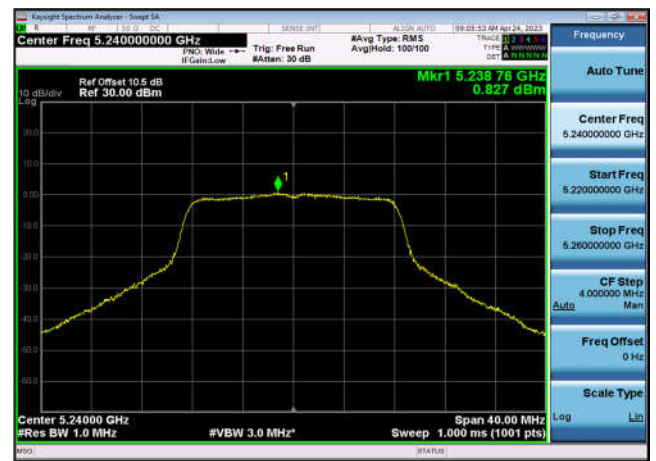


U-NII-1 Power spectral density-802.11
ac(20MHz),5180MHz,Ant1

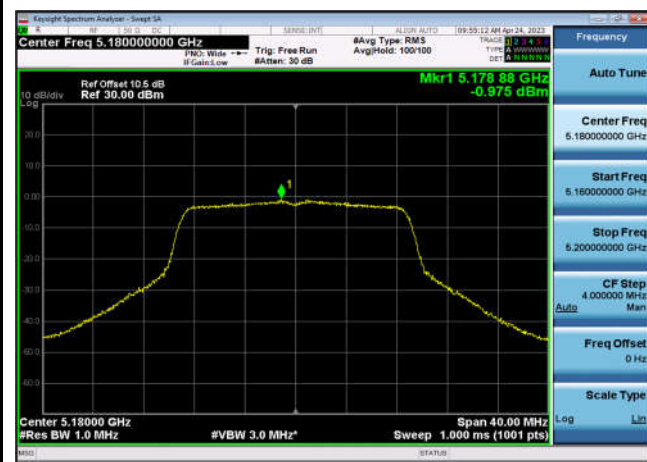

U-NII-1 Power spectral density-802.11
ac(20MHz),5220MHz,Ant1

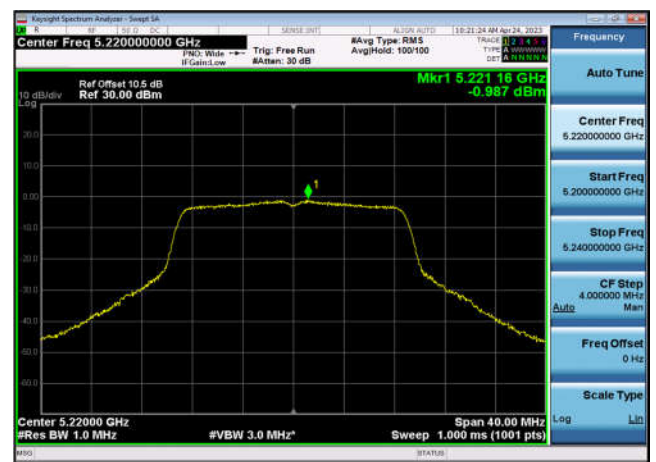

U-NII-1 Power spectral density-802.11
ac(20MHz),5240MHz,Ant1

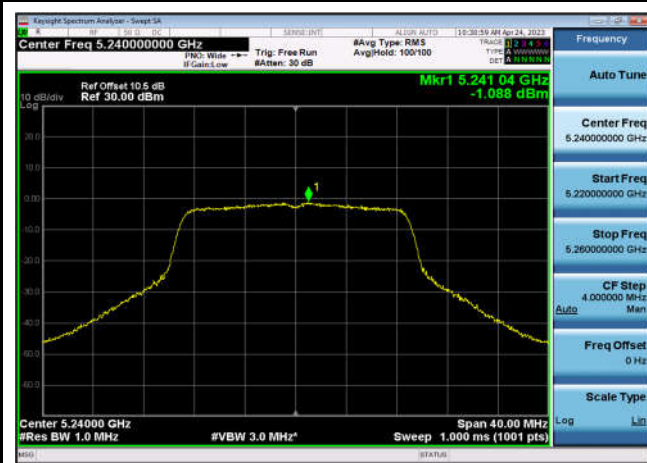

U-NII-1 Power spectral density-802.11
ac(40MHz),5190MHz,Ant1






U-NII-1 Power spectral density-802.11
ac(40MHz),5230MHz,Ant1




U-NII-1 Power spectral density-802.11
ac(80MHz),5210MHz,Ant1




U-NII-2a Power spectral density-802.11
1n(20MHz),5260MHz,Ant1

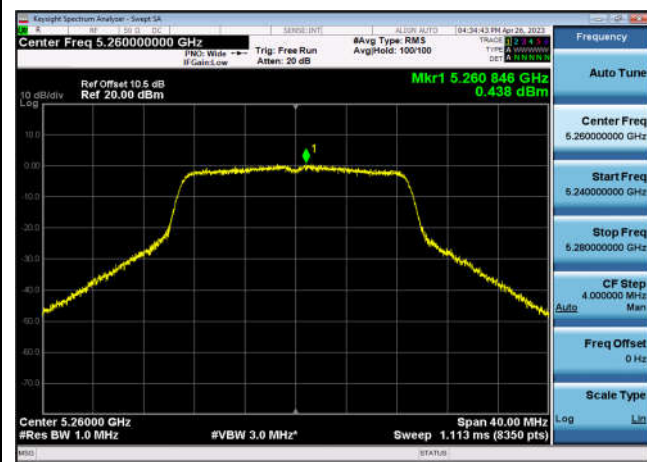

U-NII-2a Power spectral density-802.11
1n(20MHz),5300MHz,Ant1

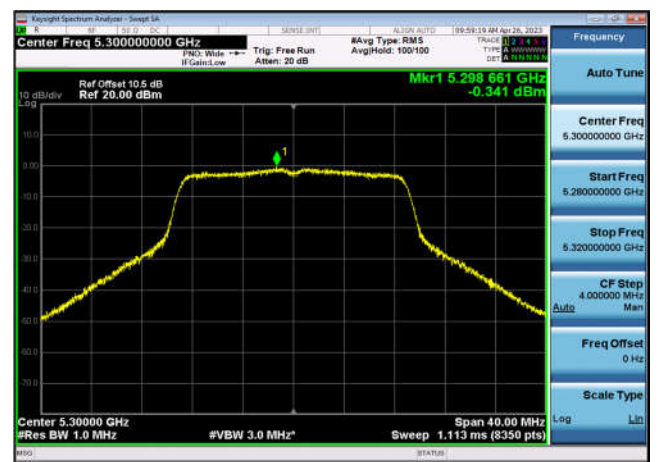

U-NII-2a Power spectral density-802.11
1n(20MHz),5320MHz,Ant1

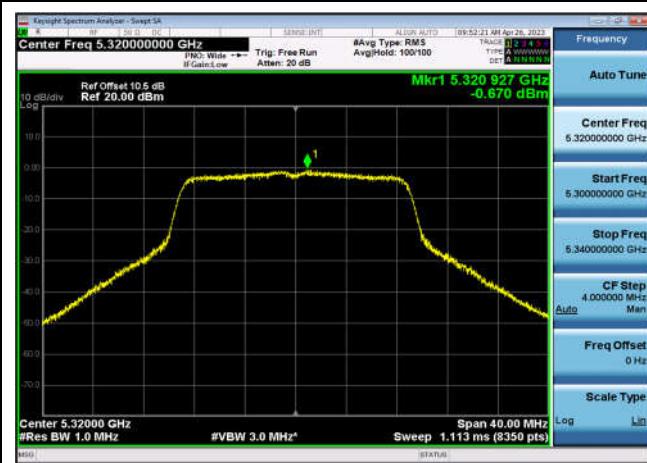


U-NII-2a Power spectral density-802.11
1n(40MHz),5270MHz,Ant1




U-NII-2a Power spectral density-802.1
1n(40MHz),5310MHz,Ant1




U-NII-2a Power spectral density-802.1
1a(20MHz),5260MHz,Ant1

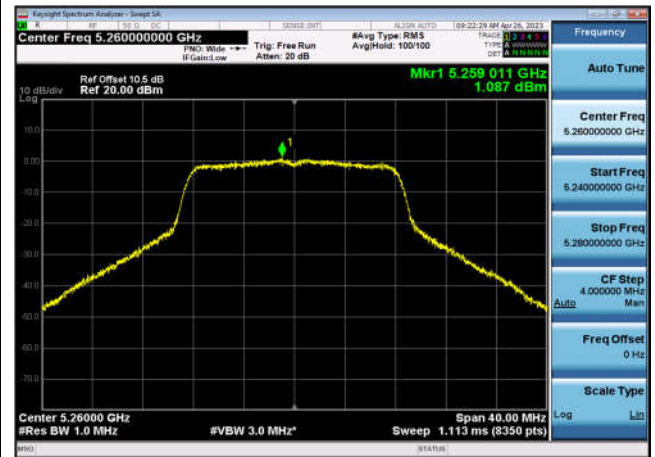


U-NII-2a Power spectral density-802.1
1a(20MHz),5300MHz,Ant1

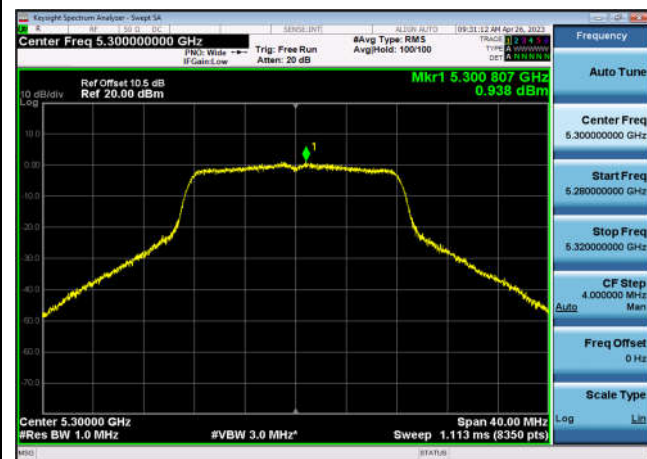

U-NII-2a Power spectral density-802.1
1a(20MHz),5320MHz,Ant1

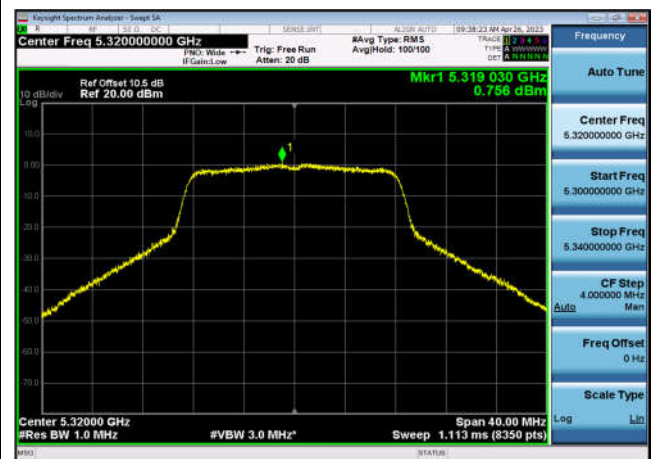


U-NII-2a Power spectral density-802.1
1ac(20MHz),5260MHz,Ant1

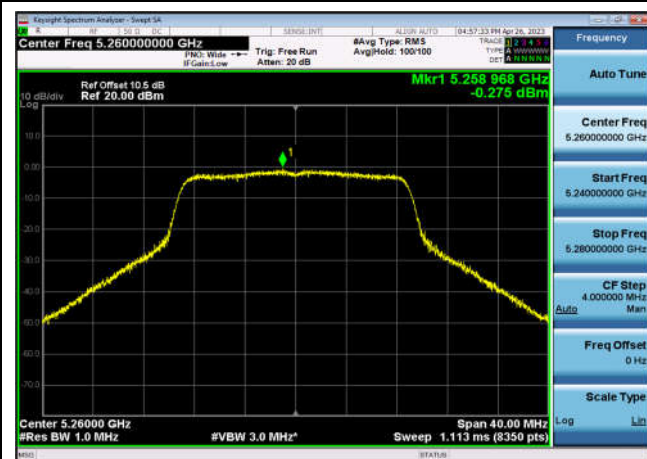

U-NII-2a Power spectral density-802.1
1ac(20MHz),5300MHz,Ant1




U-NII-2a Power spectral density-802.1
1ac(20MHz),5320MHz,Ant1

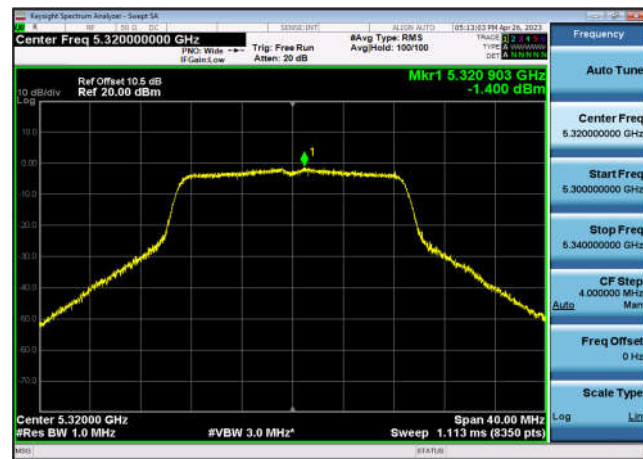

U-NII-2a Power spectral density-802.1
1ac(40MHz),5270MHz,Ant1




U-NII-2a Power spectral density-802.1
1ac(40MHz),5310MHz,Ant1

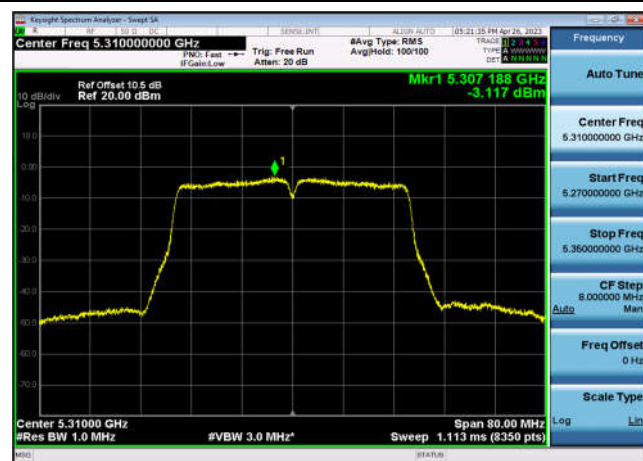


U-NII-2a Power spectral density-802.1
1ac(80MHz),5290MHz,Ant1



U-NII-2c Power spectral density-802.1
1n(20MHz),5500MHz,Ant1

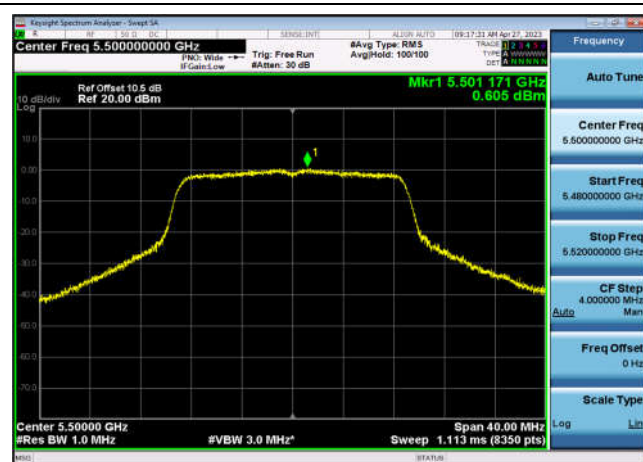


U-NII-2c Power spectral density-802.1
1n(20MHz),5600MHz,Ant1

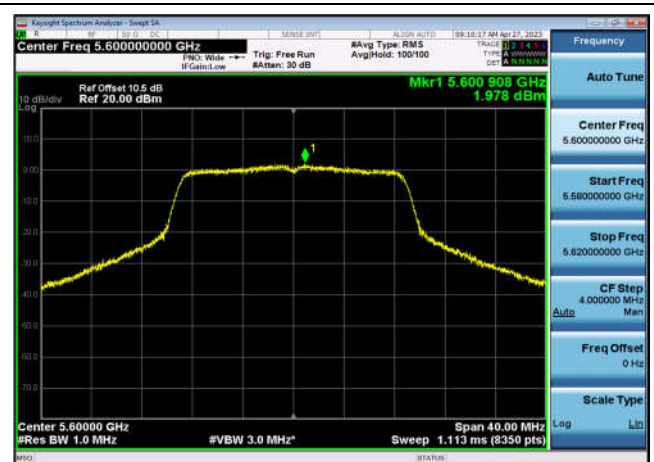




U-NII-2c Power spectral density-802.1
1n(20MHz),5700MHz,Ant1

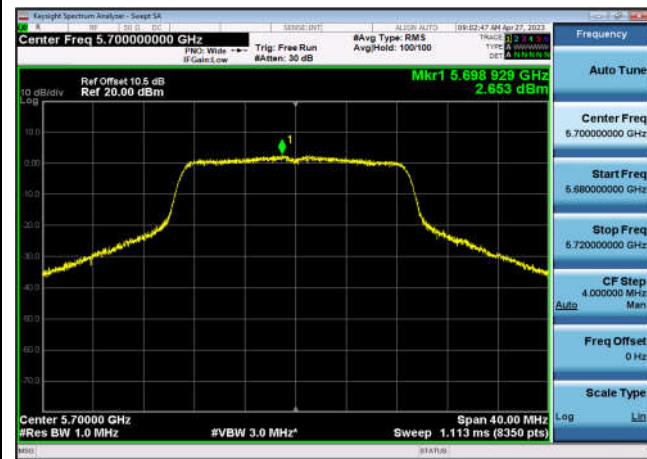

U-NII-2c Power spectral density-802.1
1n(40MHz),5510MHz,Ant1




U-NII-2c Power spectral density-802.1
1n(40MHz),5590MHz,Ant1

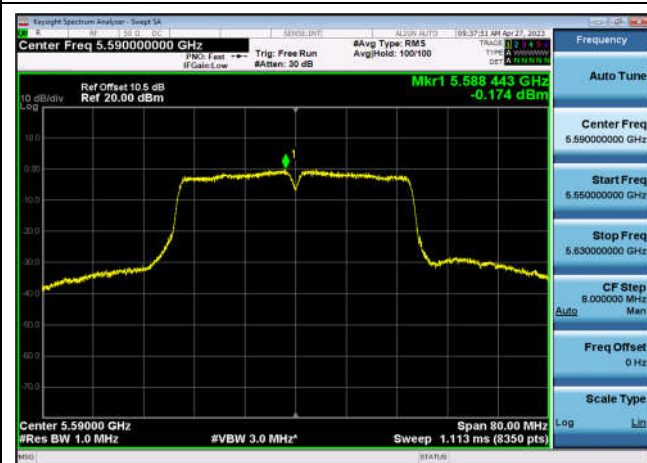

U-NII-2c Power spectral density-802.1
1n(40MHz),5670MHz,Ant1



U-NII-2c Power spectral density-802.1
1a(20MHz),5500MHz,Ant1

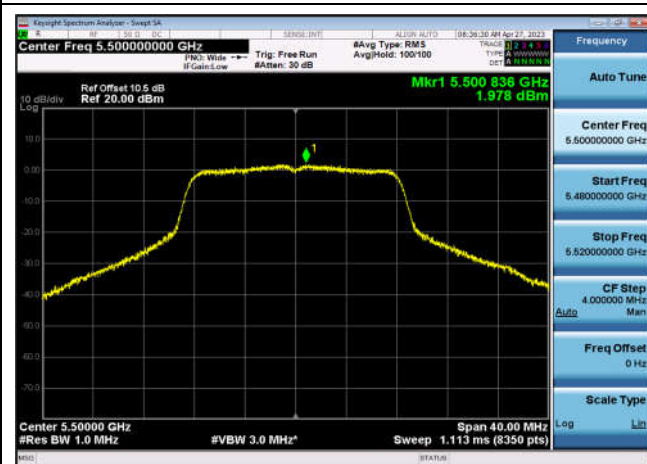

U-NII-2c Power spectral density-802.1
1a(20MHz),5600MHz,Ant1




U-NII-2c Power spectral density-802.1
1a(20MHz),5700MHz,Ant1



U-NII-2c Power spectral density-802.1
1ac(20MHz),5500MHz,Ant1




U-NII-2c Power spectral density-802.1
1ac(20MHz),5600MHz,Ant1

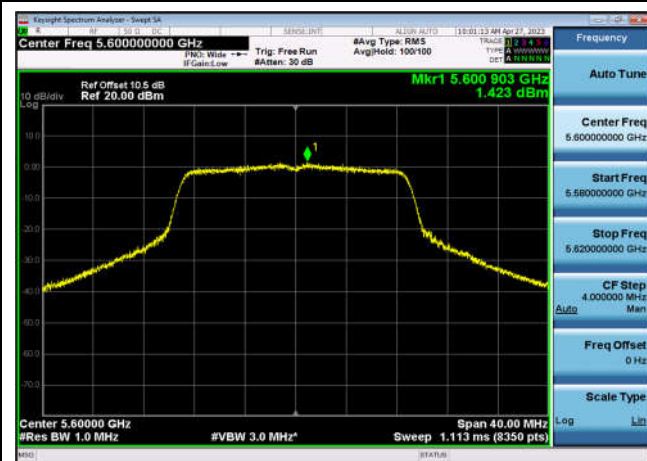

U-NII-2c Power spectral density-802.1
1ac(20MHz),5700MHz,Ant1




U-NII-2c Power spectral density-802.1
1ac(40MHz),5510MHz,Ant1

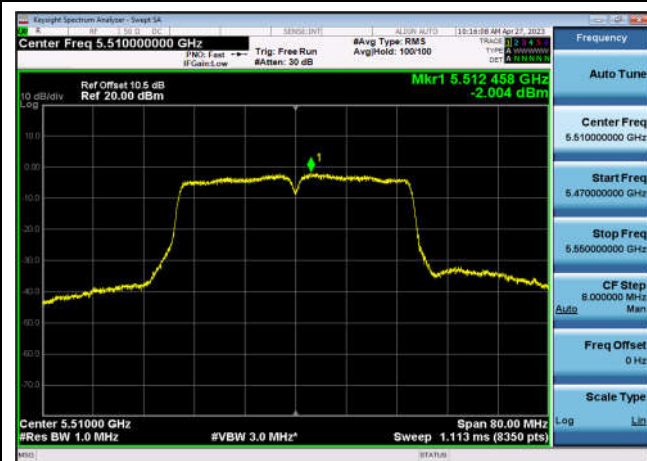

U-NII-2c Power spectral density-802.1
1ac(40MHz),5590MHz,Ant1




U-NII-2c Power spectral density-802.1
1ac(40MHz),5670MHz,Ant1

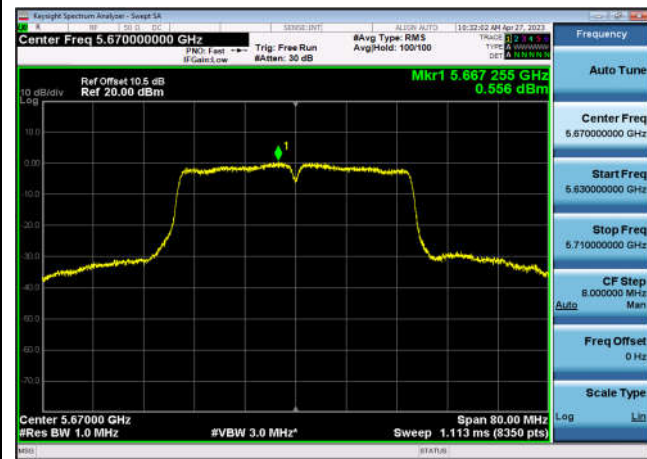

U-NII-2c Power spectral density-802.1
1ac(80MHz),5530MHz,Ant1




U-NII-2c Power spectral density-802.1
1ac(80MHz),5610MHz,Ant1

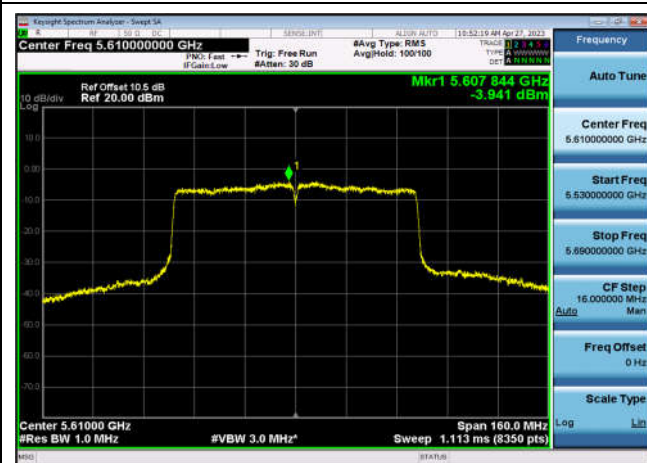


U-NII-3 Power spectral density-802.11
n(20MHz),5745MHz,Ant1




U-NII-3 Power spectral density-802.11
n(20MHz),5785MHz,Ant1

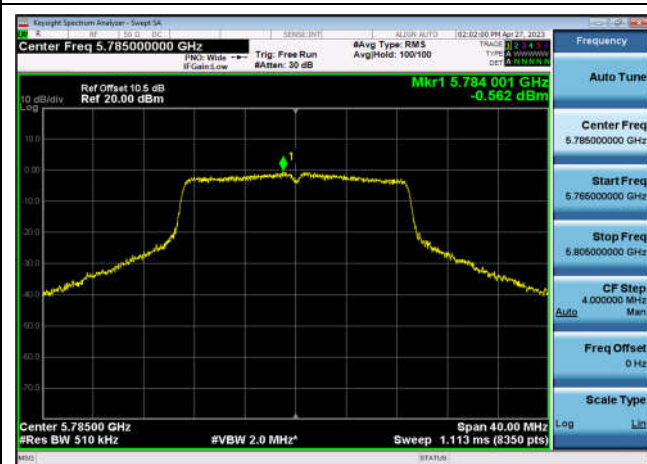

U-NII-3 Power spectral density-802.11
n(20MHz),5825MHz,Ant1

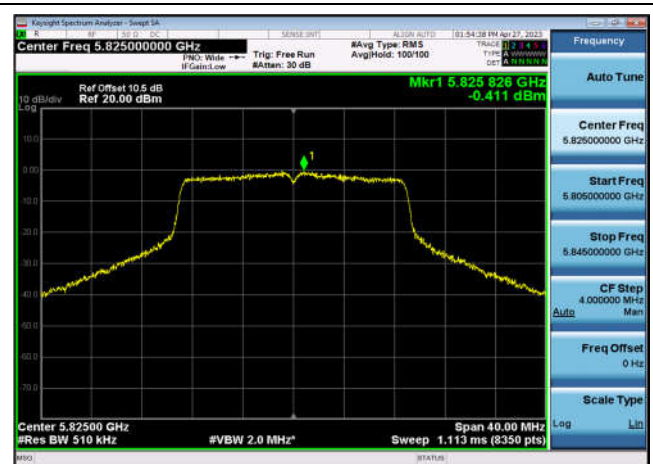


U-NII-3 Power spectral density-802.11
n(40MHz),5755MHz,Ant1

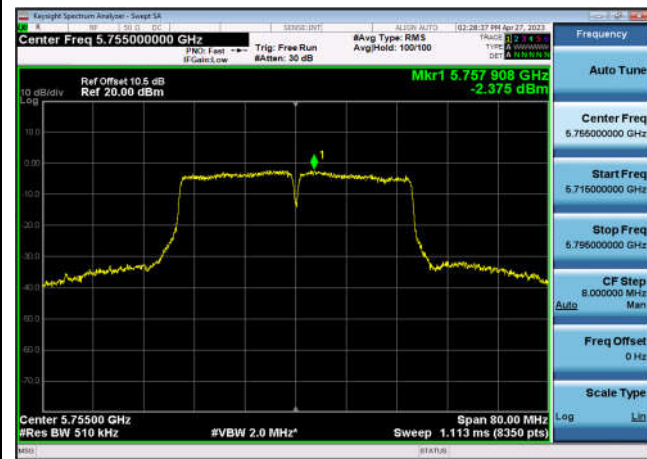


U-NII-3 Power spectral density-802.11
n(40MHz),5795MHz,Ant1




U-NII-3 Power spectral density-802.11
a(20MHz),5745MHz,Ant1

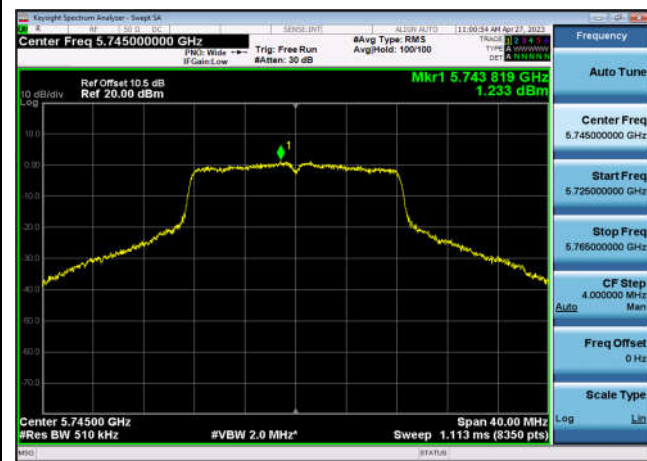

U-NII-3 Power spectral density-802.11
a(20MHz),5785MHz,Ant1

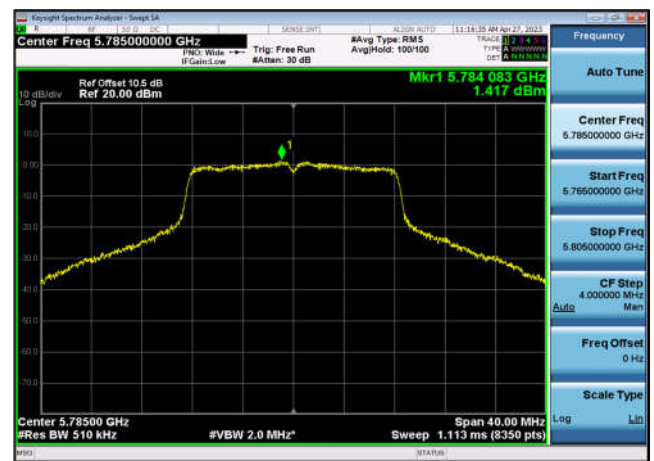


U-NII-3 Power spectral density-802.11
a(20MHz),5825MHz,Ant1

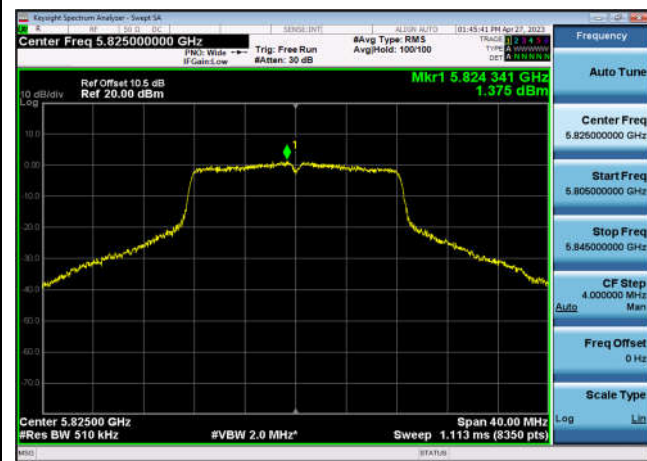

U-NII-3 Power spectral density-802.11
ac(20MHz),5745MHz,Ant1



U-NII-3 Power spectral density-802.11
ac(20MHz),5785MHz,Ant1

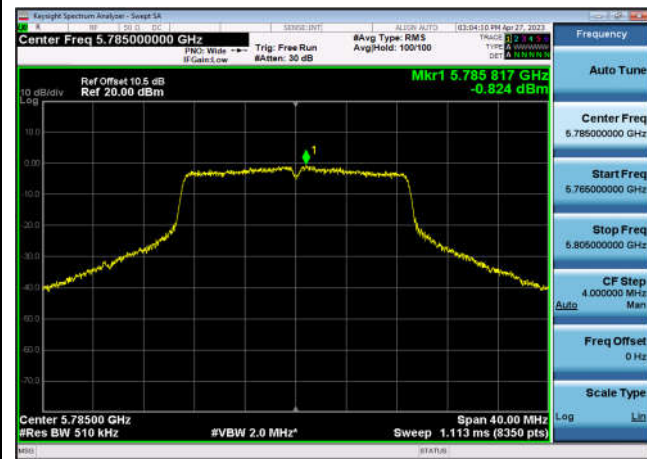


U-NII-3 Power spectral density-802.11
ac(20MHz),5825MHz,Ant1




U-NII-3 Power spectral density-802.11
ac(40MHz),5755MHz,Ant1



U-NII-3 Power spectral density-802.11
ac(40MHz),5795MHz,Ant1

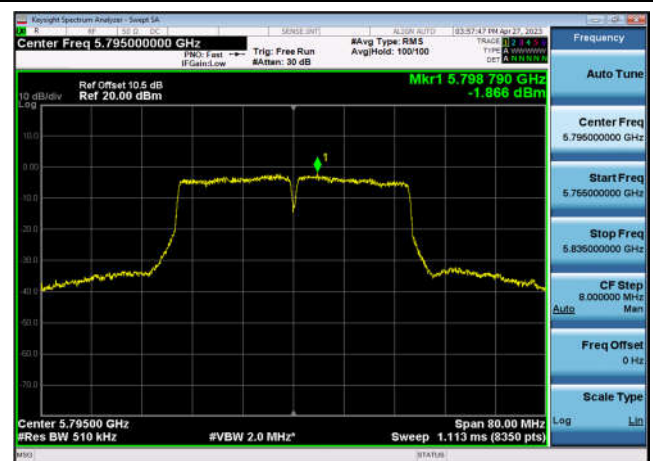

U-NII-3 Power spectral density-802.11
ac(80MHz),5775MHz,Ant1

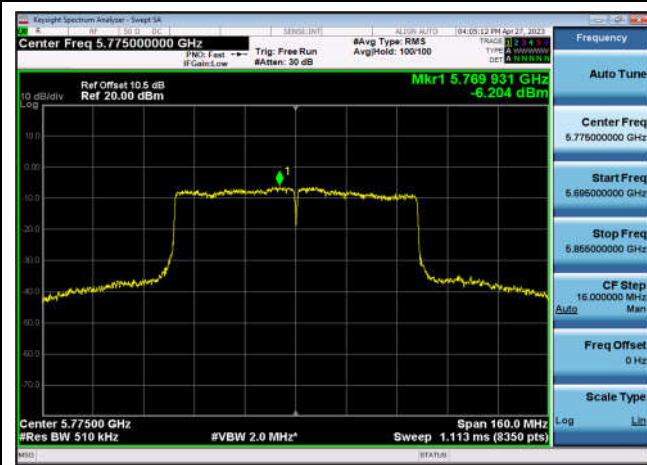

**99% Occupied Bandwidth and 26dB Emission Bandwidth****Test Result and Data**

U-NII-1 99% OBW & 26dB EBW				
Mode	Test Frequency (MHz)	99% OBW (MHz)	26dB EBW (MHz)	Result
802.11n (20MHz)	5180	17.896	24.55	Pass
802.11n (20MHz)	5220	17.853	23.33	Pass
802.11n (20MHz)	5240	17.836	22.98	Pass
802.11n (40MHz)	5190	36.220	41.04	Pass
802.11n (40MHz)	5230	36.286	40.97	Pass
802.11ac (20MHz)	5180	17.879	23.03	Pass
802.11ac (20MHz)	5220	17.855	22.56	Pass
802.11ac (20MHz)	5240	17.812	23.49	Pass
802.11ac (40MHz)	5190	36.218	40.88	Pass
802.11ac (40MHz)	5230	36.226	41.19	Pass
802.11ac (80MHz)	5210	75.631	83.46	Pass
802.11a (20MHz)	5180	16.691	22.89	Pass
802.11a (20MHz)	5220	16.687	24.38	Pass
802.11a (20MHz)	5240	16.688	23.26	Pass

U-NII-2a 99% OBW & 26dB EBW				
Mode	Test Frequency (MHz)	99% OBW (MHz)	26dB EBW (MHz)	Result
802.11n (20MHz)	5260	17.883	23.12	Pass
802.11n (20MHz)	5300	17.848	23.58	Pass
802.11n (20MHz)	5320	17.874	23.00	Pass
802.11n (40MHz)	5270	36.225	41.04	Pass
802.11n (40MHz)	5310	36.264	41.17	Pass
802.11ac (20MHz)	5260	17.845	24.55	Pass
802.11ac (20MHz)	5300	17.854	23.07	Pass
802.11ac (20MHz)	5320	17.885	23.01	Pass
802.11ac (40MHz)	5270	36.175	40.86	Pass
802.11ac (40MHz)	5310	36.235	40.89	Pass
802.11ac (80MHz)	5290	75.671	84.43	Pass
802.11a (20MHz)	5260	16.660	24.06	Pass
802.11a (20MHz)	5300	16.719	22.72	Pass
802.11a (20MHz)	5320	16.675	24.15	Pass



U-NII-2c 99% OBW & 26dB EBW				
Mode	Test Frequency (MHz)	99% OBW (MHz)	26dB EBW (MHz)	Result
802.11n (20MHz)	5500	17.978	24.46	Pass
802.11n (20MHz)	5600	18.006	25.26	Pass
802.11n (20MHz)	5700	18.102	27.87	Pass
802.11n (40MHz)	5510	36.294	44.69	Pass
802.11n (40MHz)	5590	36.389	42.75	Pass
802.11n (40MHz)	5670	36.360	45.59	Pass
802.11ac (20MHz)	5500	17.884	24.21	Pass
802.11ac (20MHz)	5600	17.973	24.05	Pass
802.11ac (20MHz)	5700	17.932	24.56	Pass
802.11ac (40MHz)	5510	36.252	41.41	Pass
802.11ac (40MHz)	5590	36.333	41.97	Pass
802.11ac (40MHz)	5670	36.325	42.43	Pass
802.11ac (80MHz)	5530	75.729	83.51	Pass
802.11ac (80MHz)	5610	75.802	87.37	Pass
802.11a (20MHz)	5500	16.835	24.76	Pass
802.11a (20MHz)	5600	17.000	27.32	Pass
802.11a (20MHz)	5700	17.162	28.67	Pass



U-NII-3 99% OBW & 26dB EBW				
Mode	Test Frequency (MHz)	99% OBW (MHz)	26dB EBW (MHz)	Result
802.11n (20MHz)	5745	18.031	25.53	Pass
802.11n (20MHz)	5785	18.027	26.31	Pass
802.11n (20MHz)	5825	17.981	27.25	Pass
802.11n (40MHz)	5755	36.347	42.44	Pass
802.11n (40MHz)	5795	36.425	41.72	Pass
802.11ac (20MHz)	5745	17.993	25.74	Pass
802.11ac (20MHz)	5785	17.980	25.46	Pass
802.11ac (20MHz)	5825	17.960	26.12	Pass
802.11ac (40MHz)	5755	36.355	42.18	Pass
802.11ac (40MHz)	5795	36.291	41.98	Pass
802.11ac (80MHz)	5775	75.828	84.40	Pass
802.11a (20MHz)	5745	17.025	25.86	Pass
802.11a (20MHz)	5785	16.987	25.42	Pass
802.11a (20MHz)	5825	16.974	26.74	Pass



Test Plots

U-NII-1 26dB&99% Bandwidth-802.11n(20MHz)
,5180MHz,Ant1



U-NII-1 26dB&99% Bandwidth-802.11n(20MHz)
,5220MHz,Ant1




U-NII-1 26dB&99% Bandwidth-802.11n(20MHz)
,5240MHz,Ant1



U-NII-1 26dB&99% Bandwidth-802.11n(40MHz)
,5190MHz,Ant1



U-NII-1 26dB&99% Bandwidth-802.11n(40MHz)
,5230MHz,Ant1

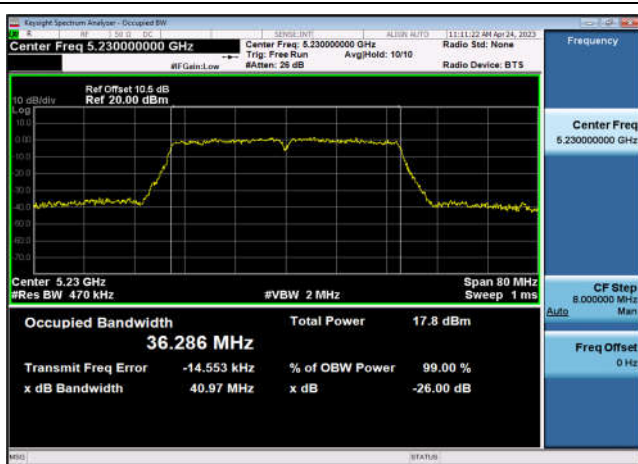


U-NII-1 26dB&99% Bandwidth-802.11a(20MHz)
,5180MHz,Ant1






U-NII-1 26dB&99% Bandwidth-802.11a(20MHz)
,5220MHz,Ant1

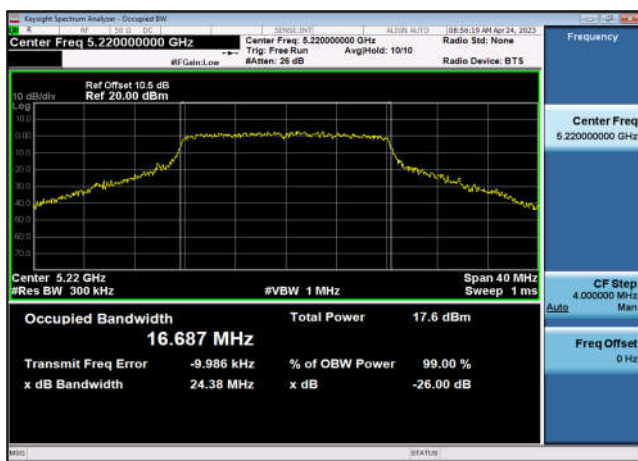

U-NII-1 26dB&99% Bandwidth-802.11a(20MHz)
,5240MHz,Ant1



U-NII-1 26dB&99% Bandwidth-802.11ac(20MHz)
,5180MHz,Ant1

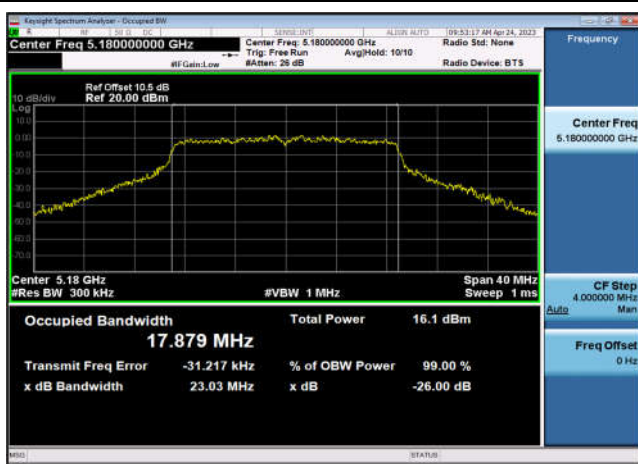


U-NII-1 26dB&99% Bandwidth-802.11ac(20MHz)
,5220MHz,Ant1



U-NII-1 26dB&99% Bandwidth-802.11ac(20MHz)
,5240MHz,Ant1




U-NII-1 26dB&99% Bandwidth-802.11ac(40MHz)
,5190MHz,Ant1

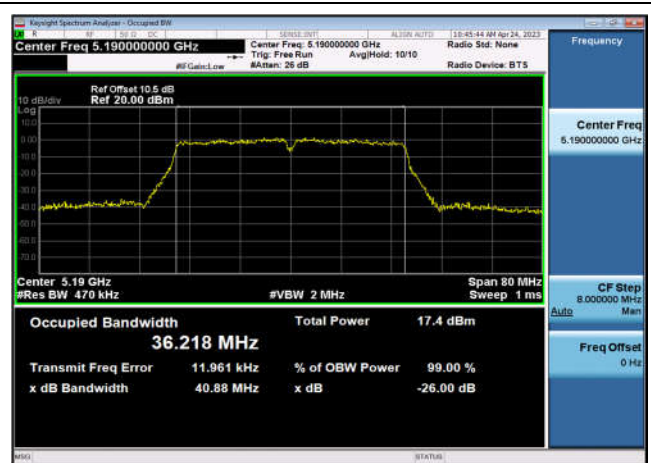




U-NII-1 26dB&99% Bandwidth-802.11ac(40MHz)
,5230MHz,Ant1

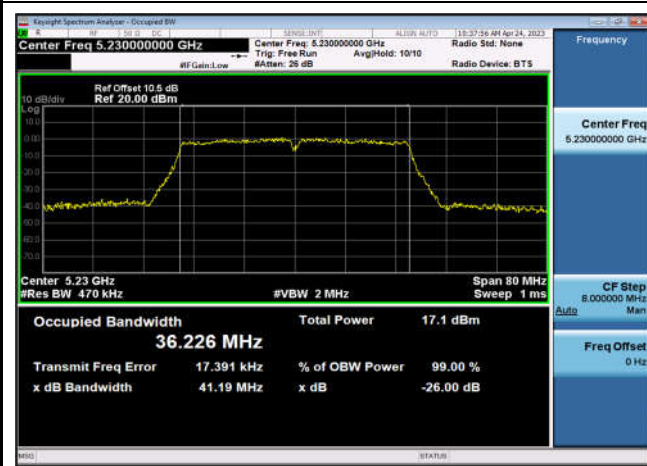

U-NII-1 26dB&99% Bandwidth-802.11ac(80MHz)
,5210MHz,Ant1




U-NII-2a 26dB&99% Bandwidth-802.11n(20MHz)
,5260MHz,Ant1

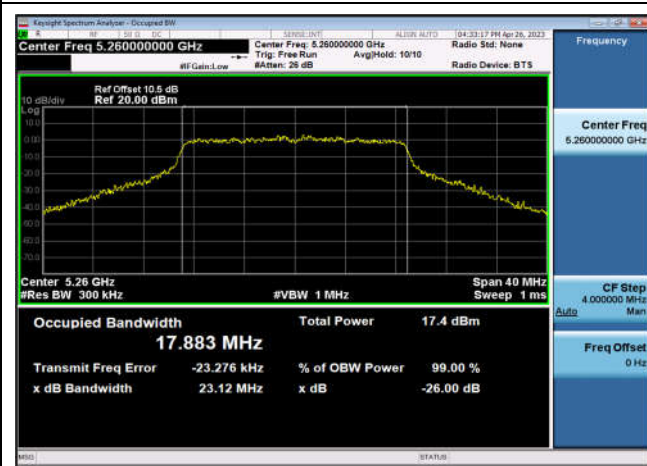

U-NII-2a 26dB&99% Bandwidth-802.11n(20MHz)
,5300MHz,Ant1



U-NII-2a 26dB&99% Bandwidth-802.11n(20MHz)
,5320MHz,Ant1

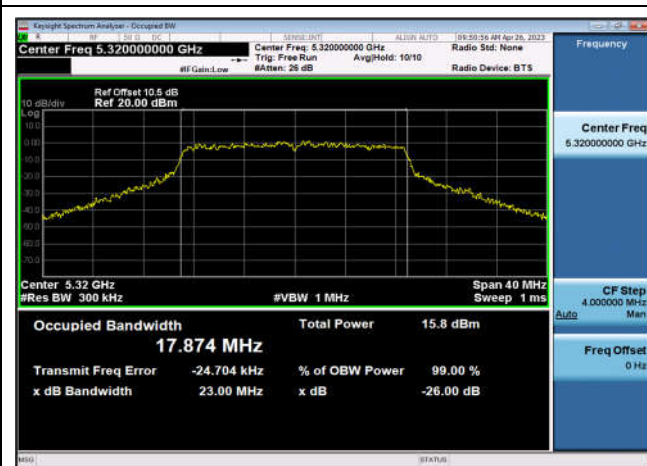

U-NII-2a 26dB&99% Bandwidth-802.11n(40MHz)
,5270MHz,Ant1

