



Test Report No.: RF2203WDG0170



TEST REPORT

Applicant	GOLABS INC.
Address	2201 LUNA RD CARROLLTON, TX 75006

Manufacturer or Supplier	ZHEJIANG TAOTAO VEHICLES CO., LTD
Address	No.10 XINYUAN ROAD, XINBI STREET, JINYUN COUNTY LISHUI City ZHEJIANG 321400 CHINA
Product	A SMART OFFROAD HOVERBOARD
Brand Name	HOVERBOARD, GOTRAX
Model	PB-809-1
Additional Model & Model Difference	E5, see item 3.1
Date of tests	Mar. 30, 2022 ~ Apr. 22, 2022

the tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.247

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Andy Zhu Supervisor / EMC Department	Approved by Glyn He Assistant Manager / EMC Department

Date: May 24, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <https://www.cps.bureauveritas.com/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT.....	6
3.2 DESCRIPTION OF TEST MODES.....	7
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
3.4 DESCRIPTION OF SUPPORT UNITS.....	10
4 TEST TYPES AND RESULTS.....	11
4.1 RADIATED EMISSION MEASUREMENT	11
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2 TEST INSTRUMENTS.....	11
4.1.3 TEST PROCEDURES	12
4.1.4 DEVIATION FROM TEST STANDARD	12
4.1.5 TEST SETUP.....	13
4.1.6 EUT OPERATING CONDITIONS	13
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
4.2.2 TEST INSTRUMENTS.....	17
4.2.3 TEST PROCEDURES	18
4.2.4 DEVIATION FROM TEST STANDARD	19
4.2.5 TEST SETUP.....	19
4.2.6 EUT OPERATING CONDITIONS	20
4.2.7 TEST RESULTS	21
4.3 6DB BANDWIDTH MEASUREMENT.....	26
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	26
4.3.2 TEST INSTRUMENTS.....	26
4.3.3 TEST PROCEDURE.....	27
4.3.4 DEVIATION FROM TEST STANDARD	27
4.3.5 TEST SETUP.....	28



Test Report No.: RF2203WDG0170

4.3.6 EUT OPERATING CONDITIONS	28
4.3.7 TEST RESULTS	29
4.4 CONDUCTED OUTPUT POWER	31
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	31
4.4.2 TEST SETUP	31
4.4.3 TEST INSTRUMENTS	31
4.4.4 TEST PROCEDURES	32
4.4.5 DEVIATION FROM TEST STANDARD	32
4.4.6 EUT OPERATING CONDITIONS	32
4.4.7 TEST RESULTS	33
4.4.7.1 MAXIMUM PEAK OUTPUT POWER	33
4.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)	34
4.5 POWER SPECTRAL DENSITY MEASUREMENT	35
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	35
4.5.2 TEST SETUP	35
4.5.3 TEST INSTRUMENTS	35
4.5.4 TEST PROCEDURE	35
4.5.5 DEVIATION FROM TEST STANDARD	35
4.5.6 EUT OPERATING CONDITION	35
4.5.7 TEST RESULTS	36
4.6 OUT OF BAND EMISSION MEASUREMENT	38
4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT	38
4.6.2 TEST SETUP	38
4.6.3 TEST INSTRUMENTS	38
4.6.4 TEST PROCEDURE	38
4.6.5 DEVIATION FROM TEST STANDARD	39
4.6.6 EUT OPERATING CONDITION	39
4.6.7 TEST RESULTS	40
5 PHOTOGRAHPS OF THE TEST CONFIGURATION	42
6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	43



Test Report No.: RF2203WDG0170

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2203WDG0170	Original release	May 24, 2022



Test Report No.: RF2203WDG0170

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.205 15.209	Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.66dB
	30MHz ~ 1GHz	4.06dB
	1GHz ~ 18GHz	4.90dB
	18GHz ~ 40GHz	4.58dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	A SMART OFFROAD HOVERBOARD
MODEL NO.	PB-809-1
ADDITIONAL MODEL	E5
FCC ID	2AWFV-E5
NOMINAL VOLTAGE	DC 42V from Adapter or DC 36V from Li-ion battery
MODULATION TECHNOLOGY	DTS
MODULATION TYPE	GFSK(BT-LE 2Mbps)
OPERATING FREQUENCY	2402-2480MHz
PEAK OUTPUT POWER	1.629mW (Max. Measured)
ANTENNA TYPE	FPC Antenna, 1.38dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2203WDG0170) for detailed product photo.
4. Additional model E5 is identical with the test model PB-809-1 except the model name for trading purpose.
5. The EUT was powered by the following adapter:

ADAPTER	
BRAND:	N/A
MODEL:	FY0474201000
INPUT:	AC 100-240V 50/60Hz 1.5A
OUTPUT:	DC 42V, 1.0A
DC LINE:	Unshielded, Non-detachable, 100cm



3.2 DESCRIPTION OF TEST MODES

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, power supply voltage range and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	AC 120V/60Hz with BT Function
B	-	-	-	√	Powered by fully battery with BT function

Where

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

**RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	39	DTS	GFSK	2

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	0,19, 39	DTS	GFSK	2

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
A	BT Link

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	0,19, 39	DTS	GFSK	2



Test Report No.: RF2203WDG0170

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER(POE)	TESTED BY
RE<1G	25deg. C, 53%RH	AC 120V/60Hz	Jelly
RE≥1G	25deg. C, 53%RH	AC 120V/60Hz	Jelly
PLC	25deg. C, 53%RH	AC 120V/60Hz	Summer
APCM	25deg. C, 53%RH	DC 36V by fully battery	Eric Fang



Test Report No.: RF2203WDG0170

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247
558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2013

Note: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any other necessary accessories or support units.



4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	100666	July 04,22
Artificial Mains Network	Rohde&Schwarz	ENV216	102477	July 12,22
Artificial Mains Network	SCHWARZBECK	NSLK 8127	8127713	Apr. 18,23
Voltage Probe	SCHWARZBECK	TK 9421	9421-0332	Aug. 22,22
Current Probe	Rohde&Schwarz	EZ-17	0816.2063.02	Sep. 21, 22
ISN	Rohde&Schwarz	ENY81-CA6	101928	Sep. 16, 22
ISN	TESEQ	ISN T800	34373	Feb. 16, 23
Coaxial RF Cable	COMMATE	CFD300-NL	5D-001	Oct. 19,22
Shielding Room	Burgeon	5m*4m*3m	D3040008DG-1	July 22, 24
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

NOTES:

1. The test was performed in shielded room 543. (Baodun)
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRT/CHINA and NIM/CHINA.



4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

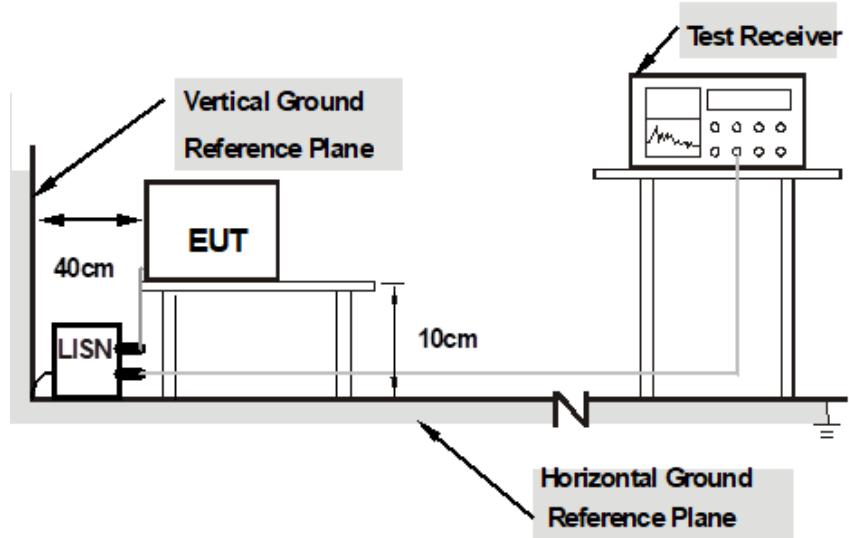

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



Test Report No.: RF2203WDG0170


4.1.7 TEST RESULTS

CONDUCTED DATA: BT Link

PHASE	Line	6dB BANDWIDTH		9kHz	
-------	------	---------------	--	------	--

No.	Freq. [MHz]	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.15800	9.89	33.73	4.58	43.62	14.47	65.57	55.57	-21.95	-41.10
2	0.18617	9.88	34.42	15.93	44.30	25.81	64.21	54.21	-19.90	-28.39
3	0.26992	9.92	30.05	14.48	39.97	24.40	61.12	51.12	-21.15	-26.72
4	1.90200	10.11	29.08	15.17	39.19	25.28	56.00	46.00	-16.81	-20.72
5	3.84211	10.18	32.35	11.91	42.53	22.09	56.00	46.00	-13.47	-23.91
6	21.65400	10.88	24.98	16.18	35.86	27.06	60.00	50.00	-24.14	-22.94

REMARKS: The emission levels of other frequencies were very low against the limit.

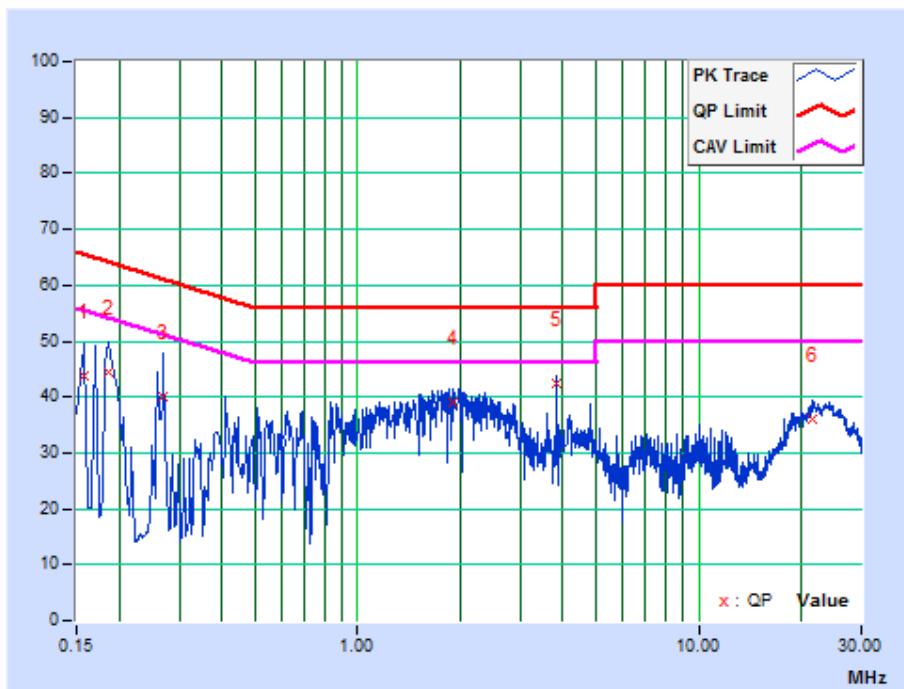




Test Report No.: RF2203WDG0170

PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No.	Freq. Factor [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19800	10.00	33.13	18.69	43.13	28.69	63.69	53.69	-20.56	-25.00
2	0.21800	10.01	26.78	8.52	36.79	18.53	62.89	52.89	-26.10	-34.36
3	0.63400	10.10	25.18	11.53	35.28	21.63	56.00	46.00	-20.72	-24.37
4	3.83400	10.27	37.25	27.82	47.52	38.09	56.00	46.00	-8.48	-7.91
5	11.65400	10.51	26.50	14.60	37.01	25.11	60.00	50.00	-22.99	-24.89
6	21.31000	10.87	32.07	23.35	42.94	34.22	60.00	50.00	-17.06	-15.78

REMARKS: The emission levels of other frequencies were very low against the limit.

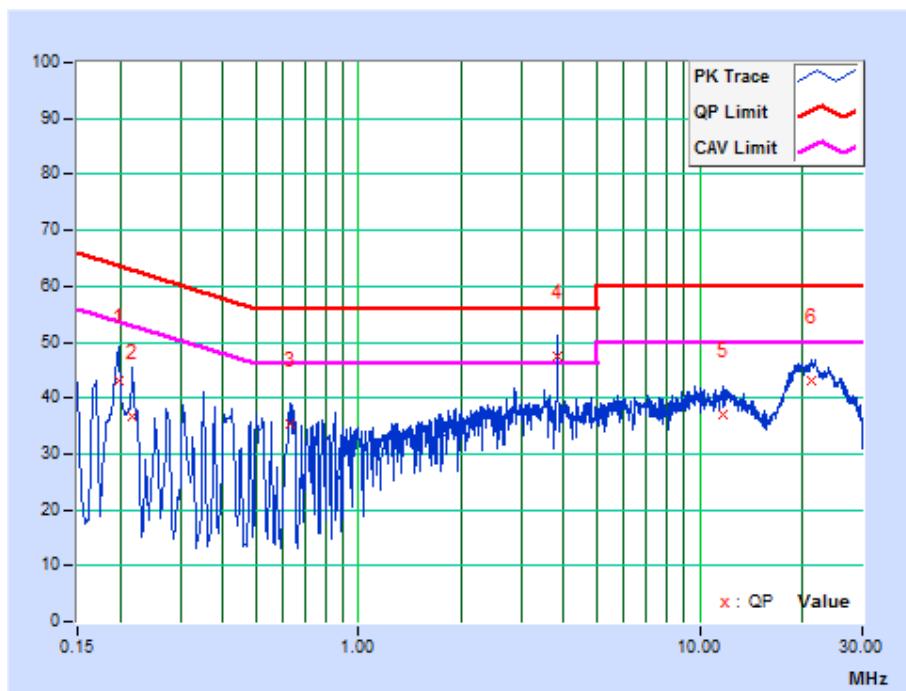



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_BV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101817	July 04, 22
Bilog Antenna	SCHWARZBECK	VULB 9168	01281	July 30, 22
Pre-Amplifier	Agilent	8447D	2944A10488	Aug.08, 22
3m Semi-anechoic Chamber	ETS-Lindgren	9m*6m*6m	D3040003DG-1	July 30, 24
Coaxial RF Cable	Joinfront	JFAA6-NMNM-8000	2100033742	Aug.08, 22
Coaxial RF Cable	Joinfront	JFAR-NMBNCM-2000	2100033742	Aug.08, 22
Coaxial RF Cable	Joinfront	JFAR-BNCMSMM-500	2100033742	Aug.08, 22
Test software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Horn Antenna	ETS-Lindgren	3117	00240041	July 22, 22
Horn Antenna	SCHWARZBECK	BBHA 9170	01024	Dec. 25, 22
Pre-Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV 9718C	00142	Aug. 06, 22
Pre-Amplifier (18GHz-40GHz)	Rohde&Schwarz	SCU40	100437	Nov. 16, 22
Coaxial RF Cable	Joinfront	JFAA6-NMNM-8000	2100033742	Aug.08, 22
Coaxial RF Cable	Joinfront	JFAA6-NMSMM-2000	2100033742	Aug.08, 22
Coaxial RF Cable	Joinfront	JFAA6-NMSMM-800	2100033742	Aug.08, 22

NOTES:

1. The test was performed in 966 Chamber (Baodun).
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

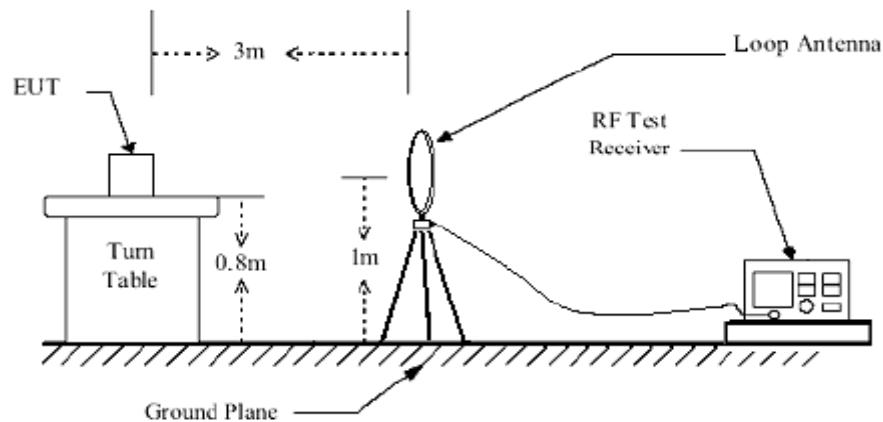

Below 1GHz test setup

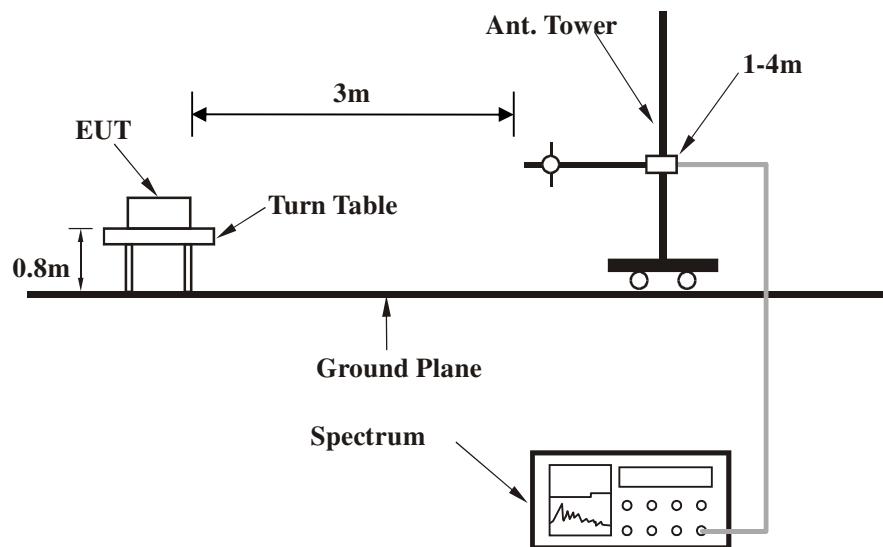


Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).



Test Report No.: RF2203WDG0170

Above 1GHz test setup

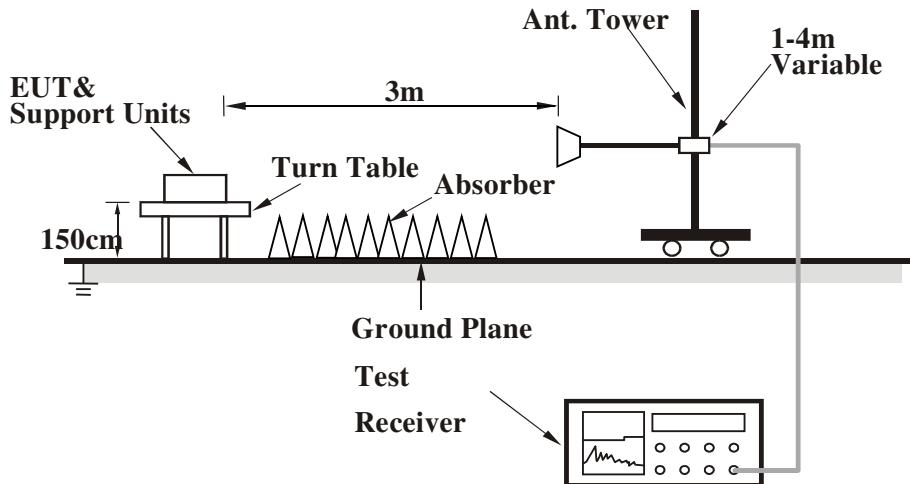

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


BT-LE (GFSK)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	115.36	36.36 QP	43.50	-7.14	1.00 H	230	53.52	-17.16
2	175.50	39.85 QP	43.50	-3.65	1.00 H	292	54.40	-14.55
3	204.60	40.00 QP	43.50	-3.50	1.00 H	196	56.19	-16.19
4	297.72	40.62 QP	46.00	-5.38	1.00 H	198	53.19	-12.57
5	332.64	39.59 QP	46.00	-6.41	1.00 H	280	51.43	-11.84
6	505.30	32.00 QP	46.00	-14.00	1.00 H	344	41.00	-9.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

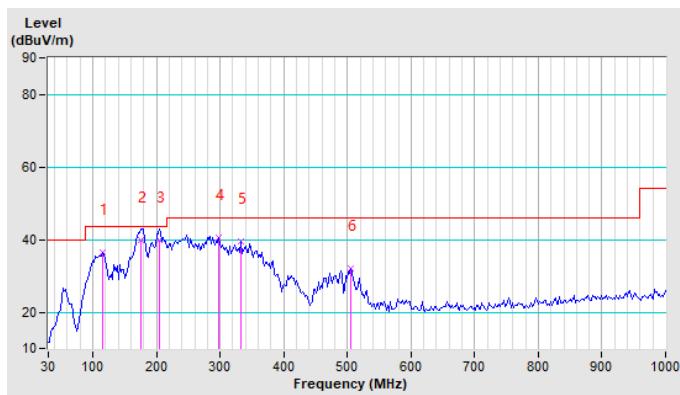




Test Report No.: RF2203WDG0170

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.28	34.90 QP	40.00	-5.10	1.00 V	200	48.96	-14.06
2	95.96	31.90 QP	43.50	-11.60	1.00 V	33	50.67	-18.77
3	175.50	39.73 QP	43.50	-3.77	1.00 V	272	54.28	-14.55
4	313.24	42.20 QP	46.00	-3.80	1.00 V	219	54.45	-12.25
5	328.76	42.35 QP	46.00	-3.65	1.00 V	205	54.27	-11.92
6	359.80	41.36 QP	46.00	-4.64	1.00 V	133	52.69	-11.33

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

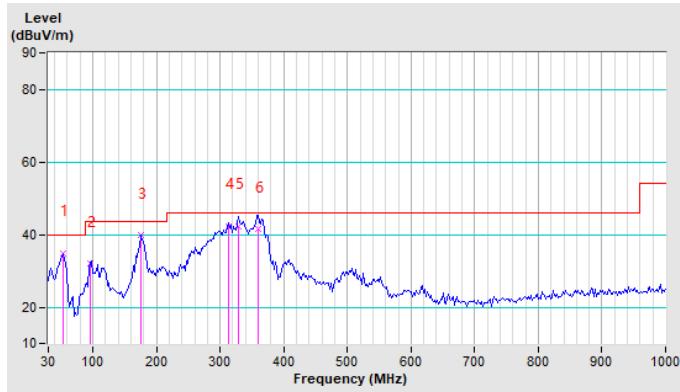



ABOVE 1GHz TEST DATA:

BT-LE (GFSK)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.65 PK	74.00	-19.35	1.00 H	127	52.68	1.97
2	2390.00	35.69 AV	54.00	-18.31	1.00 H	127	33.72	1.97
3	*2402.00	91.61 PK			1.00 H	127	89.63	1.98
4	*2402.00	90.52 AV			1.00 H	127	88.54	1.98
5	4804.00	51.66 PK	74.00	-22.34	1.70 H	186	46.77	4.89
6	4804.00	40.36 AV	54.00	-13.64	1.70 H	186	35.47	4.89
7	#7206.00	54.36 PK	74.00	-19.64	1.40 H	174	44.80	9.56
8	#7206.00	44.00 AV	54.00	-10.00	1.40 H	174	34.44	9.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.01 PK	74.00	-27.99	1.00 V	271	44.04	1.97
2	2390.00	33.14 AV	54.00	-20.86	1.00 V	271	31.17	1.97
3	*2402.00	84.65 PK			1.00 V	271	82.67	1.98
4	*2402.00	83.44 AV			1.00 V	271	81.46	1.98
5	4804.00	50.14 PK	74.00	-23.86	1.77 V	180	45.25	4.89
6	4804.00	39.15 AV	54.00	-14.85	1.77 V	180	34.26	4.89
7	#7206.00	53.64 PK	74.00	-20.36	1.97 V	355	44.08	9.56
8	#7206.00	43.69 AV	54.00	-10.31	1.97 V	355	34.13	9.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



Test Report No.: RF2203WDG0170

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	94.00 PK			1.00 H	0	92.00	2.00
2	*2440.00	93.52 AV			1.00 H	0	91.52	2.00
3	4880.00	50.08 PK	74.00	-23.92	1.29 H	300	44.90	5.18
4	4880.00	39.51 AV	54.00	-14.49	1.29 H	300	34.33	5.18
5	7320.00	53.00 PK	74.00	-21.00	1.74 H	110	42.97	10.03
6	7320.00	43.67 AV	54.00	-10.33	1.74 H	110	33.64	10.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	89.00 PK			1.00 V	125	87.00	2.00
2	*2440.00	88.41 AV			1.00 V	125	86.41	2.00
3	4880.00	50.00 PK	74.00	-24.00	1.20 V	147	44.82	5.18
4	4880.00	39.00 AV	54.00	-15.00	1.20 V	147	33.82	5.18
5	7320.00	53.90 PK	74.00	-20.10	1.65 V	177	43.87	10.03
6	7320.00	43.95 AV	54.00	-10.05	1.65 V	177	33.92	10.03

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



Test Report No.: RF2203WDG0170

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	97.15 PK			1.16 H	351	95.13	2.02
2	*2480.00	96.22 AV			1.16 H	351	94.20	2.02
3	2483.50	56.54 PK	74.00	-17.46	1.16 H	351	54.51	2.03
4	2483.50	45.26 AV	54.00	-8.74	1.16 H	351	43.23	2.03
5	4960.00	50.65 PK	74.00	-23.35	1.00 H	159	45.16	5.49
6	4960.00	40.00 AV	54.00	-14.00	1.00 H	159	34.51	5.49
7	7440.00	53.88 PK	74.00	-20.12	1.56 H	156	43.37	10.51
8	7440.00	44.71 AV	54.00	-9.29	1.56 H	156	34.20	10.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	91.76 PK			1.14 V	249	89.74	2.02
2	*2480.00	90.52 AV			1.14 V	249	88.50	2.02
3	2483.50	53.62 PK	74.00	-20.38	1.14 V	249	51.59	2.03
4	2483.50	42.10 AV	54.00	-11.90	1.14 V	249	40.07	2.03
5	4960.00	49.67 PK	74.00	-24.33	1.50 V	196	44.18	5.49
6	4960.00	39.52 AV	54.00	-14.48	1.50 V	196	34.03	5.49
7	7440.00	54.00 PK	74.00	-20.00	1.87 V	130	43.49	10.51
8	7440.00	43.69 AV	54.00	-10.31	1.87 V	130	33.18	10.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



Test Report No.: RF2203WDG0170

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Wireless Connectivity Tester	Rohde&Schwarz	CMW270	101601	Nov. 21, 22
MXA signal analyzer	Agilent	N9020A	MY49100060	Apr. 06, 23
Network Analyzer	Agilent	8753ES	US39173518	Mar. 28, 23
Spectrum Analyzer	Rohde&Schwarz	FSV7	101574	July 04, 22
Frequency Analyzer	Keysight	N9010B	MY60240432	Nov. 25, 22
Progamable Temperature&Humidity Chamber	Hongjin	HYC-TH-225DH	DG-180746	Feb. 16, 23
DC Source	Agilent	E3640A	MY40004013	Feb. 23, 23
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.4	N/A	N/A

NOTES:

1. The test was performed in RF Oven room (Baodun).
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



Test Report No.: RF2203WDG0170

4.3.3 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) \geq 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


4.3.4 DEVIATION FROM TEST STANDARD

No deviation.



Test Report No.: RF2203WDG0170

4.3.5 TEST SETUP

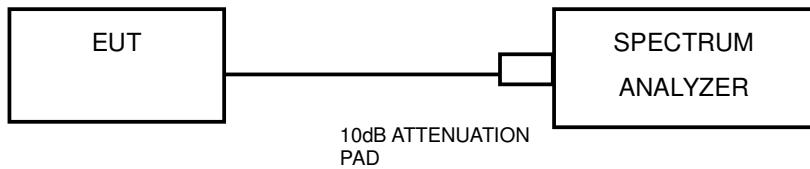

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.18	0.5	PASS
19	2440	1.24	0.5	PASS
39	2480	1.24	0.5	PASS


CH0

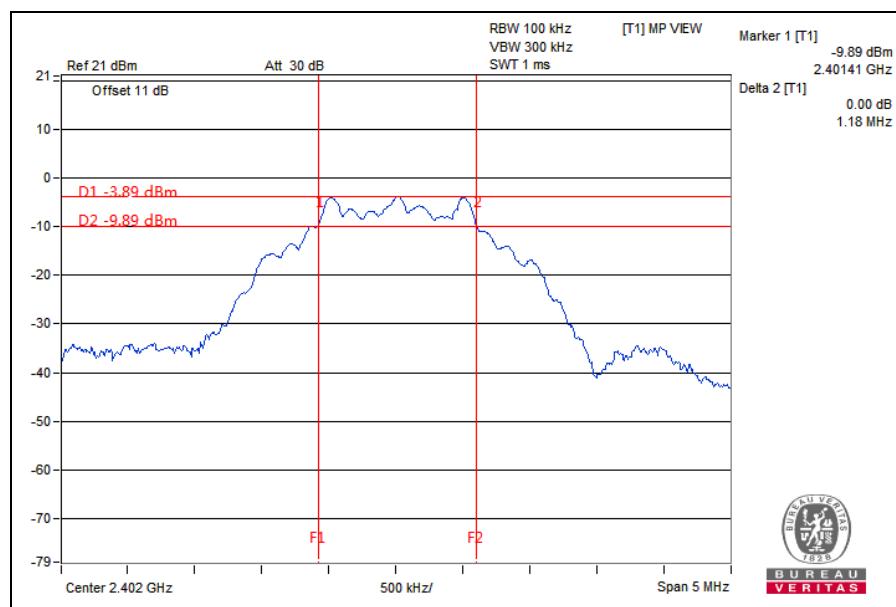




Test Report No.: RF2203WDG0170

CH19

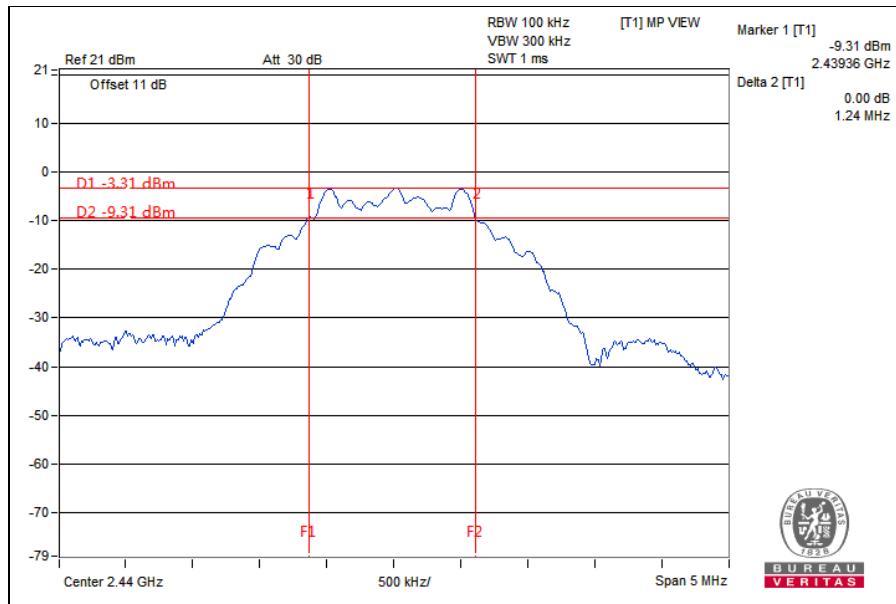

CH40

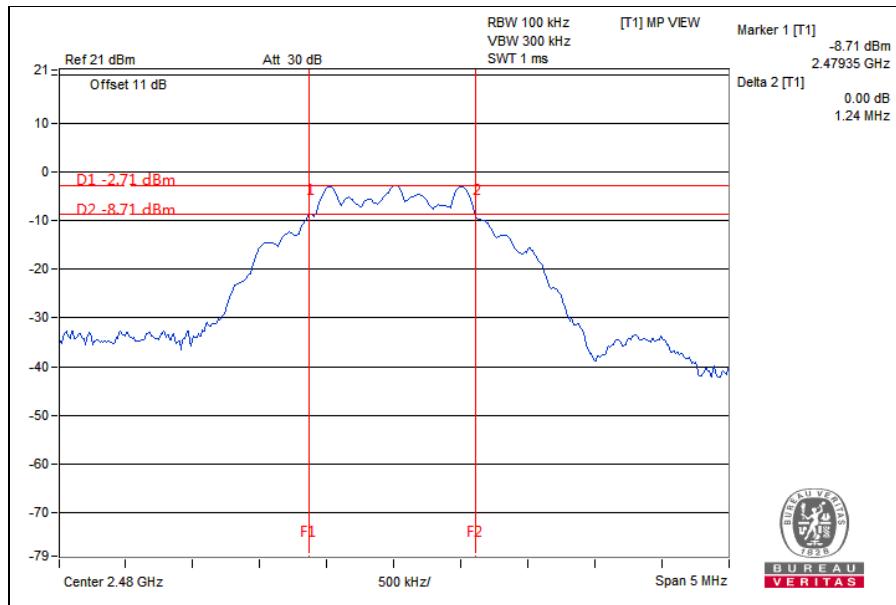

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 TEST SETUP

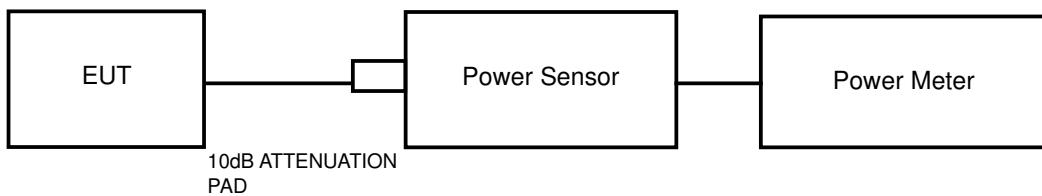

4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Wireless Connectivity Tester	Rohde&Schwarz	CMW270	101601	Nov. 21, 22
MXA signal analyzer	Agilent	N9020A	MY49100060	Apr. 06, 23
Network Analyzer	Agilent	8753ES	US39173518	Mar. 28, 23
Spectrum Analyzer	Rohde&Schwarz	FSV7	101574	July 04, 22
Frequency Analyzer	Keysight	N9010B	MY60240432	Nov. 25, 22
Programmable Temperature&Humidity Chamber	Hongjin	HYC-TH-225DH	DG-180746	Feb. 16, 23
DC Source	Agilent	E3640A	MY40004013	Feb. 23, 23
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.4	N/A	N/A

NOTES:

1. The test was performed in RF Oven room (Baodun).
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



Test Report No.: RF2203WDG0170

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.4.7 TEST RESULTS

4.4.7.1 MAXIMUM PEAK OUTPUT POWER

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	0.32	1.076	1	PASS
19	2440	1.51	1.416	1	PASS
39	2480	2.12	1.629	1	PASS



4.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2402	-2.55
19	2440	-1.38
39	2480	-0.78




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP

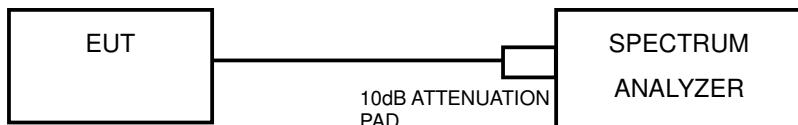

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW \geq 3 x RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




Test Report No.: RF2203WDG0170

4.5.7 TEST RESULTS

BT-LE (GFSK)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-22.30	8	PASS
19	2440	-21.65	8	PASS
39	2480	-21.21	8	PASS

CH0

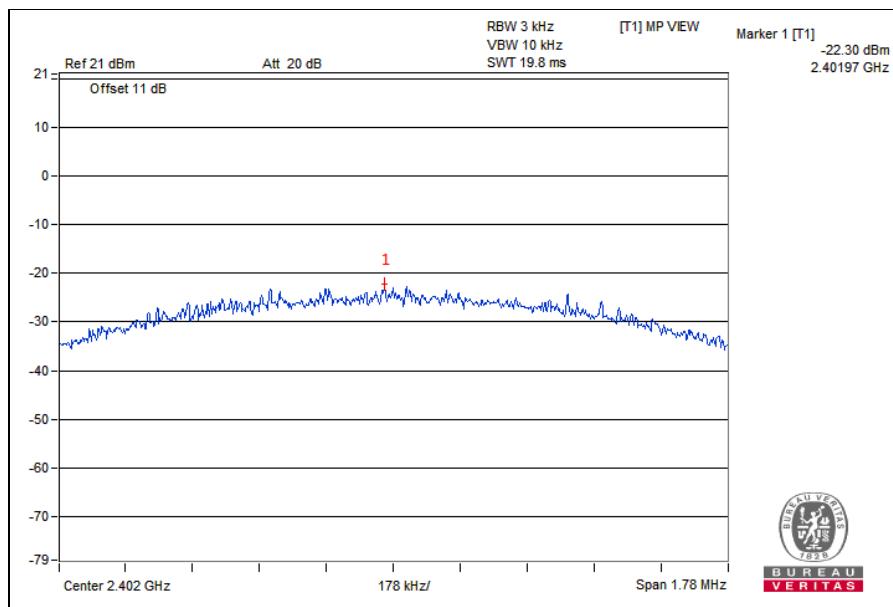

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




Test Report No.: RF2203WDG0170

CH19

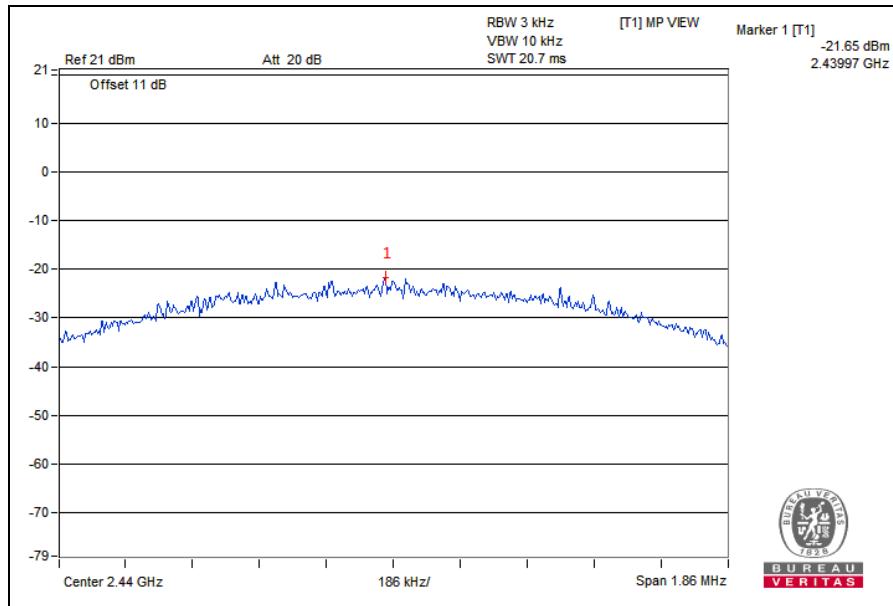

CH39

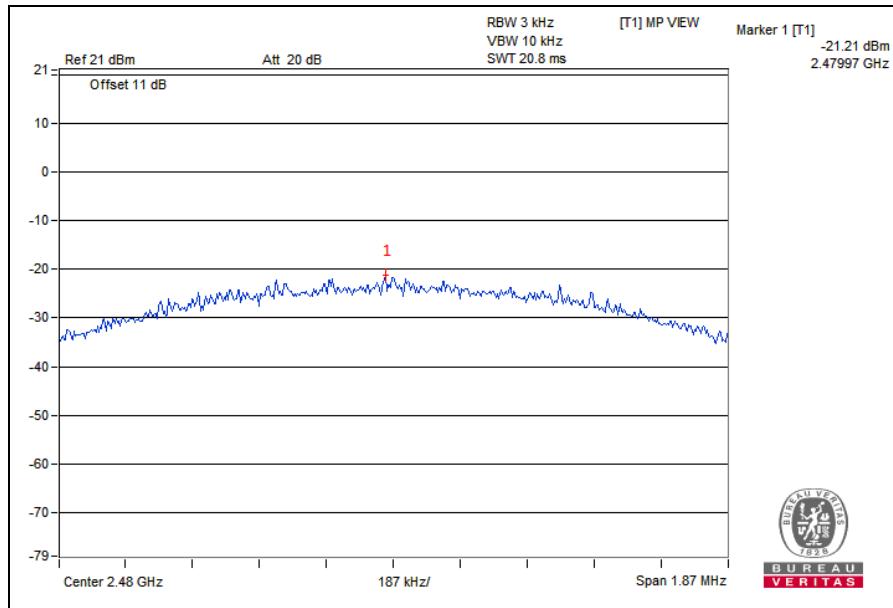

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com




4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

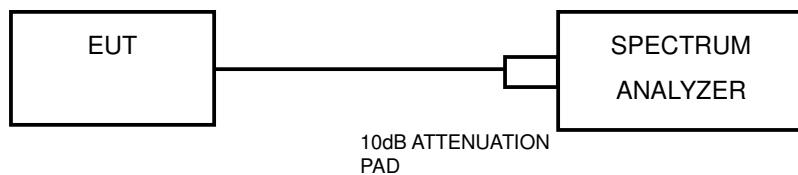

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



Test Report No.: RF2203WDG0170

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: RF2203WDG0170

4.6.7 TEST RESULTS

BT-LE (GFSK) 1Mbps

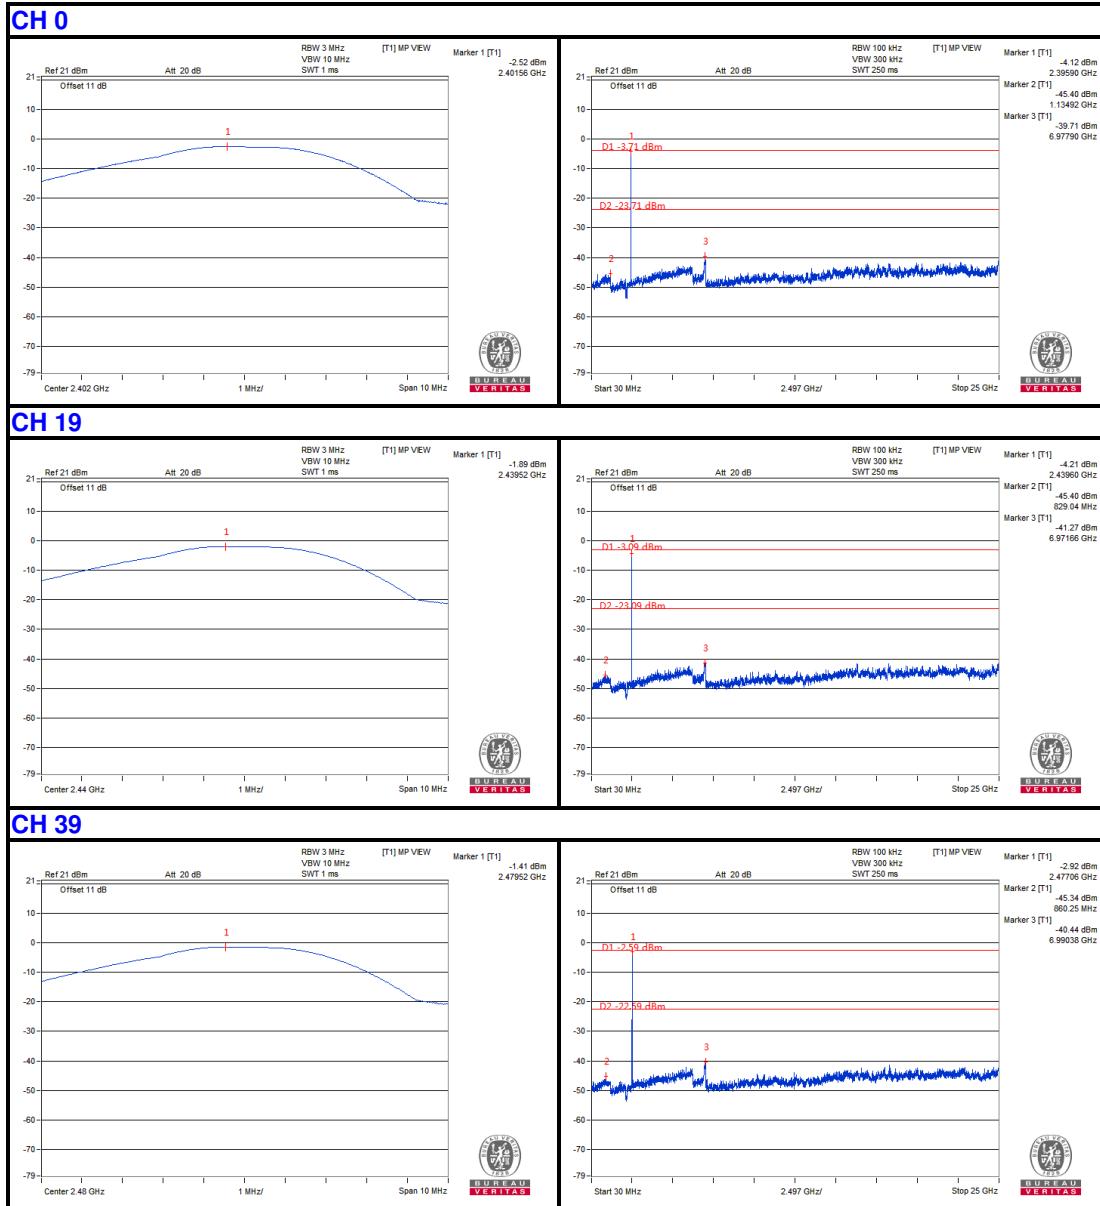

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Test Report No.: RF2203WDG0170

Band Edge:

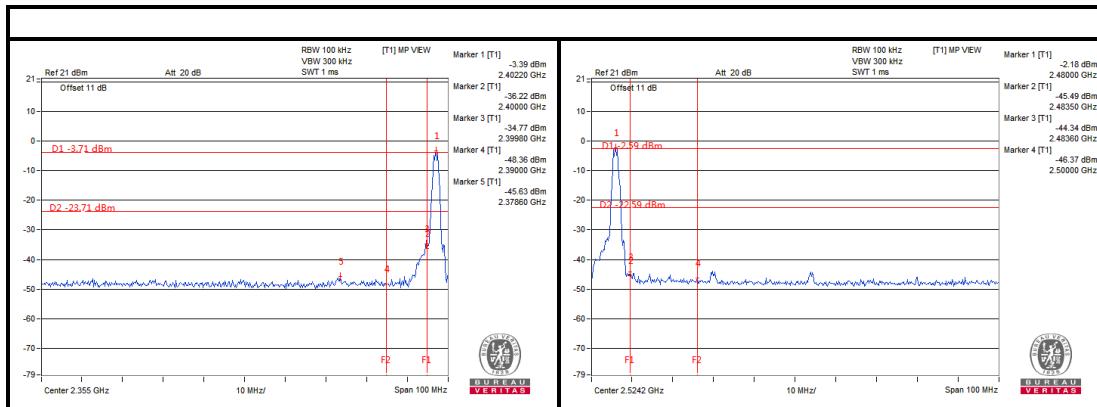

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Test Report No.: RF2203WDG0170

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie
Town, Dongguan City, Guangdong Province.
523942. People's Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com



Test Report No.: RF2203WDG0170

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---