



Exhibit 9: Internal photos



Below the standard USB-C receptacle, mounted directly on the main PCBA, is shown.

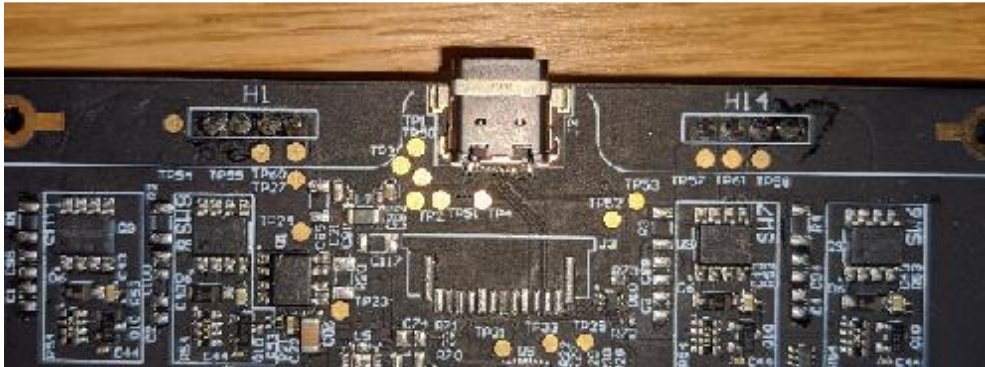

Below the flex connector is used to go between the main board and an off-board USB-C receptacle.

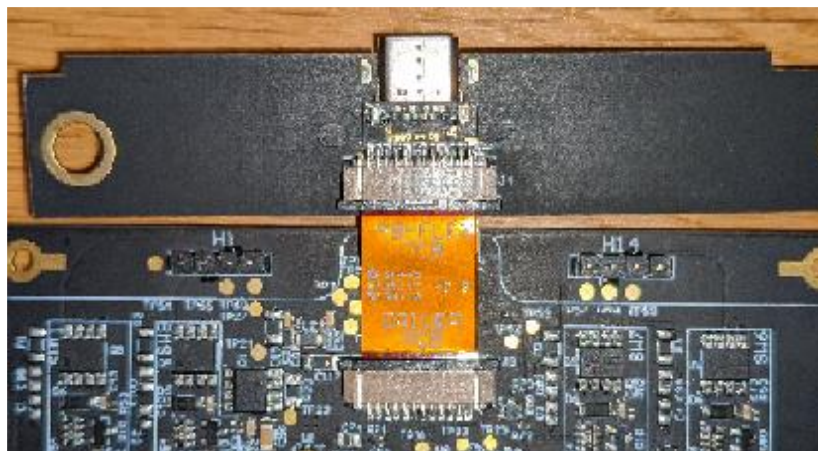

The electronics within the two PCBAs are identical. The only difference between the two options is the USB-C connector location. The flex connector contains the same pin connections that would be carried within the USB-C cable.