


Vertical:

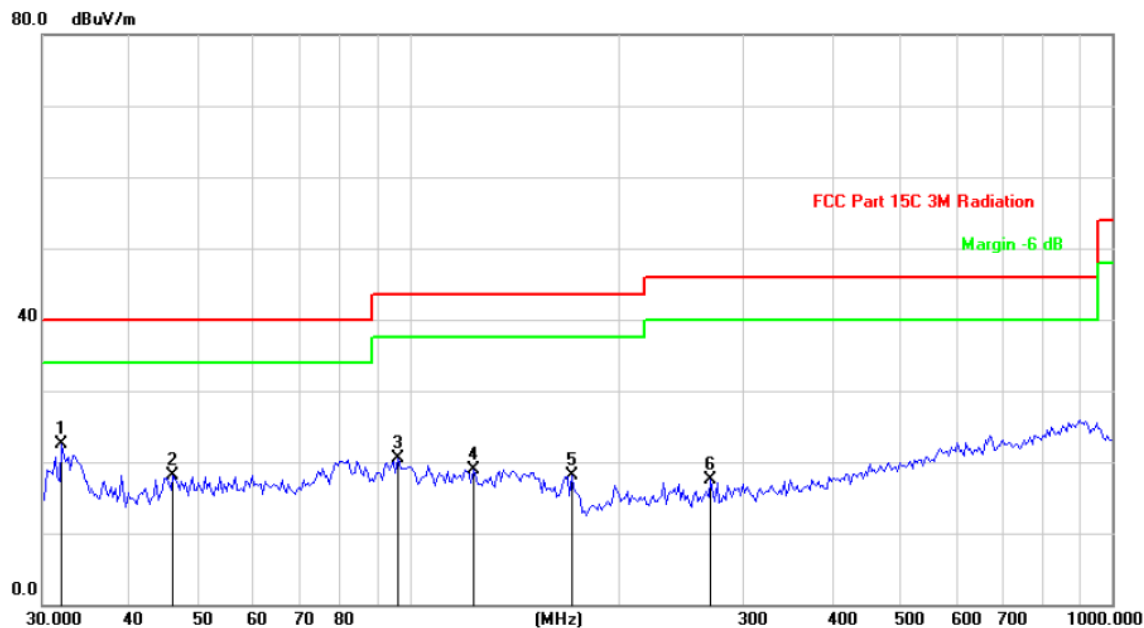

Site: Polarization: **Vertical** Temperature: 25
Limit: FCC Part 15C 3M Radiation Power: Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	31.9586	33.56	-11.15	22.41	40.00	-17.59	peak
2		46.0558	28.69	-10.54	18.15	40.00	-21.85	peak
3		96.3230	29.79	-9.32	20.47	43.50	-23.03	peak
4		123.1815	32.17	-13.18	18.99	43.50	-24.51	peak
5		170.1888	33.74	-15.67	18.07	43.50	-25.43	peak
6		268.7212	29.56	-12.12	17.44	46.00	-28.56	peak

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and three modulation (GFSK, Pi/4 DQPSK, 8DPSK) and the worst case Mode (Highest channel and GFSK) was submitted only.

3. Freq. = Emission frequency in MHz

Measurement (dBuV/m) = Reading level (dBuV) + Corr. Factor (dB)

Correction Factor = Antenna Factor + Cable loss - Pre-amplifier

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Measurement (dBuV/m) - Limits (dBuV/m)


Any value more than 10dB below limit have not been specifically reported

* is meaning the worst frequency has been tested in the test frequency range

Test Result of Radiated Spurious at Band edges

Lowest channel 2402:

Horizontal:

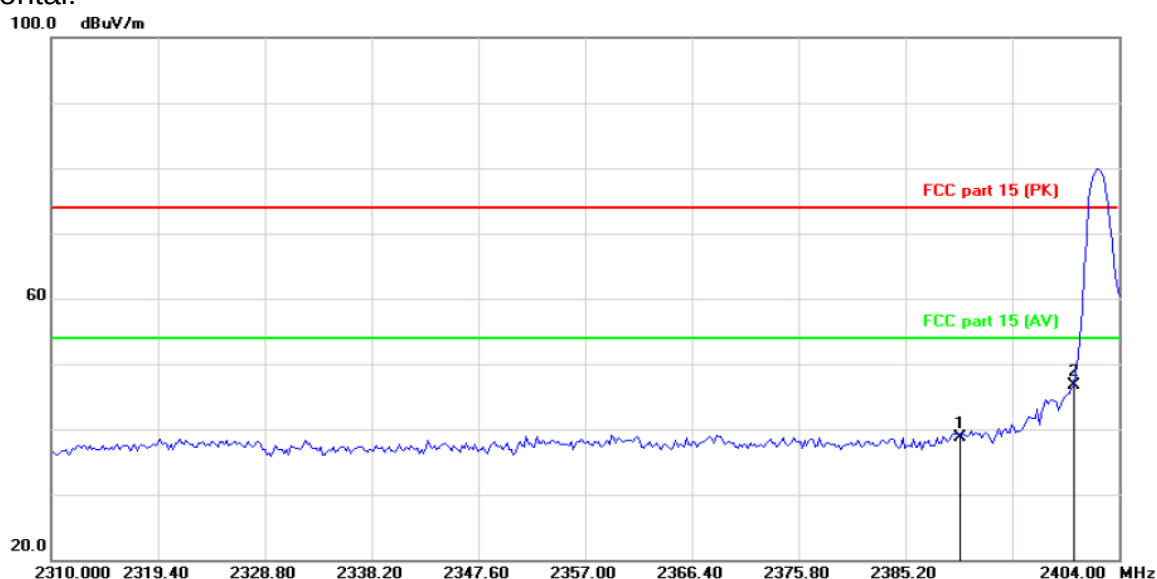

Site

Polarization: **Horizontal**


Temperature: 25

Limit: FCC part 15 (PK)

Power:

Humidity: 55 %

Vertical:

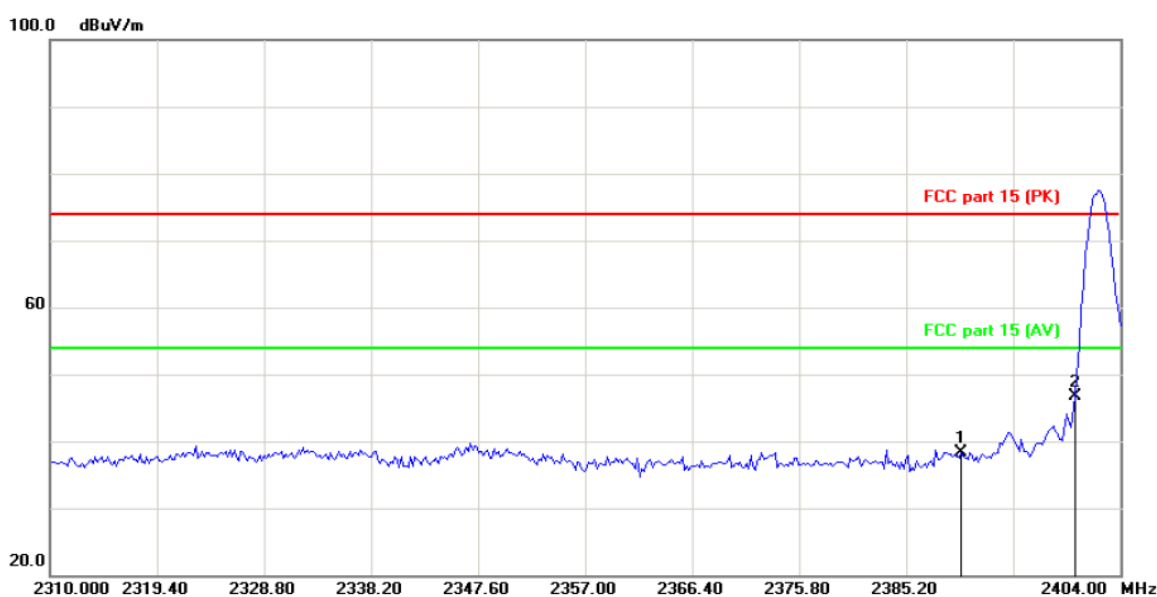

Site

Polarization: **Vertical**

Temperature: 25

Limit: FCC part 15 (PK)


Power:

Humidity: 55 %

Frequency (MHz)	Ant. Pol. H/V	Peak (dBμV/m)	Duty cycle factor (dB/m)	AV (dBμV/m)	Peak limit (dBμV/m)	AV limit (dBμV/m)	PK Margin (dB)	AVG Margin (dB)
2390	H	38.77	-4.62	34.15	74	54	-35.23	-19.85
2390	V	38.39	-4.62	33.77	74	54	-35.61	-20.23
2400	H	46.80	-4.62	42.18	74	54	-27.20	-11.82
2400	V	46.69	-4.62	42.07	74	54	-27.31	-11.93

Highest channel 2480:

Horizontal:

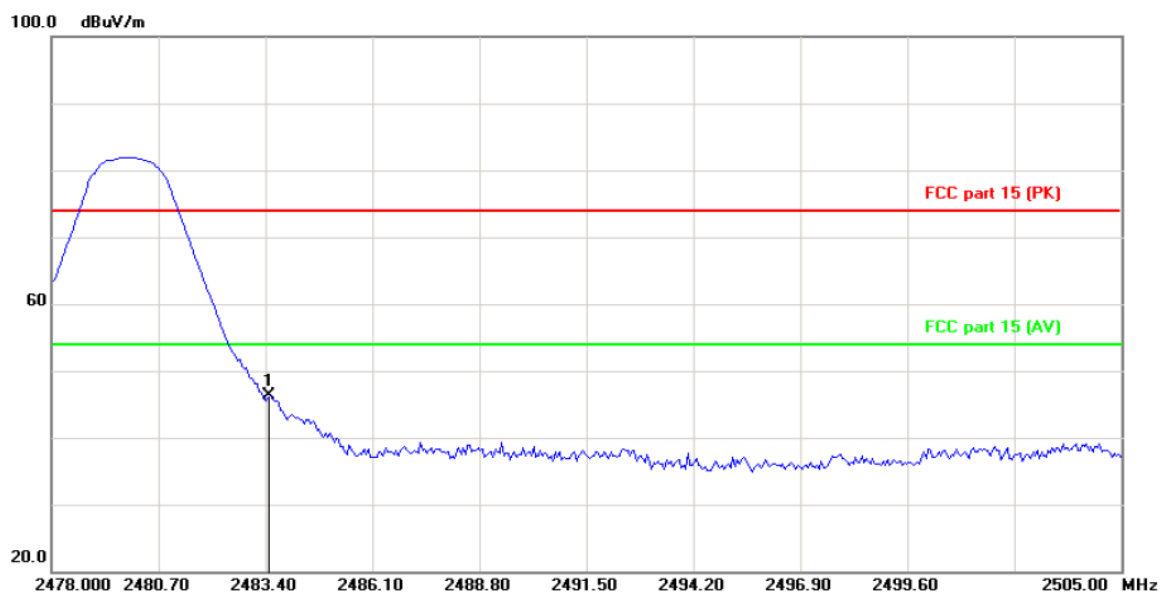

Site

Limit: FCC part 15 (PK)


Polarization: **Horizontal**

Power:

Temperature: 25

Humidity: 55 %

Vertical:

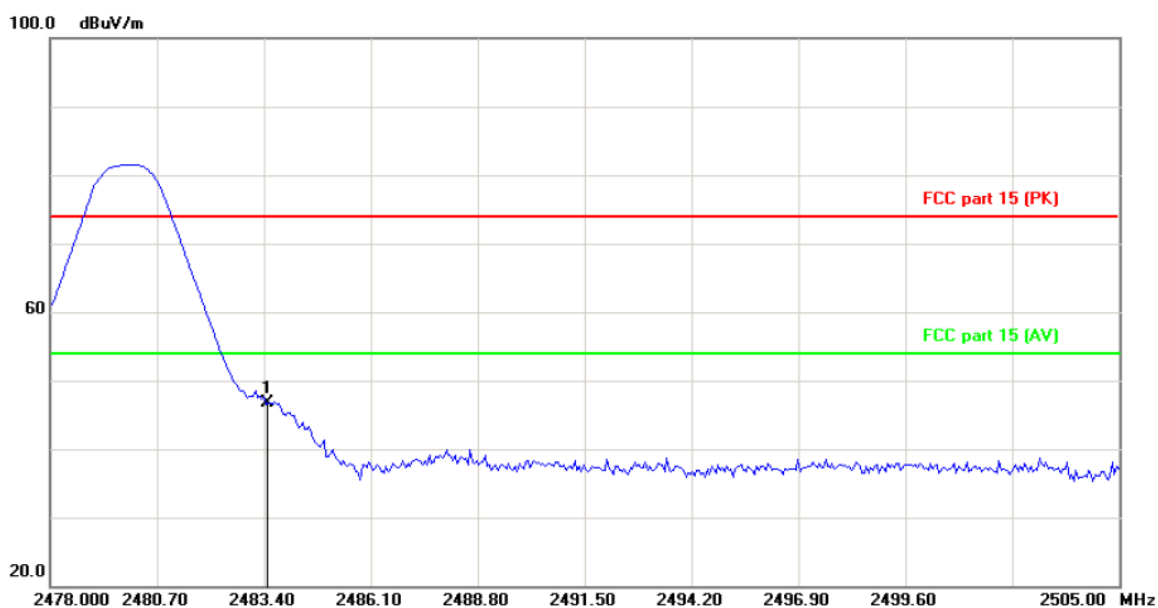

Site

Limit: FCC part 15 (PK)

Polarization: **Vertical**

Power:

Temperature: 25

Humidity: 55 %

Frequency (MHz)	Ant. Pol. H/V	Peak (dBuV/m)	Duty cycle factor (dB/m)	AV (dBuV/m)	Peak limit (dBuV/m)	AV limit (dBuV/m)	PK Margin (dB)	AVG Margin (dB)
2483.5	H	46.35	-4.62	41.73	74	54	-27.65	-12.27
2483.5	V	46.69	-4.62	42.07	74	54	-27.31	-11.93

Note: Measurements were conducted in all three modulation (GFSK, Pi/4DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.

Above 1GHz

Modulation Type: GFSK									
Low channel: 2402 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
4804	H	45.93	---	0.66	46.59	---	74	54	-7.41
7206	H	36.27	---	9.50	45.77	---	74	54	-8.23
---	H	---	---	---	---	---	---	---	---
4804	V	44.89	---	0.66	45.55	---	74	54	-8.45
7206	V	35.04	---	9.50	44.54	---	74	54	-9.46
---	V	---	---	---	---	---	---	---	---

Middle channel: 2441 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
4882	H	45.58	---	0.99	46.57	---	74	54	-7.43
7323	H	34.67	---	9.87	44.54	---	74	54	-9.46
---	H	---	---	---	---	---	---	---	---
4882	V	44.74	---	0.99	45.73	---	74	54	-8.27
7323	V	35.06	---	9.87	44.93	---	74	54	-9.07
---	V	---	---	---	---	---	---	---	---

High channel: 2480 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
4960	H	46.98	---	1.33	48.31	---	74	54	-5.69
7440	H	37.15	---	10.22	47.37	---	74	54	-6.63
---	H	---	---	---	---	---	---	---	---
4960	V	47.59	---	1.33	48.92	---	74	54	-5.08
7440	V	37.12	---	10.22	47.34	---	74	54	-6.66
---	V	---	---	---	---	---	---	---	---

Note:



1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
6. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
7. All the restriction bands are compliance with the limit of 15.209.

Appendix A: Photographs of Test Setup


Product: Wireless Earbuds with Charging Case

Model: AIR 2

Radiated Emission

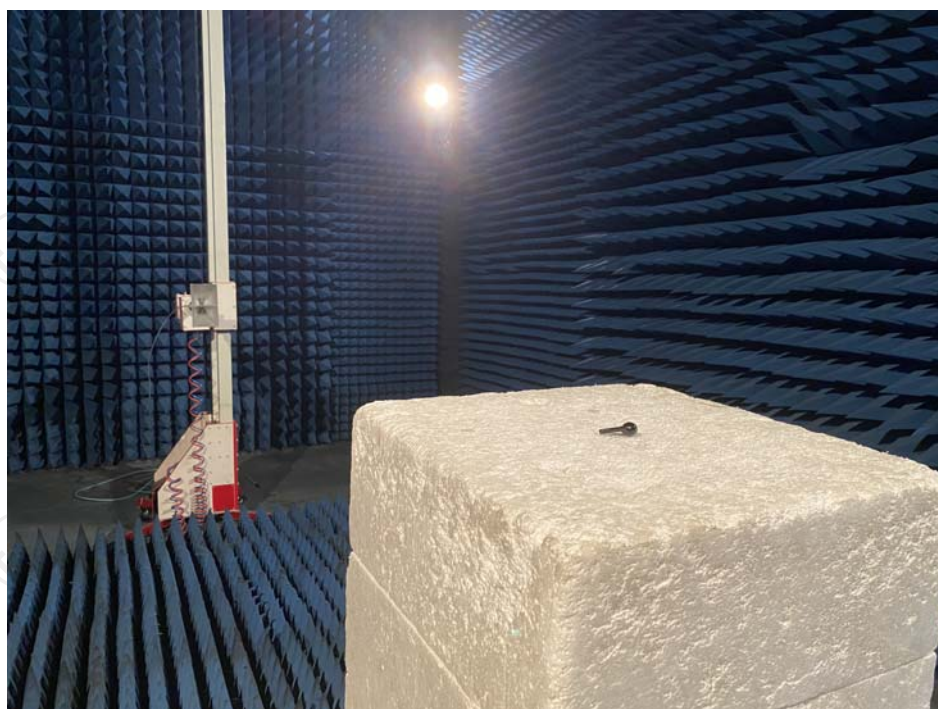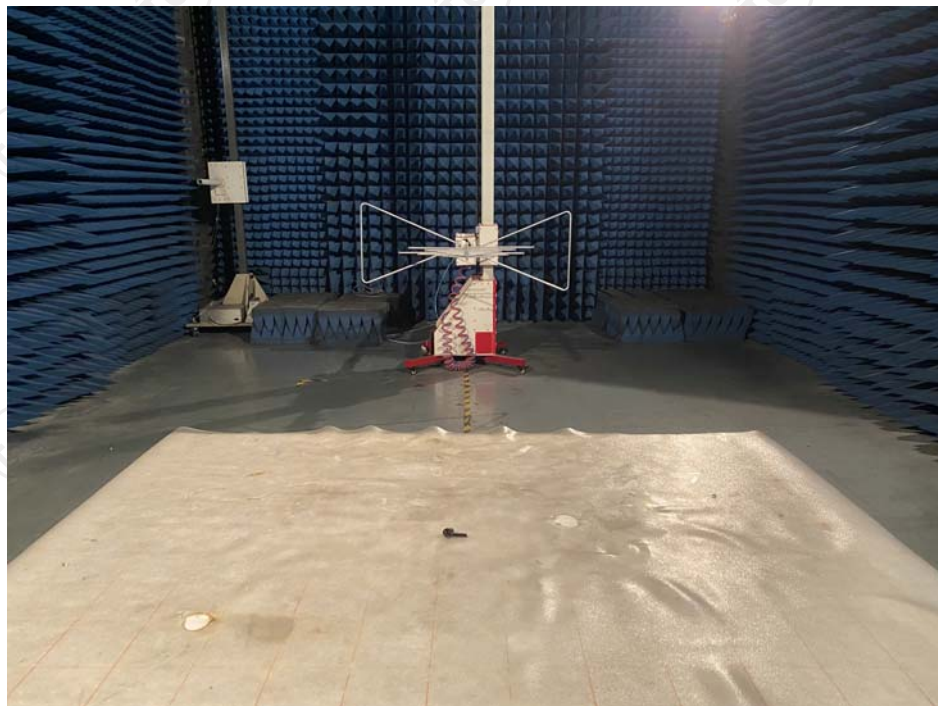

Conducted Emission

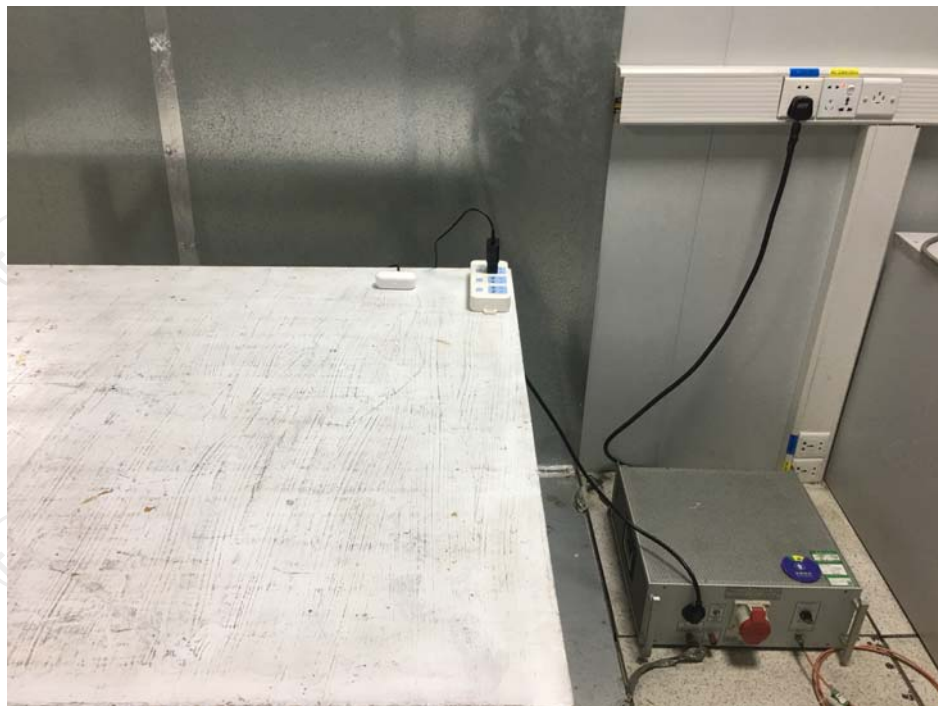

Appendix B: Photographs of EUT
Product: Wireless Earbuds with Charging Case
Model: AIR 2
External Photos






























Product: Wireless Earbuds with Charging Case
Model: AIR 2
Internal Photos

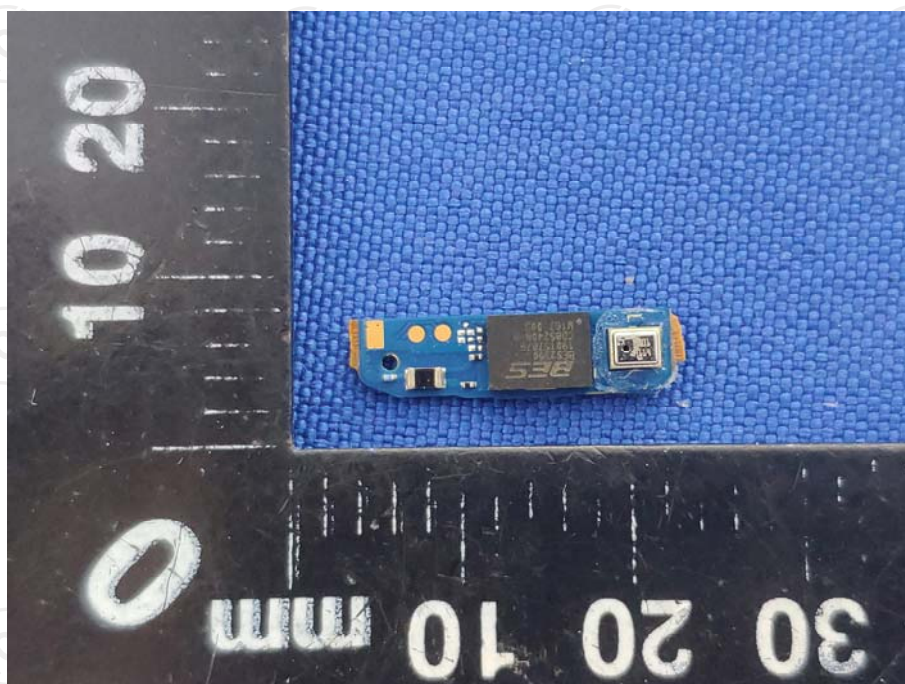


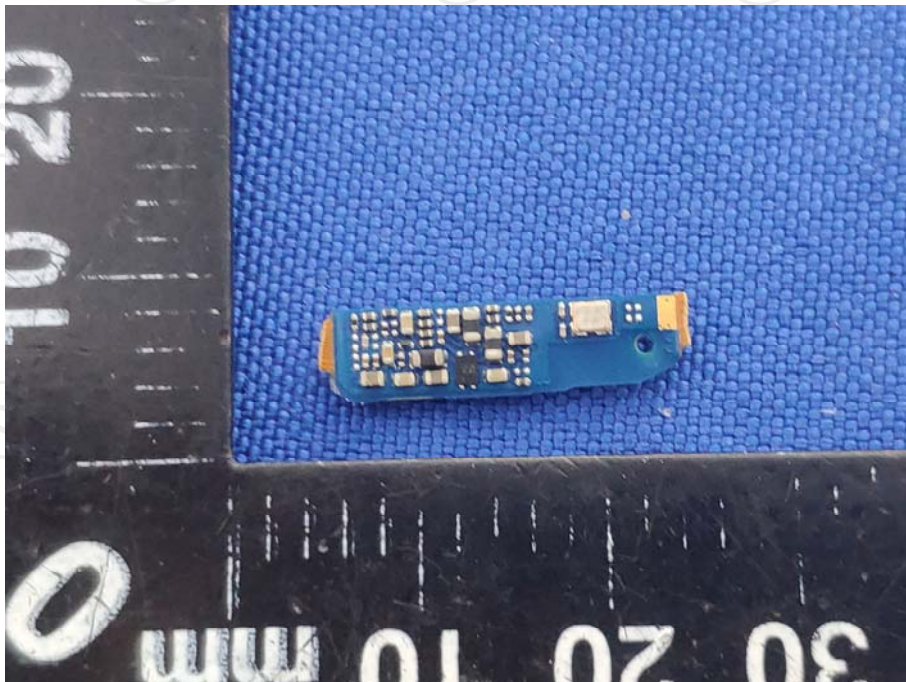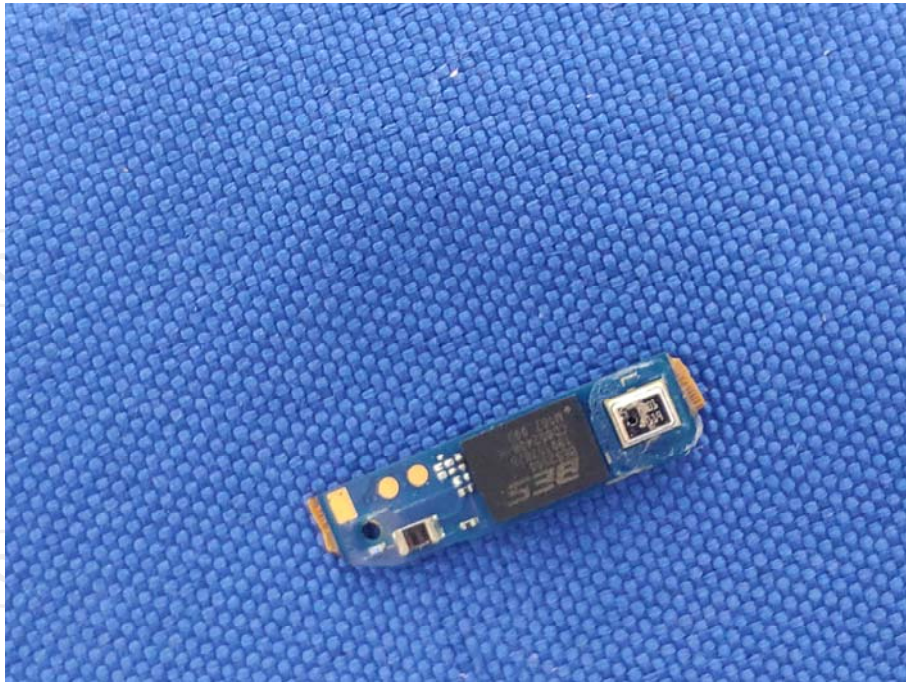


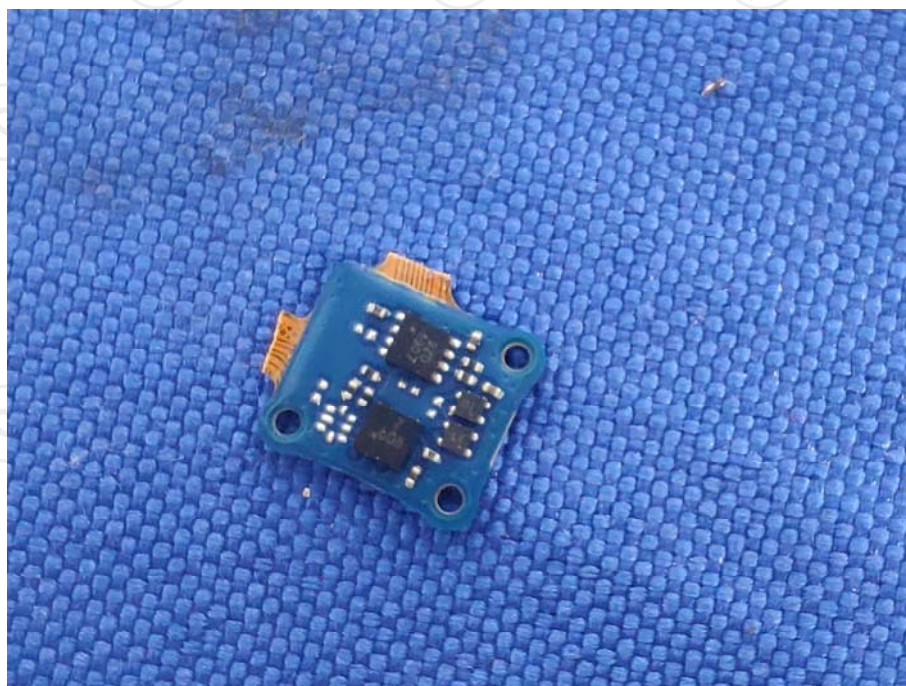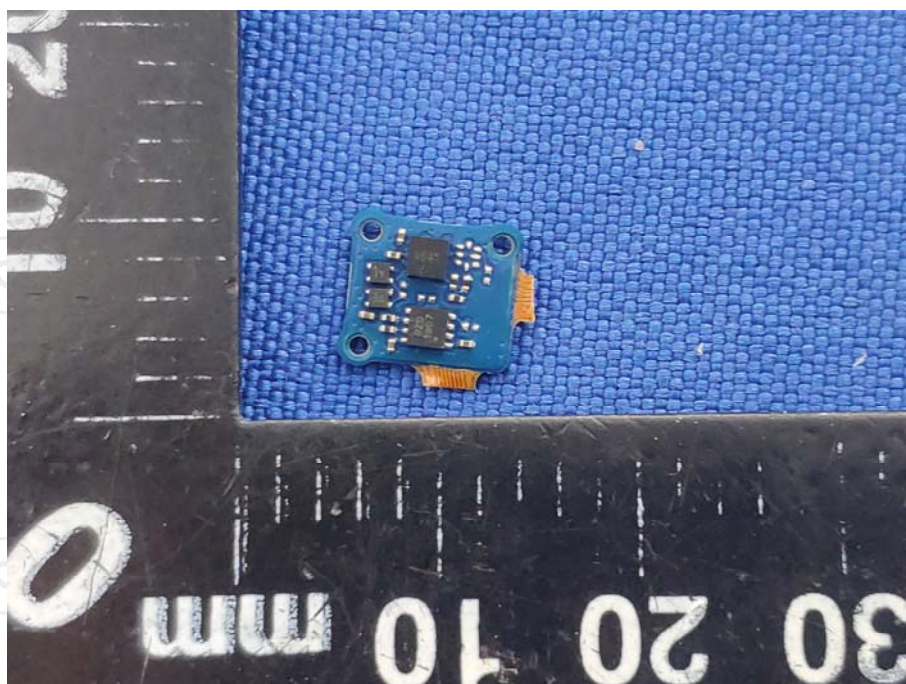


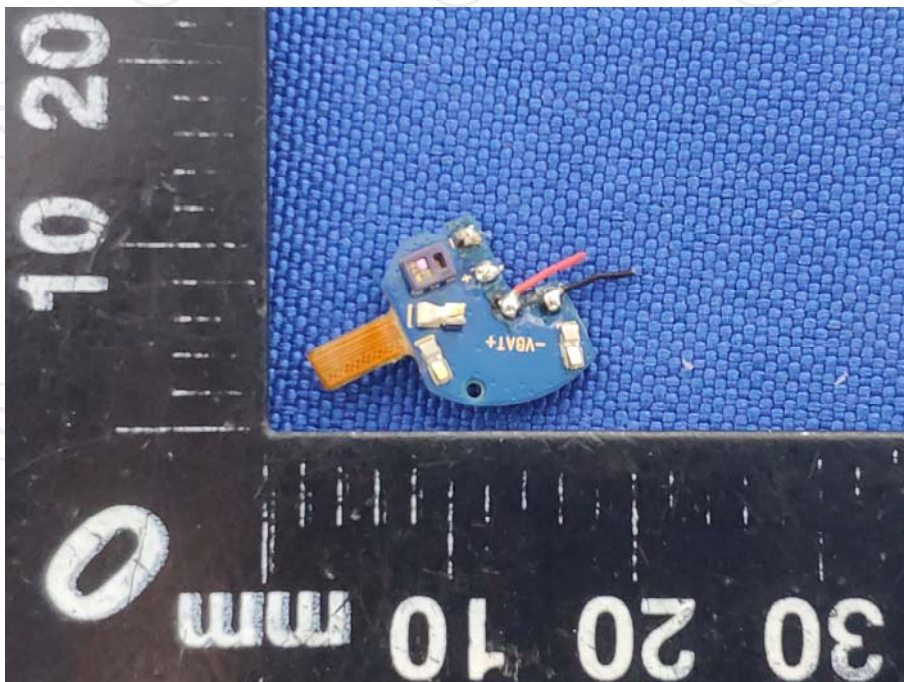
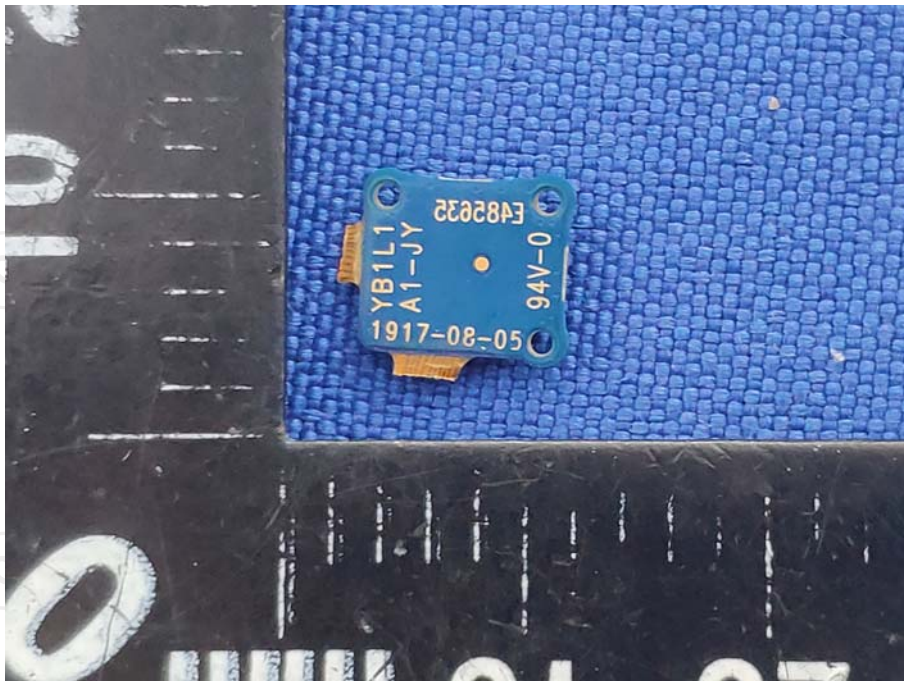


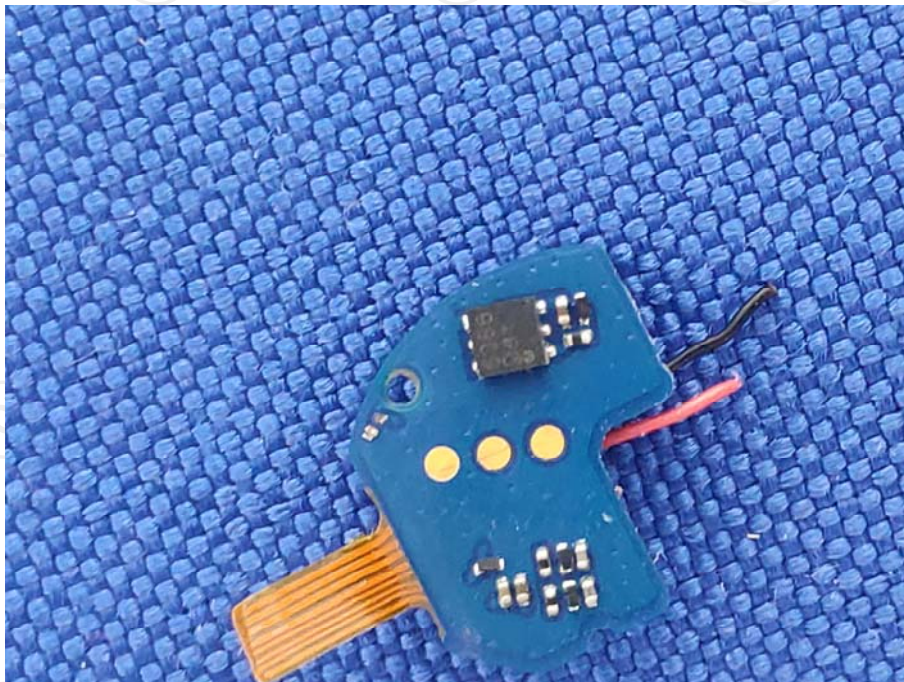
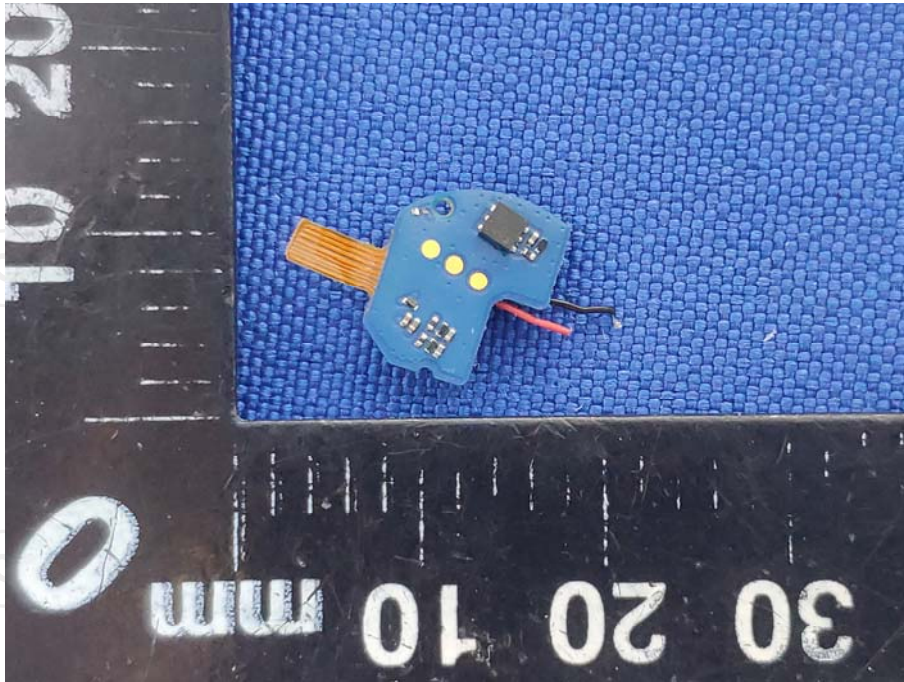



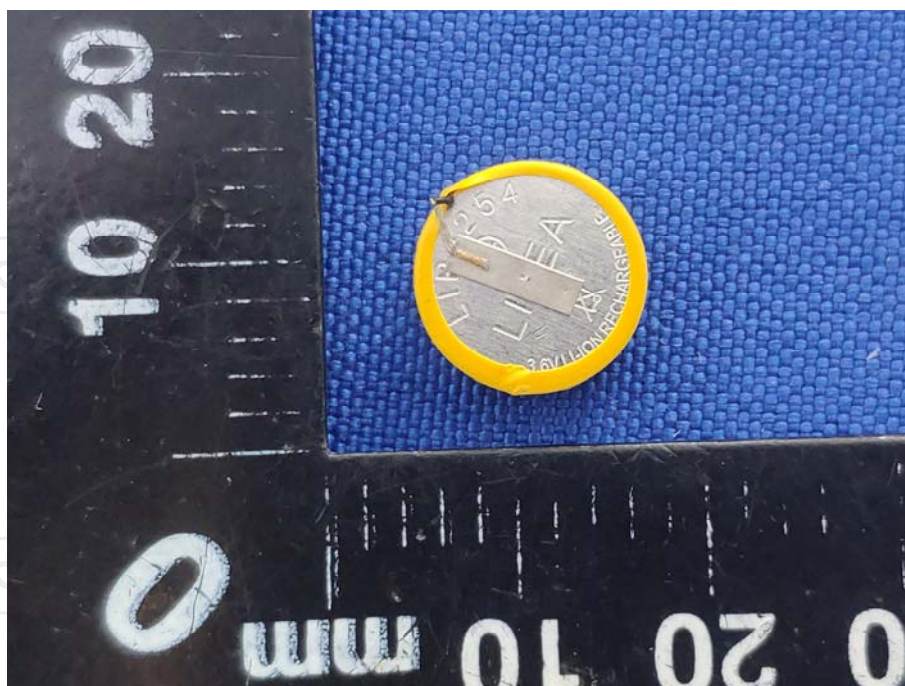


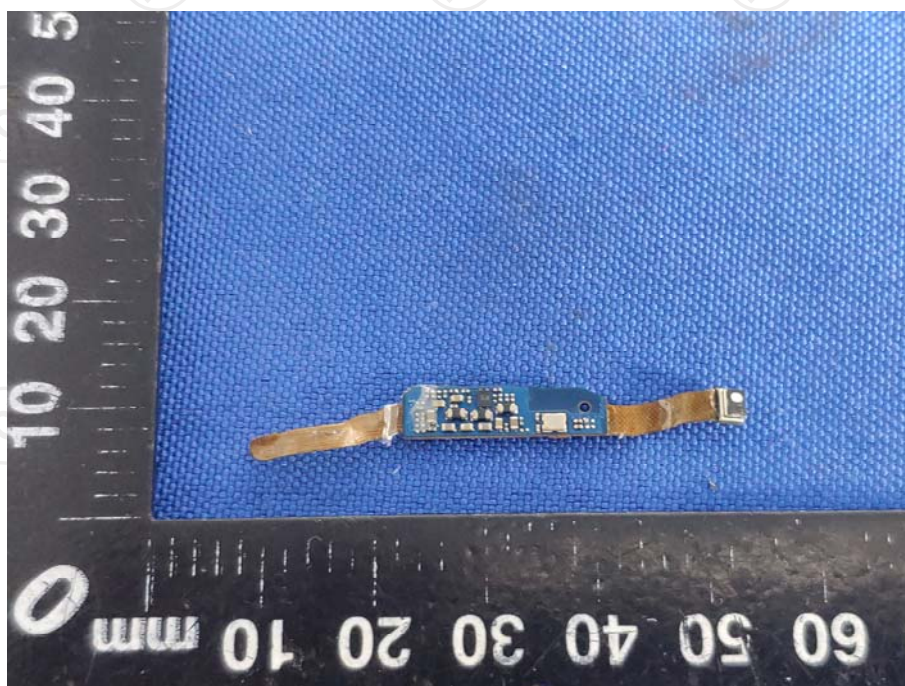


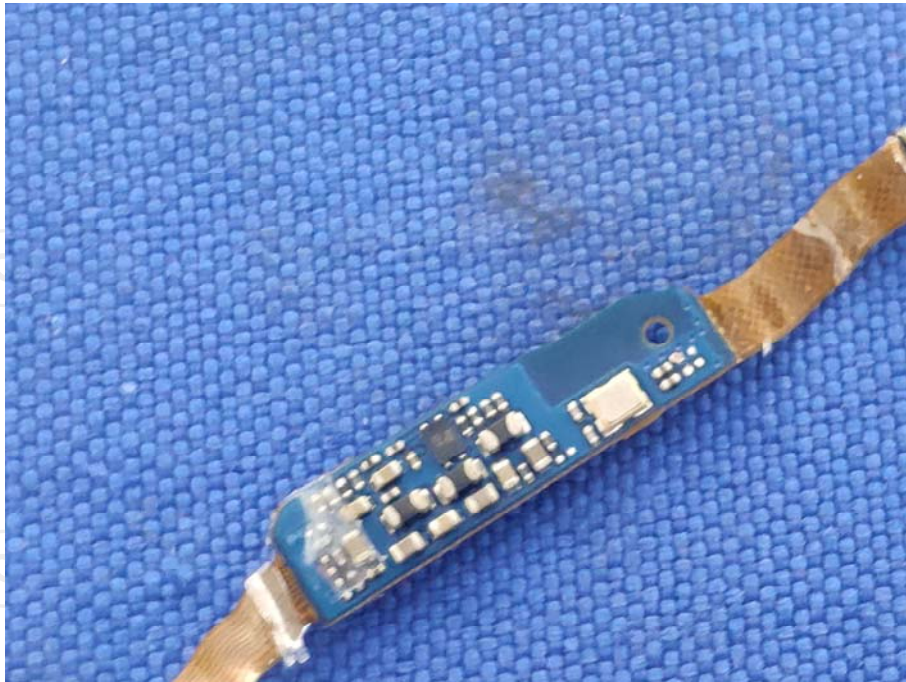

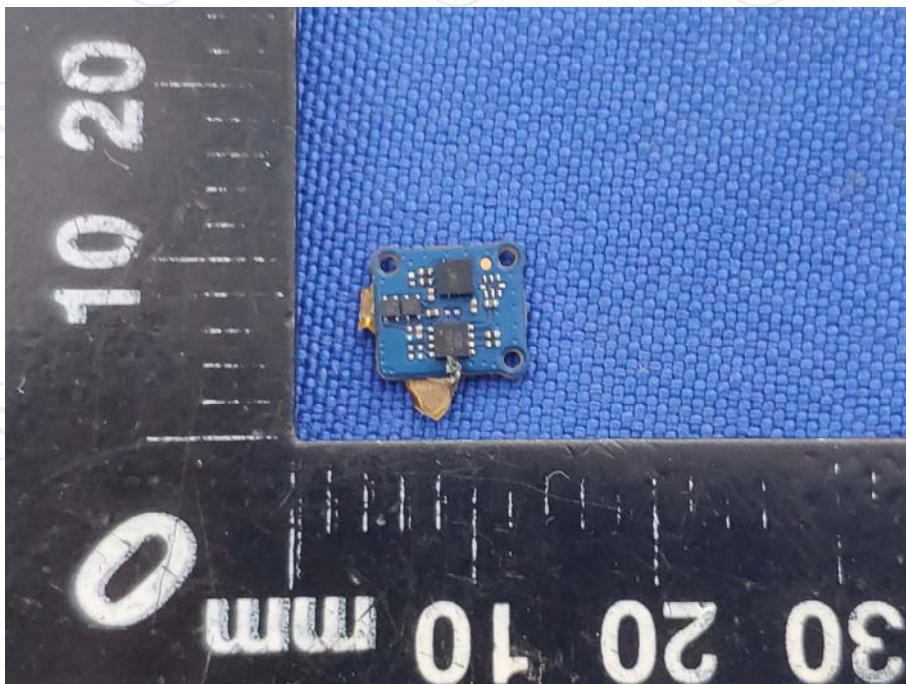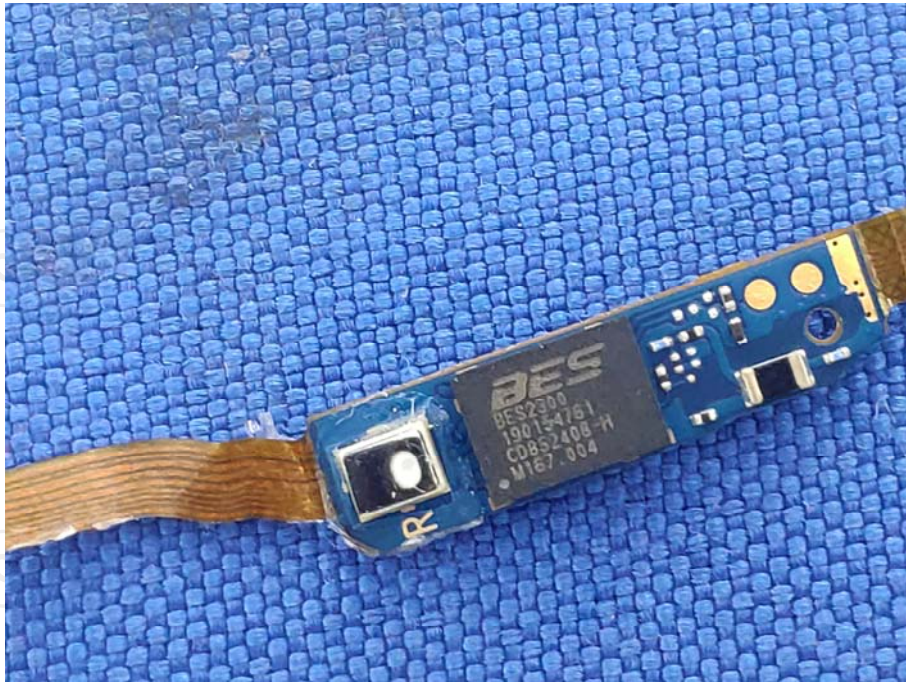

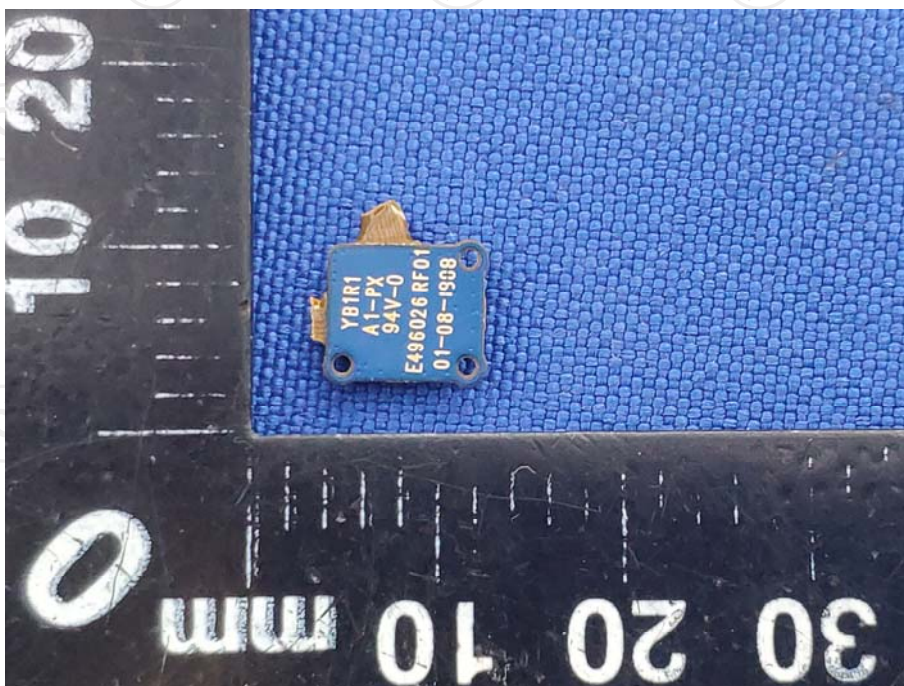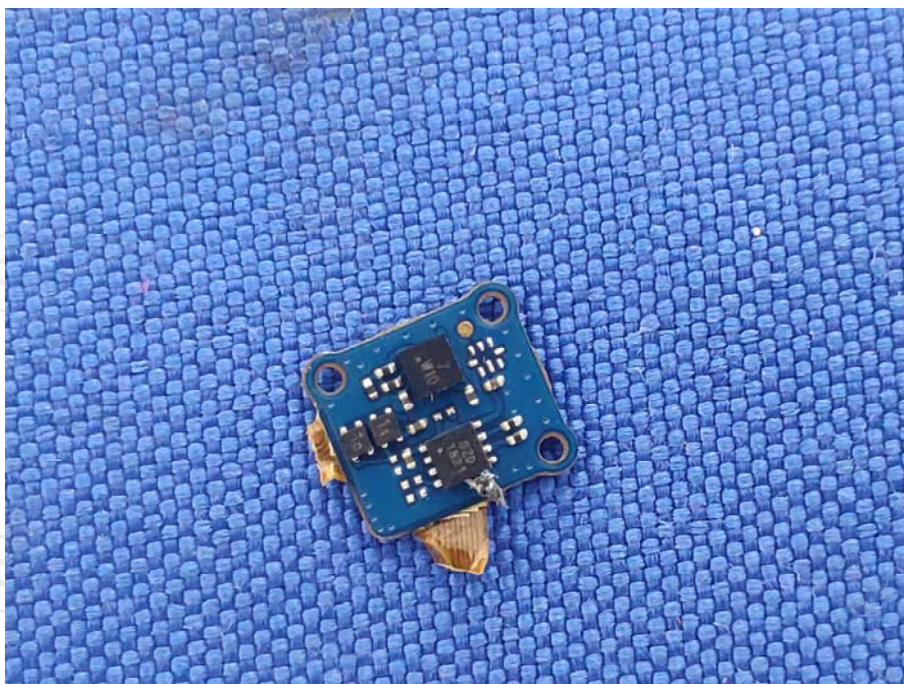

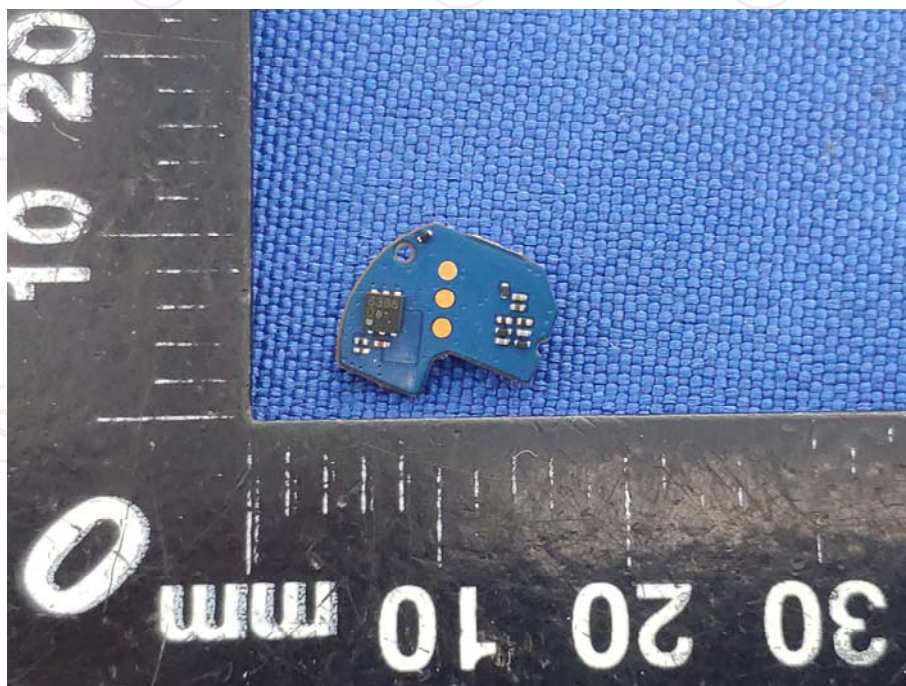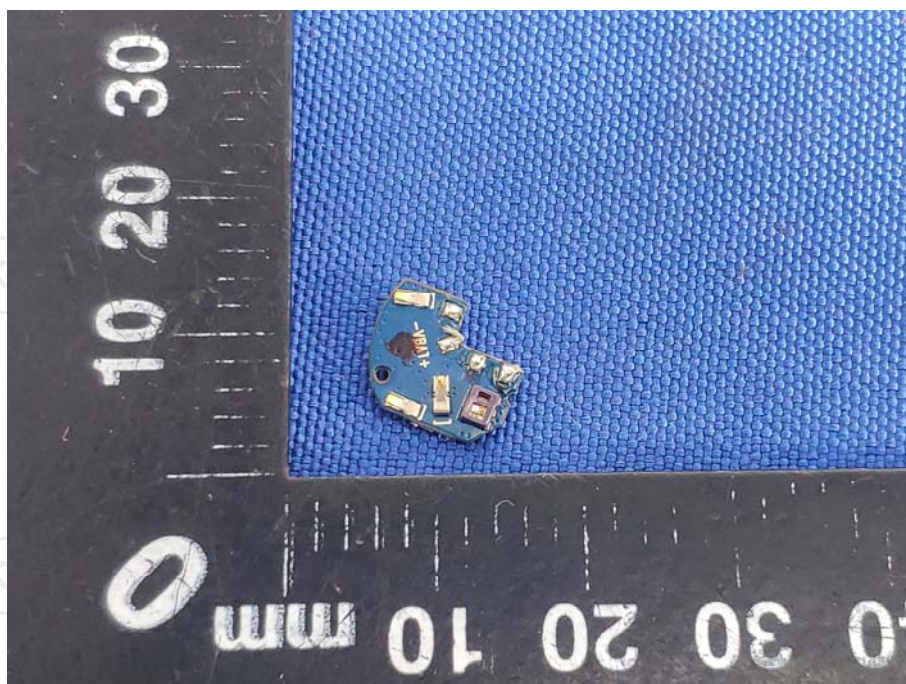

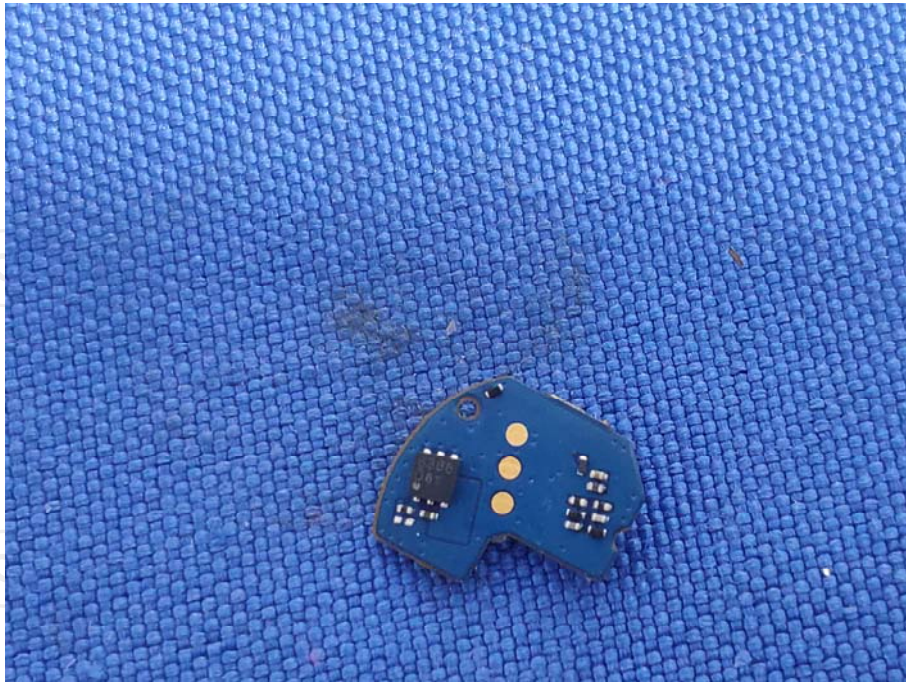



*******END OF REPORT*******