



REVISIONS

REV	DESCRIPTION	DATE	APPROVE
H	RELEASE	07/01/20	SAM SUN

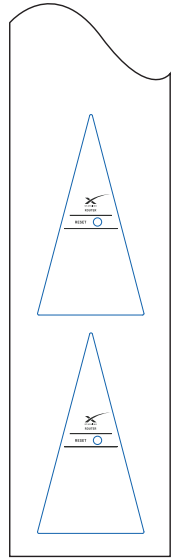

出標方向
↓

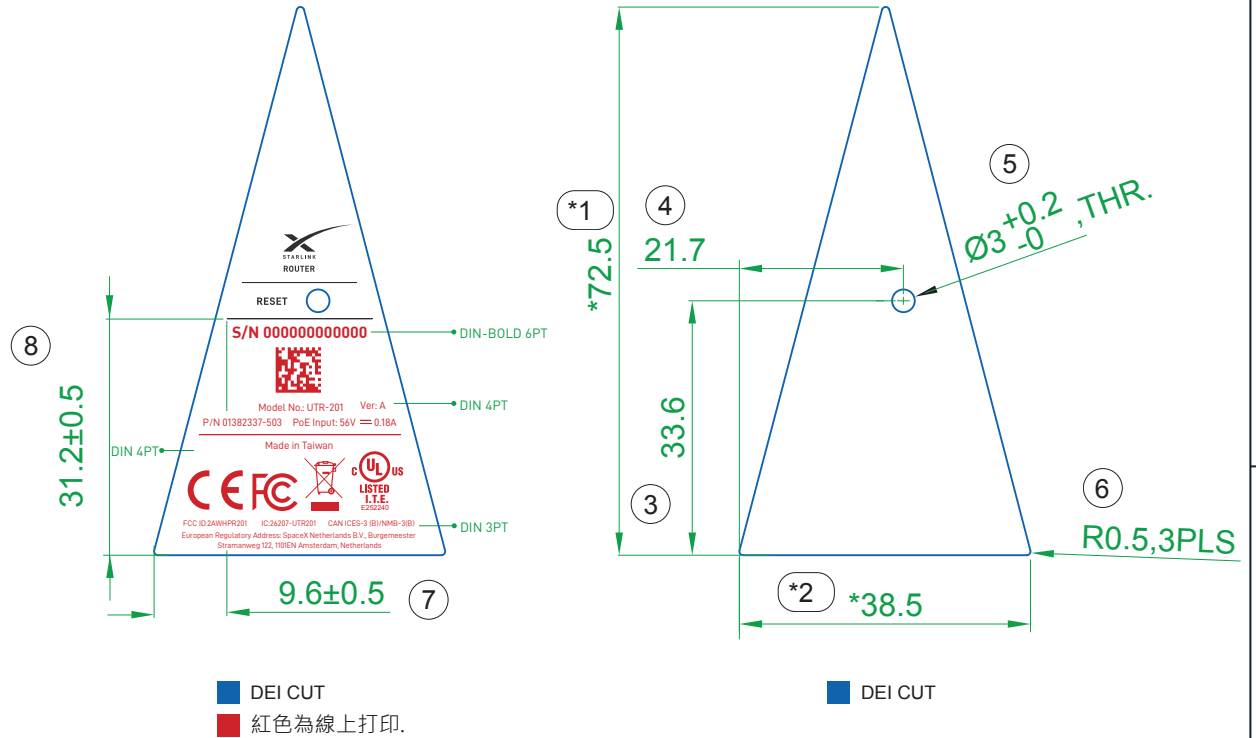



NOTES:

- MATERIAL: WHITE PET, t=0.05,可打印
ADHESIVE: EMBOSSED ADHESIVE, T=0.035
FINISH: MATTE PET, t=0.025,
- COLOR:
a. BACKGROUND= 白色,參照機殼顏色.
黑色: 
- 捲狀出貨,中間孔洞請排廢.
- 離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
- 被貼物:鋁噴漆
- UL Approved, PGJ12,PRINTED,CM-100-KP,搭配碳帶RICOH B110C,B110CR
- TEMPERATURE RESISTANT= 120° C
- 印刷公差:尺寸30mm以下~120mm為±0.5mm,120~315mm為±0.5mm,315以上±0.8mm

9.TEST REQUIREMENTS

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1 附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION 		 啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DRAWN CATHY CHEN		07/01/20		DWG TITLE LABEL, BOTTOM LABEL,SAQ4-SX1	
ENGR CATHY CHEN		07/01/20		SIZE A4	DWG NO. 4L.SAQ4S.00301
APVD SAM SUN		07/01/20		SCALE 1/1	SHEET 1 OF 1
				REV H	