

FCC Test Report

Client Name : Shenzhen Beisiai Technology Co., Ltd
Address : 1904, Block C, North Youcheng District, Minqiang
Community, Minzhi Street, Longhua District, Shenzhen,
China
Product Name : DOG TRAINING COLLAR
Date : Jun. 10, 2020



Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of channels.....	5
1.6. Description Of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	17
5. 20DB Occupy Bandwidth Test.....	23
5.1. Test Standard and Limit.....	23
5.2. Test Setup.....	23
5.3. Test Procedure.....	23
5.4. Test Data.....	23
6. Dwell Time Test.....	25
6.1. Test Standard and Limit.....	25
6.2. Test Setup.....	25
6.3. Test Procedure.....	25
6.4. Test Data.....	25
7. Antenna Requirement.....	27
7.1. Test Standard and Requirement.....	27
7.2. Antenna Connected Construction.....	27
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	28
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	30
APPENDIX III -- INTERNAL PHOTOGRAPH.....	34



TEST REPORT

Applicant : Shenzhen Beisiai Technology Co., Ltd
Manufacturer : Shenzhen Beisiai Technology Co., Ltd
Product Name : DOG TRAINING COLLAR
Model No. : DTC01, DTC01-C, DTC01-R
Trade Mark : PETPNR
Rating(s) : TX: Input:DC 5V, 0.5A (with DC 3.7V, 200 mAh Battery inside)
RX: Input:DC 5V, 0.5A (with DC 3.7V, 200 mAh Battery inside)

Test Standard(s) : FCC Part15 Subpart C 2019, Section 15.231

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

May 14, 2020

Date of Test

May 14~Jun. 09, 2020

Prepared By

Dolly Mo

(Engineer / Dolly Mo)

Reviewer

Bibo Zhang

(Supervisor / Bibo Zhang)

Approved & Authorized Signer

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Shenzhen Beisiai Technology Co., Ltd
Address	:	1904, Block C, North Youcheng District, Minqiang Community, Minzhi Street, Longhua District, Shenzhen, China
Manufacturer	:	Shenzhen Beisiai Technology Co., Ltd
Address	:	1904, Block C, North Youcheng District, Minqiang Community, Minzhi Street, Longhua District, Shenzhen, China
Factory	:	Shenzhen YiFeng digital electronic manufacturing co. LTD
Address	:	4th floor, building 3, jinmeiwei industrial zone, heyi village, shajing town, baoan district, shenzhen

1.2. Description of Device (EUT)

Product Name	:	DOG TRAINING COLLAR	
Model No.	:	DTC01, DTC01-C, DTC01-R (Note: All samples are the same except the model name, so we prepare "DTC01" for test only.)	
Trade Mark	:	PETPNR	
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter	
Product Description	:	Operation Frequency:	433.92MHz
	:	Number of Channel:	1 Channels
	:	Modulation Type:	FSK
	:	Antenna Type:	Spring Antenna
	:	Antenna Gain(Peak):	0 dBi

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: ZTE
		M/N: STC-A2050I1000USBA-C S/N: 201202102100876 Input: 100-240V~ 50/60Hz, 0.3A Output: DC 5V, 1000mA

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode



For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode

Note: During the test, the EUT was keeping continuous transmission.

1.5. List of channels

Channel	Freq. (MHz)	Note (Modulation Type)
01	433.92	FSK

1.6. Description Of Test Setup

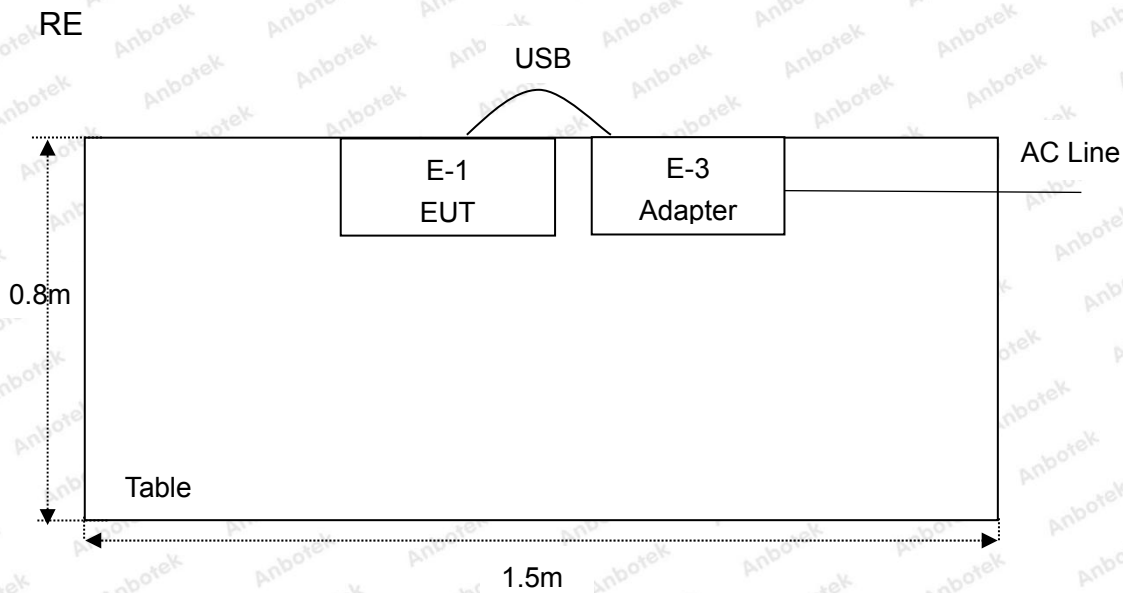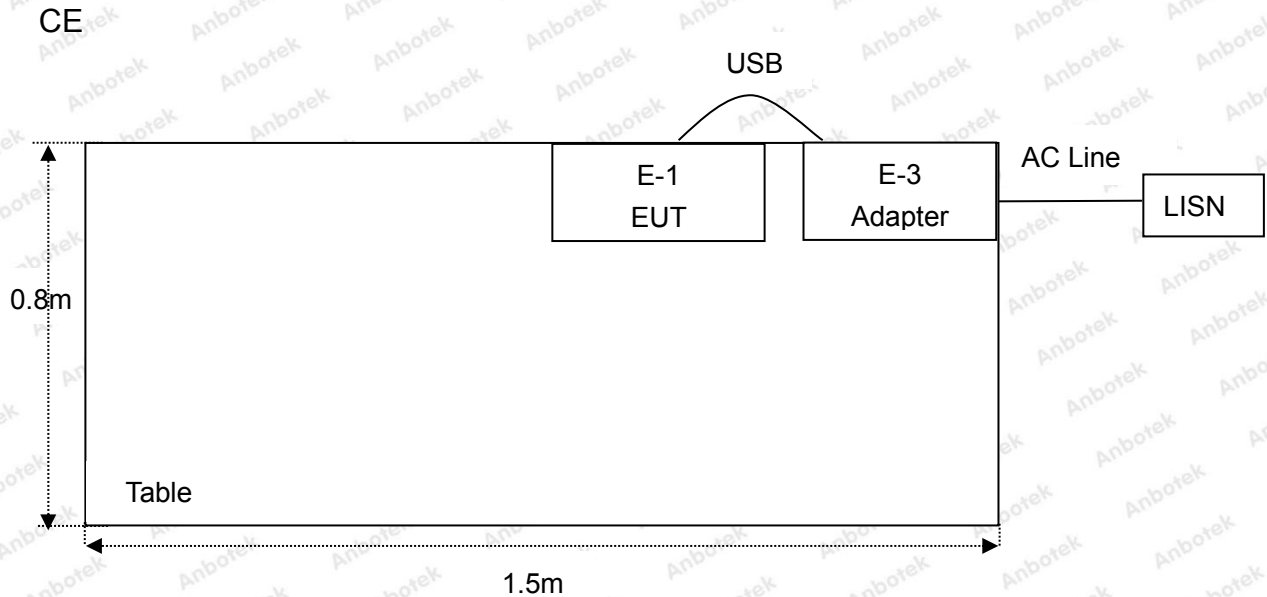

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 04, 2019	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 04, 2019	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 04, 2019	1 Year
4.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 04, 2019	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 01, 2019	1 Year
7.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 01, 2019	1 Year
8.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 01, 2019	1 Year
9.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 01, 2019	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Nov. 04, 2019	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 04, 2019	1 Year
13.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 04, 2019	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 04, 2019	1 Year
15.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
16.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 04, 2019	1 Year
17.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 04, 2019	1 Year
18.	DC Power Supply	LW	TPR-6420D	374470	Nov. 04, 2019	1 Year
19.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Nov. 04, 2019	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 27, 2019.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, March 07, 2019.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209/15.231(b)	Spurious Emission	PASS
15.231(c)	20dB Occupied Bandwidth	PASS
15.231(a)	Dwell time	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

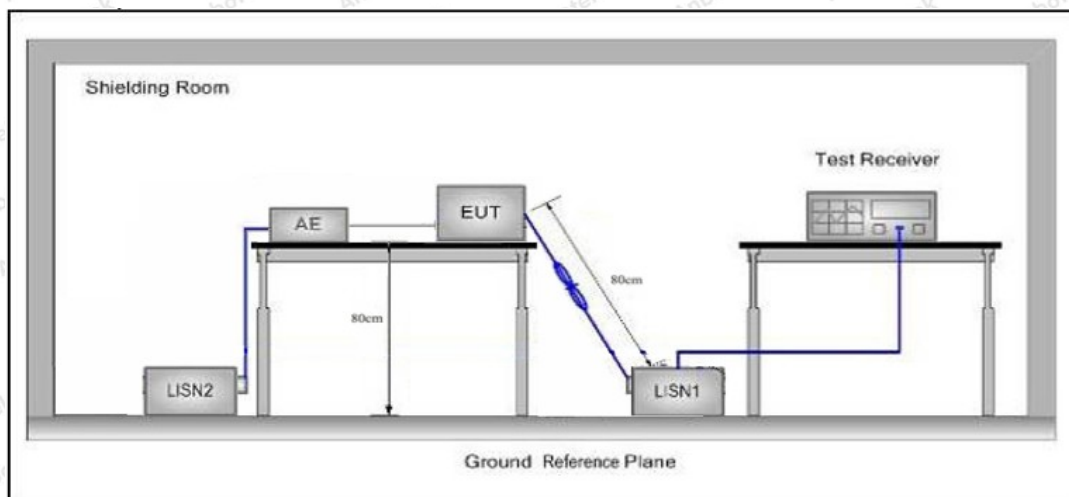

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages.

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 23.6°C Hum.: 56%

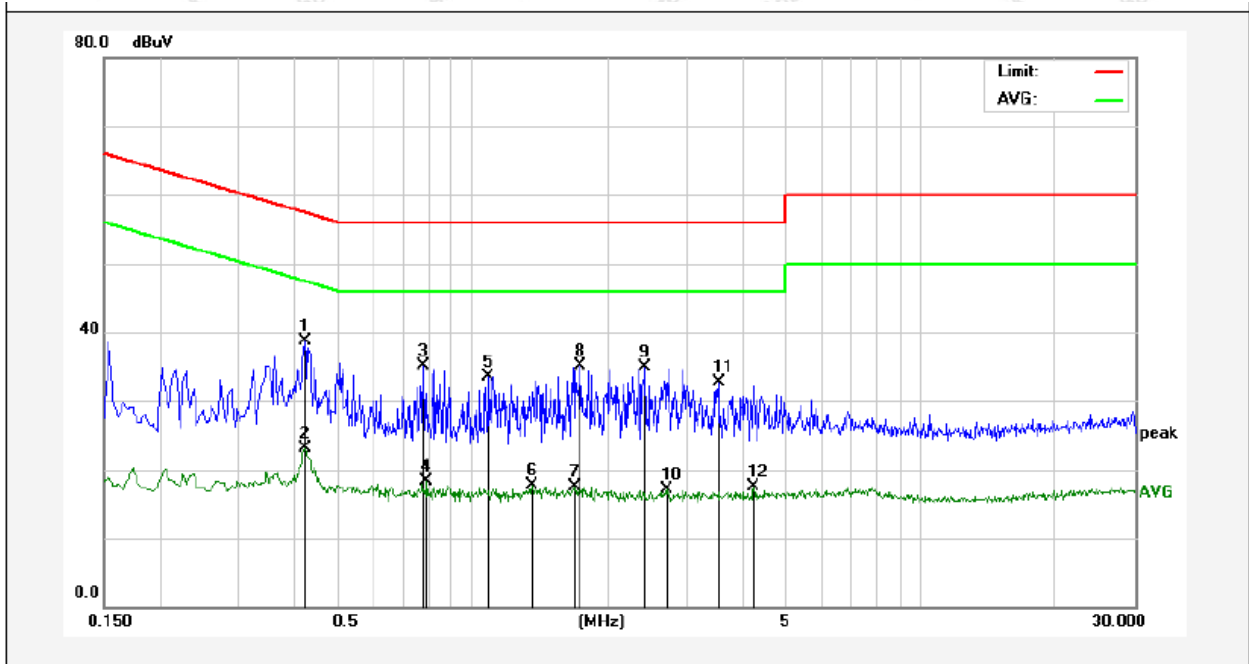

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4220	18.70	19.94	38.64	57.41	-18.77	QP	
2	0.4220	3.18	19.94	23.12	47.41	-24.29	AVG	
3	0.7780	15.04	20.06	35.10	56.00	-20.90	QP	
4	0.7900	-1.79	20.06	18.27	46.00	-27.73	AVG	
5	1.0859	13.40	20.12	33.52	56.00	-22.48	QP	
6	1.3580	-2.44	20.13	17.69	46.00	-28.31	AVG	
7	1.6900	-2.69	20.13	17.44	46.00	-28.56	AVG	
8	1.7380	14.97	20.13	35.10	56.00	-20.90	QP	
9	2.4260	14.71	20.15	34.86	56.00	-21.14	QP	
10	2.7100	-3.06	20.15	17.09	46.00	-28.91	AVG	
11	3.5460	12.52	20.17	32.69	56.00	-23.31	QP	
12	4.2260	-2.78	20.19	17.41	46.00	-28.59	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.6°C Hum.: 56%

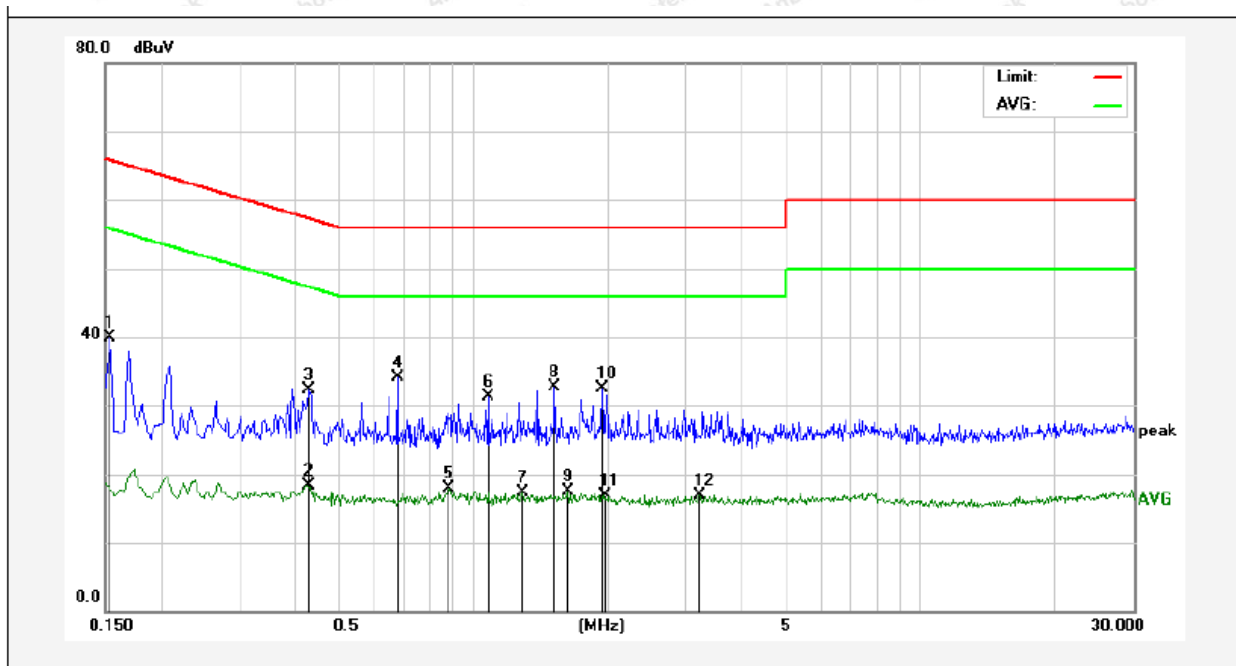

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	19.97	19.90	39.87	65.78	-25.91	QP	
2	0.4260	-1.61	19.95	18.34	47.33	-28.99	AVG	
3	0.4300	12.36	19.95	32.31	57.25	-24.94	QP	
4	0.6780	14.09	20.03	34.12	56.00	-21.88	QP	
5	0.8820	-2.16	20.09	17.93	46.00	-28.07	AVG	
6	1.0780	11.26	20.12	31.38	56.00	-24.62	QP	
7	1.2940	-2.84	20.13	17.29	46.00	-28.71	AVG	
8	1.5220	12.61	20.13	32.74	56.00	-23.26	QP	
9	1.6340	-2.68	20.13	17.45	46.00	-28.55	AVG	
10	1.9460	12.28	20.14	32.42	56.00	-23.58	QP	
11	1.9660	-3.28	20.14	16.86	46.00	-29.14	AVG	
12	3.2139	-3.16	20.16	17.00	46.00	-29.00	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.: 23.6°C Hum.: 56%

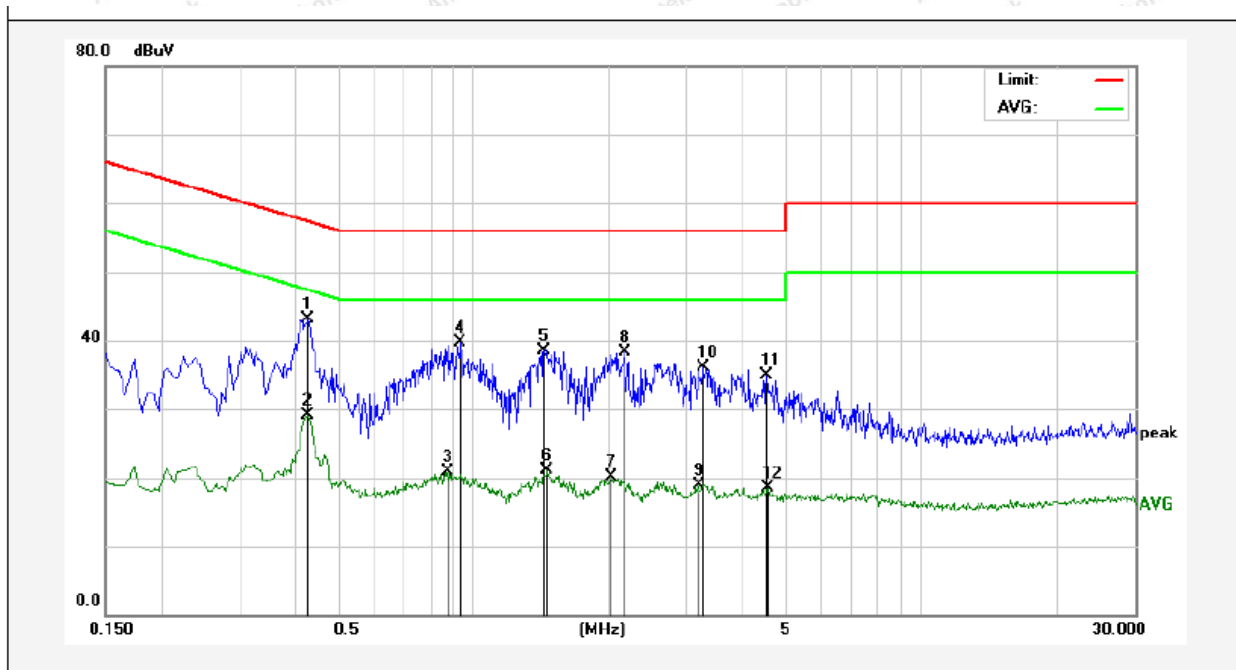

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4260	23.10	19.95	43.05	57.33	-14.28	QP	
2	0.4260	9.21	19.95	29.16	47.33	-18.17	AVG	
3	0.8780	0.74	20.09	20.83	46.00	-25.17	AVG	
4	0.9340	19.53	20.10	39.63	56.00	-16.37	QP	
5	1.4340	18.42	20.13	38.55	56.00	-17.45	QP	
6	1.4580	1.00	20.13	21.13	46.00	-24.87	AVG	
7	2.0300	0.01	20.14	20.15	46.00	-25.85	AVG	
8	2.1780	18.08	20.14	38.22	56.00	-17.78	QP	
9	3.1740	-1.24	20.16	18.92	46.00	-27.08	AVG	
10	3.2740	15.98	20.17	36.15	56.00	-19.85	QP	
11	4.5020	14.63	20.19	34.82	56.00	-21.18	QP	
12	4.5300	-1.67	20.19	18.52	46.00	-27.48	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.: 23.6°C Hum.: 56%

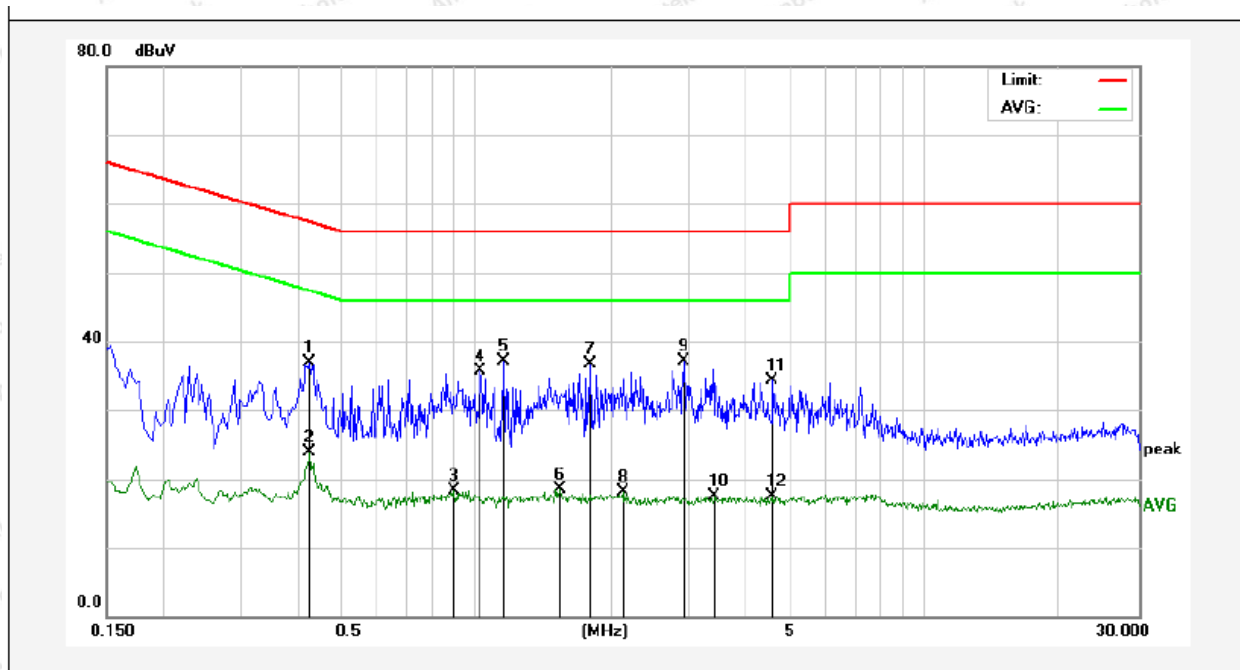

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4260	17.05	19.95	37.00	57.33	-20.33	QP	
2	0.4260	3.91	19.95	23.86	47.33	-23.47	AVG	
3	0.8900	-1.77	20.09	18.32	46.00	-27.68	AVG	
4	1.0260	15.57	20.12	35.69	56.00	-20.31	QP	
5	1.1580	16.93	20.12	37.05	56.00	-18.95	QP	
6	1.5380	-1.68	20.13	18.45	46.00	-27.55	AVG	
7	1.8060	16.62	20.14	36.76	56.00	-19.24	QP	
8	2.1220	-2.06	20.14	18.08	46.00	-27.92	AVG	
9	2.9020	17.01	20.16	37.17	56.00	-18.83	QP	
10	3.4140	-2.66	20.17	17.51	46.00	-28.49	AVG	
11	4.5939	14.16	20.20	34.36	56.00	-21.64	QP	
12	4.5939	-2.65	20.20	17.55	46.00	-28.45	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.231(b)				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3
Remark: (1)The lower limit shall apply at the transition frequency. (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

the formulas for calculating the maximum permitted fundamental field strengths are as follows:

for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$.

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level

Emission Level (dBuV/m)=20log Emission Level($\mu\text{V/m}$)

The field strength of emission limits have been calculated in below table:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)@3m
433.92	80.82 (AVG)
433.92	100.82 (Peak)

4.2. Test Setup

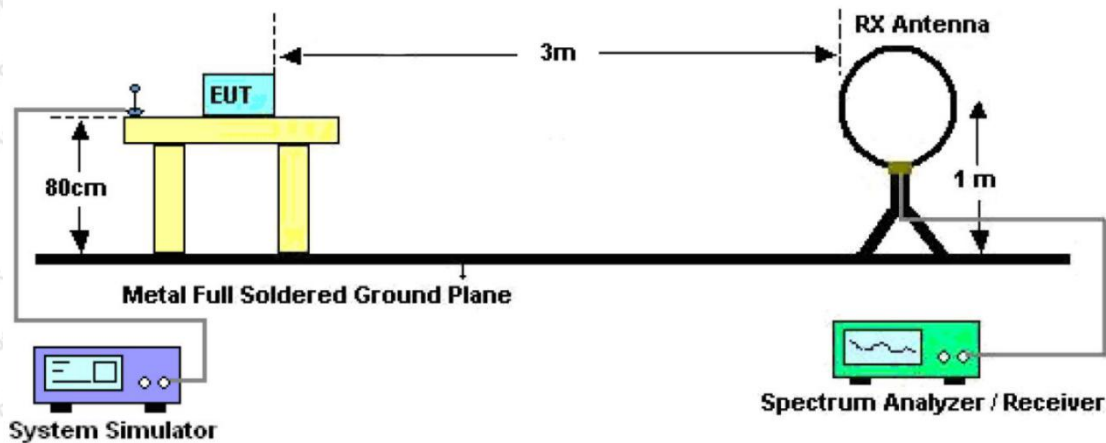


Figure 1. Below 30MHz

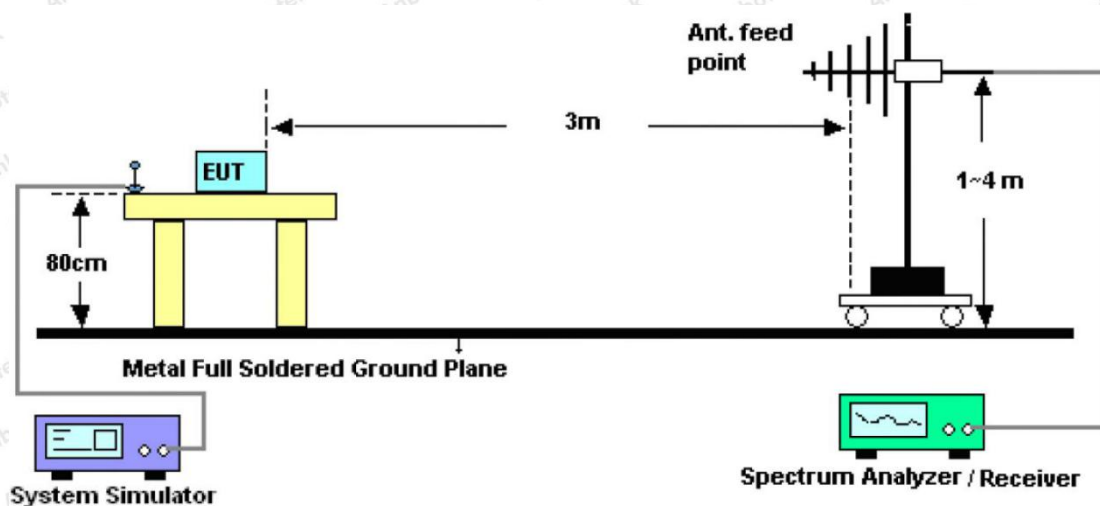


Figure 2. 30MHz to 1GHz

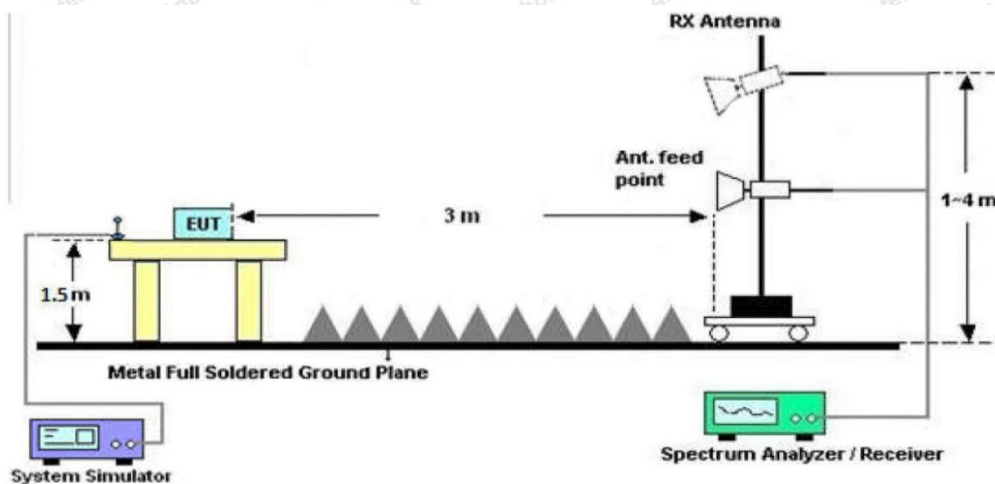


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Test Results (Fundamental 433.92MHz)

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Duty cycle Factor	Results	Limits	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	Mode
433.92	H	94.12	1.52	12.64	31.45	-	76.83	100.82	PK
433.92	H	94.12	1.52	12.64	31.45	-29.34	47.49	80.82	AV
433.92	V	97.94	1.52	12.64	31.45	-	80.65	100.82	PK
433.92	V	97.94	1.52	12.64	31.45	-29.34	51.31	80.82	AV

Remark:

1. Result = Reading + Cable Loss +Ant Factor –Amplifier + Duty cycle Factor

2. Pulse Desensitization Correction Factor

Pulse Width (PW)= 15.75ms

$2/PW=2/15.75=0.127\text{kHz}$

$RBW(1000\text{kHz}) > 2/PW (0.127\text{kHz})$

Therefore PDCF is not needed.

3. Duty Cycle Factor

Calculate Formula:

$AV=PEAK + \text{Duty Cycle Factor}$

$\text{Duty Cycle Factor}=20\log(\text{Duty Cycle})$

$\text{Duty Cycle} = \text{on time} / \text{period}$

Test Data:

$T_{\text{on time}}=15.75\text{ms} \times 2 + 25.60\text{ms} \times 1 = 57.10 \text{ ms}$



$T_{\text{period}}=2352.00\text{ms}-678\text{ms}=1674\text{ms}$

$\text{Duty Cycle}=3.41\%$


$\text{Duty Cycle Factor} = 20\log(\text{Duty Cycle}) = -29.34$

T on time slot-1

T on time slot-2

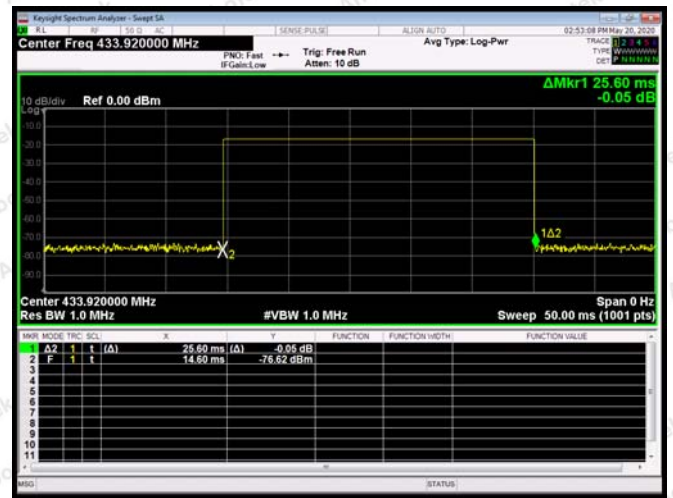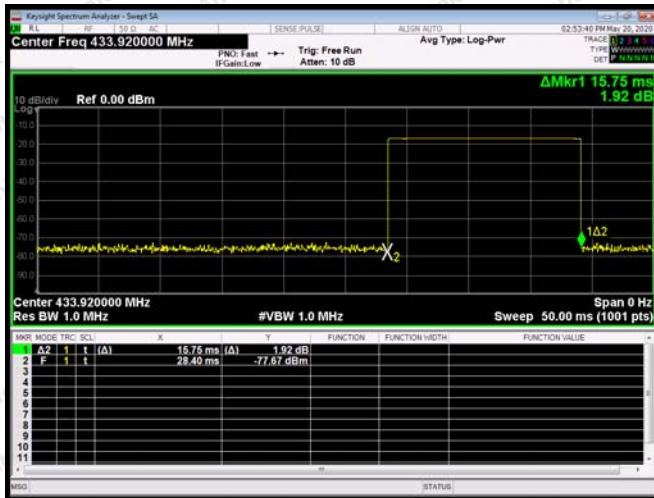

T period

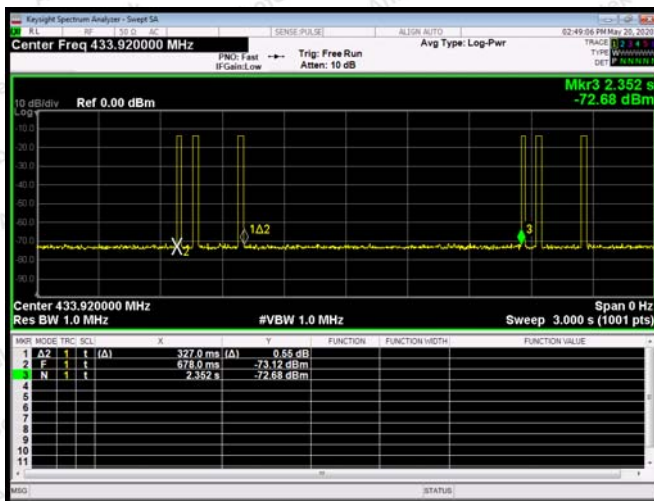

Test Results (Harmonics Emissions)

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Duty cycle Factor	Results	Limits	Det
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	Mode
867.84	H	74.86	1.92	12.71	31.72	-	57.77	80.82	PK
867.84	H	74.86	1.92	12.71	31.72	-29.34	28.43	60.82	AV
867.84	V	76.39	1.92	12.71	31.72	-	59.30	80.82	PK
867.84	V	76.39	1.92	12.71	31.72	-29.34	29.96	60.82	AV
1301.76	H	63.32	2.38	21.43	32.45	-	54.68	74	PK
1301.76	H	63.32	2.38	21.43	32.45	-29.34	25.34	54	AV
1301.76	V	65.07	2.38	18.56	32.45	-	53.56	74	PK
1301.76	V	65.07	2.38	18.56	32.45	-29.34	24.22	54	AV

Remark :

1. Result = Reading + Cable Loss +Ant Factor –Amplifier + Duty cycle Factor

2. Pulse Desensitization Correction Factor

Pulse Width (PW)= 15.75ms

 $2/PW=2/15.75=0.127\text{kHz}$ $RBW(1000\text{kHz}) > 2/PW (0.127\text{KHz})$

Therefore PDCF is not needed.

3. Duty Cycle Factor=-29.34

Report No.: 18220WC00052801

FCC ID: 2AWHX-DTC01

Page 21 of 36

Test Results (30~1000MHz)

Job No.: 18220WC00052801

Temp.(°C)/Hum.(%RH): 22.6°C/56%RH


Standard: FCC PART 15C

Power Source: AC 120V, 60Hz for adapter

Test Mode: TX Mode

Polarization: Horizontal

Note:

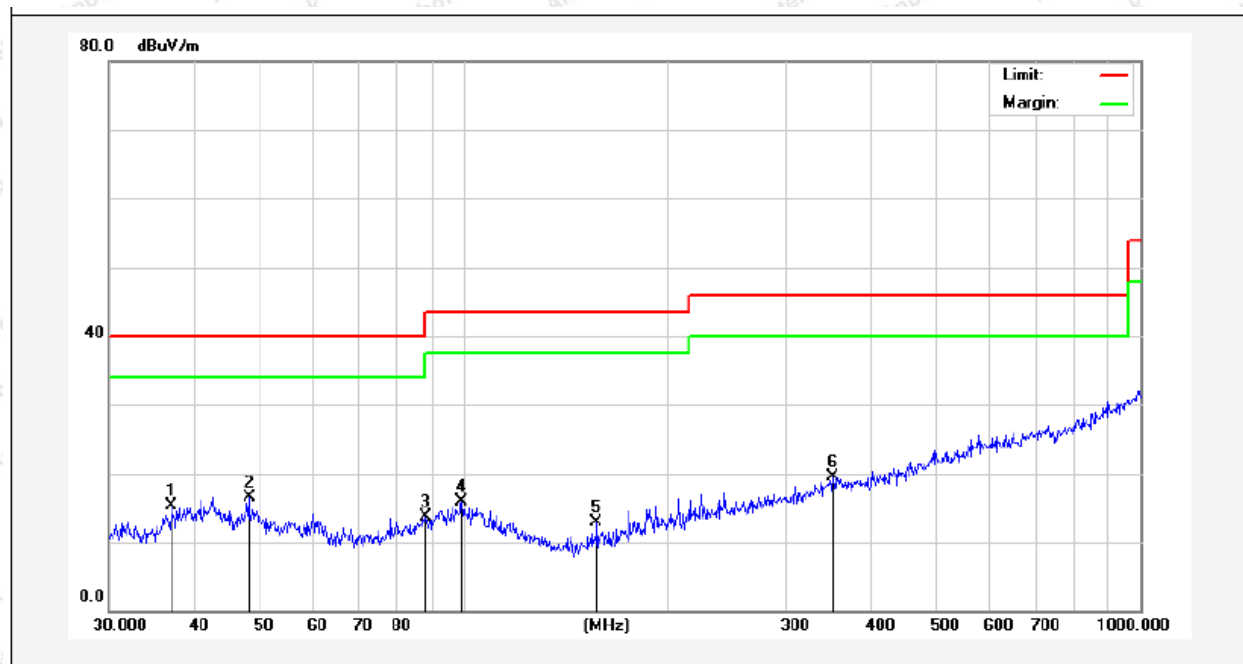

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.1550	31.69	-16.48	15.21	40.00	-24.79	QP	100	360	
2	48.3318	31.15	-14.65	16.50	40.00	-23.50	QP	100	0	
3	88.0329	34.20	-20.49	13.71	43.50	-29.79	QP	100	360	
4	99.5281	35.28	-19.42	15.86	43.50	-27.64	QP	100	0	
5	157.5588	34.34	-21.52	12.82	43.50	-30.68	QP	100	360	
6	351.7079	32.46	-12.98	19.48	46.00	-26.52	QP	100	0	

Report No.: 18220WC00052801

FCC ID: 2AWHX-DTC01

Page 22 of 36

Test Results (30~1000MHz)

Job No.: 18220WC00052801

Temp.(°C)/Hum.(%RH): 22.6°C/56%RH


Standard: FCC PART 15C

Power Source: AC 120V, 60Hz for adapter

Test Mode: TX Mode

Polarization: Vertical

Note:

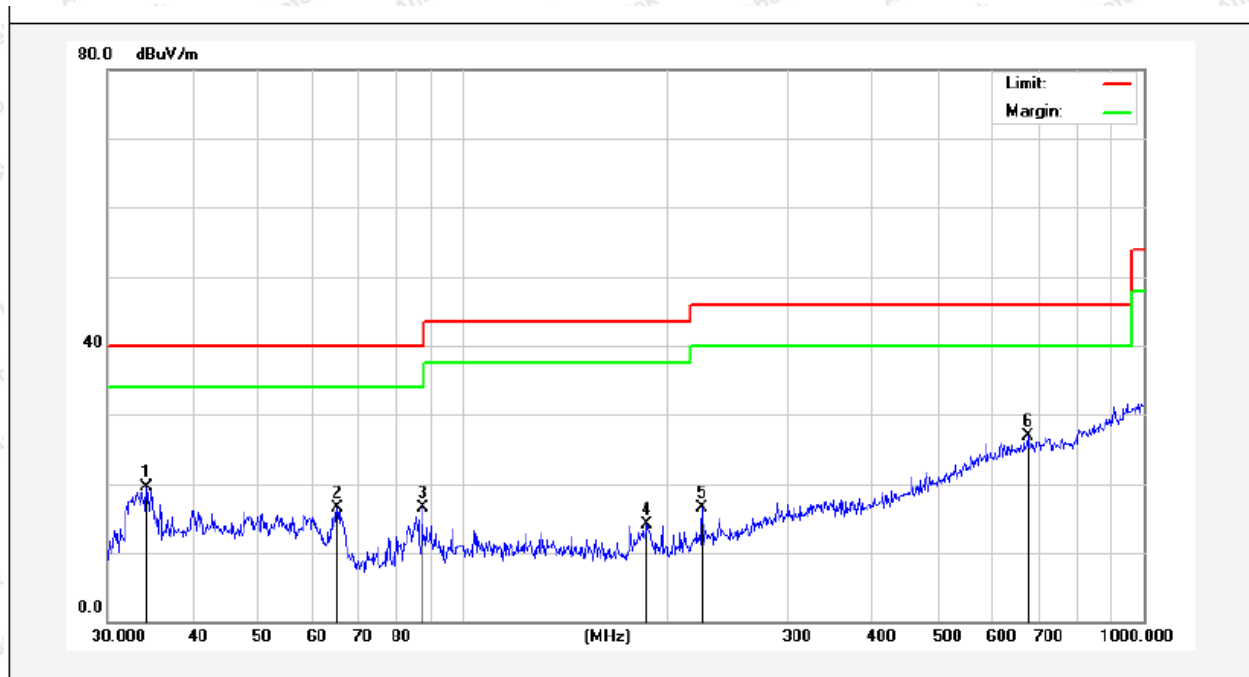

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	34.2760	35.87	-16.41	19.46	40.00	-20.54	QP	100	0	
2	65.3432	34.50	-18.01	16.49	40.00	-23.51	QP	100	360	
3	87.1117	32.97	-16.38	16.59	40.00	-23.41	QP	100	0	
4	186.4409	31.94	-17.91	14.03	43.50	-29.47	QP	100	360	
5	224.5193	32.83	-16.25	16.58	46.00	-29.42	QP	100	0	
6	675.2080	33.40	-6.41	26.99	46.00	-19.01	QP	100	360	

Remark:


1. Results = Reading + Cable Loss +Ant Factor –Amplifier

5. 20DB Occupy Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.231 (c)				
Test Limit	According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier. So the emission bandwidth limits have been calculated in below table: <table><tr><th>Fundamental Frequency</th><th>Limit of 20dB Bandwidth</th></tr><tr><td>433.92 MHz</td><td>$433920 \times 0.0025 = 1084.80 \text{ kHz}$</td></tr></table>	Fundamental Frequency	Limit of 20dB Bandwidth	433.92 MHz	$433920 \times 0.0025 = 1084.80 \text{ kHz}$
Fundamental Frequency	Limit of 20dB Bandwidth				
433.92 MHz	$433920 \times 0.0025 = 1084.80 \text{ kHz}$				

5.2. Test Setup




5.3. Test Procedure

1. Place the EUT on the table and set it in the continuously transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 10kHz, VBW $\geq$ 3*RBW =30kHz,
Span= 500KHz
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

5.4. Test Data

Test Item	:	20dB Bandwidth	Test Mode	:	Continuously transmitting
Test Voltage	:	AC 120V, 60Hz for adapter	Temperature	:	23.6℃
Test Result	:	PASS	Humidity	:	54%RH

Freq. (MHz)	Modulation Type	20dB Bandwidth (kHz)	Limit (kHz)	Results
433.92	FSK	582.6	<1084.80	PASS

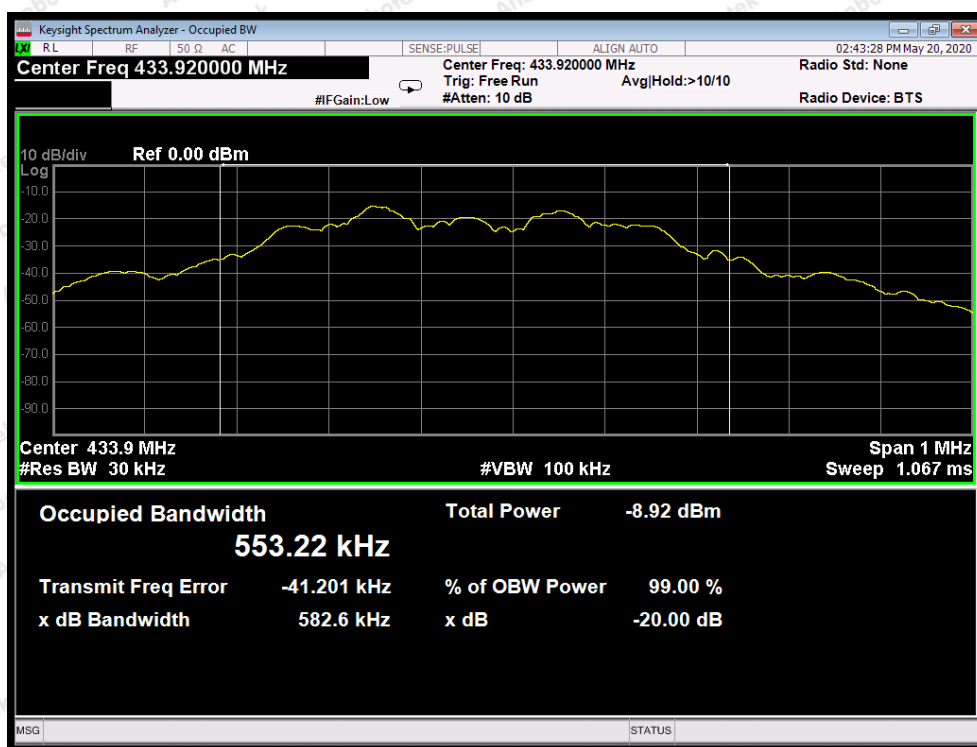


433.92MHz

6. Dwell Time Test

6.1. Test Standard and Limit

Test Standard	FCC Part 15.231(a)(1)
Test Limit	According to FCC Part 15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released

6.2. Test Setup



6.3. Test Procedure


1. Place the EUT on the table and set it in continuously transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as
RBW=1000kHz, VBW= 1000 kHz, Span= 0Hz, Sweep Time= 20 Seconds.
3. Record the Delta mark time.

6.4. Test Data

Test Item	: Dwell Time	Test Mode	: Continuously transmitting
Test Voltage	: AC 120V, 60Hz for adapter	Temperature	: 23.6°C
Test Result	: PASS	Humidity	: 54%RH

Test Mode	Transmitting time(s)	Limit(s)	Result
FSK mode	0.30	≤5	PASS

Please refer the following plot.

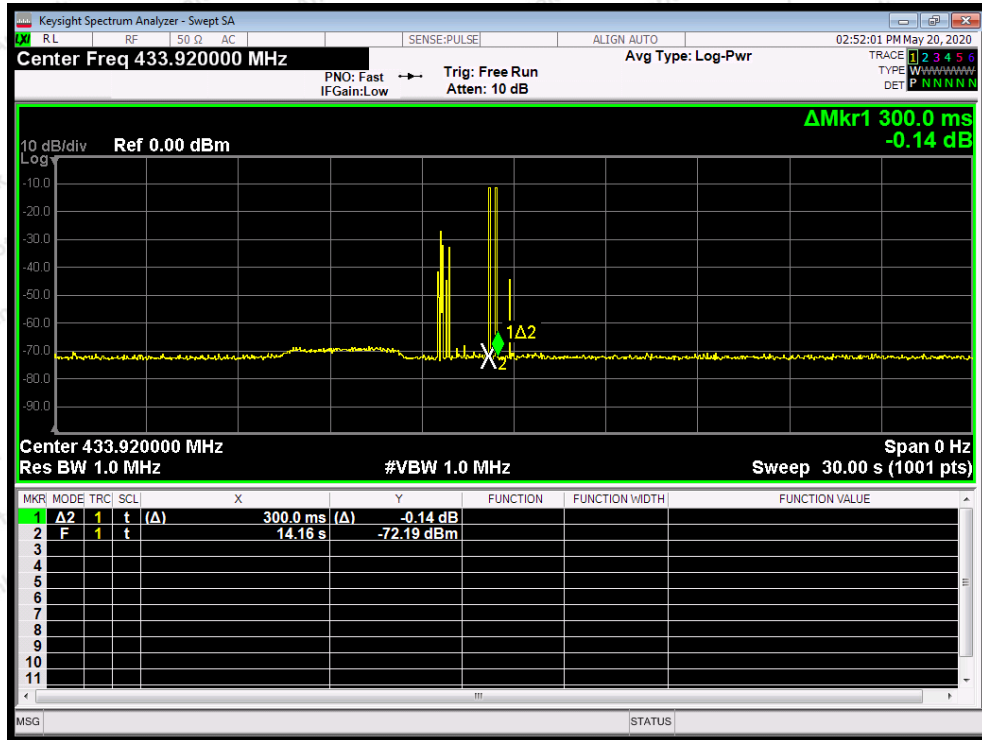

Dwell Time


7. Antenna Requirement

7.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. Antenna requirement must meet at least one of the following: 1) Antenna must be permanently attached to device. 2) The antenna must use a unique type of connector to attach to the device. 3) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.

7.2. Antenna Connected Construction

The antenna is a Spring antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

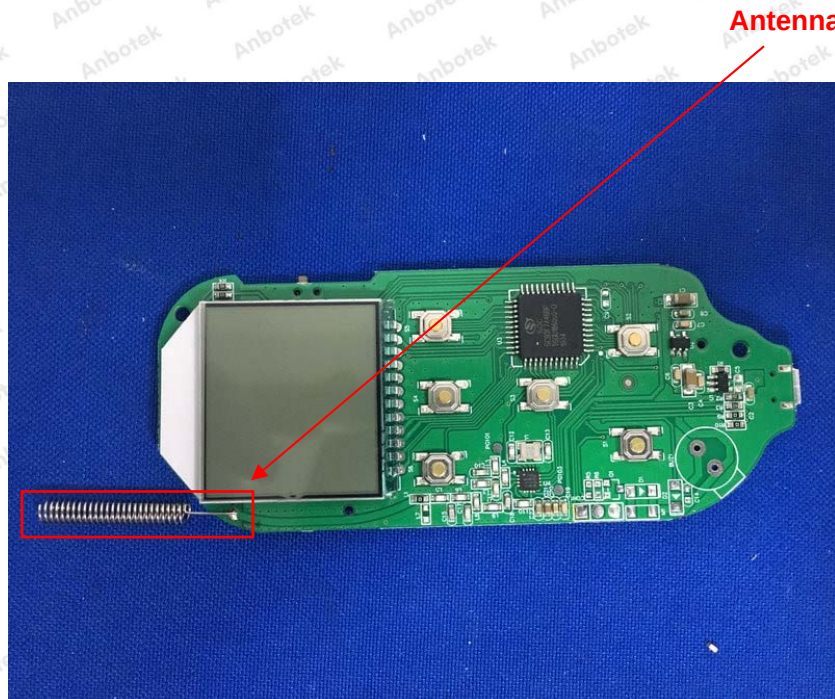


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement





Photo of Radiated Emission Measurement




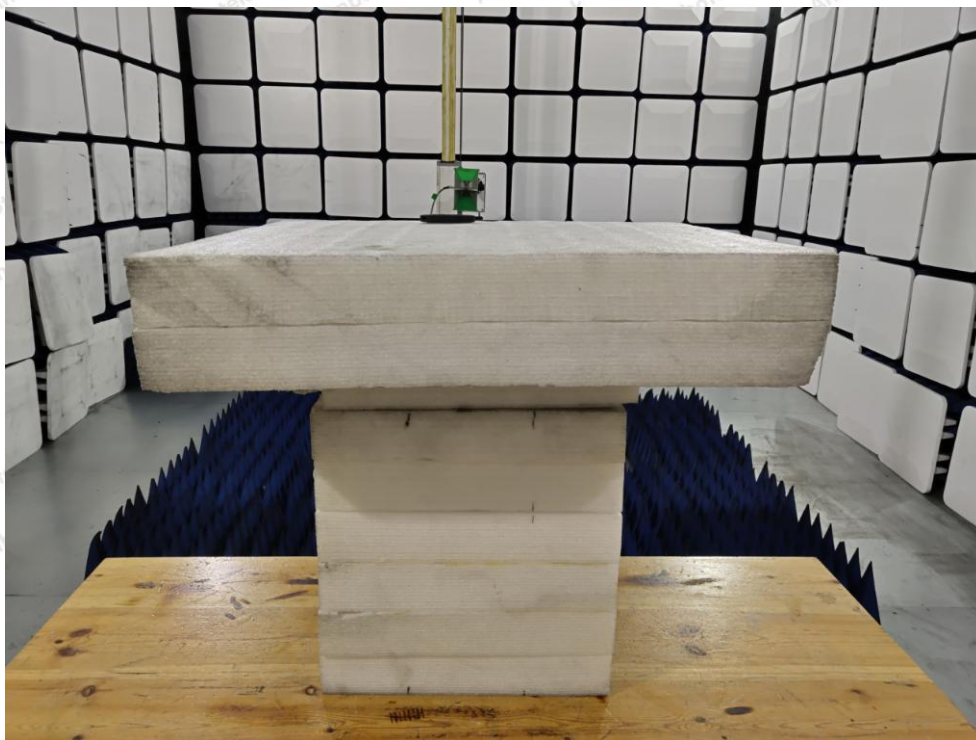



APPENDIX II -- EXTERNAL PHOTOGRAPH


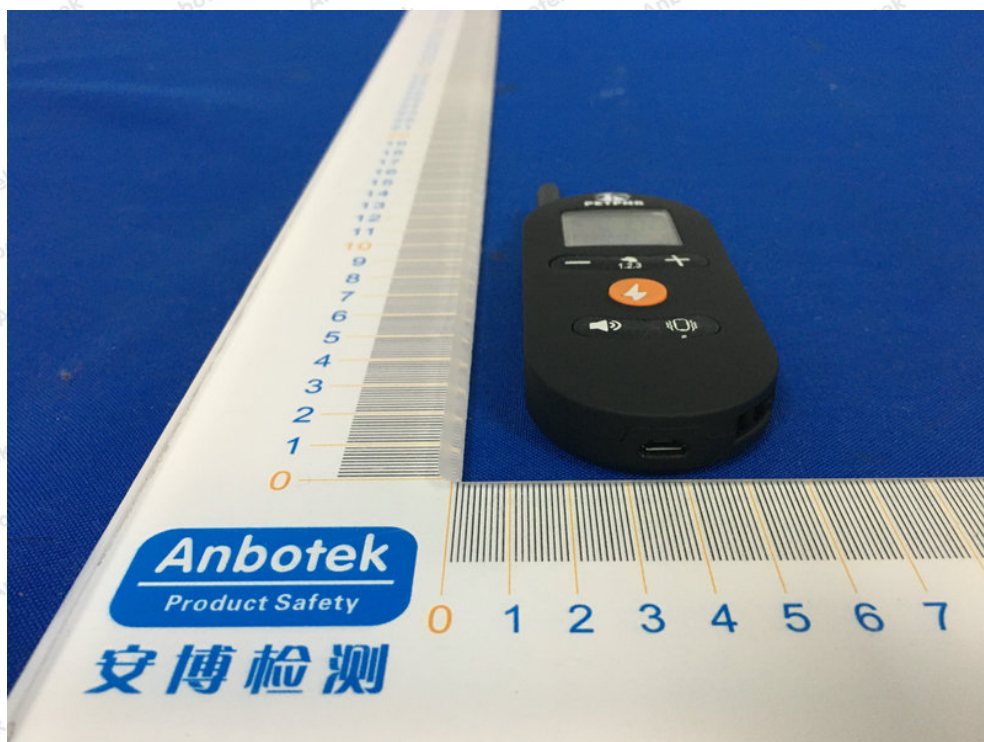


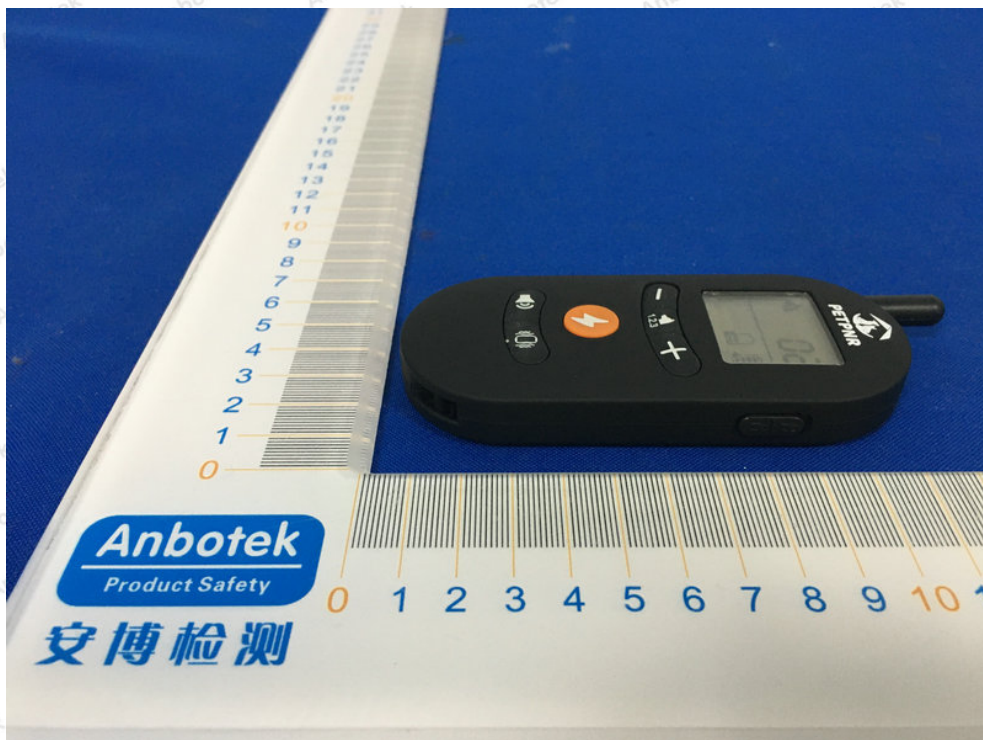

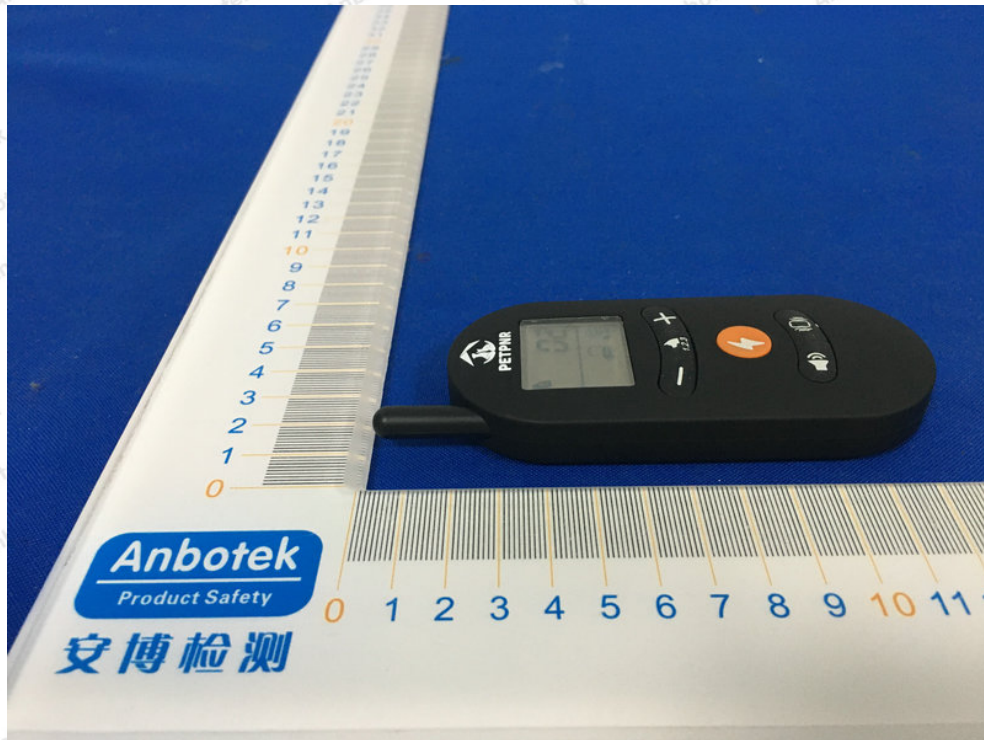

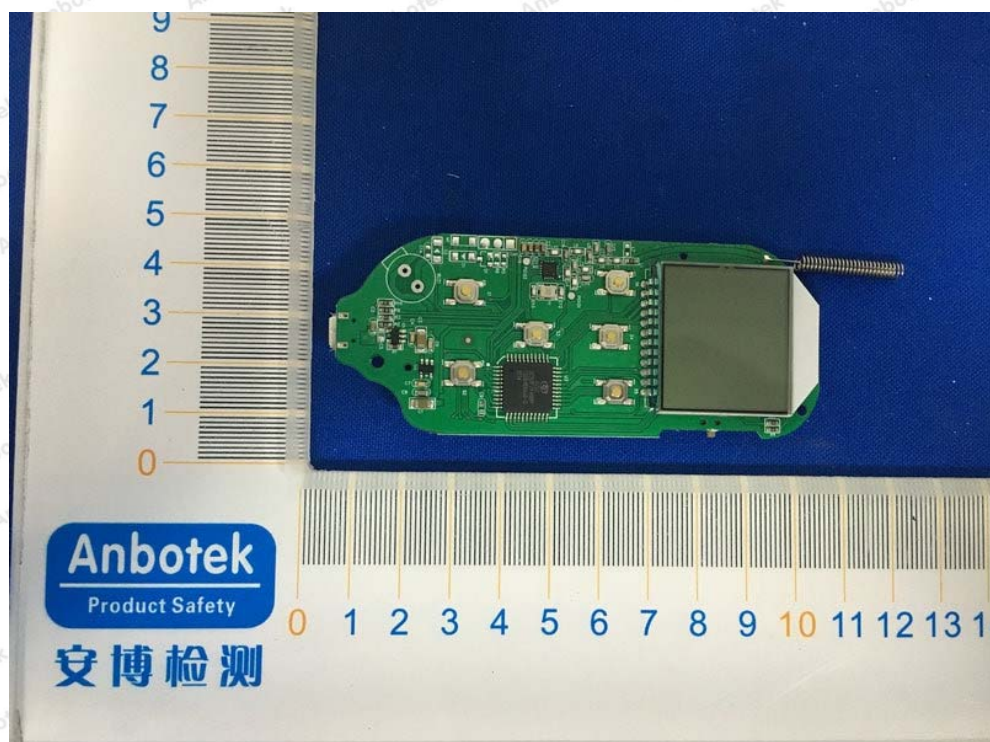APPENDIX III -- INTERNAL PHOTOGRAPH

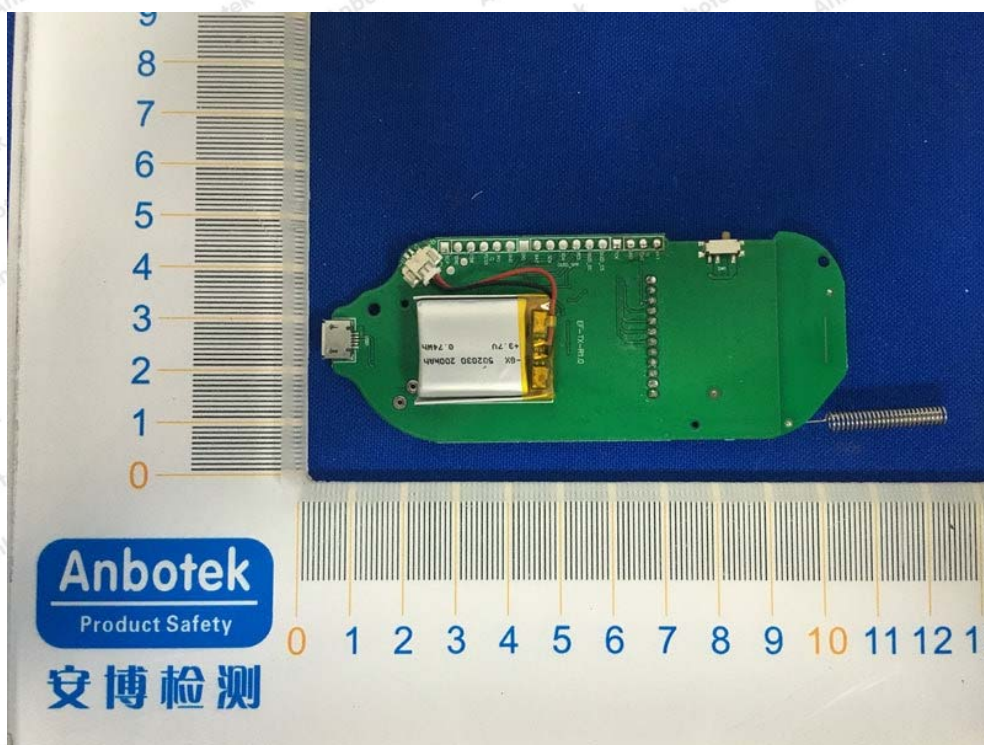

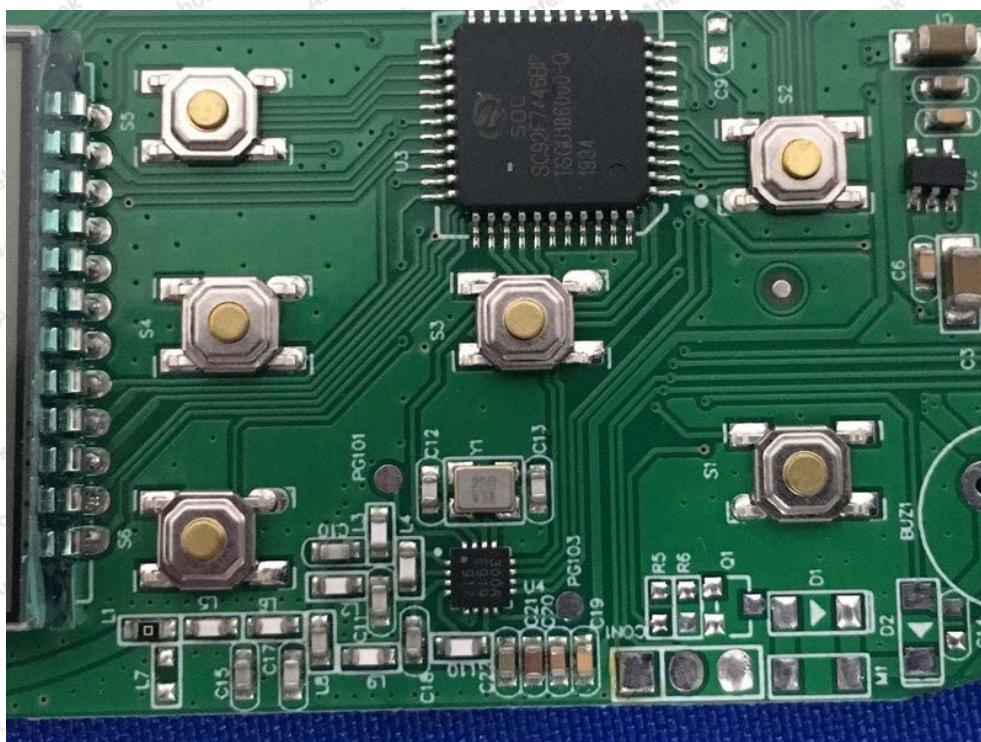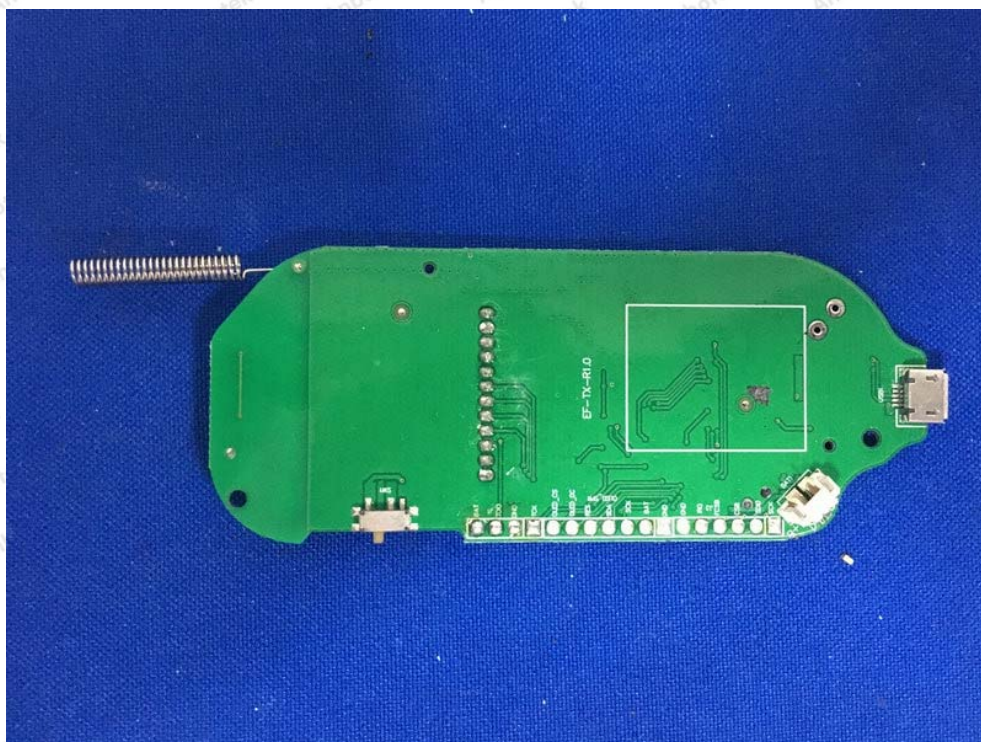

----- End of Report -----