






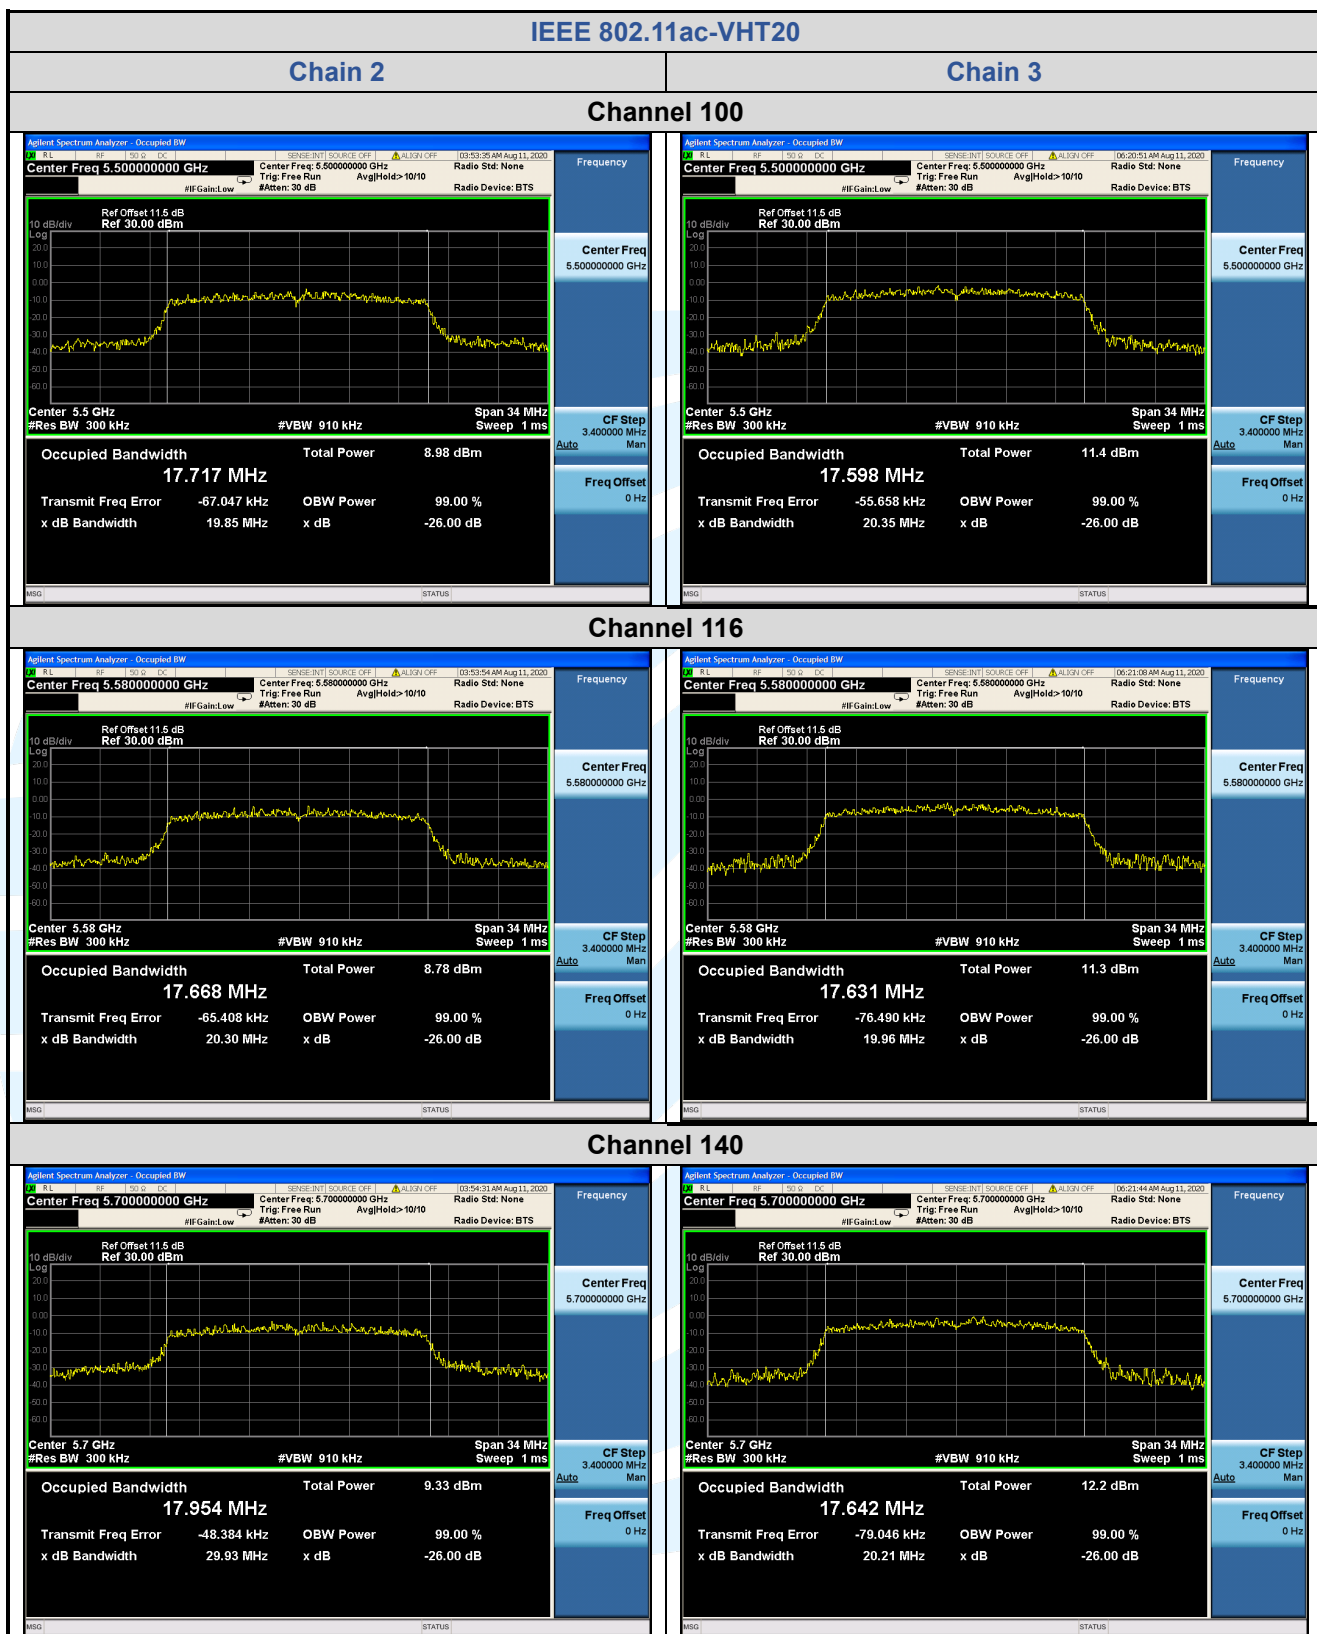


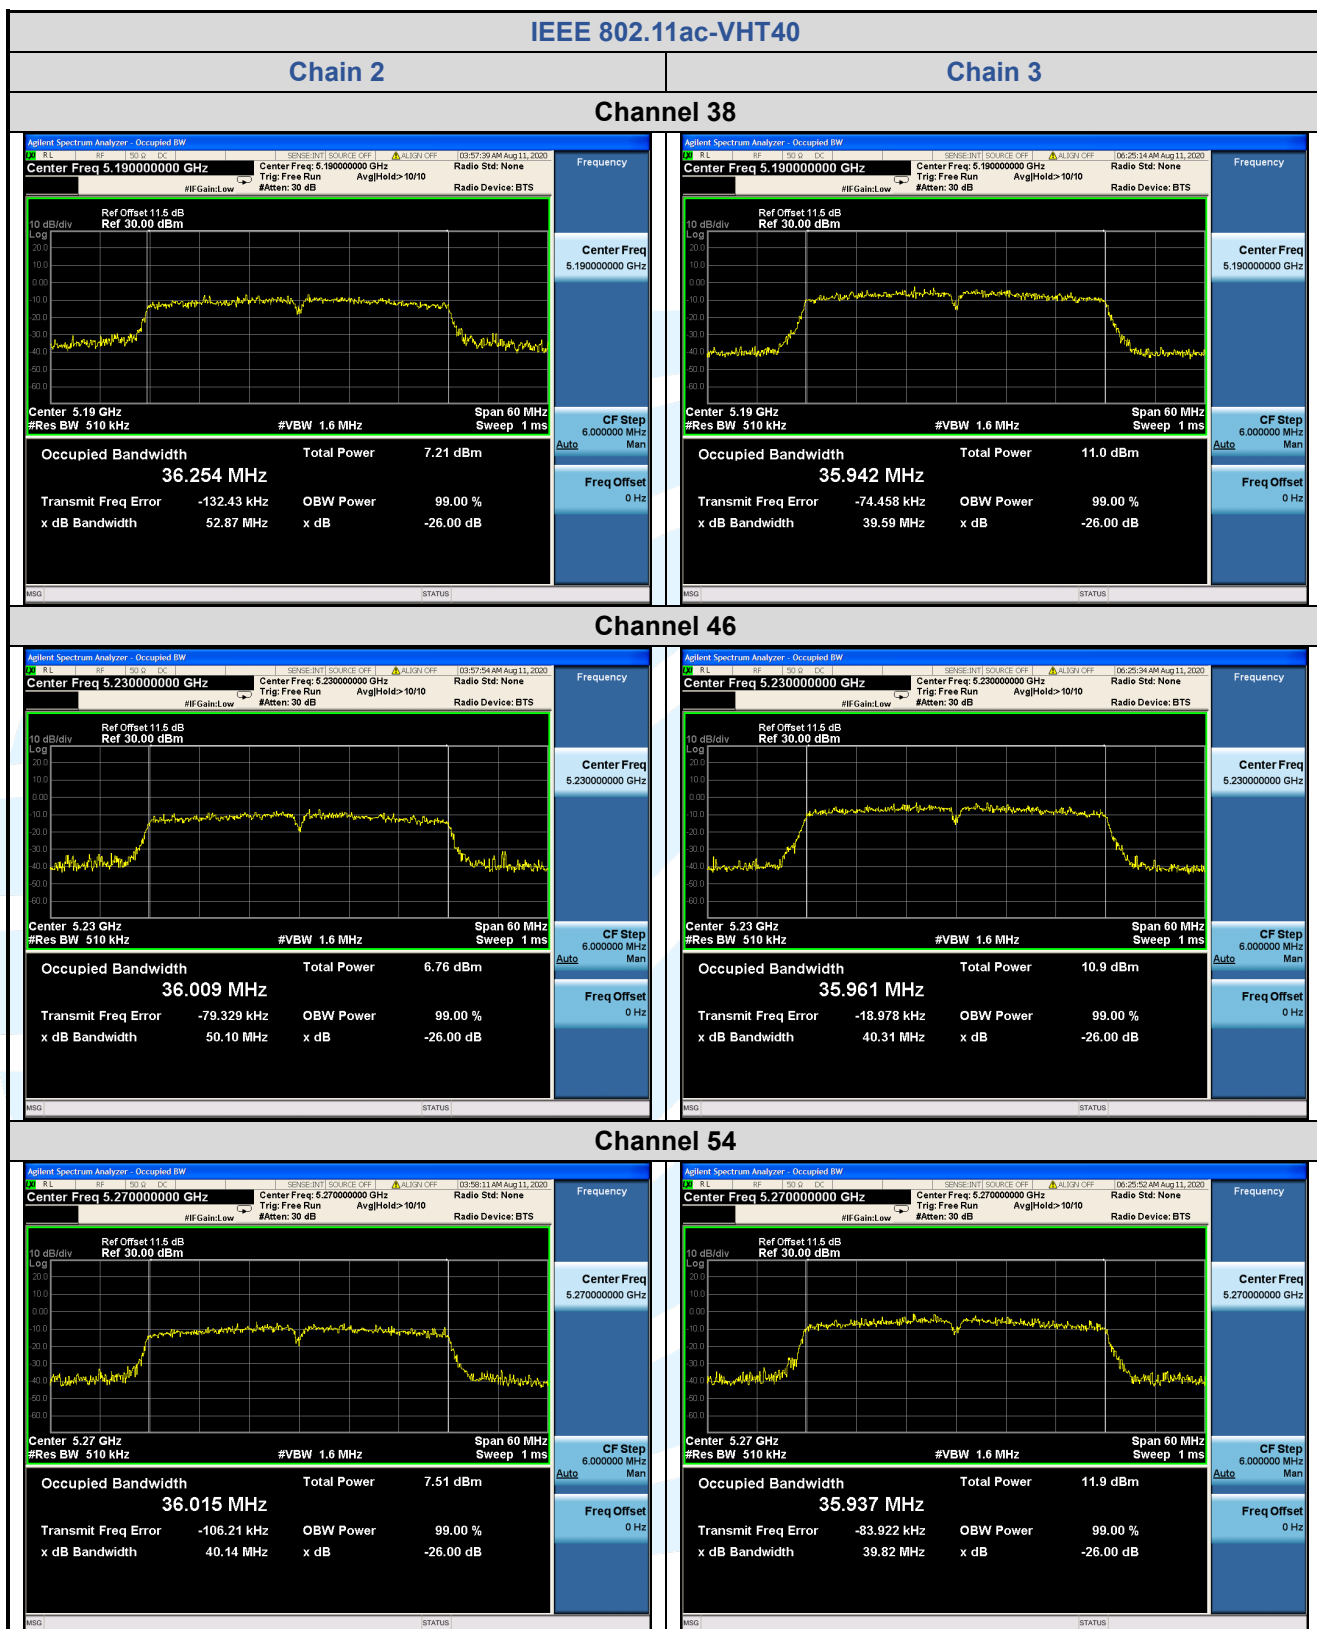

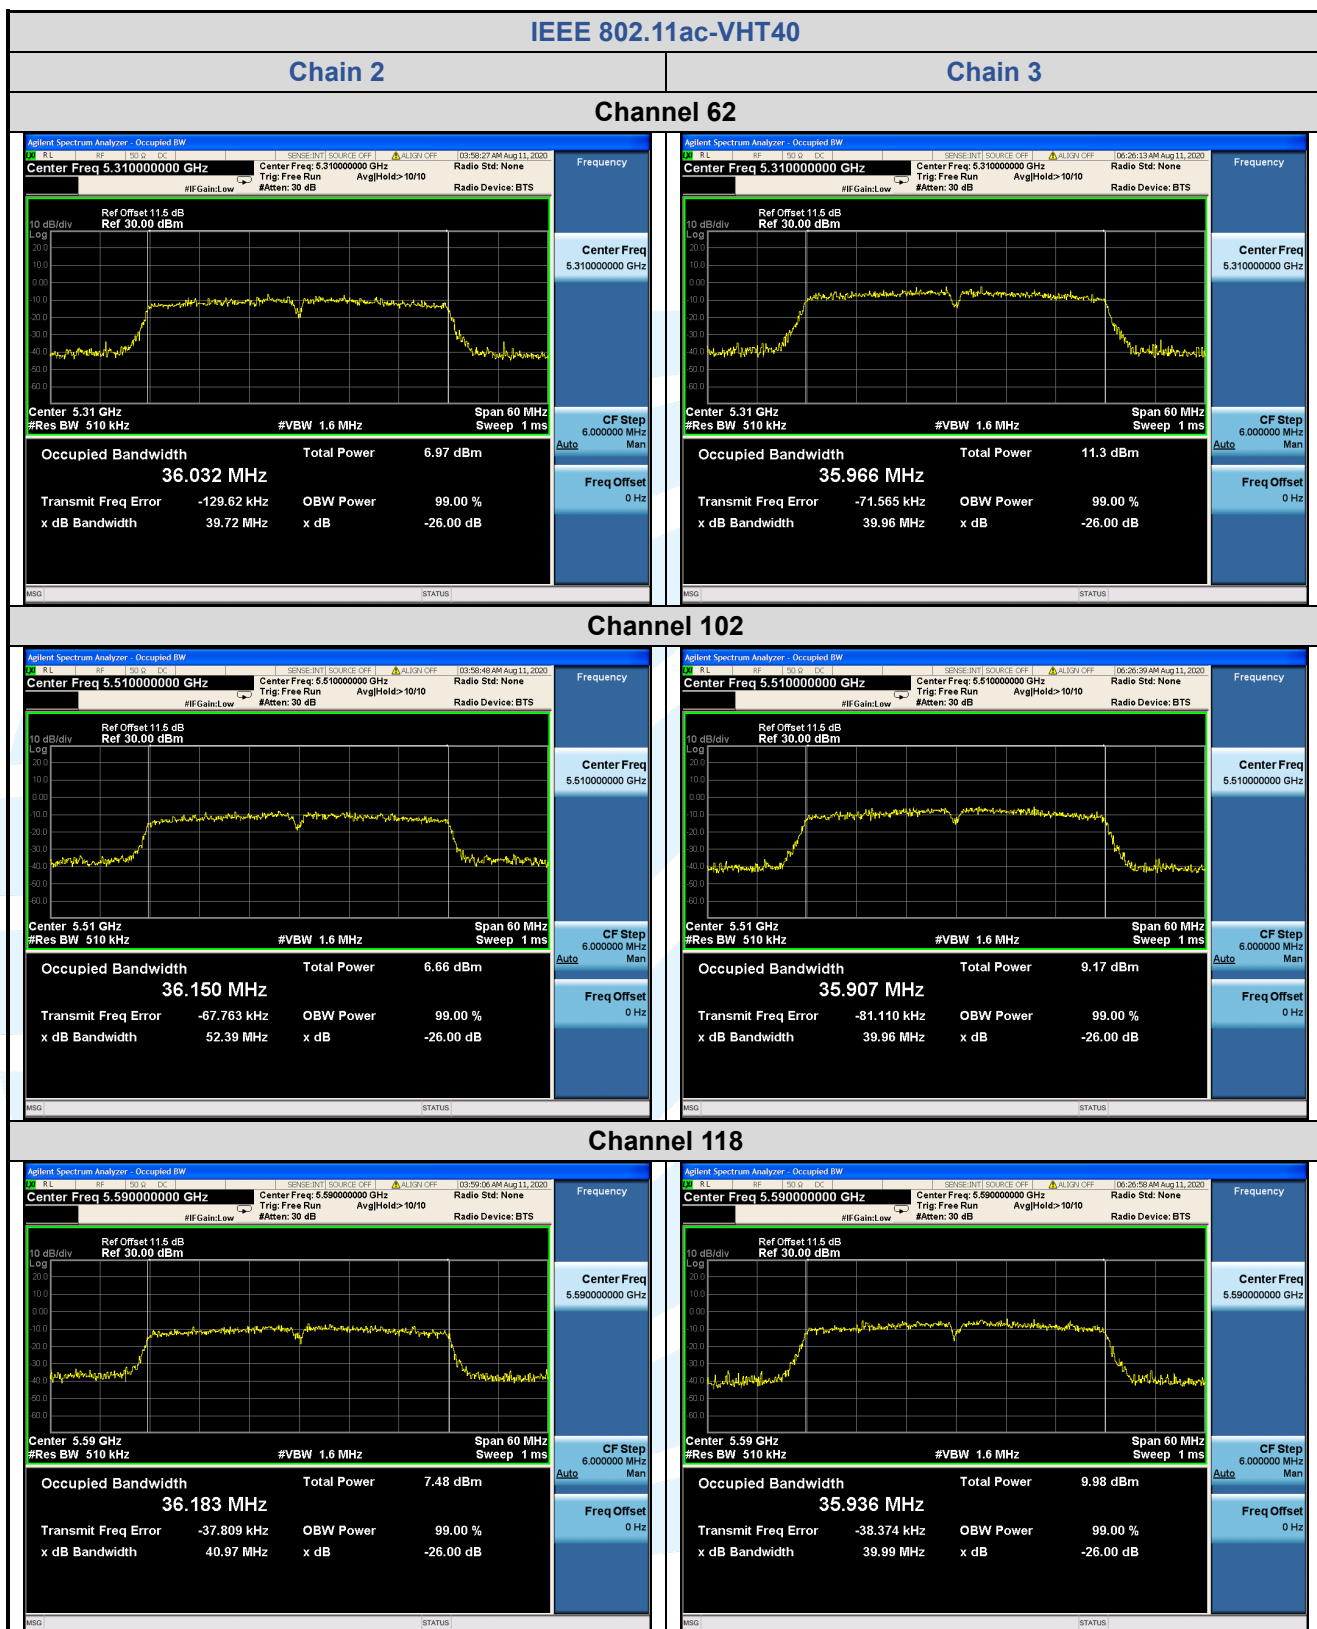

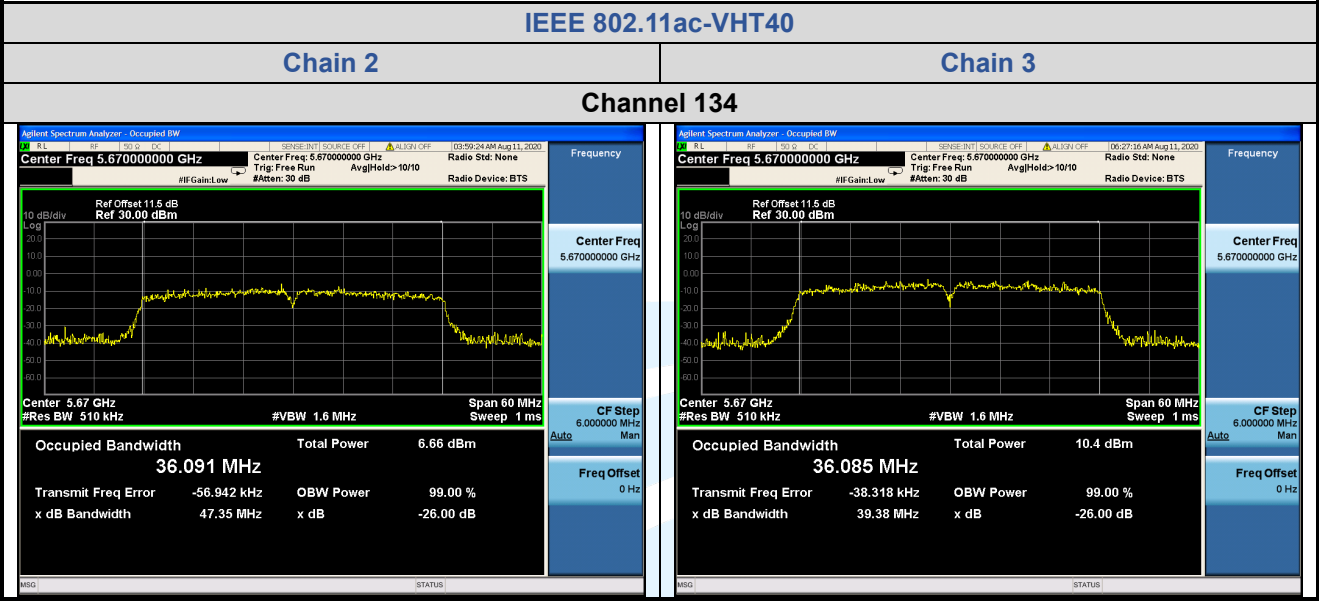

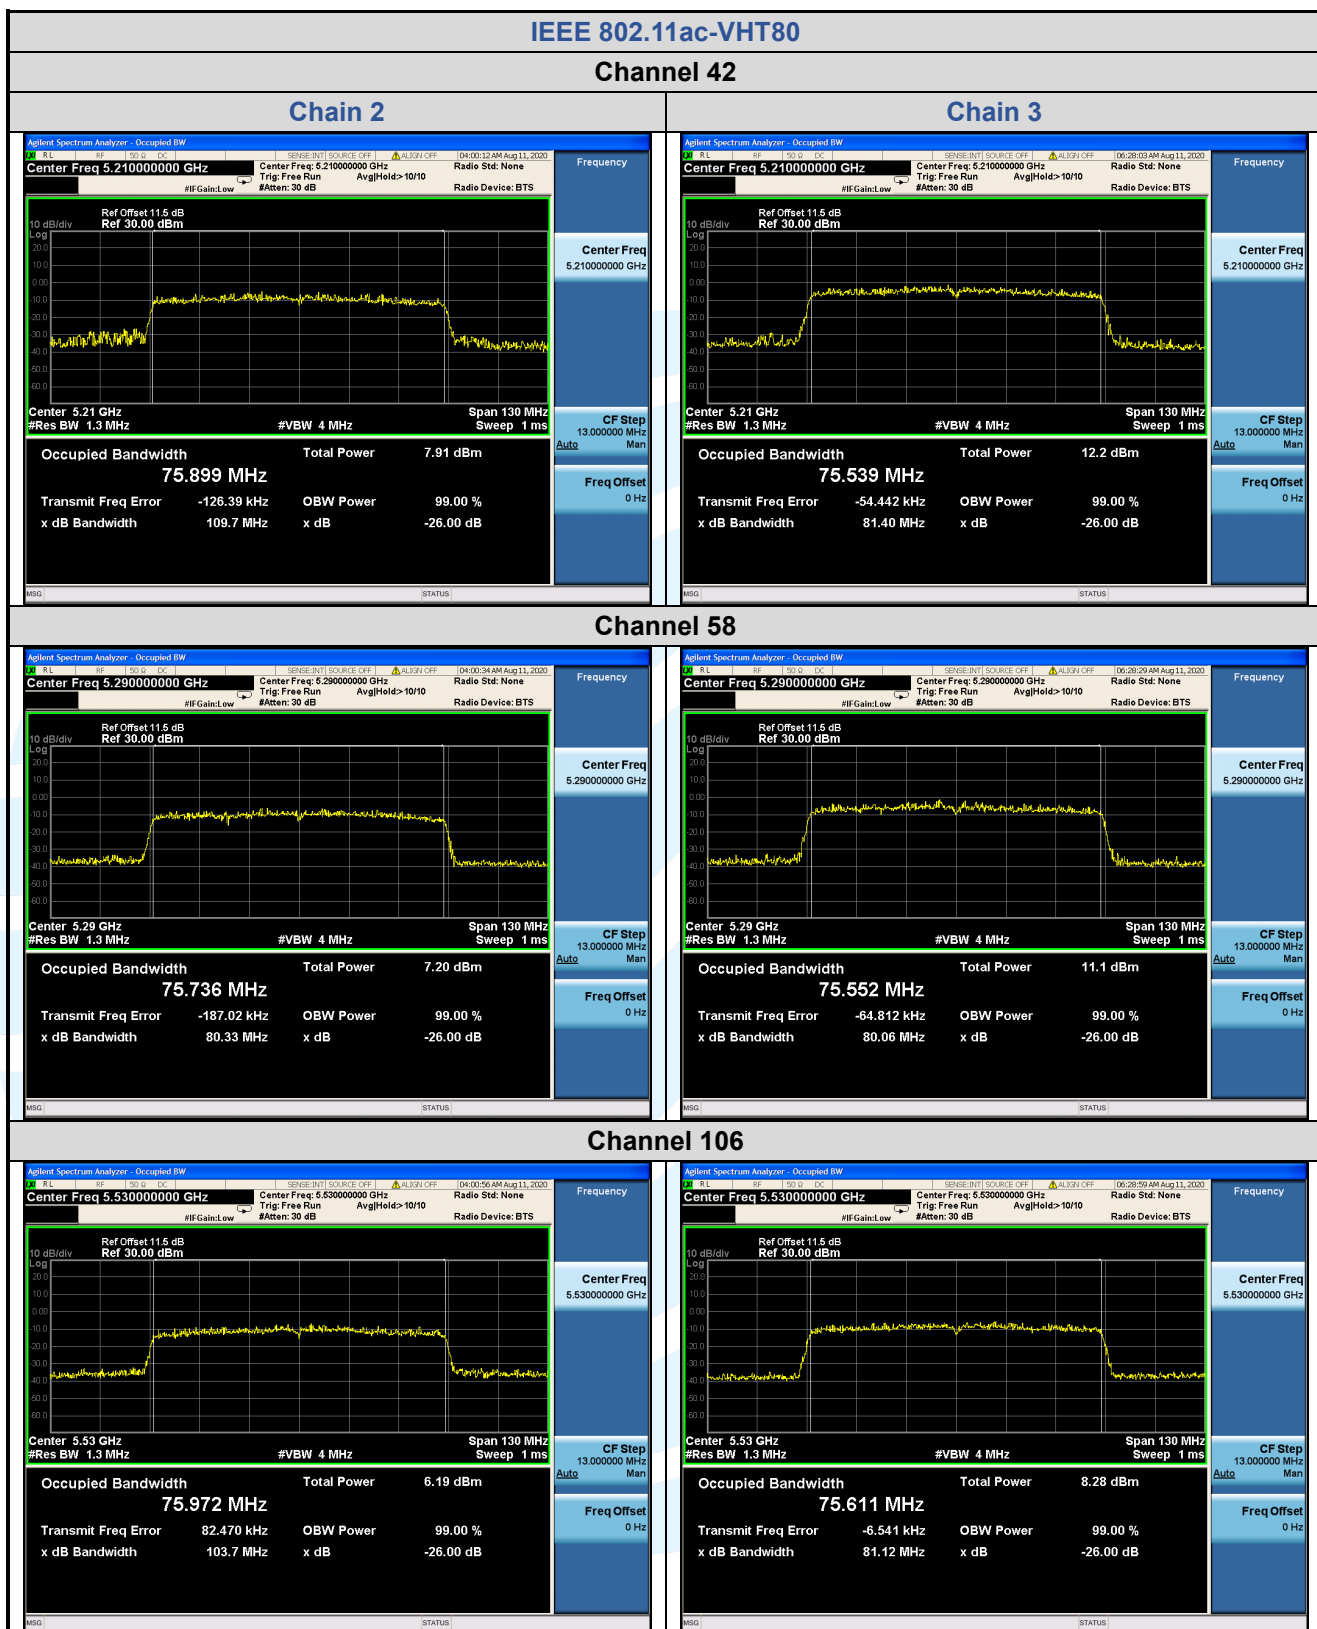

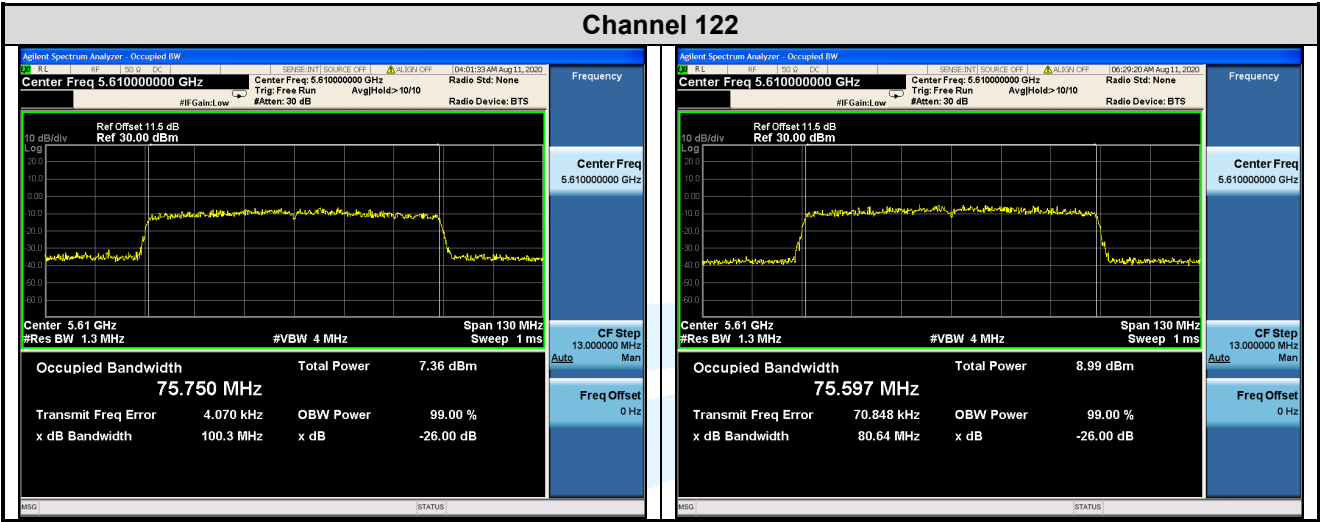

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China  
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: [info@uttlab.com](mailto:info@uttlab.com) <http://www.uttlab.com>  
UTTR-RF-FCCPART15.407-V1.0

## 5.46 DB BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.407 (e)

**Test Method:** KDB 789033 D02 v02r01Section C.2

**Limit:** Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

**Test Procedure:**

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 * \text{RBW}$ .
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Transmitter mode

**Test Results:** Pass

**Test Data:**

| Mode                   | Channel/<br>Frequency<br>(MHz) | 6 dB Bandwidth (MHz) |         | 99% Bandwidth (MHz) |         | 6 dB<br>Bandwidth<br>Limit | Pass /<br>Fail |
|------------------------|--------------------------------|----------------------|---------|---------------------|---------|----------------------------|----------------|
|                        |                                | Chain 0              | Chain 1 | Chain 0             | Chain 1 |                            |                |
| IEEE 802.11a           | 149 (5745)                     | 15.05                | 14.20   | 16.900              | 17.067  | > 500 kHz                  | Pass           |
|                        | 157 (5785)                     | 15.76                | 13.19   | 17.006              | 17.173  | > 500 kHz                  | Pass           |
|                        | 165 (5825)                     | 14.44                | 15.17   | 16.601              | 17.459  | > 500 kHz                  | Pass           |
| IEEE<br>802.11n-HT20   | 149 (5745)                     | 16.04                | 12.92   | 17.595              | 17.694  | > 500 kHz                  | Pass           |
|                        | 157 (5785)                     | 15.15                | 13.79   | 17.552              | 17.565  | > 500 kHz                  | Pass           |
|                        | 165 (5825)                     | 9.461                | 15.51   | 17.555              | 17.657  | > 500 kHz                  | Pass           |
| IEEE<br>802.11n-HT40   | 151 (5755)                     | 33.93                | 33.96   | 35.091              | 36.117  | > 500 kHz                  | Pass           |
|                        | 159 (5795)                     | 33.83                | 35.11   | 35.928              | 36.037  | > 500 kHz                  | Pass           |
| IEEE<br>802.11ac-VHT20 | 149 (5745)                     | 13.18                | 15.49   | 17.573              | 17.618  | > 500 kHz                  | Pass           |
|                        | 157 (5785)                     | 13.51                | 13.84   | 17.619              | 17.594  | > 500 kHz                  | Pass           |
|                        | 165 (5825)                     | 12.86                | 13.88   | 17.554              | 17.638  | > 500 kHz                  | Pass           |
| IEEE<br>802.11ac-VHT40 | 151 (5755)                     | 31.43                | 33.94   | 35.932              | 36.095  | > 500 kHz                  | Pass           |
|                        | 159 (5795)                     | 35.12                | 32.60   | 35.969              | 36.129  | > 500 kHz                  | Pass           |
| IEEE<br>802.11ac-VHT80 | 155 (5775)                     | 71.49                | 75.29   | 75.396              | 75.789  | > 500 kHz                  | Pass           |

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.0

| Mode                   | Channel/<br>Frequency<br>(MHz) | 6 dB Bandwidth (MHz) |         | 99% Bandwidth (MHz) |         | 6 dB<br>Bandwidth<br>Limit | Pass /<br>Fail |
|------------------------|--------------------------------|----------------------|---------|---------------------|---------|----------------------------|----------------|
|                        |                                | Chain 2              | Chain 3 | Chain 2             | Chain 3 |                            |                |
| IEEE 802.11a           | 149 (5745)                     | 16.02                | 14.15   | 17.050              | 16.437  | > 500 kHz                  | Pass           |
|                        | 157 (5785)                     | 14.11                | 15.84   | 17.020              | 16.412  | > 500 kHz                  | Pass           |
|                        | 165 (5825)                     | 15.40                | 13.55   | 17.567              | 16.450  | > 500 kHz                  | Pass           |
| IEEE<br>802.11n-HT20   | 149 (5745)                     | 15.89                | 15.12   | 17.856              | 17.521  | > 500 kHz                  | Pass           |
|                        | 157 (5785)                     | 15.10                | 15.14   | 17.862              | 17.537  | > 500 kHz                  | Pass           |
|                        | 165 (5825)                     | 15.44                | 15.94   | 17.828              | 17.592  | > 500 kHz                  | Pass           |
| IEEE<br>802.11n-HT40   | 151 (5755)                     | 31.42                | 35.15   | 36.810              | 35.948  | > 500 kHz                  | Pass           |
|                        | 159 (5795)                     | 35.10                | 35.16   | 36.453              | 35.806  | > 500 kHz                  | Pass           |
| IEEE<br>802.11ac-VHT20 | 149 (5745)                     | 13.81                | 12.44   | 17.881              | 17.532  | > 500 kHz                  | Pass           |
|                        | 157 (5785)                     | 15.80                | 15.13   | 17.997              | 17.549  | > 500 kHz                  | Pass           |
|                        | 165 (5825)                     | 15.09                | 15.15   | 17.791              | 17.604  | > 500 kHz                  | Pass           |
| IEEE<br>802.11ac-VHT40 | 151 (5755)                     | 31.40                | 35.14   | 36.580              | 35.895  | > 500 kHz                  | Pass           |
|                        | 159 (5795)                     | 35.10                | 30.15   | 36.784              | 35.893  | > 500 kHz                  | Pass           |
| IEEE<br>802.11ac-VHT80 | 155 (5775)                     | 72.67                | 73.93   | 78.750              | 75.457  | > 500 kHz                  | Pass           |

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)
<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.0

The test plots as follows:

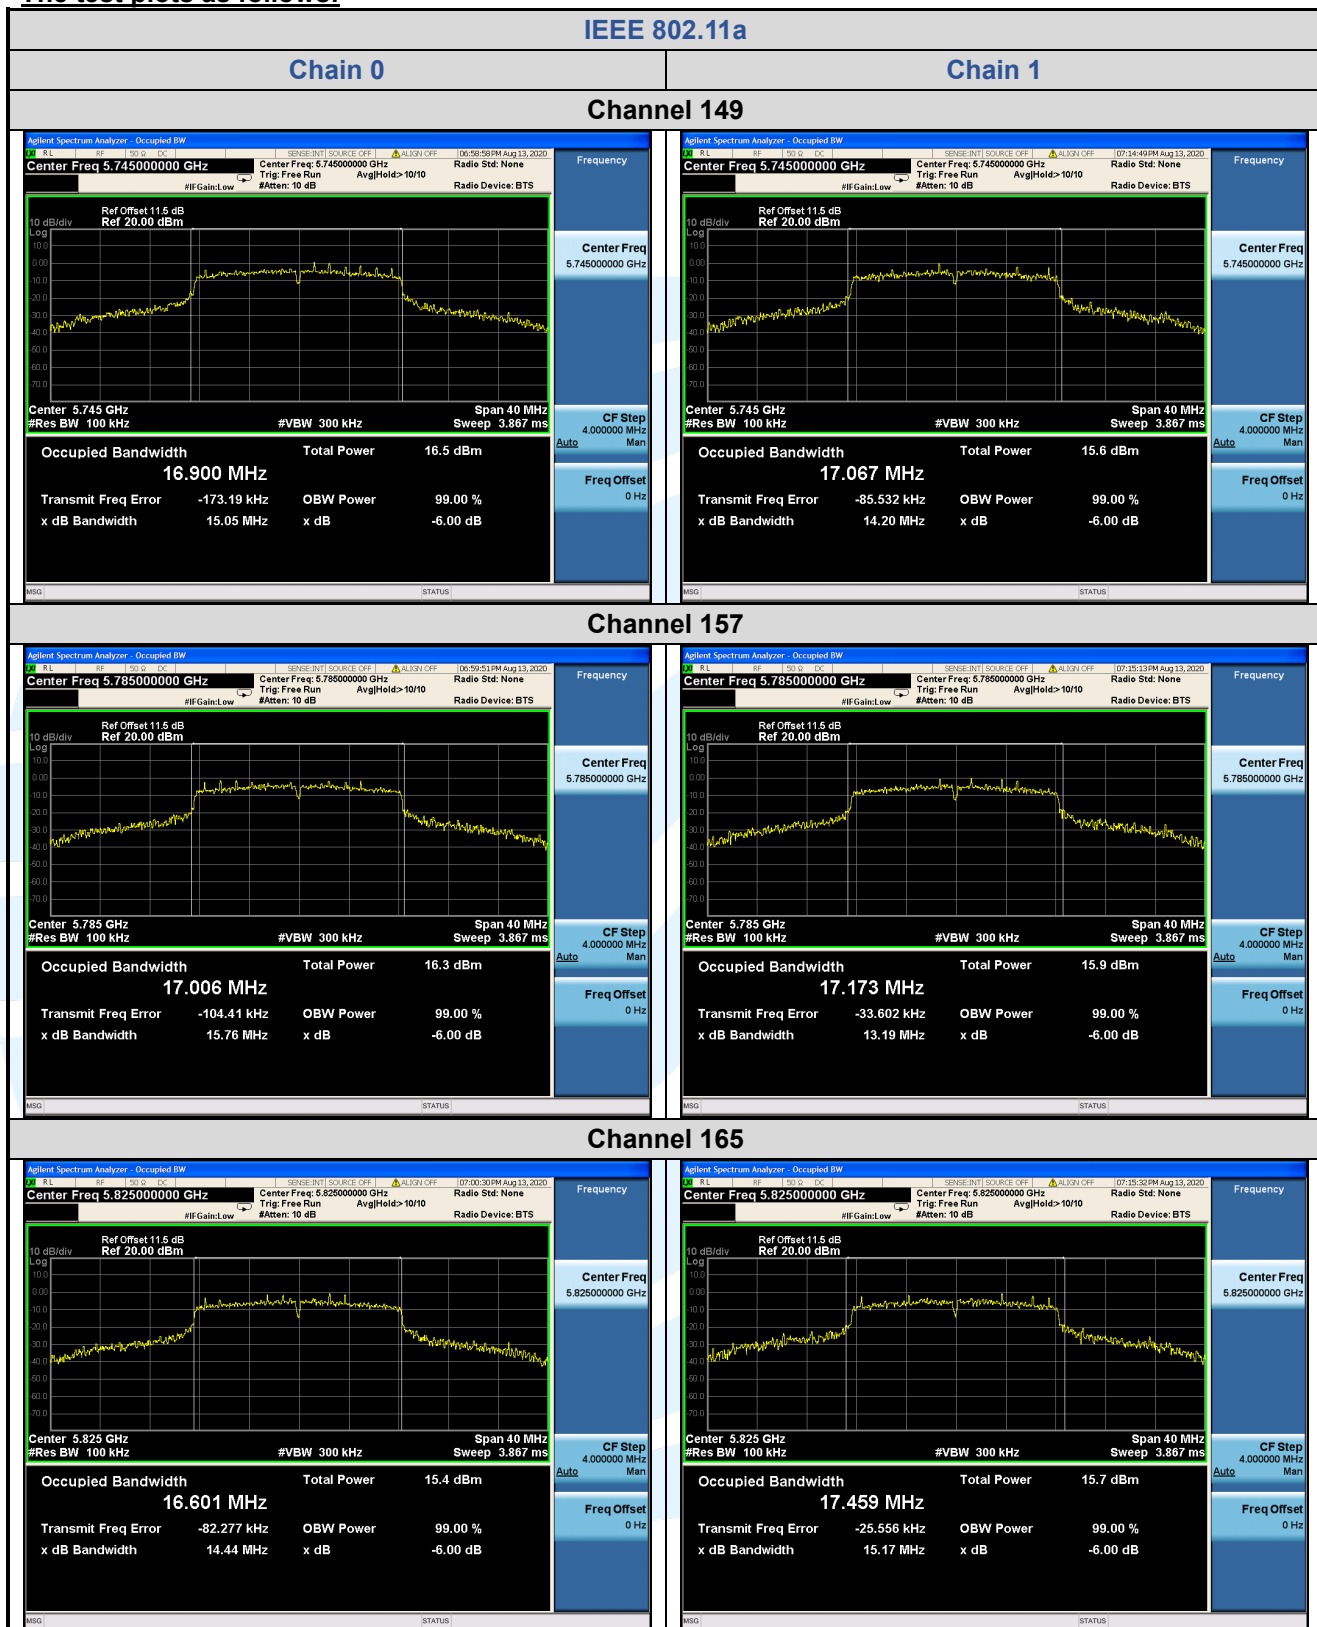

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com


<http://www.uttlab.com>


UTTR-RF-FCCPART15.407-V1.0

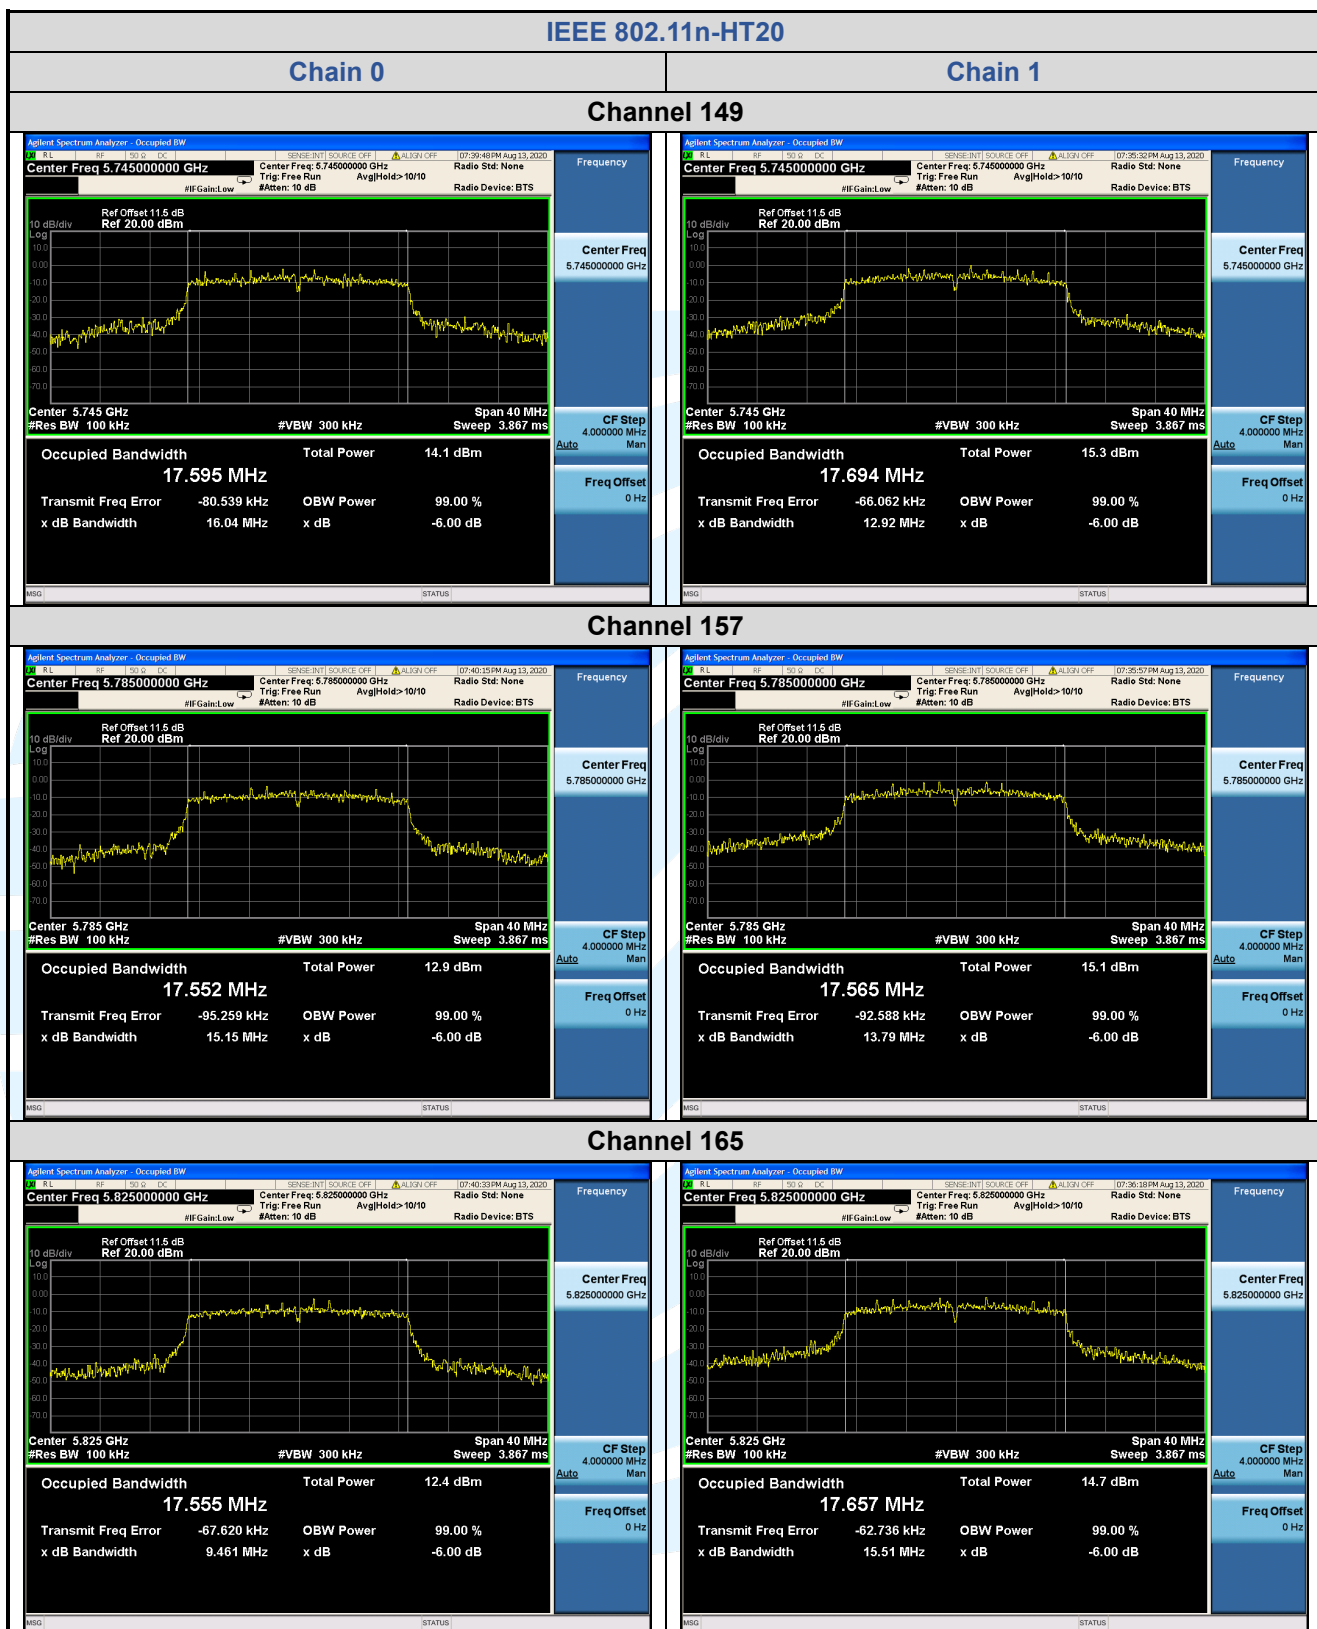


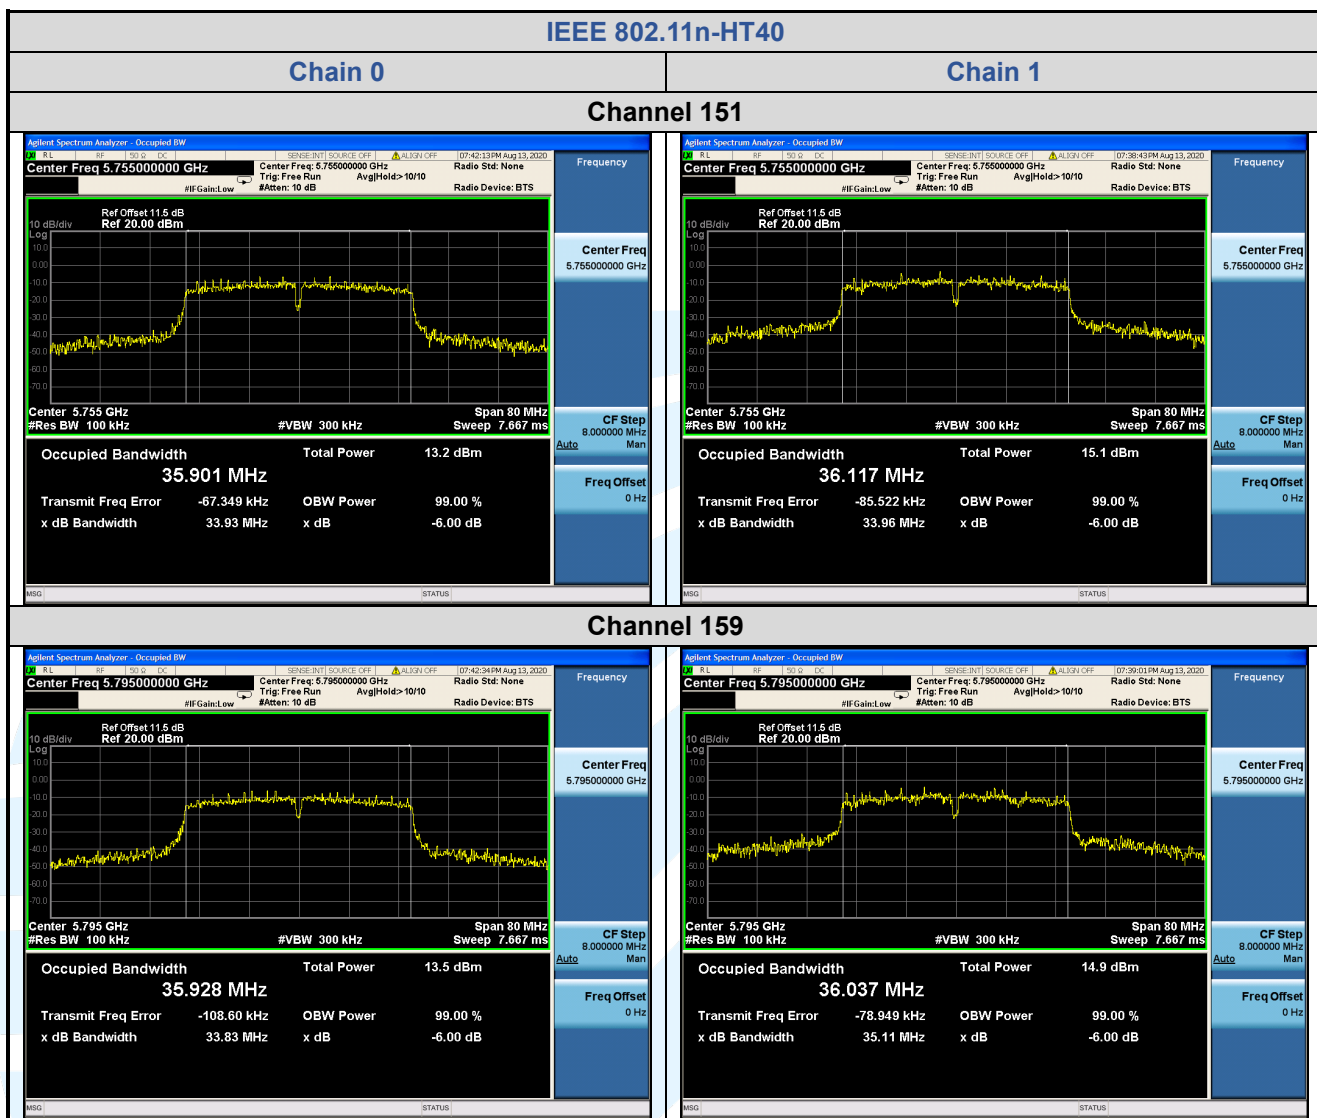


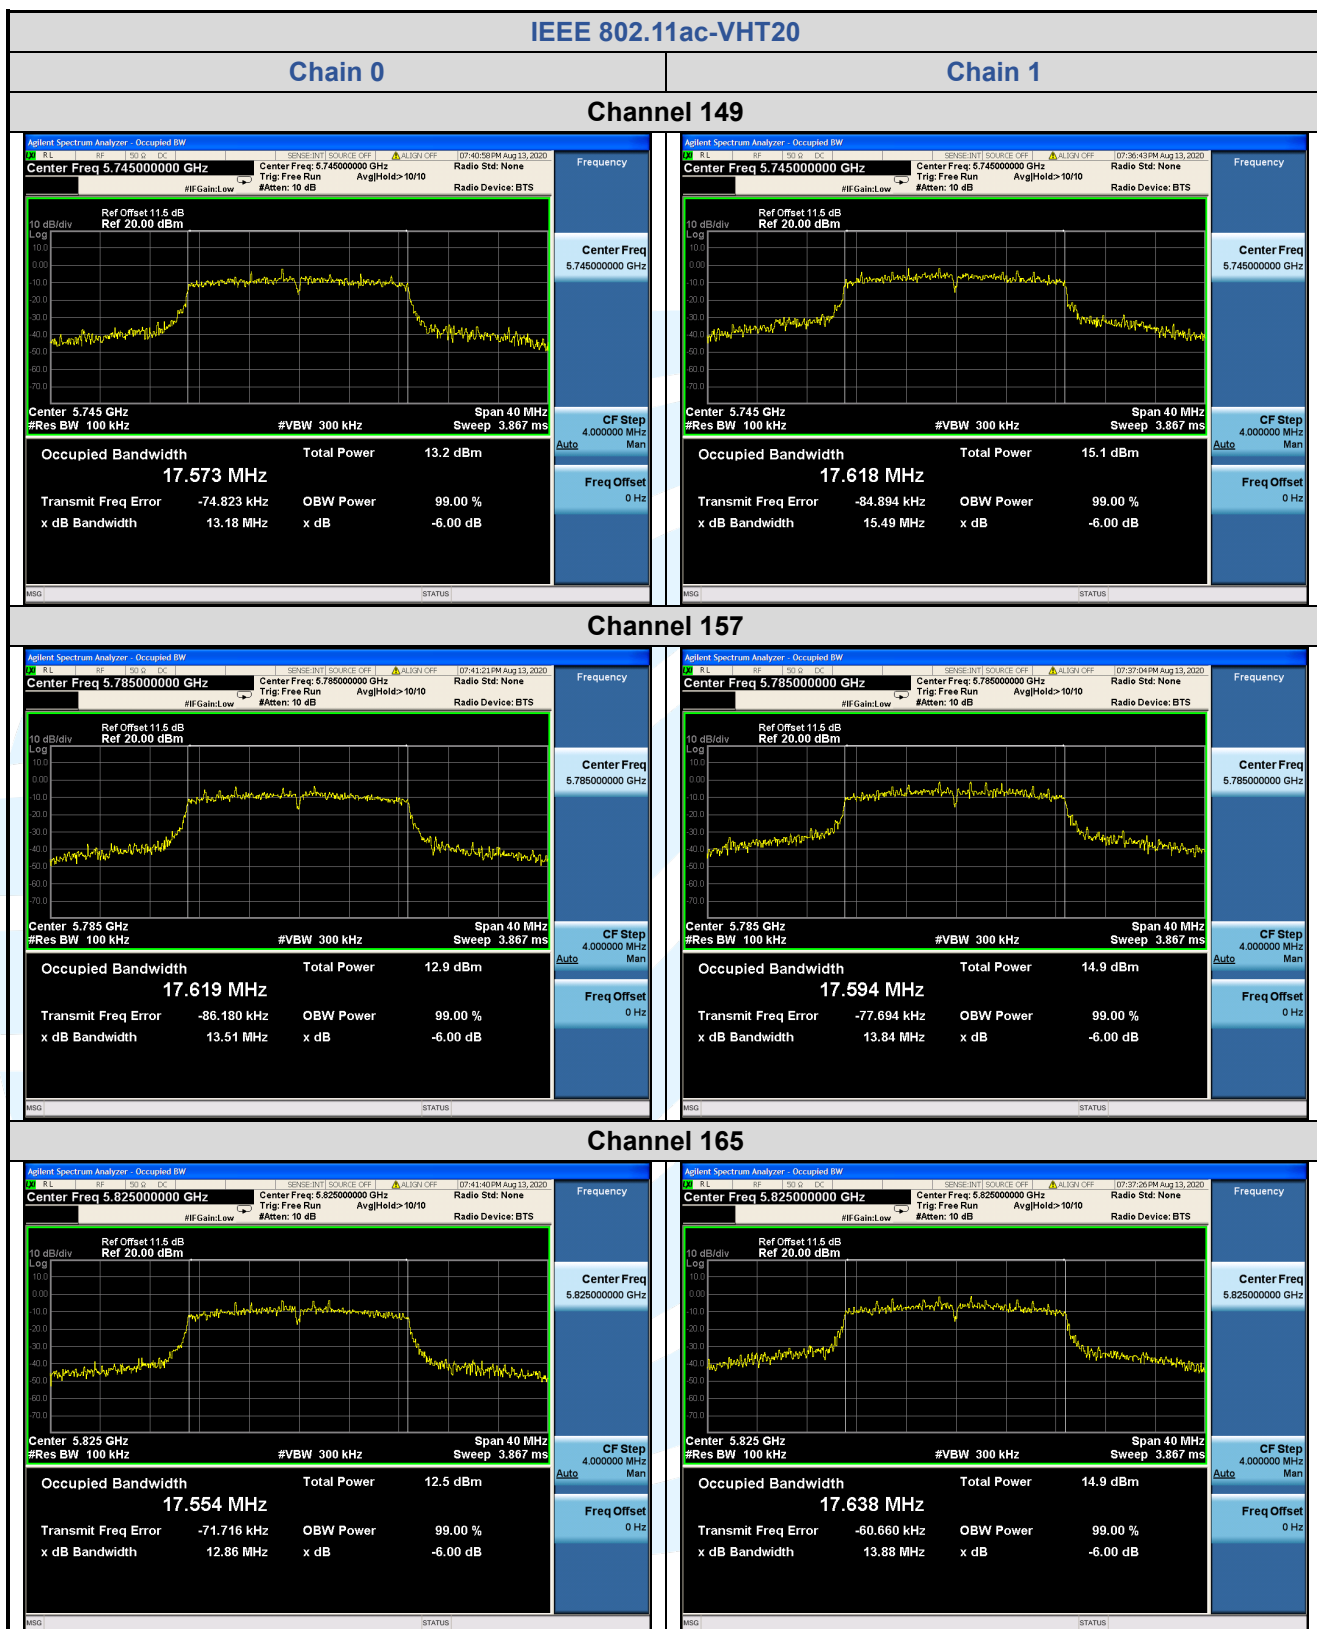


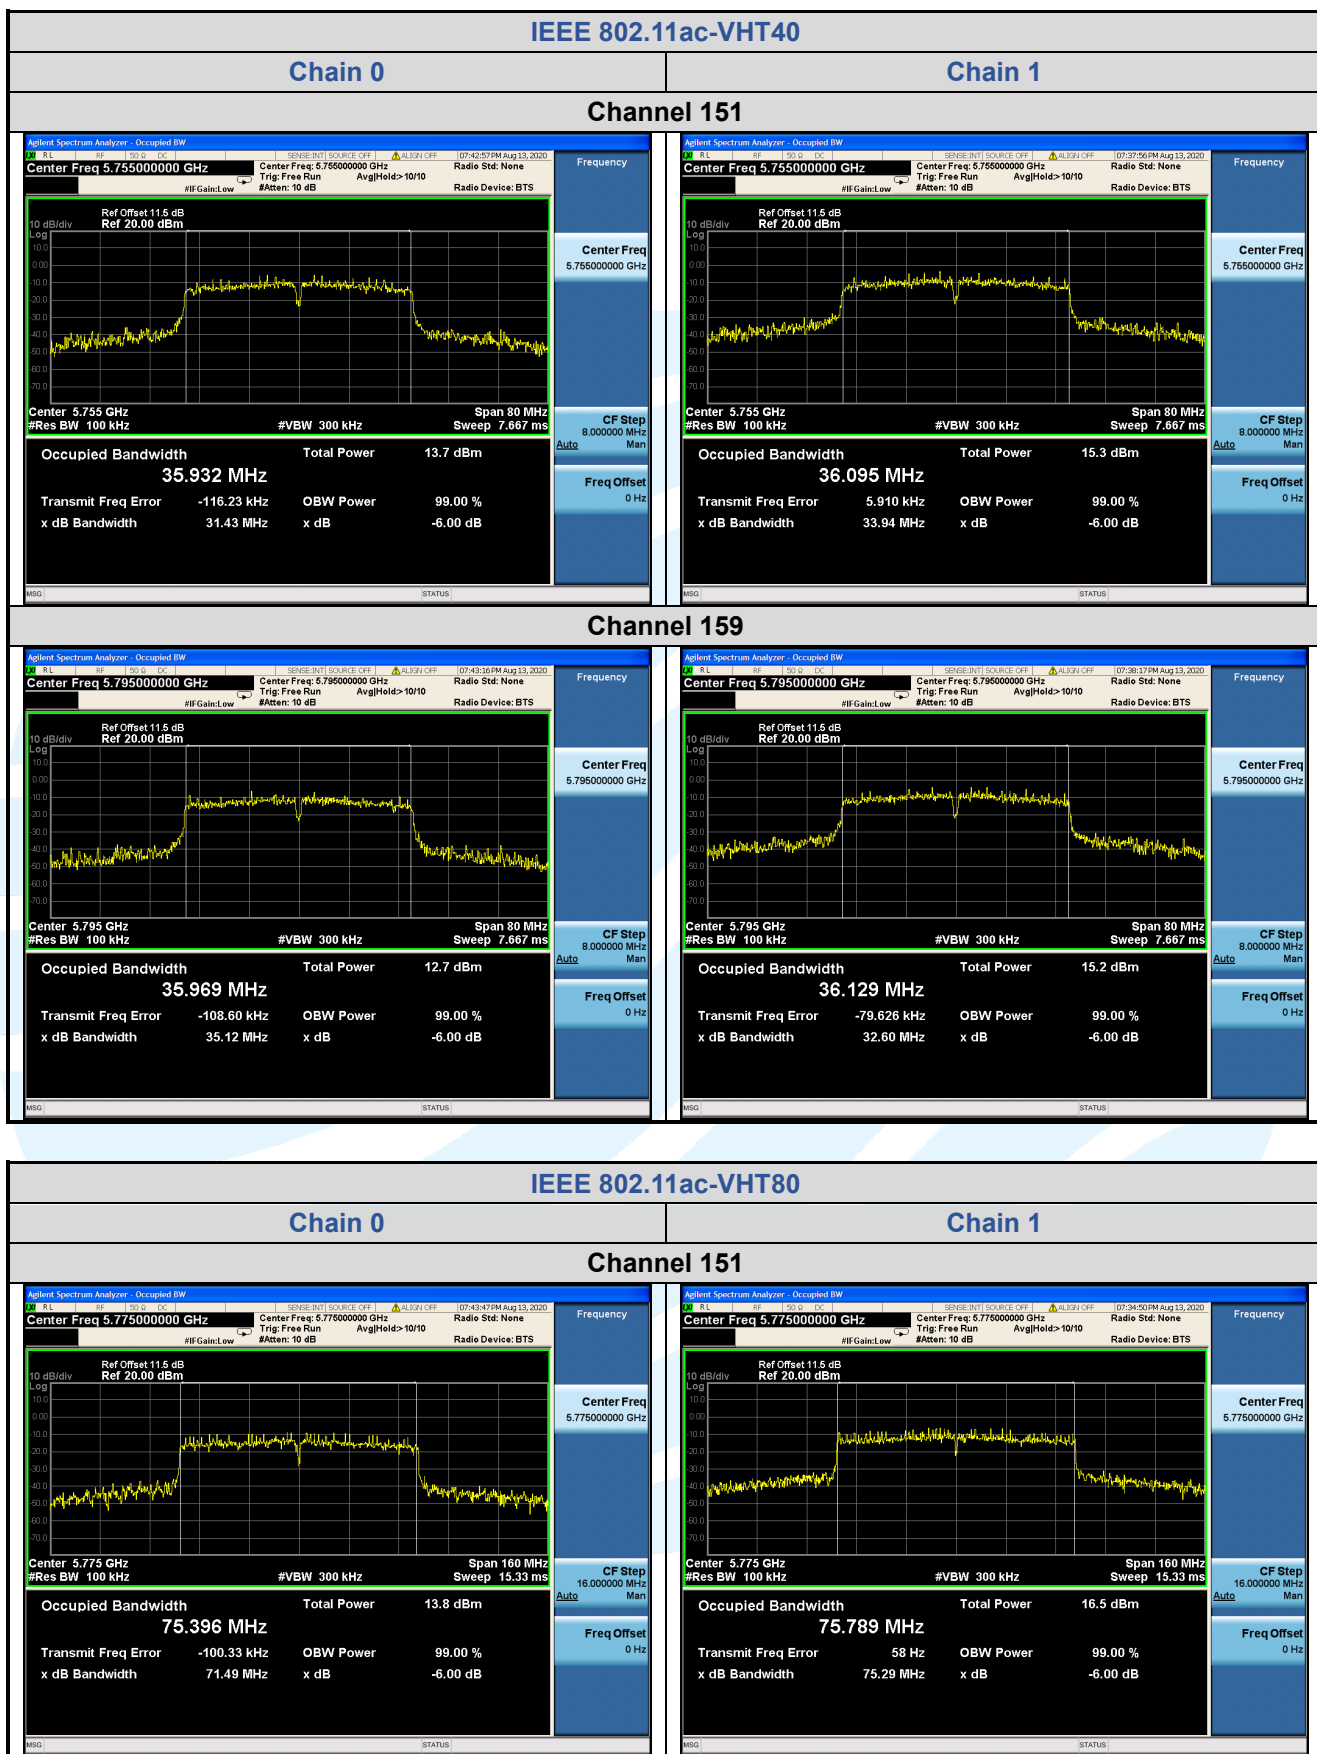


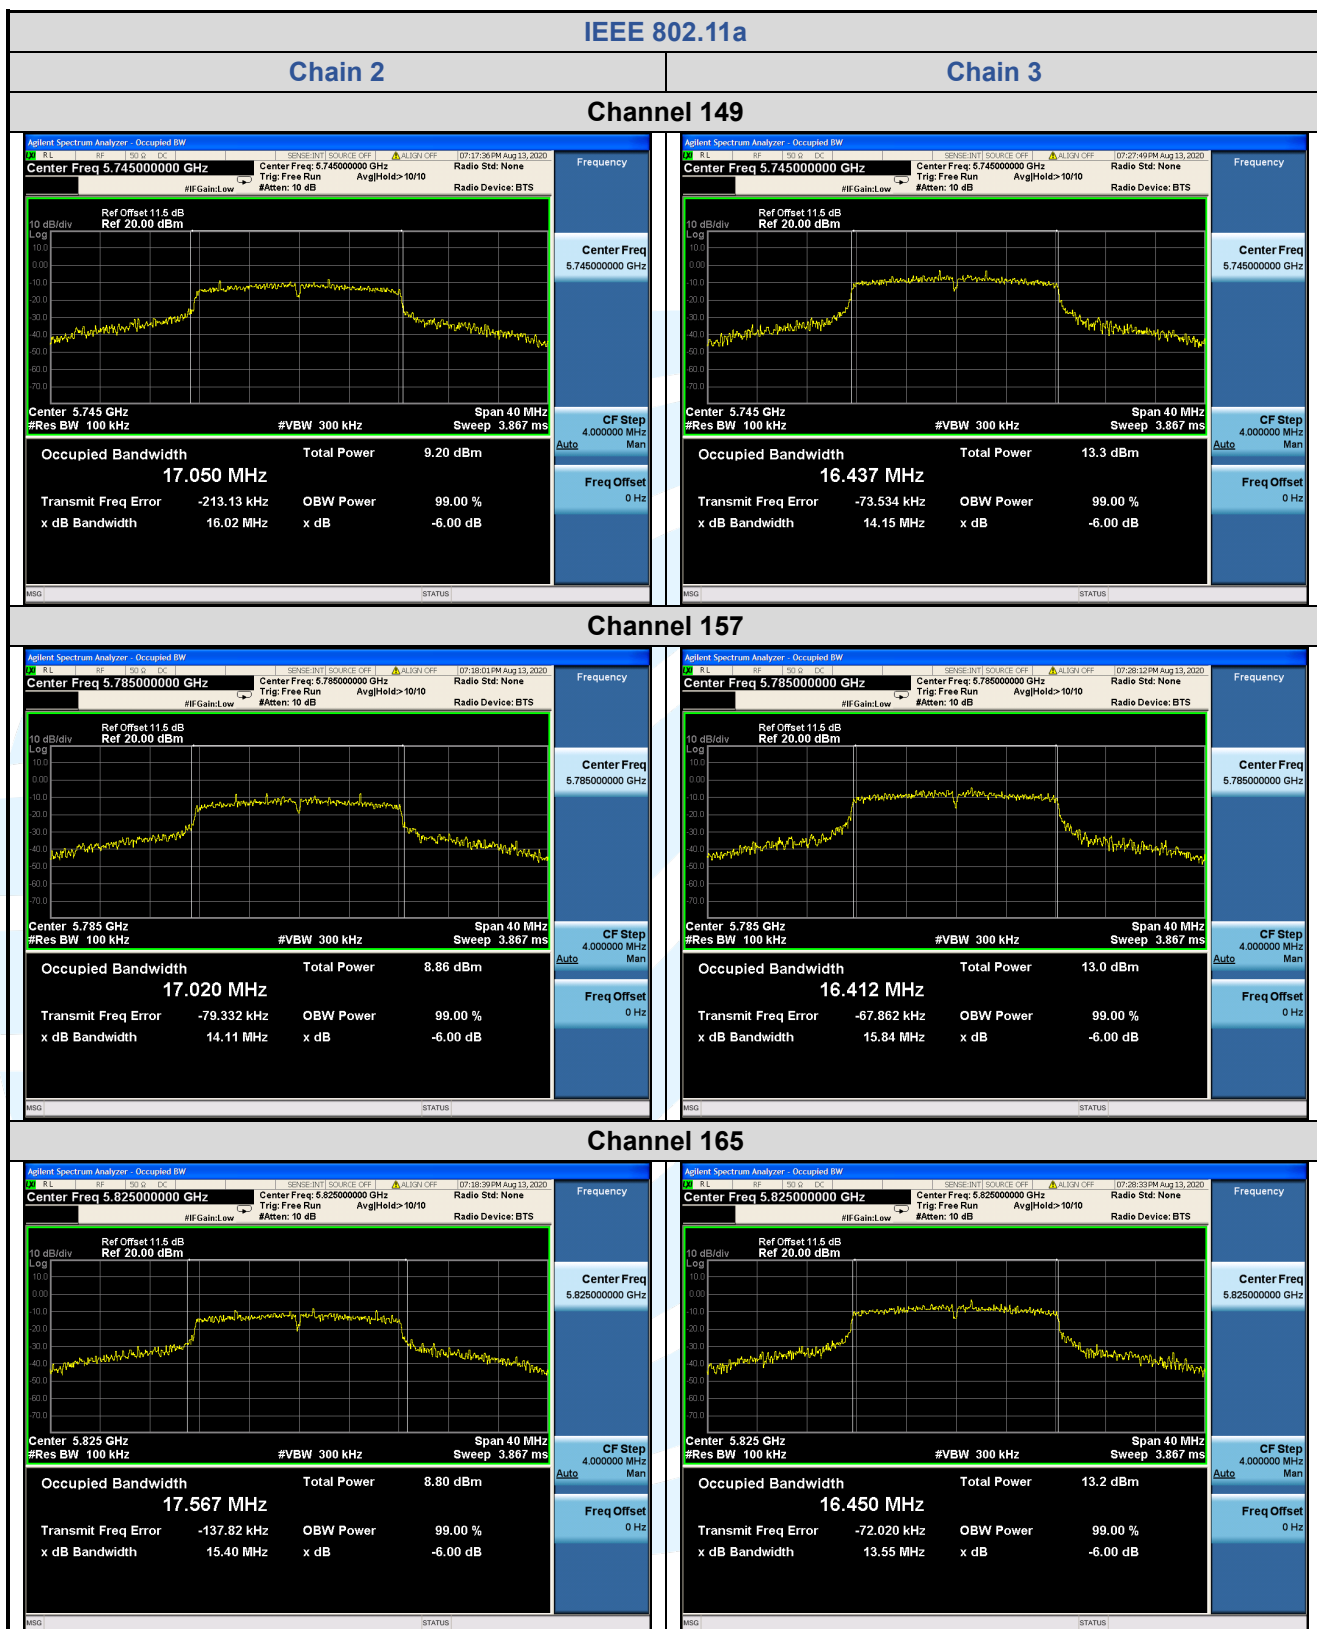

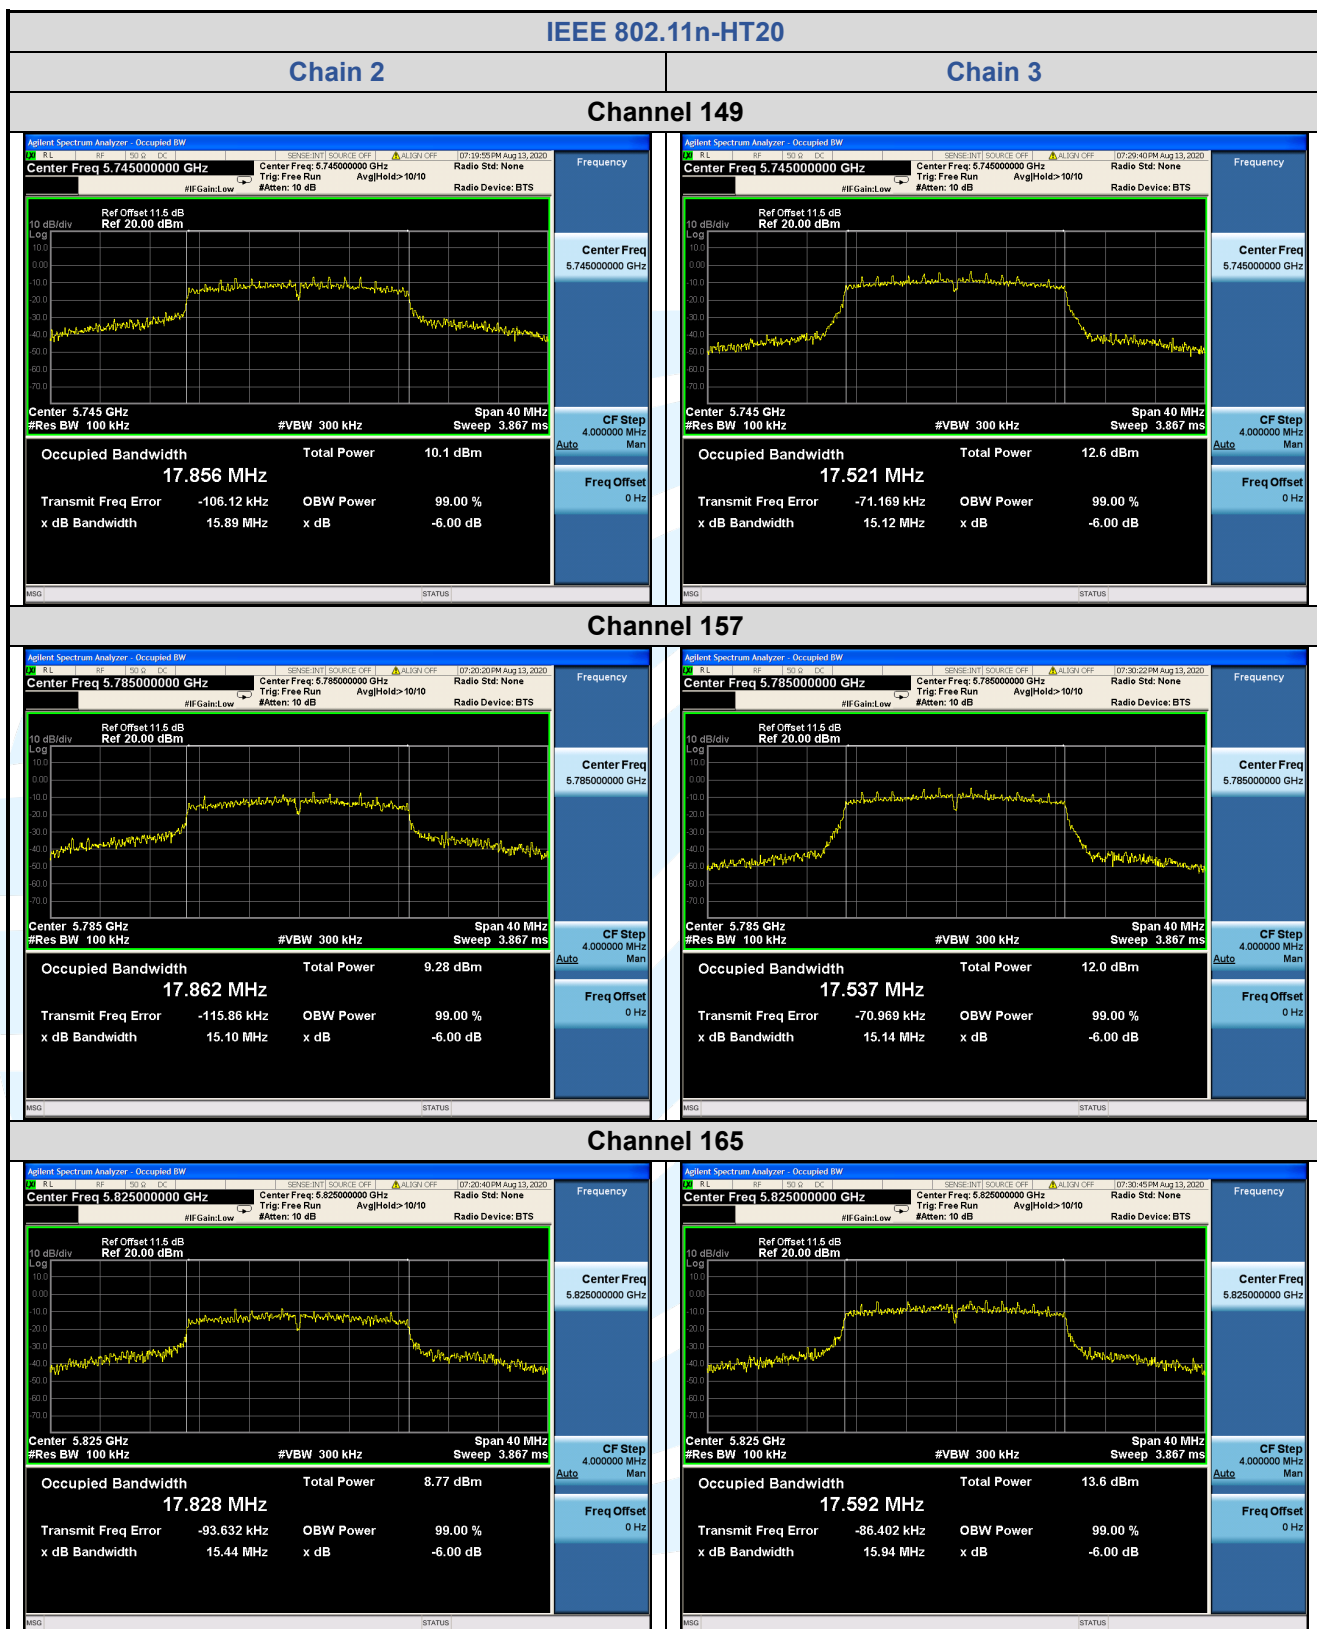

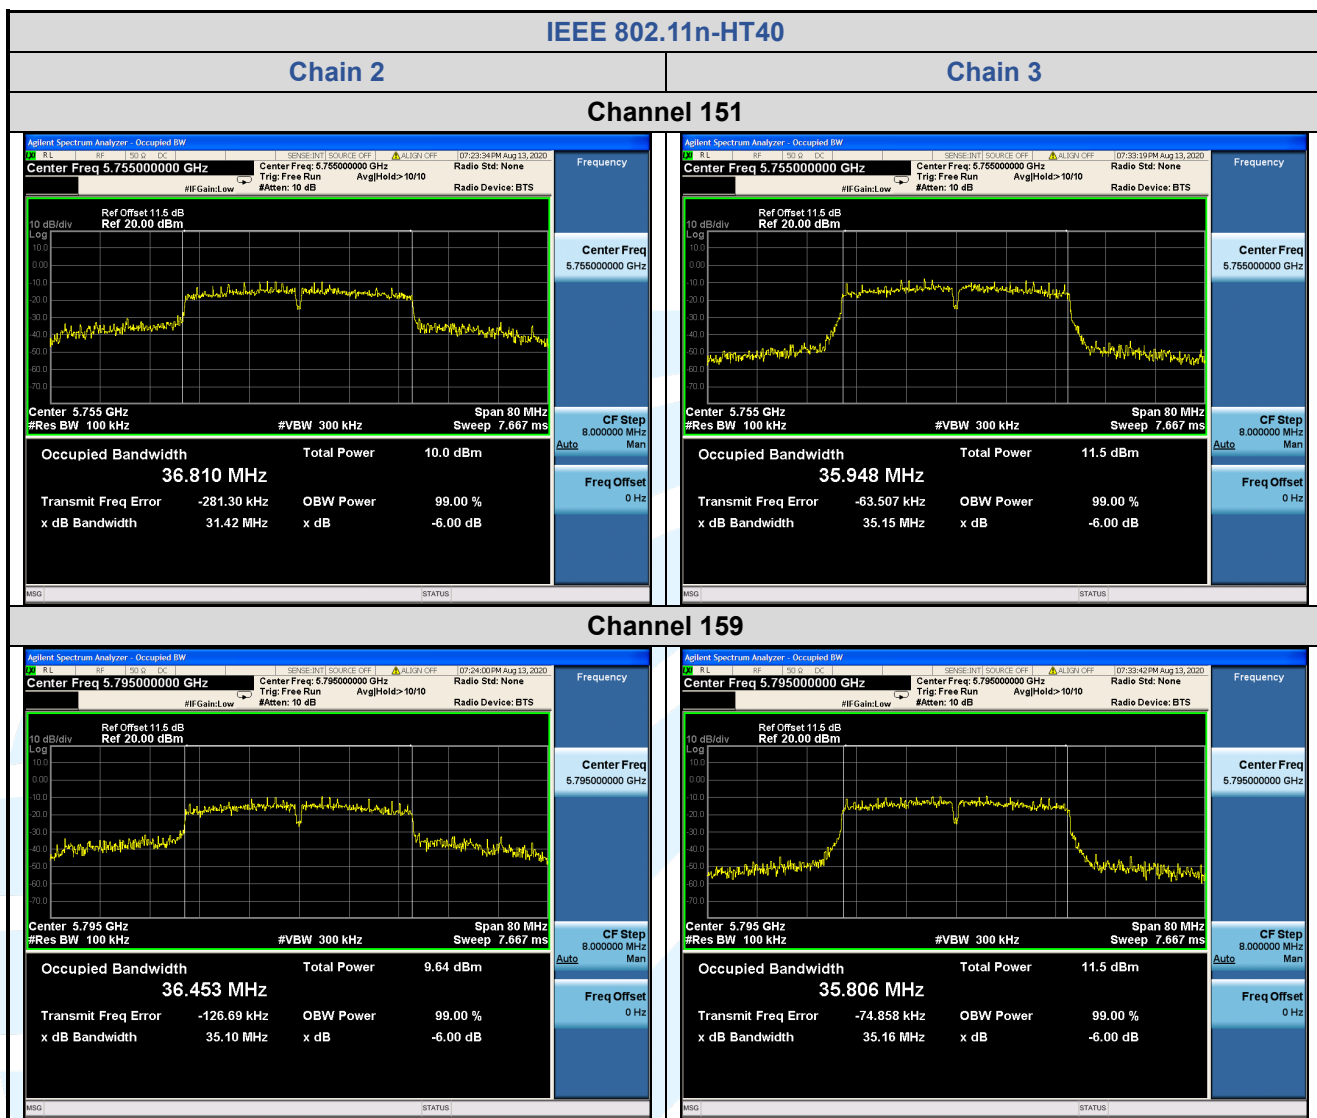

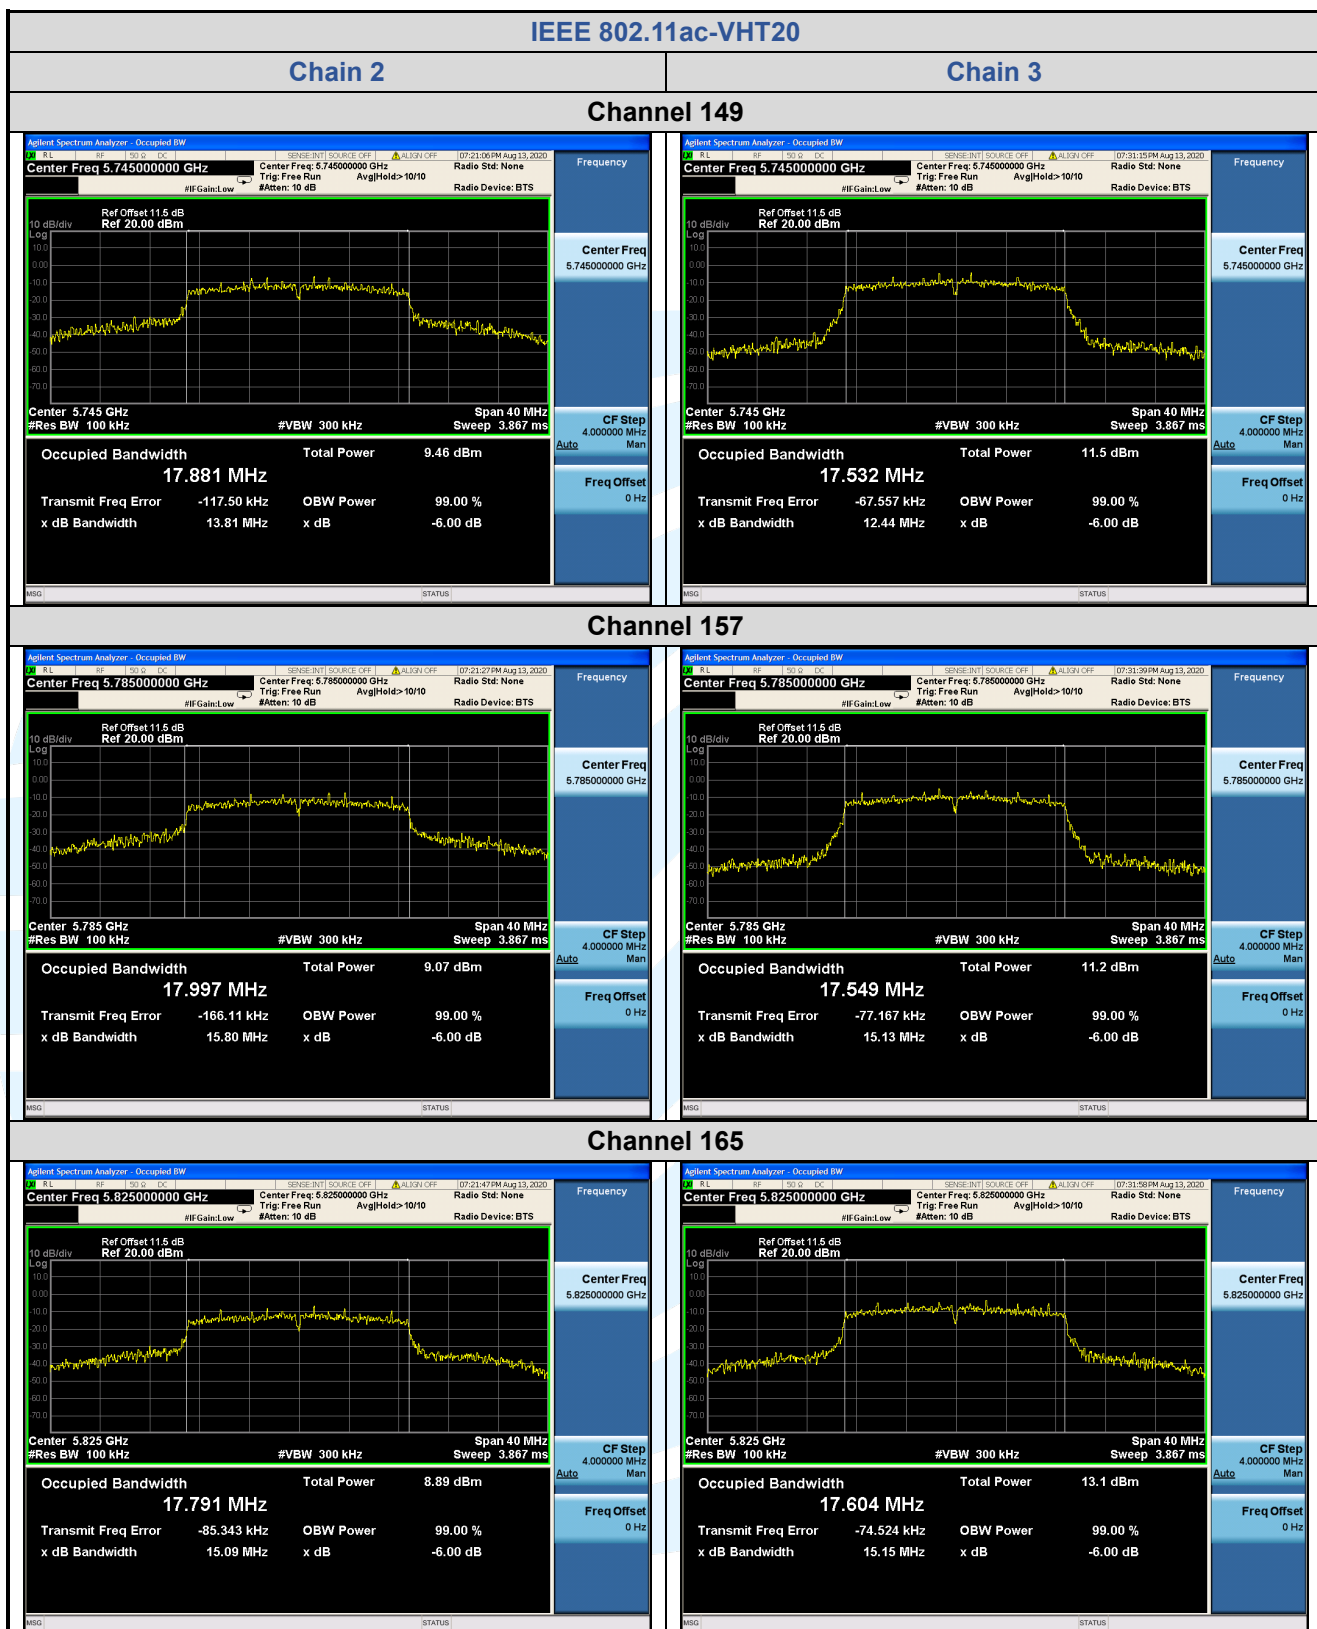

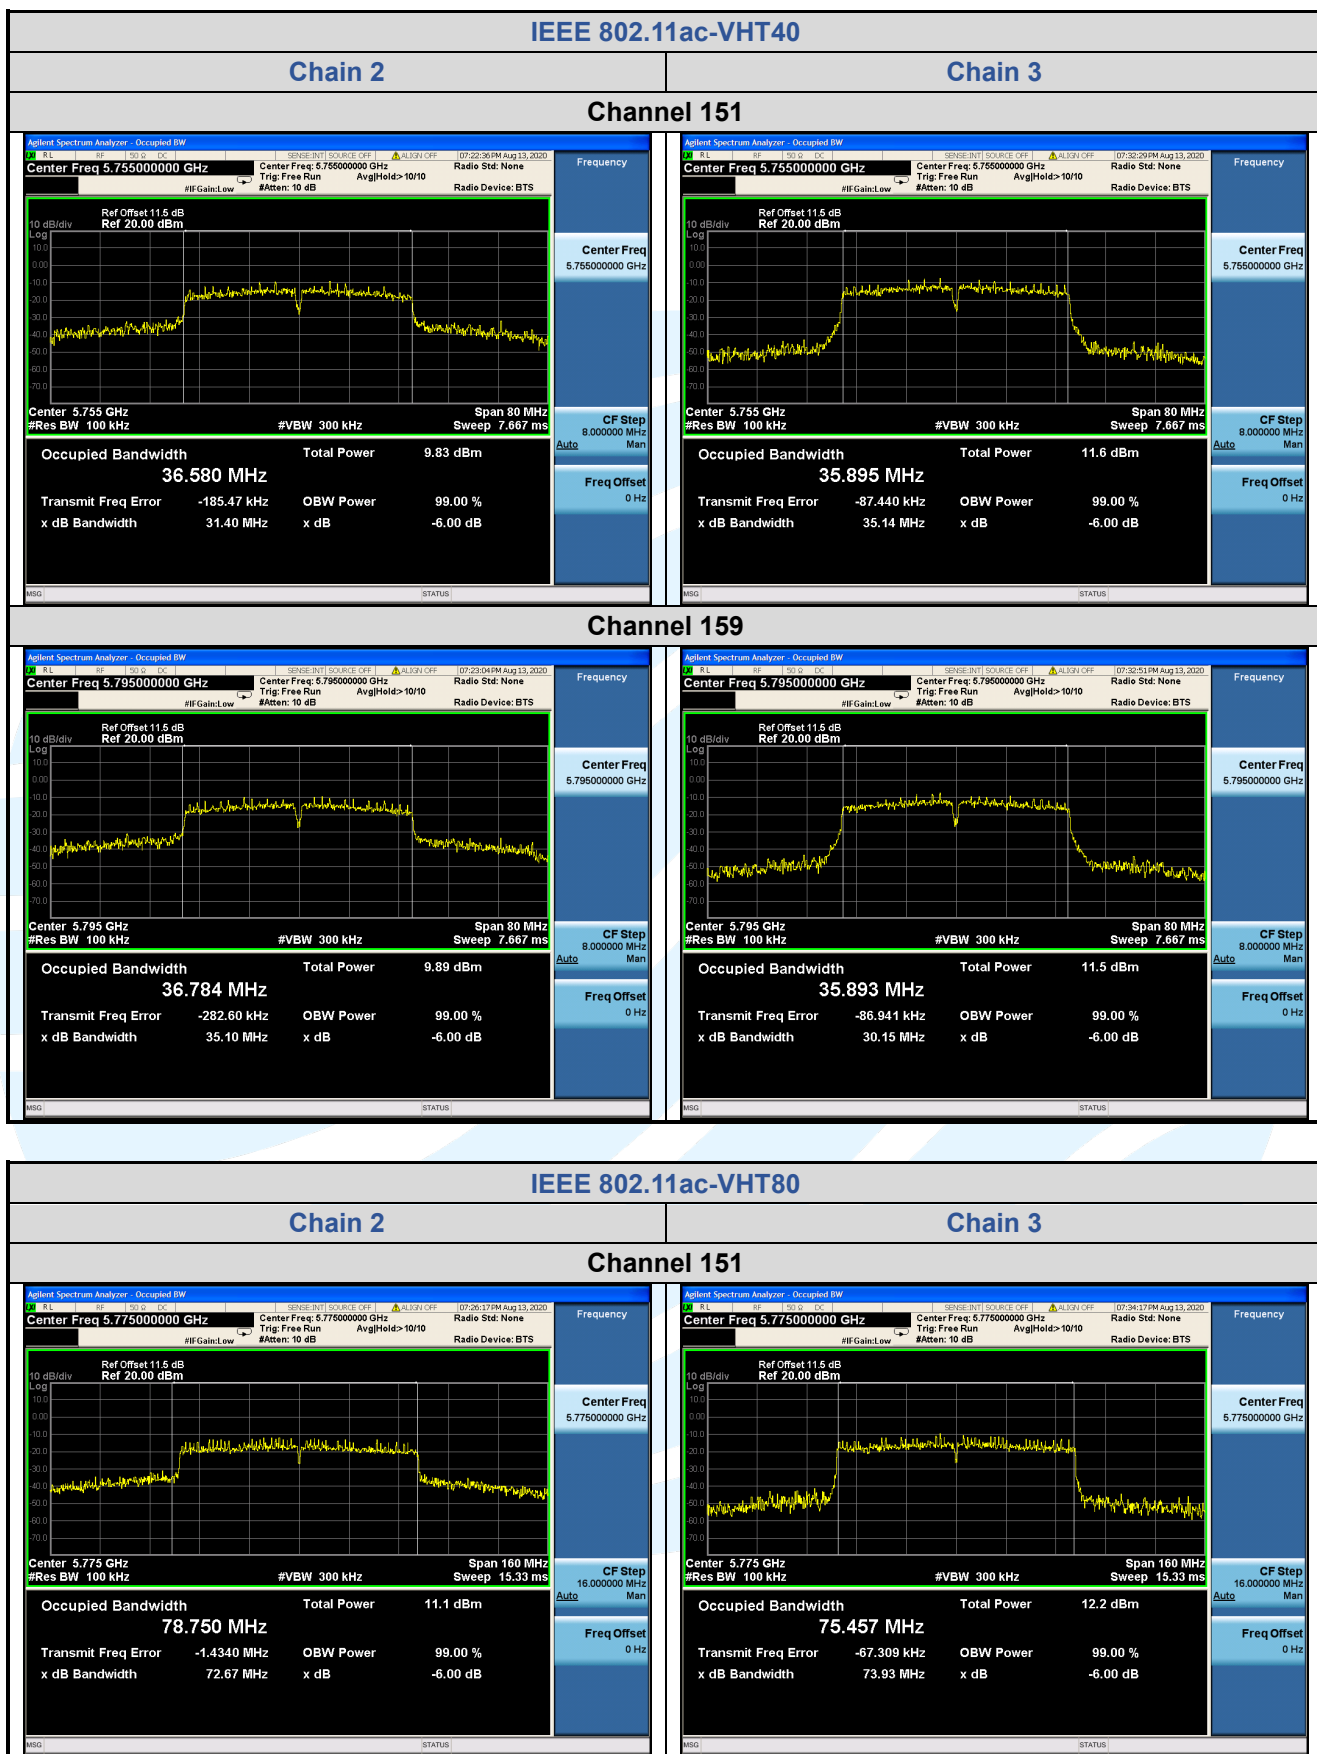

## 5.5 MAXIMUM CONDUCTED OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)

**Test Method:** KDB 789033 D02 v02r01 Section E.3.a (Method PM)

**Limits:**

1. For the band 5.15-5.25 GHz.
  - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
  - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
  - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
  - (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**Test Procedure:**

1. Connected the EUT's antenna port to measure device by 10dB attenuator.
2. Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of Tx on burst.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Transmitter mode

**Test Results:** Pass

**Test Data:**

**For U-NII-2A, U-NII-2C Band:**

For IEEE 802.11 a/n/ac, the minimum 26 dB emission bandwidth is 19.85 MHz

$$11 \text{ dBm} + 10\log_{10}(19.85) = 23.98\text{dBm} > 18.98 \text{ dBm (200mW)}$$

So the 18.98dB limit applicable

**Directional gain and the maximum output power limit.**

| Frequency Band | Chain 0 Antenna Gain (dBi) | Chain 1 Antenna Gain (dBi) | Chain2 Antenna Gain (dBi) | Chain 3 Antenna Gain | Correlated chains directional gain (dBi) | Peak Power Limits (dBm) |
|----------------|----------------------------|----------------------------|---------------------------|----------------------|------------------------------------------|-------------------------|
| U-NII-1        | 5.00                       | 5.00                       | 5.00                      | 5.00                 | 11.02                                    | 24.98                   |
| U-NII-2A       | 5.00                       | 5.00                       | 5.00                      | 5.00                 | 11.02                                    | 18.98                   |
| U-NII-2C       | 5.00                       | 5.00                       | 5.00                      | 5.00                 | 11.02                                    | 18.98                   |
| U-NII-3        | 5.00                       | 5.00                       | 5.00                      | 5.00                 | 11.02                                    | 24.98                   |

Basic methodology with  $N_{ANT}$  transmit antennas, each with the same directional gain  $G_{ANT}$  dBi, being driven by  $N_{ANT}$  transmitter outputs of equal power. Directional gain is to be computed as follows:

If any transmit signals are *correlated* with each other,

$$\text{Directional gain} = G_{ANT} + 10 \log(N_{ANT}) \text{ dBi}$$

| Mode            | Channel/<br>Frequency<br>(MHz) | Maximum Conducted Output Power (dBm) |                 |               |                 |               |                 |               |                 | Total<br>Power<br>MIMO_<br>Chain<br>0+1+2+3 | Limits<br>(dBm) | Pass /<br>Fail |
|-----------------|--------------------------------|--------------------------------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------------------------------------|-----------------|----------------|
|                 |                                | SISO                                 |                 |               |                 |               |                 |               |                 |                                             |                 |                |
|                 |                                | Chain 0                              |                 | Chain 1       |                 | Chain 2       |                 | Chain 3       |                 |                                             |                 |                |
|                 |                                | Meas<br>Power                        | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power |                                             |                 |                |
| IEEE<br>802.11a | 36 (5180)                      | 10.93                                | 11.86           | 10.46         | 11.39           | 4.15          | 5.08            | 10.18         | 11.11           | N/A                                         | 30.00           | Pass           |
|                 | 44 (5220)                      | 10.42                                | 11.35           | 10.15         | 11.08           | 4.91          | 5.84            | 10.25         | 11.18           | N/A                                         | 30.00           | Pass           |
|                 | 48 (5240)                      | 10.83                                | 11.76           | 10.06         | 10.99           | 5.29          | 6.22            | 10.17         | 11.10           | N/A                                         | 30.00           | Pass           |
|                 | 52 (5260)                      | 10.59                                | 11.52           | 11.06         | 11.99           | 5.84          | 6.77            | 10.85         | 11.78           | N/A                                         | 24.00           | Pass           |
|                 | 60 (5300)                      | 10.45                                | 11.38           | 10.75         | 11.68           | 6.20          | 7.13            | 10.68         | 11.61           | N/A                                         | 24.00           | Pass           |
|                 | 64 (5320)                      | 10.26                                | 11.19           | 10.60         | 11.53           | 6.56          | 7.49            | 10.52         | 11.45           | N/A                                         | 24.00           | Pass           |
|                 | 100 (5500)                     | 8.52                                 | 9.45            | 8.42          | 9.35            | 5.89          | 6.82            | 9.70          | 10.63           | N/A                                         | 24.00           | Pass           |
|                 | 116 (5580)                     | 8.85                                 | 9.78            | 7.93          | 8.86            | 5.33          | 6.26            | 9.43          | 10.36           | N/A                                         | 24.00           | Pass           |
|                 | 140 (5700)                     | 8.89                                 | 9.82            | 9.07          | 10.00           | 4.65          | 5.58            | 9.37          | 10.30           | N/A                                         | 24.00           | Pass           |
|                 | 149 (5745)                     | 12.59                                | 13.52           | 12.72         | 13.65           | 6.19          | 7.12            | 11.87         | 12.80           | N/A                                         | 30.00           | Pass           |
|                 | 157 (5785)                     | 12.41                                | 13.34           | 12.19         | 13.12           | 5.81          | 6.74            | 11.61         | 12.54           | N/A                                         | 30.00           | Pass           |
|                 | 165 (5825)                     | 12.13                                | 13.06           | 11.86         | 12.79           | 5.18          | 6.11            | 11.50         | 12.43           | N/A                                         | 30.00           | Pass           |

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.0

| Mode                     | Channel/<br>Frequency<br>(MHz) | Maximum Conducted Output Power (dBm) |                 |               |                 |               |                 |               |                 | Total<br>Power<br>MIMO_<br>Chain<br>0+1+2+3 | Limits<br>(dBm) | Pass /<br>Fail |
|--------------------------|--------------------------------|--------------------------------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------------------------------------|-----------------|----------------|
|                          |                                | MIMO                                 |                 |               |                 |               |                 |               |                 |                                             |                 |                |
|                          |                                | Chain 0                              |                 | Chain 1       |                 | Chain 2       |                 | Chain 3       |                 |                                             |                 |                |
|                          |                                | Meas<br>Power                        | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power |                                             |                 |                |
| IEEE<br>802.11n-<br>HT20 | 36 (5180)                      | 6.53                                 | 9.40            | 7.82          | 10.69           | 1.27          | 4.14            | 5.89          | 8.76            | 14.85                                       | 24.98           | Pass           |
|                          | 44 (5220)                      | 6.93                                 | 9.80            | 7.32          | 10.19           | 1.37          | 4.24            | 5.82          | 8.69            | 14.78                                       | 24.98           | Pass           |
|                          | 48 (5240)                      | 6.69                                 | 9.56            | 6.90          | 9.77            | 1.55          | 4.42            | 5.34          | 8.21            | 14.46                                       | 24.98           | Pass           |
|                          | 52 (5260)                      | 7.06                                 | 9.93            | 7.79          | 10.66           | 2.21          | 5.08            | 6.88          | 9.75            | 15.33                                       | 18.98           | Pass           |
|                          | 60 (5300)                      | 6.91                                 | 9.78            | 7.01          | 9.88            | 2.35          | 5.22            | 6.62          | 9.49            | 14.98                                       | 18.98           | Pass           |
|                          | 64 (5320)                      | 6.73                                 | 9.60            | 7.06          | 9.93            | 2.32          | 5.19            | 6.18          | 9.05            | 14.81                                       | 18.98           | Pass           |
|                          | 100 (5500)                     | 5.45                                 | 8.32            | 5.62          | 8.49            | 2.55          | 5.42            | 5.10          | 7.97            | 13.73                                       | 18.98           | Pass           |
|                          | 116 (5580)                     | 4.75                                 | 7.62            | 4.97          | 7.84            | 1.62          | 4.49            | 4.59          | 7.46            | 13.06                                       | 18.98           | Pass           |
|                          | 140 (5700)                     | 5.72                                 | 8.59            | 6.52          | 9.39            | 1.20          | 4.07            | 4.30          | 7.17            | 13.74                                       | 18.98           | Pass           |
|                          | 149 (5745)                     | 10.56                                | 13.43           | 10.63         | 13.50           | 4.46          | 7.33            | 10.19         | 13.06           | 18.45                                       | 24.98           | Pass           |
|                          | 157 (5785)                     | 10.41                                | 13.28           | 10.37         | 13.24           | 3.97          | 6.84            | 9.97          | 12.84           | 18.22                                       | 24.98           | Pass           |
|                          | 165 (5825)                     | 10.05                                | 12.92           | 10.08         | 12.95           | 3.78          | 6.65            | 9.88          | 12.75           | 17.98                                       | 24.98           | Pass           |

| Mode                     | Channel/<br>Frequency<br>(MHz) | Maximum Conducted Output Power (dBm) |                 |               |                 |               |                 |               |                 | Total<br>Power<br>MIMO_Chain<br>0+1+2+3 | Limits<br>(dBm) | Pass /<br>Fail |
|--------------------------|--------------------------------|--------------------------------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|-----------------------------------------|-----------------|----------------|
|                          |                                | MIMO                                 |                 |               |                 |               |                 |               |                 |                                         |                 |                |
|                          |                                | Chain 0                              |                 | Chain 1       |                 | Chain 2       |                 | Chain 3       |                 |                                         |                 |                |
|                          |                                | Meas<br>Power                        | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power |                                         |                 |                |
| IEEE<br>802.11n-<br>HT40 | 38 (5190)                      | 2.81                                 | 6.81            | 5.18          | 9.18            | -1.98         | 2.02            | 1.47          | 5.47            | 12.60                                   | 24.98           | Pass           |
|                          | 46 (5230)                      | 2.59                                 | 6.59            | 4.38          | 8.38            | -2.03         | 1.97            | 1.71          | 5.71            | 12.24                                   | 24.98           | Pass           |
|                          | 54 (5270)                      | 2.93                                 | 6.93            | 5.18          | 9.18            | -1.51         | 2.49            | 2.78          | 6.78            | 12.96                                   | 18.98           | Pass           |
|                          | 62 (5310)                      | 2.48                                 | 6.48            | 4.71          | 8.71            | -1.63         | 2.37            | 2.29          | 6.29            | 12.52                                   | 18.98           | Pass           |
|                          | 102 (5510)                     | 1.96                                 | 5.96            | 3.56          | 7.56            | -0.52         | 3.48            | 1.63          | 5.63            | 11.91                                   | 18.98           | Pass           |
|                          | 110 (5550)                     | 2.37                                 | 6.37            | 3.88          | 7.88            | -0.21         | 3.79            | 1.93          | 5.93            | 12.25                                   | 18.98           | Pass           |
|                          | 134 (5670)                     | 2.39                                 | 6.39            | 3.85          | 7.85            | -1.32         | 2.68            | 2.18          | 6.18            | 12.16                                   | 18.98           | Pass           |
|                          | 151 (5755)                     | 8.67                                 | 12.67           | 10.22         | 14.22           | 2.43          | 6.43            | 7.57          | 11.57           | 18.04                                   | 24.98           | Pass           |
|                          | 159 (5795)                     | 8.38                                 | 12.38           | 9.91          | 13.91           | 2.01          | 6.01            | 7.27          | 11.27           | 17.73                                   | 24.98           | Pass           |

| Mode                       | Channel/<br>Frequency<br>(MHz) | Maximum Conducted Output Power (dBm) |                 |               |                 |               |                 |               |                 | Total<br>Power<br>MIMO_<br>Chain<br>0+1+2+3 | Limits<br>(dBm) | Pass /<br>Fail |
|----------------------------|--------------------------------|--------------------------------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------------------------------------|-----------------|----------------|
|                            |                                | MIMO                                 |                 |               |                 |               |                 |               |                 |                                             |                 |                |
|                            |                                | Chain 0                              |                 | Chain 1       |                 | Chain 2       |                 | Chain 3       |                 |                                             |                 |                |
|                            |                                | Meas<br>Power                        | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power |                                             |                 |                |
| IEEE<br>802.11ac<br>-VHT20 | 36 (5180)                      | 6.81                                 | 9.62            | 7.61          | 10.42           | 0.90          | 3.71            | 5.76          | 8.57            | 14.73                                       | 24.98           | Pass           |
|                            | 44 (5220)                      | 6.65                                 | 9.46            | 7.28          | 10.09           | 1.21          | 4.02            | 5.75          | 8.56            | 14.59                                       | 24.98           | Pass           |
|                            | 48 (5240)                      | 6.60                                 | 9.41            | 7.04          | 9.85            | 1.42          | 4.23            | 5.29          | 8.10            | 14.39                                       | 24.98           | Pass           |
|                            | 52 (5260)                      | 6.77                                 | 9.58            | 7.84          | 10.65           | 2.13          | 4.94            | 6.73          | 9.54            | 15.16                                       | 18.98           | Pass           |
|                            | 60 (5300)                      | 6.72                                 | 9.53            | 7.18          | 9.99            | 2.29          | 5.10            | 6.52          | 9.33            | 14.88                                       | 18.98           | Pass           |
|                            | 64 (5320)                      | 6.60                                 | 9.41            | 6.85          | 9.66            | 2.26          | 5.07            | 6.27          | 9.08            | 14.67                                       | 18.98           | Pass           |
|                            | 100 (5500)                     | 5.23                                 | 8.04            | 5.88          | 8.69            | 2.38          | 5.19            | 4.91          | 7.72            | 13.61                                       | 18.98           | Pass           |
|                            | 116 (5580)                     | 4.53                                 | 7.34            | 5.08          | 7.89            | 1.70          | 4.51            | 4.45          | 7.26            | 12.95                                       | 18.98           | Pass           |
|                            | 140 (5700)                     | 5.46                                 | 8.27            | 6.39          | 9.20            | 1.12          | 3.93            | 4.17          | 6.98            | 13.52                                       | 18.98           | Pass           |
|                            | 149 (5745)                     | 10.61                                | 13.42           | 10.83         | 13.64           | 4.33          | 7.14            | 10.12         | 12.93           | 18.45                                       | 24.98           | Pass           |
|                            | 157 (5785)                     | 10.40                                | 13.21           | 10.64         | 13.45           | 3.69          | 6.50            | 9.89          | 12.70           | 18.21                                       | 24.98           | Pass           |
|                            | 165 (5825)                     | 10.08                                | 12.89           | 10.32         | 13.13           | 3.61          | 6.42            | 9.68          | 12.49           | 17.93                                       | 24.98           | Pass           |

| Mode                       | Channel/<br>Frequency<br>(MHz) | Maximum Conducted Output Power (dBm) |                 |               |                 |               |                 |               |                 | Total<br>Power<br>MIMO_<br>Chain<br>0+1+2+3 | Limits<br>(dBm) | Pass /<br>Fail |
|----------------------------|--------------------------------|--------------------------------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|---------------------------------------------|-----------------|----------------|
|                            |                                | MIMO                                 |                 |               |                 |               |                 |               |                 |                                             |                 |                |
|                            |                                | Chain 0                              |                 | Chain 1       |                 | Chain 2       |                 | Chain 3       |                 |                                             |                 |                |
|                            |                                | Meas<br>Power                        | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power |                                             |                 |                |
| IEEE<br>802.11ac<br>-VHT40 | 38 (5190)                      | 2.93                                 | 7.25            | 4.44          | 8.76            | -2.12         | 2.20            | 1.35          | 5.67            | 12.59                                       | 24.98           | Pass           |
|                            | 46 (5230)                      | 2.45                                 | 6.77            | 3.81          | 8.13            | -2.29         | 2.03            | 1.58          | 5.90            | 12.24                                       | 24.98           | Pass           |
|                            | 54 (5270)                      | 2.92                                 | 7.24            | 4.52          | 8.84            | -1.63         | 2.69            | 2.63          | 6.95            | 12.96                                       | 18.98           | Pass           |
|                            | 62 (5310)                      | 2.35                                 | 6.67            | 3.67          | 7.99            | -1.77         | 2.55            | 2.18          | 6.50            | 12.36                                       | 18.98           | Pass           |
|                            | 102 (5510)                     | 1.89                                 | 6.21            | 2.81          | 7.13            | -0.63         | 3.69            | 1.45          | 5.77            | 11.89                                       | 18.98           | Pass           |
|                            | 110 (5550)                     | 2.21                                 | 6.53            | 3.16          | 7.48            | -0.29         | 4.03            | 1.75          | 6.07            | 12.22                                       | 18.98           | Pass           |
|                            | 134 (5670)                     | 2.05                                 | 6.37            | 3.33          | 7.65            | -1.50         | 2.82            | 2.10          | 6.42            | 12.16                                       | 18.98           | Pass           |
|                            | 151 (5755)                     | 8.61                                 | 12.93           | 9.14          | 13.46           | 2.33          | 6.65            | 7.44          | 11.76           | 17.88                                       | 24.98           | Pass           |
|                            | 159 (5795)                     | 8.31                                 | 12.63           | 8.92          | 13.24           | 1.94          | 6.26            | 7.19          | 11.51           | 17.62                                       | 24.98           | Pass           |

| Mode                       | Channel/<br>Frequency<br>(MHz) | Maximum Conducted Output Power (dBm) |                 |               |                 |               |                 |               |                 | Total<br>Power<br>MIMO –<br>Chain<br>0+1+2+3 | Limits<br>(dBm) | Pass /<br>Fail |
|----------------------------|--------------------------------|--------------------------------------|-----------------|---------------|-----------------|---------------|-----------------|---------------|-----------------|----------------------------------------------|-----------------|----------------|
|                            |                                | MIMO                                 |                 |               |                 |               |                 |               |                 |                                              |                 |                |
|                            |                                | Chain 0                              |                 | Chain 1       |                 | Chain 2       |                 | Chain 3       |                 |                                              |                 |                |
|                            |                                | Meas<br>Power                        | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power | Meas<br>Power | Corr'd<br>Power |                                              |                 |                |
| IEEE<br>802.11ac<br>-VHT80 | 42 (5230)                      | 0.86                                 | 6.63            | 2.71          | 8.48            | -3.58         | 2.19            | 0.59          | 6.36            | 12.46                                        | 24.98           | Pass           |
|                            | 58 (5290)                      | 0.15                                 | 5.92            | 1.48          | 7.25            | -3.93         | 1.84            | 0.36          | 6.13            | 11.72                                        | 18.98           | Pass           |
|                            | 106 (5530)                     | -1.45                                | 4.32            | -0.65         | 5.12            | -3.96         | 1.81            | -1.77         | 4.00            | 9.99                                         | 18.98           | Pass           |
|                            | 122 (5610)                     | -1.48                                | 4.29            | -0.04         | 5.73            | -3.58         | 2.19            | -1.42         | 4.35            | 10.34                                        | 18.98           | Pass           |
|                            | 155 (5775)                     | 4.69                                 | 10.46           | 6.01          | 11.78           | -0.57         | 5.20            | 2.82          | 8.59            | 15.65                                        | 24.98           | Pass           |

Remark:

1. Corr'd Power = Meas Power + Duty Cycle Factor
2. Total (Chain 0+1+2+3) =  $10 \cdot \log[(10^{\text{Chain 0}/10}) + (10^{\text{Chain 1}/10})]$

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.0

## 5.6 PEAK POWER SPECTRAL DENSITY

**Test Requirement:** FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)

**Test Method:** KDB 789033 D02 v02r01 Section F

**Limits:**

1. For the band 5.15-5.25 GHz.
  - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
  - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
  - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
  - (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**Test Procedure:**

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.0

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

**1. For U-NII-1, U-NII-2A, U-NII-2C band:**

Using method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW  $\geq$  3 RBW, Detector = RMS
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

**2. For U-NII-3 band:**

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500 kHz, Set VBW  $\geq$  3 RBW, Detector = RMS
- Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Transmitter mode

**Test Results:** Pass

**Test Data:**

**Directional gain and the maximum output power limit.**

| Frequency Band | Chain 0<br>Antenna<br>Gain | Chain 1<br>Antenna<br>Gain | Chain 2<br>Antenna<br>Gain | Chain 3<br>Antenna<br>Gain | Correlated chains<br>directional gain (dBi) | PSD Limits<br>(dBm/MHz or<br>dBm/500kHz) |
|----------------|----------------------------|----------------------------|----------------------------|----------------------------|---------------------------------------------|------------------------------------------|
| U-NII-1        | 5.00                       | 5.00                       | 5.00                       | 5.00                       | 11.02                                       | 11.98                                    |
| U-NII-2A       | 5.00                       | 5.00                       | 5.00                       | 5.00                       | 11.02                                       | 5.98                                     |
| U-NII-2C       | 5.00                       | 5.00                       | 5.00                       | 5.00                       | 11.02                                       | 5.98                                     |
| U-NII-3        | 5.00                       | 5.00                       | 5.00                       | 5.00                       | 11.02                                       | 24.98                                    |

Basic methodology with  $N_{ANT}$  transmit antennas, each with the same directional gain  $G_{ANT}$  dBi, being driven by  $N_{ANT}$  transmitter outputs of equal power. Directional gain is to be computed as follows:

If any transmit signals are *correlated* with each other,

$$\text{Directional gain} = G_{ANT} + 10 \log(N_{ANT}) \text{ dBi}$$

### For U-NII-1, U-NII-2A, U-NII-2C band

| Mode                | Channel/<br>Frequency<br>(MHz) | Maximum Power Spectral Density (dBm/MHz) |               |             |               |             |               |             |               | Total PSD<br>MIMO_<br>Chain<br>0+1+2+3 | Limit<br>s | Pass /<br>Fail |
|---------------------|--------------------------------|------------------------------------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|----------------------------------------|------------|----------------|
|                     |                                | SISO                                     |               |             |               |             |               |             |               |                                        |            |                |
|                     |                                | Chain 0                                  |               | Chain 1     |               | Chain 2     |               | Chain 3     |               |                                        |            |                |
|                     |                                | Meas<br>PSD                              | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD |                                        |            |                |
| IEEE<br>802.11<br>a | 36 (5180)                      | 1.404                                    | 2.335         | 1.298       | 2.229         | -5.899      | -4.968        | -0.195      | 0.736         | ---                                    | 17         | Pass           |
|                     | 44 (5220)                      | 1.316                                    | 2.247         | 1.093       | 2.024         | -5.691      | -4.760        | -0.208      | 0.723         | ---                                    | 17         | Pass           |
|                     | 48 (5240)                      | 1.086                                    | 2.017         | 0.712       | 1.643         | -5.337      | -4.406        | -0.267      | 0.664         | ---                                    | 17         | Pass           |
|                     | 52 (5260)                      | 1.477                                    | 2.408         | 1.582       | 2.513         | -4.386      | -3.455        | -0.382      | 0.549         | ---                                    | 11         | Pass           |
|                     | 60 (5300)                      | 1.128                                    | 2.059         | 1.015       | 1.946         | -4.031      | -3.100        | -0.200      | 0.731         | ---                                    | 11         | Pass           |
|                     | 64 (5320)                      | 0.686                                    | 1.617         | 0.817       | 1.748         | -4.328      | -3.397        | -0.032      | 0.899         | ---                                    | 11         | Pass           |
|                     | 100 (5500)                     | -1.188                                   | -0.257        | -2.216      | -1.285        | -5.501      | -4.570        | -1.089      | -0.158        | ---                                    | 11         | Pass           |
|                     | 116 (5580)                     | -1.420                                   | -0.489        | -2.096      | -1.165        | -5.898      | -4.967        | -1.607      | -0.676        | ---                                    | 11         | Pass           |
|                     | 140 (5700)                     | -0.461                                   | 0.470         | -0.561      | 0.370         | -5.914      | -4.983        | -0.811      | 0.120         | ---                                    | 11         | Pass           |

| Mode                     | Channel/<br>Frequency<br>(MHz) | Maximum Power Spectral Density (dBm/MHz) |               |             |               |             |               |             |               | Total<br>PSD<br>MIMO_<br>Chain<br>0+1+2+3 | Limits | Pass / Fail |
|--------------------------|--------------------------------|------------------------------------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------------------------------------|--------|-------------|
|                          |                                | MIMO                                     |               |             |               |             |               |             |               |                                           |        |             |
|                          |                                | Chain 0                                  |               | Chain 1     |               | Chain 2     |               | Chain 3     |               |                                           |        |             |
|                          |                                | Meas<br>PSD                              | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD |                                           |        |             |
| IEEE<br>802.11n-<br>HT20 | 36 (5180)                      | -2.817                                   | 0.049         | -1.841      | 1.025         | -9.328      | -6.462        | -4.595      | -1.729        | 5.017                                     | 11.98  | Pass        |
|                          | 44 (5220)                      | -2.984                                   | -0.118        | -2.135      | 0.731         | -8.980      | -6.114        | -4.538      | -1.672        | 4.887                                     | 11.98  | Pass        |
|                          | 48 (5240)                      | -3.255                                   | -0.389        | -2.565      | 0.301         | -9.263      | -6.397        | -5.146      | -2.280        | 4.482                                     | 11.98  | Pass        |
|                          | 52 (5260)                      | -2.904                                   | -0.038        | -1.979      | 0.887         | -8.290      | -5.424        | -3.652      | -0.786        | 5.236                                     | 5.98   | Pass        |
|                          | 60 (5300)                      | -3.561                                   | -0.695        | -2.680      | 0.186         | -7.242      | -4.376        | -3.130      | -0.264        | 5.054                                     | 5.98   | Pass        |
|                          | 64 (5320)                      | -3.875                                   | -1.009        | -2.955      | -0.089        | -7.511      | -4.645        | -4.216      | -1.350        | 4.546                                     | 5.98   | Pass        |
|                          | 100 (5500)                     | -5.531                                   | -2.665        | -4.499      | -1.633        | -8.467      | -5.601        | -5.680      | -2.814        | 3.067                                     | 5.98   | Pass        |
|                          | 116 (5580)                     | -5.406                                   | -2.540        | -5.016      | -2.150        | -8.763      | -5.897        | -6.094      | -3.228        | 2.786                                     | 5.98   | Pass        |
|                          | 140 (5700)                     | -4.265                                   | -1.399        | -3.779      | -0.913        | -9.115      | -6.249        | -6.026      | -3.160        | 3.531                                     | 5.98   | Pass        |

| Mode                     | Channel/<br>Frequency<br>(MHz) | Maximum Power Spectral Density (dBm/MHz) |               |             |               |             |               |             |               | Total<br>PSD<br>MIMO_<br>Chain<br>0+1+2+3 | Limits | Pass / Fail |
|--------------------------|--------------------------------|------------------------------------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------------------------------------|--------|-------------|
|                          |                                | MIMO                                     |               |             |               |             |               |             |               |                                           |        |             |
|                          |                                | Chain 0                                  |               | Chain 1     |               | Chain 2     |               | Chain 3     |               |                                           |        |             |
|                          |                                | Meas<br>PSD                              | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD |                                           |        |             |
| IEEE<br>802.11n-<br>HT40 | 38 (5190)                      | -9.752                                   | -5.747        | -8.259      | -4.254        | -15.756     | -11.751       | -12.055     | -8.050        | -0.629                                    | 11.98  | Pass        |
|                          | 46 (5230)                      | -10.441                                  | -6.436        | -9.544      | -5.539        | -15.908     | -11.903       | -11.639     | -7.634        | -1.288                                    | 11.98  | Pass        |
|                          | 54 (5270)                      | -9.190                                   | -5.185        | -8.448      | -4.443        | -14.417     | -10.412       | -10.034     | -6.029        | 0.013                                     | 5.98   | Pass        |
|                          | 62 (5310)                      | -10.258                                  | -6.253        | -9.745      | -5.740        | -15.588     | -11.583       | -10.682     | -6.677        | -1.035                                    | 5.98   | Pass        |
|                          | 102 (5510)                     | -12.218                                  | -8.213        | -11.309     | -7.304        | -15.999     | -11.994       | -13.693     | -9.688        | -2.945                                    | 5.98   | Pass        |
|                          | 118 (5590)                     | -10.232                                  | -6.227        | -10.862     | -6.857        | -13.516     | -9.511        | -12.403     | -8.398        | -1.542                                    | 5.98   | Pass        |
|                          | 134 (5670)                     | -10.017                                  | -6.012        | -10.988     | -6.983        | -14.106     | -10.101       | -11.685     | -7.680        | -1.432                                    | 5.98   | Pass        |

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.0

| Mode                       | Channel/<br>Frequency<br>(MHz) | Maximum Power Spectral Density (dBm/MHz) |               |             |               |             |               |             |               | Total<br>PSD<br>MIMO_<br>Chain<br>0+1+2+3 | Limits | Pass / Fail |
|----------------------------|--------------------------------|------------------------------------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------------------------------------|--------|-------------|
|                            |                                | MIMO                                     |               |             |               |             |               |             |               |                                           |        |             |
|                            |                                | Chain 0                                  |               | Chain 1     |               | Chain 2     |               | Chain 3     |               |                                           |        |             |
|                            |                                | Meas<br>PSD                              | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD |                                           |        |             |
| IEEE<br>802.11ac-<br>VHT20 | 36 (5180)                      | -2.548                                   | 0.262         | -2.167      | 0.643         | -9.354      | -6.544        | -4.780      | -1.970        | 4.884                                     | 11.98  | Pass        |
|                            | 44 (5220)                      | -3.312                                   | -0.502        | -2.172      | 0.638         | -9.063      | -6.253        | -4.700      | -1.890        | 4.673                                     | 11.98  | Pass        |
|                            | 48 (5240)                      | -3.572                                   | -0.762        | -3.050      | -0.240        | -9.171      | -6.361        | -4.759      | -1.949        | 4.240                                     | 11.98  | Pass        |
|                            | 52 (5260)                      | -3.003                                   | -0.193        | -2.003      | 0.807         | -8.710      | -5.900        | -3.676      | -0.866        | 5.101                                     | 5.98   | Pass        |
|                            | 60 (5300)                      | -3.098                                   | -0.288        | -2.319      | 0.491         | -8.655      | -5.845        | -4.450      | -1.640        | 4.773                                     | 5.98   | Pass        |
|                            | 64 (5320)                      | -2.781                                   | 0.029         | -2.992      | -0.182        | -7.918      | -5.108        | -5.079      | -2.269        | 4.575                                     | 5.98   | Pass        |
|                            | 100 (5500)                     | -5.553                                   | -2.743        | -5.569      | -2.759        | -8.905      | -6.095        | -6.260      | -3.450        | 2.453                                     | 5.98   | Pass        |
|                            | 116 (5580)                     | -6.118                                   | -3.308        | -5.860      | -3.050        | -8.843      | -6.033        | -5.541      | -2.731        | 2.417                                     | 5.98   | Pass        |
|                            | 140 (5700)                     | -4.291                                   | -1.481        | -3.206      | -0.396        | -8.895      | -6.085        | -6.040      | -3.230        | 3.702                                     | 5.98   | Pass        |

| Mode                       | Channel/<br>Frequency<br>(MHz) | Maximum Power Spectral Density (dBm/MHz) |               |             |               |             |               |             |               | Total<br>PSD<br>MIMO_<br>Chain<br>0+1+2+3 | Limits | Pass / Fail |
|----------------------------|--------------------------------|------------------------------------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------------------------------------|--------|-------------|
|                            |                                | MIMO                                     |               |             |               |             |               |             |               |                                           |        |             |
|                            |                                | Chain 0                                  |               | Chain 1     |               | Chain 2     |               | Chain 3     |               |                                           |        |             |
|                            |                                | Meas<br>PSD                              | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD |                                           |        |             |
| IEEE<br>802.11ac-<br>VHT40 | 38 (5190)                      | -10.153                                  | -5.837        | -8.642      | -4.326        | -14.878     | -10.562       | -12.577     | -8.261        | -0.619                                    | 11.98  | Pass        |
|                            | 46 (5230)                      | -10.370                                  | -6.054        | -9.725      | -5.409        | -16.272     | -11.956       | -12.234     | -7.918        | -1.185                                    | 11.98  | Pass        |
|                            | 54 (5270)                      | -10.872                                  | -6.556        | -8.473      | -4.157        | -14.866     | -10.550       | -11.420     | -7.104        | -0.516                                    | 5.98   | Pass        |
|                            | 62 (5310)                      | -10.693                                  | -6.377        | -9.854      | -5.538        | -15.583     | -11.267       | -12.170     | -7.854        | -1.259                                    | 5.98   | Pass        |
|                            | 102 (5510)                     | -12.356                                  | -8.040        | -12.381     | -8.065        | -15.614     | -11.298       | -13.472     | -9.156        | -2.935                                    | 5.98   | Pass        |
|                            | 118 (5590)                     | -9.068                                   | -4.752        | -10.825     | -6.509        | -12.954     | -8.638        | -12.764     | -8.448        | -0.767                                    | 5.98   | Pass        |
|                            | 134 (5670)                     | -9.325                                   | -5.009        | -10.276     | -5.960        | -14.300     | -9.984        | -12.345     | -8.029        | -0.825                                    | 5.98   | Pass        |

| Mode                       | Channel/<br>Frequency<br>(MHz) | Maximum Power Spectral Density (dBm/MHz) |               |             |               |             |               |             |               | Total<br>PSD<br>MIMO_<br>Chain<br>0+1+2+3 | Limits | Pass / Fail |
|----------------------------|--------------------------------|------------------------------------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------------------------------------|--------|-------------|
|                            |                                | MIMO                                     |               |             |               |             |               |             |               |                                           |        |             |
|                            |                                | Chain 0                                  |               | Chain 1     |               | Chain 2     |               | Chain 3     |               |                                           |        |             |
|                            |                                | Meas<br>PSD                              | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD |                                           |        |             |
| IEEE<br>802.11ac-<br>VHT80 | 42 (5230)                      | -14.194                                  | -8.425        | -12.437     | -6.668        | -19.975     | -14.206       | -15.801     | -10.032       | -3.042                                    | 11.98  | Pass        |
|                            | 58 (5290)                      | -15.425                                  | -9.656        | -14.777     | -9.008        | -20.690     | -14.921       | -16.057     | -10.288       | -4.441                                    | 5.98   | Pass        |
|                            | 106 (5530)                     | -18.392                                  | -12.623       | -18.127     | -12.358       | -21.541     | -15.772       | -20.454     | -14.685       | -7.613                                    | 5.98   | Pass        |
|                            | 122 (5610)                     | -16.851                                  | -11.082       | -16.545     | -10.776       | -20.828     | -15.059       | -18.758     | -12.989       | -6.143                                    | 5.98   | Pass        |

### For U-NII-3 band

| Mode         | Channel/<br>Frequency<br>(MHz) | Maximum Power Spectral Density (dBm/500kHz) |               |             |               |             |               |             |               |                                        |        |                |
|--------------|--------------------------------|---------------------------------------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|----------------------------------------|--------|----------------|
|              |                                | SISO                                        |               |             |               |             |               |             |               | Total PSD<br>MIMO_<br>Chain<br>0+1+2+3 | Limits | Pass /<br>Fail |
|              |                                | Chain 0                                     |               | Chain 1     |               | Chain 2     |               | Chain 3     |               |                                        |        |                |
|              |                                | Meas<br>PSD                                 | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD |                                        |        |                |
| IEEE 802.11a | 149 (5745)                     | -0.004                                      | 0.9272        | 0.057       | 0.9882        | -7.191      | -6.26         | -1.337      | -0.406        | ---                                    | 30     | Pass           |
|              | 157 (5785)                     | 0.62                                        | 1.5512        | 0.172       | 1.1032        | -6.794      | -5.863        | -1.178      | -0.247        | ---                                    | 30     | Pass           |
|              | 165 (5825)                     | 0.317                                       | 1.2482        | -0.835      | 0.0962        | -7.395      | -6.464        | -1.382      | -0.451        | ---                                    | 30     | Pass           |

| Mode                     | Channel/<br>Frequency<br>(MHz) | Maximum Power Spectral Density (dBm/500kHz) |               |             |               |             |               |             |               |                                           |       | Limits | Pass / Fail |
|--------------------------|--------------------------------|---------------------------------------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------------------------------------|-------|--------|-------------|
|                          |                                | MIMO                                        |               |             |               |             |               |             |               | Total<br>PSD<br>MIMO_<br>Chain<br>0+1+2+3 |       |        |             |
|                          |                                | Chain 0                                     |               | Chain 1     |               | Chain 2     |               | Chain 3     |               |                                           |       |        |             |
|                          |                                | Meas<br>PSD                                 | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD |                                           |       |        |             |
| IEEE<br>802.11n-<br>HT20 | 149 (5745)                     | -2.501                                      | 0.365         | -2.702      | 0.164         | -9.051      | -6.185        | -2.951      | -0.085        | 5.247                                     | 24.98 | Pass   |             |
|                          | 157 (5785)                     | -1.711                                      | 1.155         | -2.601      | 0.265         | -8.410      | -5.544        | -2.653      | 0.213         | 5.678                                     | 24.98 | Pass   |             |
|                          | 165 (5825)                     | -2.573                                      | 0.293         | -2.624      | 0.242         | -9.391      | -6.525        | -3.178      | -0.312        | 5.159                                     | 24.98 | Pass   |             |
| IEEE<br>802.11n-<br>HT40 | 151 (5755)                     | -7.563                                      | -3.558        | -6.654      | -2.649        | -14.140     | -10.135       | -7.761      | -3.756        | 1.767                                     | 24.98 | Pass   |             |
|                          | 159 (5795)                     | -7.272                                      | -3.267        | -6.397      | -2.392        | -13.028     | -9.023        | -7.990      | -3.985        | 1.966                                     | 24.98 | Pass   |             |

| Mode                       | Channel/<br>Frequency<br>(MHz) | Maximum Power Spectral Density (dBm/500kHz) |               |             |               |             |               |             |               |                                           |        |             |
|----------------------------|--------------------------------|---------------------------------------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------------------------------------|--------|-------------|
|                            |                                | MIMO                                        |               |             |               |             |               |             |               | Total<br>PSD<br>MIMO_<br>Chain<br>0+1+2+3 | Limits | Pass / Fail |
|                            |                                | Chain 0                                     |               | Chain 1     |               | Chain 2     |               | Chain 3     |               |                                           |        |             |
|                            |                                | Meas<br>PSD                                 | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD |                                           |        |             |
| IEEE<br>802.11ac-<br>VHT20 | 149 (5745)                     | -1.772                                      | 1.038         | -1.776      | 1.034         | -9.078      | -6.268        | -2.703      | 0.107         | 5.798                                     | 24.98  | Pass        |
|                            | 157 (5785)                     | -2.317                                      | 0.493         | -1.427      | 1.383         | -8.936      | -6.126        | -3.195      | -0.385        | 5.628                                     | 24.98  | Pass        |
|                            | 165 (5825)                     | -2.204                                      | 0.606         | -2.544      | 0.266         | -9.569      | -6.759        | -3.381      | -0.571        | 5.186                                     | 24.98  | Pass        |
| IEEE<br>802.11ac-<br>VHT40 | 151 (5755)                     | -7.225                                      | -2.909        | -7.756      | -3.440        | -13.578     | -9.262        | -8.434      | -4.118        | 1.675                                     | 24.98  | Pass        |
|                            | 159 (5795)                     | -7.373                                      | -3.057        | -7.013      | -2.697        | -13.179     | -8.863        | -8.331      | -4.015        | 1.928                                     | 24.98  | Pass        |

| Mode                    | Channel/<br>Frequency<br>(MHz) | Maximum Power Spectral Density (dBm/500kHz) |               |             |               |             |               |             |               |                                           |       | Limits | Pass / Fail |
|-------------------------|--------------------------------|---------------------------------------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------------------------------------|-------|--------|-------------|
|                         |                                | MIMO                                        |               |             |               |             |               |             |               | Total<br>PSD<br>MIMO_<br>Chain<br>0+1+2+3 |       |        |             |
|                         |                                | Chain 0                                     |               | Chain 1     |               | Chain 2     |               | Chain 3     |               |                                           |       |        |             |
|                         |                                | Meas<br>PSD                                 | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD | Meas<br>PSD | Corr'd<br>PSD |                                           |       |        |             |
| IEEE 802.11ac-<br>VHT80 | 155 (5775)                     | -14.292                                     | -8.523        | -12.541     | -8.523        | -19.403     | -13.634       | -16.780     | -11.011       | -3.941                                    | 24.98 | Pass   |             |

Remark:

1. Corr'd PSD = Meas PSD + Duty Cycle Factor
2. Total (Chain 0+1) =  $10 \cdot \log[(10^{\text{Chain 0}/10}) + (10^{\text{Chain 1}/10})]$

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.0

The test plots as follows:

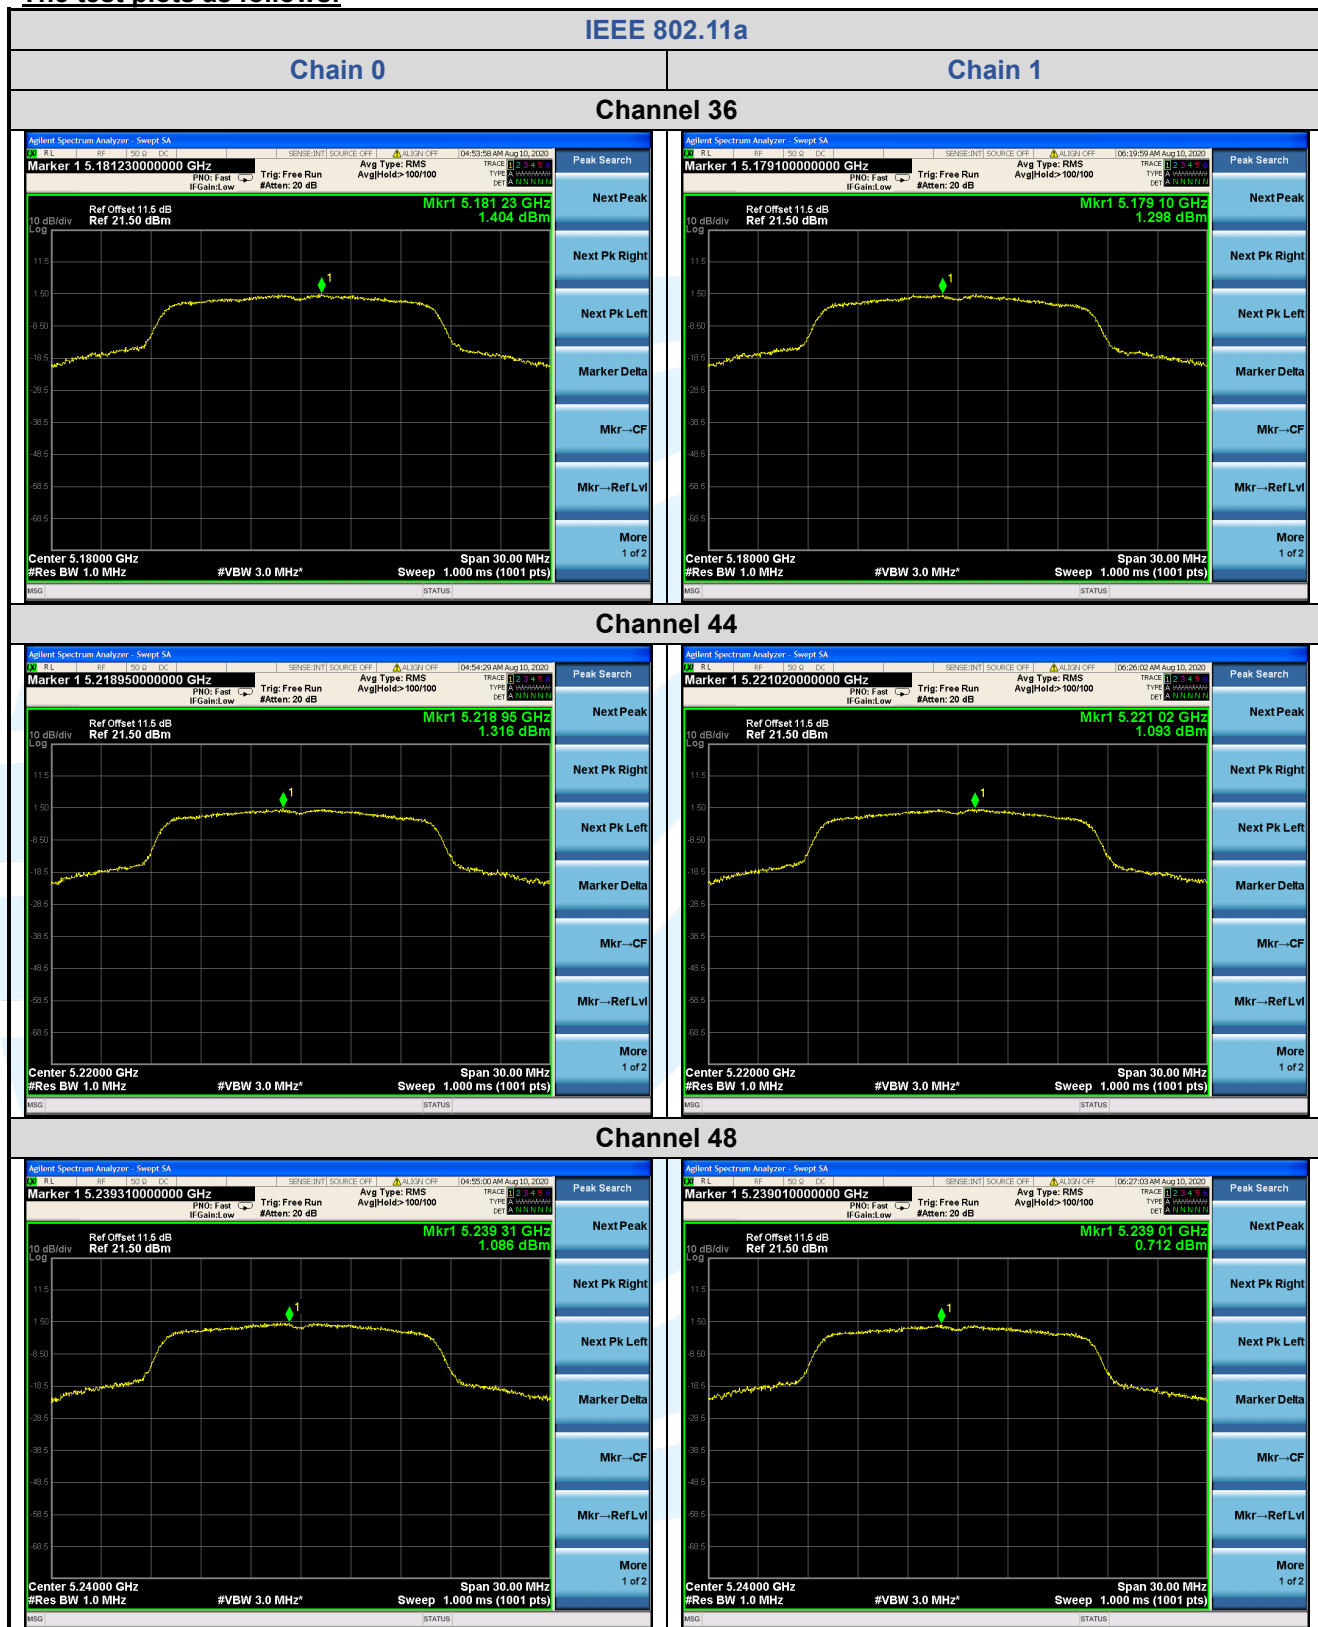

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.0