


7.9.4. Test Result

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-06-10
Factor	CE_ENV216-L1	Temp. / Humidity	26.1°C /59%
Polarity	Line1	Site / Test Engineer	SR2 / Peter
Test Mode	802.11n-20_TX_Band1_CH36_ANT0+1	Test Voltage	AC 120V/60Hz

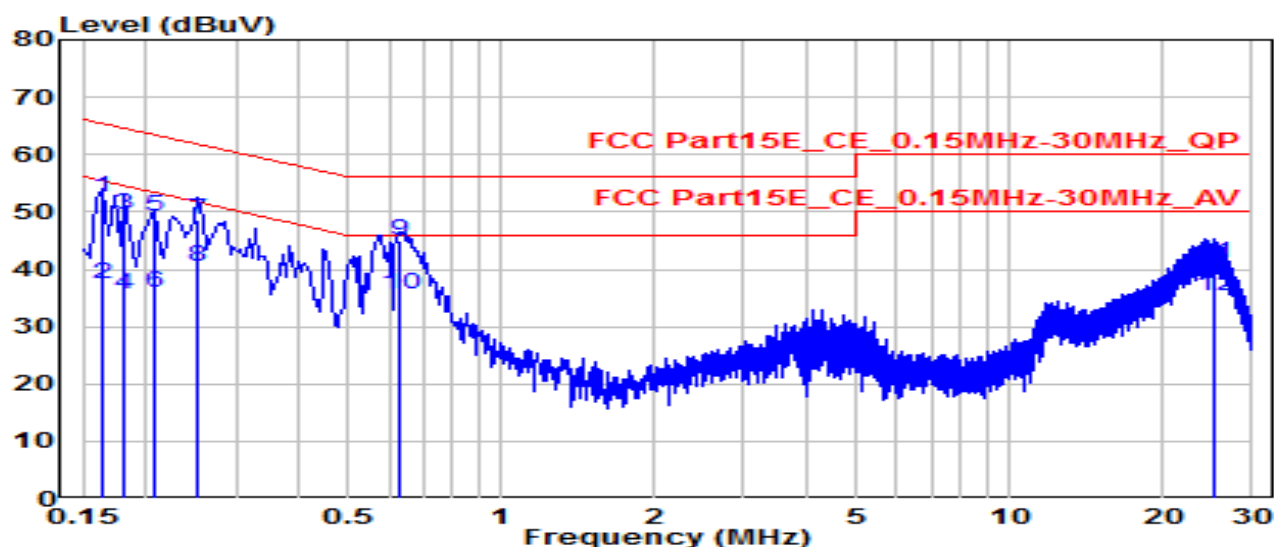


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		0.163	43.04	9.61	52.65	-12.63	65.28	QP
2		0.163	27.85	9.61	37.46	-17.82	55.28	Average
3		0.181	40.00	9.61	49.61	-14.81	64.42	QP
4		0.181	25.88	9.61	35.49	-18.93	54.42	Average
5		0.208	39.67	9.61	49.28	-13.98	63.27	QP
6		0.208	26.40	9.61	36.02	-17.25	53.27	Average
7		0.253	39.09	9.62	48.70	-12.94	61.64	QP
8		0.253	30.77	9.62	40.39	-11.25	51.64	Average
9	*	0.631	35.48	9.64	45.12	-10.88	56.00	QP
10	*	0.631	26.02	9.64	35.66	-10.34	46.00	Average
11		25.226	30.92	10.04	40.96	-19.04	60.00	QP
12		25.226	25.35	10.04	35.40	-14.60	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-06-10
Factor	CE_ENV216-N	Temp. / Humidity	26.1°C / 59%
Polarity	Neutral	Site / Test Engineer	SR2 / Peter
Test Mode	802.11n-20_TX_Band1_CH36_ANT0+1	Test Voltage	AC 120V/60Hz

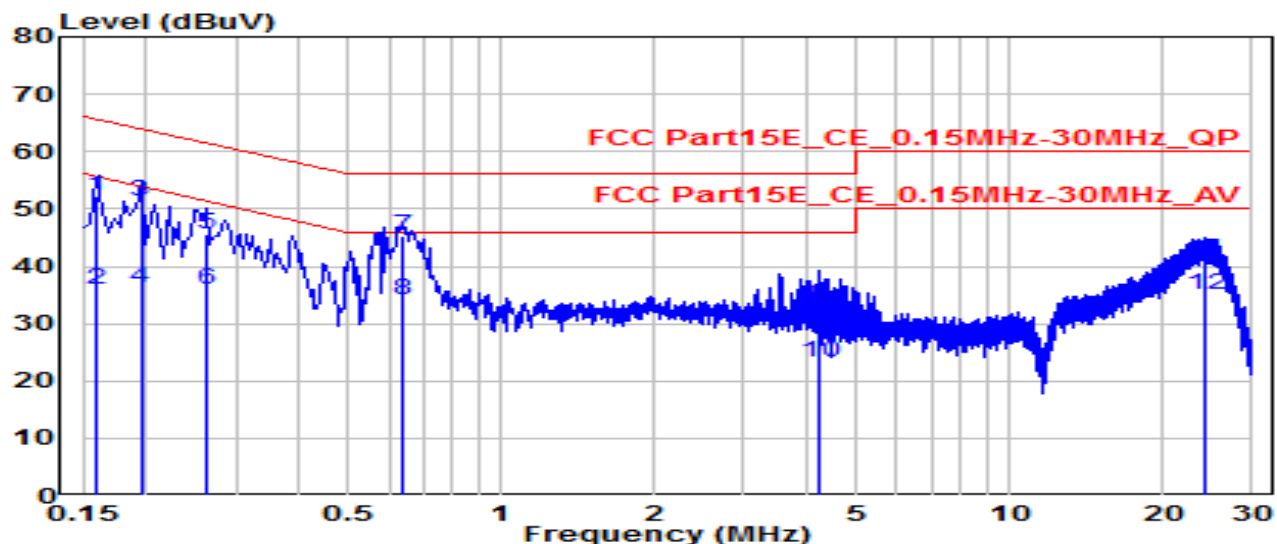


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.159	42.69	9.62	52.31	-13.20	65.52	QP
2	0.159	26.37	9.62	35.99	-19.53	55.52	Average
3	0.195	41.74	9.62	51.36	-12.46	63.82	QP
4	0.195	26.68	9.62	36.30	-17.52	53.82	Average
5	0.262	35.97	9.63	45.60	-15.75	61.35	QP
6	0.262	26.17	9.63	35.80	-15.55	51.35	Average
7	* 0.640	35.58	9.65	45.23	-10.77	56.00	QP
8	* 0.640	24.32	9.65	33.97	-12.03	46.00	Average
9	4.218	23.34	9.73	33.08	-22.92	56.00	QP
10	4.218	13.41	9.73	23.14	-22.86	46.00	Average
11	24.164	30.81	10.13	40.94	-19.06	60.00	QP
12	24.164	24.89	10.13	35.02	-14.98	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-06-10
Factor	CE_ENV216-L1	Temp. / Humidity	26.1°C / 59%
Polarity	Line1	Site / Test Engineer	SR2 / Peter
Test Mode	802.11n-20_TX_Band1_CH36_ANT0+1	Test Voltage	AC 240V/60Hz

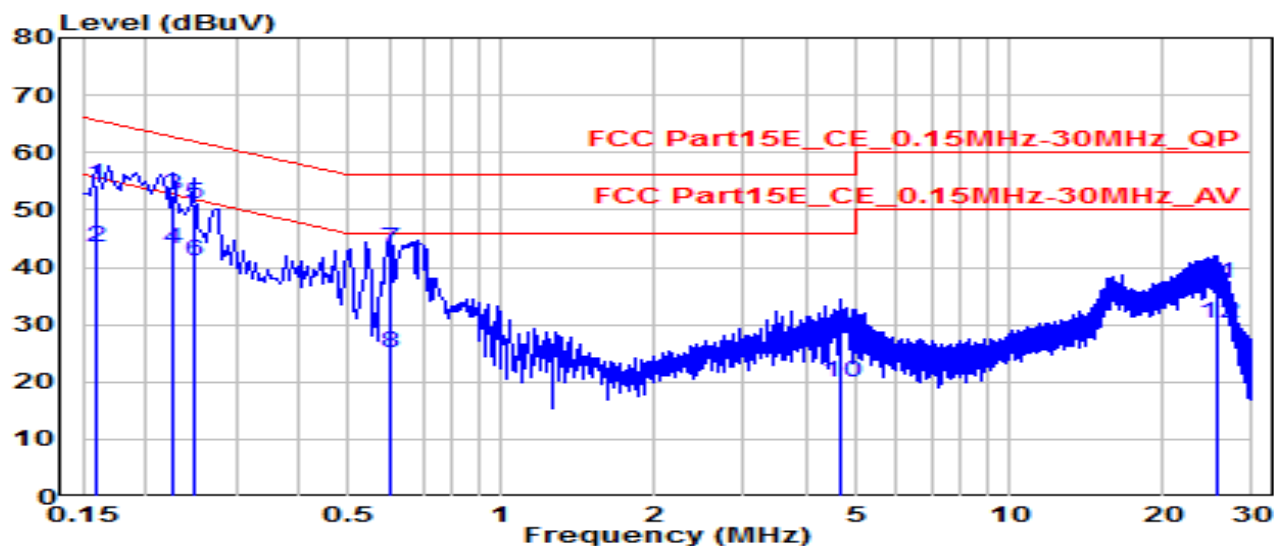


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		0.159	44.69	9.61	54.30	-11.22	65.52	QP
2		0.159	33.93	9.61	43.54	-11.98	55.52	Average
3	*	0.226	42.82	9.61	52.43	-10.15	62.58	QP
4	*	0.226	33.63	9.61	43.24	-9.33	52.58	Average
5		0.249	41.42	9.62	51.03	-10.76	61.79	QP
6		0.249	31.35	9.62	40.97	-10.82	51.79	Average
7		0.604	33.39	9.64	43.03	-12.97	56.00	QP
8		0.604	15.51	9.64	25.15	-20.85	46.00	Average
9		4.627	18.52	9.73	28.26	-27.74	56.00	QP
10		4.627	10.28	9.73	20.01	-25.99	46.00	Average
11		25.487	27.19	10.05	37.23	-22.77	60.00	QP
12		25.487	20.19	10.05	30.24	-19.76	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	OHMNI TELEPRESENCE ROBOTS	Date of Test	2020-06-10
Factor	CE_ENV216-N	Temp. / Humidity	26.1°C / 59%
Polarity	Neutral	Site / Test Engineer	SR2 / Peter
Test Mode	802.11n-20_TX_Band1_CH36_ANT0+1	Test Voltage	AC 240V/60Hz

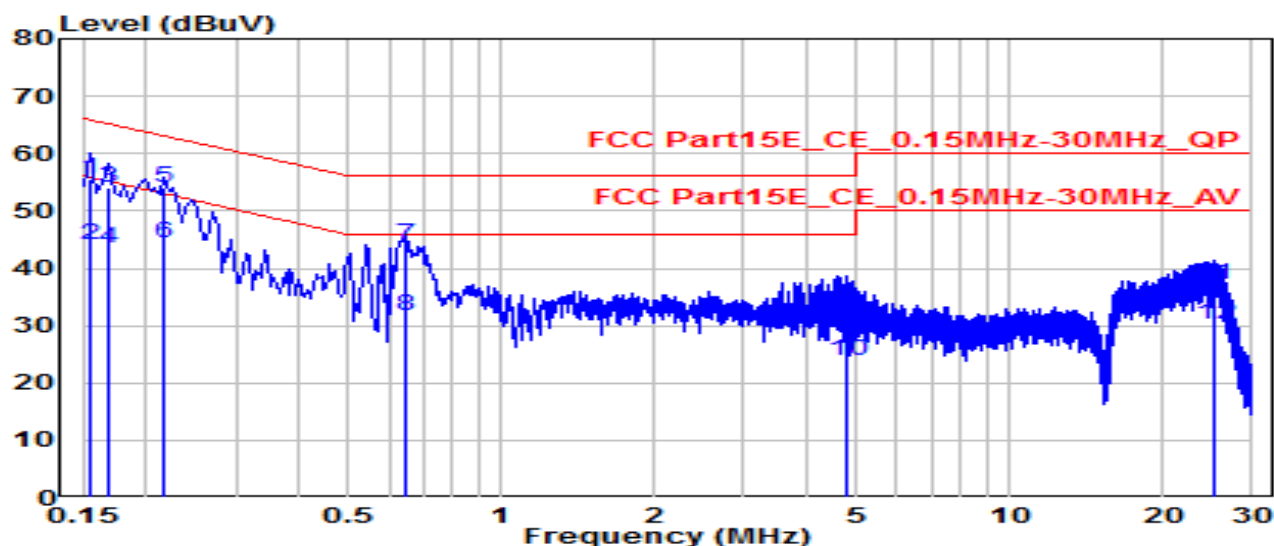

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1		0.154	46.06	9.62	55.68	-10.07	65.75	QP
2		0.154	34.32	9.62	43.94	-11.82	55.75	Average
3		0.168	44.42	9.62	54.04	-11.02	65.06	QP
4		0.168	33.92	9.62	43.54	-11.52	55.06	Average
5	*	0.217	44.52	9.62	54.15	-8.77	62.91	QP
6	*	0.217	34.74	9.62	44.36	-8.55	52.91	Average
7		0.645	34.32	9.65	43.97	-12.03	56.00	QP
8		0.645	21.97	9.65	31.62	-14.38	46.00	Average
9		4.758	23.62	9.75	33.37	-22.63	56.00	QP
10		4.758	13.97	9.75	23.72	-22.28	46.00	Average
11		25.149	26.96	10.14	37.11	-22.89	60.00	QP
12		25.149	19.97	10.14	30.11	-19.89	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **OHMNI TELEPRESENCE ROBOTS, Model Number: OHMNI ROBOT** is in compliance with Part 15E & IC RSS-247 of the FCC Rules & IC Rules.

_____ The End _____