



TESTING LABORATORY
CERTIFICATE # 4821.01



FCC PART 15.247

TEST REPORT

For

Evolve 3 Holdings Pty Ltd

PO BOX 6222, NARRAWEEA NSW, Australia, 2099

FCC ID: 2AWLG-MEB11W

Report Type: Original Report	Product Type: Notebook
Report Number: <u>RSZ200904001-00C</u>	
Report Date: <u>2020-09-30</u>	
Nancy Wang Reviewed By: <u>RF Engineer</u>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	10
EXTERNAL I/O CABLE.....	11
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS.....	12
TEST EQUIPMENT LIST	13
FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	15
APPLICABLE STANDARD	15
FCC §15.203 - ANTENNA REQUIREMENT.....	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED FACTOR & MARGIN CALCULATION	19
TEST DATA	19
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	24
APPLICABLE STANDARD	24
EUT SETUP	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	25
TEST PROCEDURE	25
CORRECTED AMPLITUDE & MARGIN CALCULATION	25
TEST DATA	25
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST DATA	46
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	48

APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.247(e) - POWER SPECTRAL DENSITY	54
APPLICABLE STANDARD	54
TEST PROCEDURE	54
TEST DATA	54

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Notebook
Tested Model	MZB1164G64GW10
Frequency Range	Bluetooth LE: 2402~2480MHz Wi-Fi: 2412~2462MHz/2422-2452MHz
Conducted Peak Power	Bluetooth LE: 5.46dBm Wi-Fi: 15.60dBm(802.11b), 15.80dBm(802.11g), 15.85dBm(802.11n-HT20), 16.18dBm(802.11n-HT40)
Modulation Technique	Bluetooth LE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification	Internal Antenna Bluetooth/Wi-Fi: 1.5dBi@2.4GHz
Voltage Range	DC 7.6V from battery or DC 12V from adapter
Date of Test	2020-09-14 to 2020-09-29
Sample serial number	RSZ200904001-RF-S1(for RE above 1G Test & Conducted Emission Test) & RSZ200904001-RF-S2(for RE below 1G Test & RF Conducted Test) (Assigned by BACL, Shenzhen)
Received date	2020-09-04
Sample/EUT Status	Good condition
Adapter information	Model: JHD-AP024U-120200BA-A Input: AC 100-240V, 50/60Hz, 0.55A Output: DC 12V, 2000mA

Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	±5%	
RF Output Power with Power meter	±0.73dB	
RF conducted test with spectrum	±1.6dB	
AC Power Lines Conducted Emissions	±1.95dB	
Emissions, Radiated	Below 1GHz Above 1GHz	±4.75dB ±4.88dB
Temperature	±1°C	
Humidity	±6%	
Supply voltages	±0.4%	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	/	/
4	2437	/	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

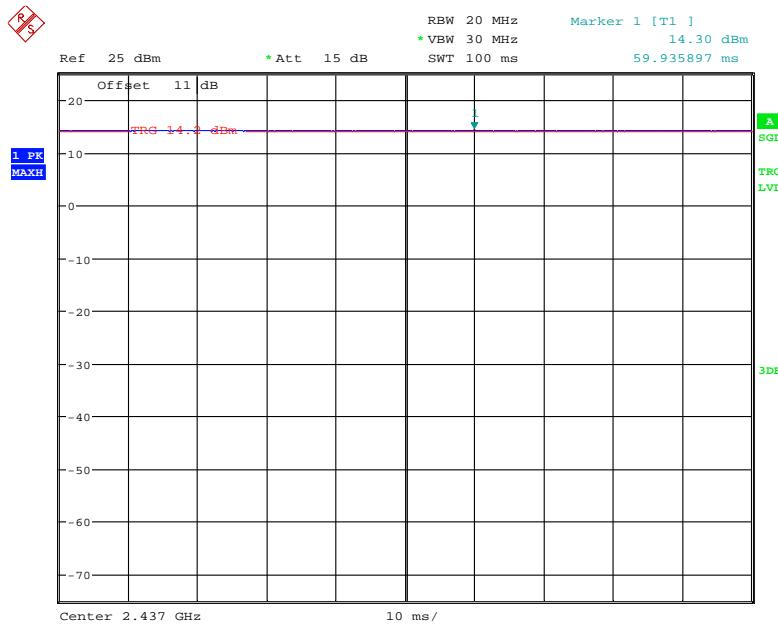
“RTLBTAPP” software was use to the BLE tested.

“REALTEK 11N8723DU USB WLAN NIC Massproduction Kit” software was use to the Wi-Fi tested

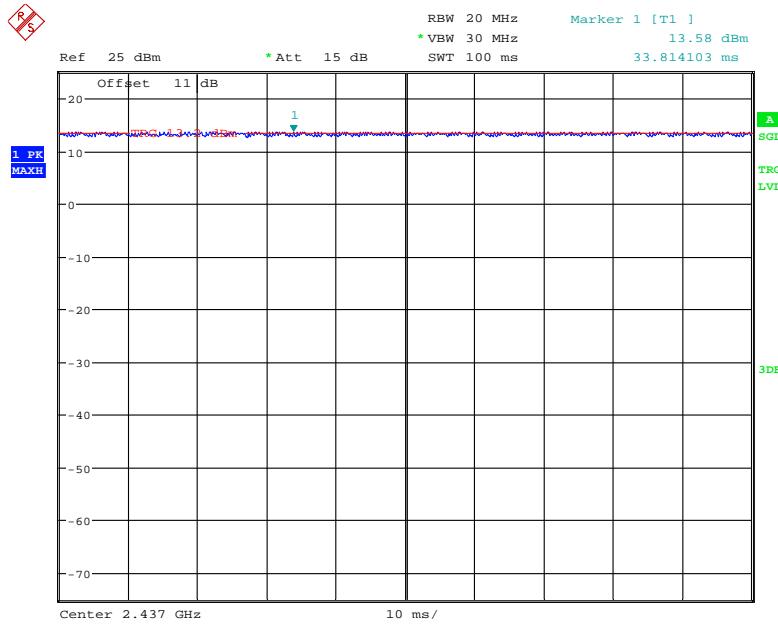
The device was tested with the worst case was performed as below:

Mode	Data rate	Power level		
		Low channel	Middle channel	High channel
802.11b	1 Mbps	30	30	30
802.11g	6 Mbps	30	30	30
802.11n-HT20	MCS0	30	30	30
802.11n-HT40	MCS0	30	30	30
BLE	/	Default	Default	Default

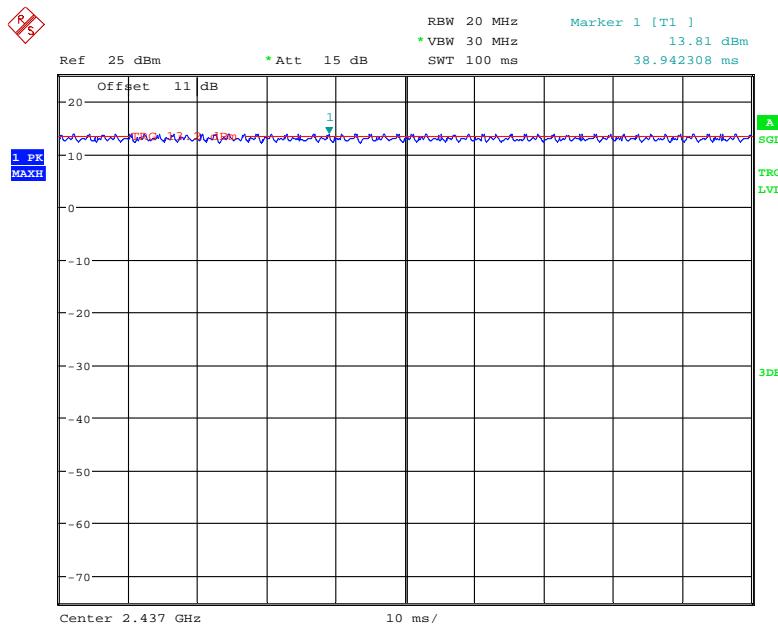
Pre-scan with all the data rates, the above data rate is the worst case for Wi-Fi test.

Duty cycle**802.11b mode**

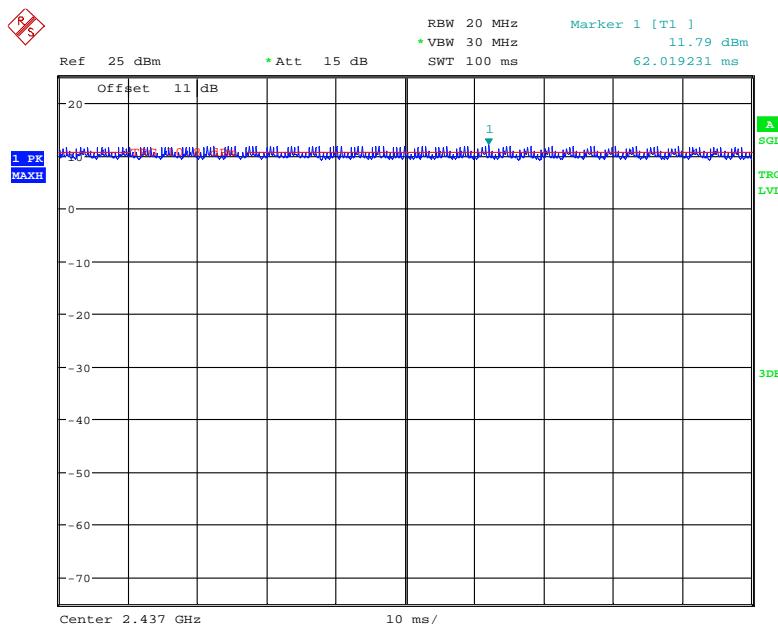
Date: 16.SEP.2020 20:12:02

802.11g mode

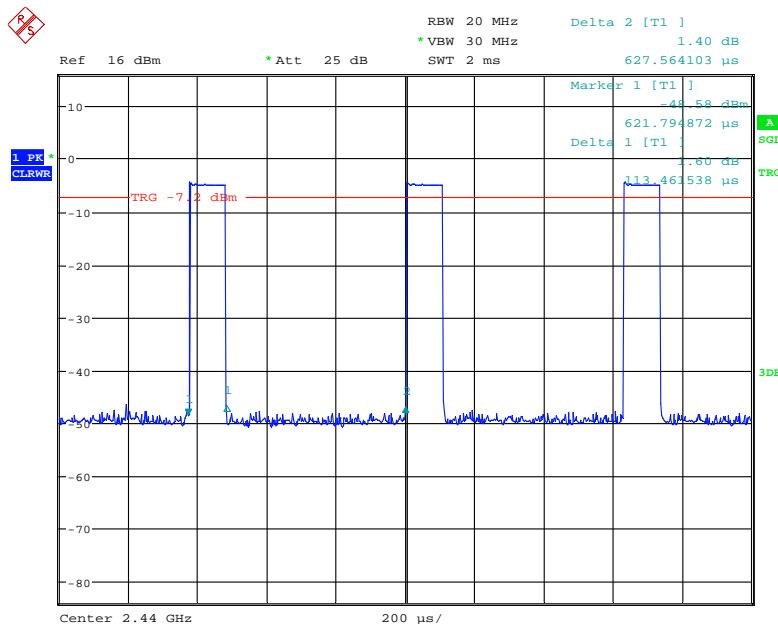
Date: 16.SEP.2020 20:10:11

802.11n-HT20 Mode

Date: 16.SEP.2020 20:08:27

802.11n-HT40 Mode

Date: 16.SEP.2020 20:06:40

BLE Mode

Date: 23.SEP.2020 11:10:59

Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	-	-	100
802.11g	-	-	100
802.11n-HT20	-	-	100
802.11n-HT40	-	-	100
BLE	0.113	0.628	17.99

Support Equipment List and Details

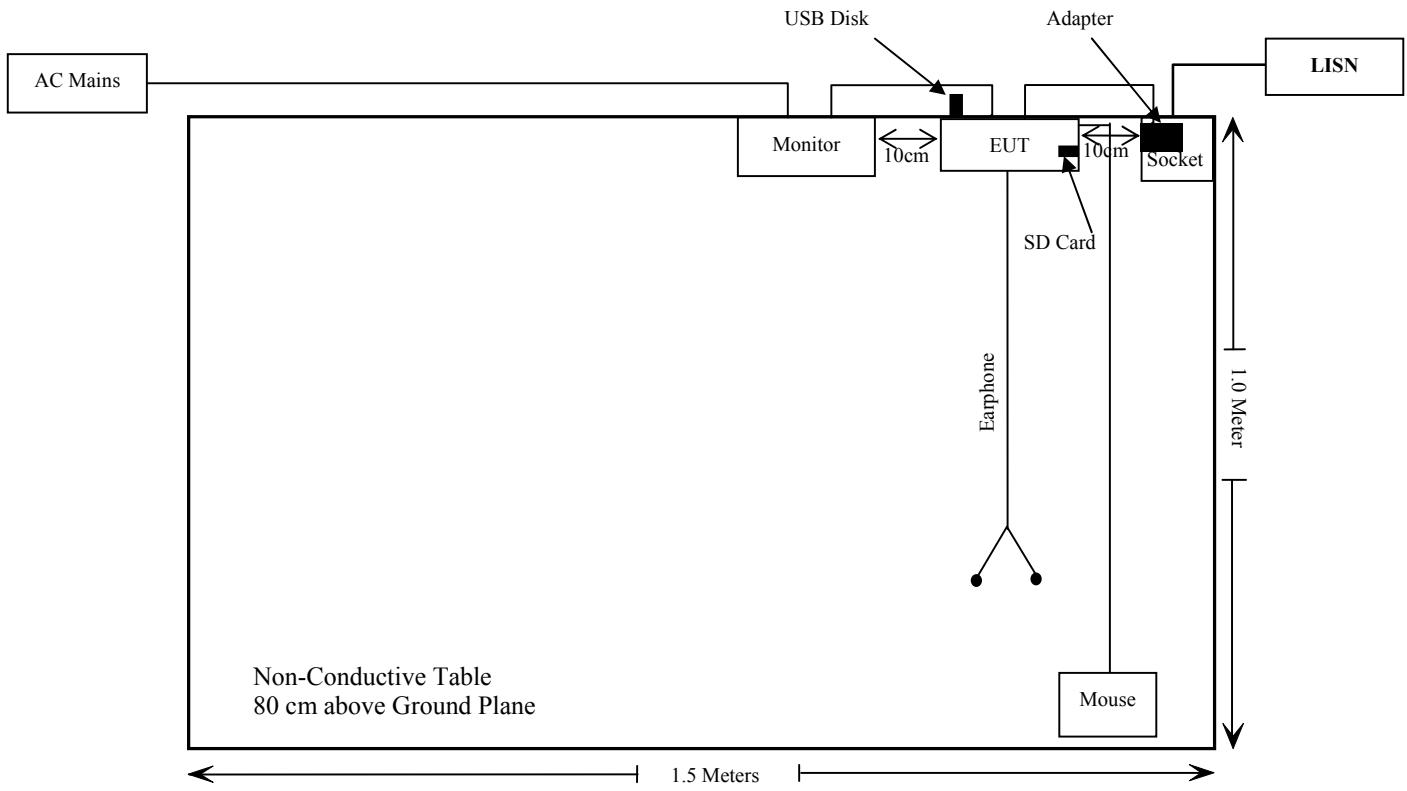
Manufacturer	Description	Model	Serial Number
SAMSUNG	Monitor	S24E390HL	ZZFRH4ZN303357K
DELL	Mouse	M-U0026	DZL-M-U0026(B)
Sandisk	SD Card	SDSDUNG-128G-ZN61N	SD012463
Kingston	USB Disk	DTSE9G2 64G	DTSE9G2
Unknown	Earphone	Unknown	Earphone

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielding Un-Detachable AC Cable	1.0	Socket	LISN
Un-shielding Un-Detachable DC Cable	1.5	Adapter	EUT
Un-Shielding Detachable HDMI Cable	1.2	EUT	Monitor
Un-shielding Un-Detachable AC Cable	1.2	AC Mains	Monitor
Un-shielding Un-Detachable USB Cable	1.2	EUT	Mouse

Block Diagram of Test Setup

For conducted emission:



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2020/04/20	2021/04/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02 1304	2017/12/06	2020/12/05

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Agilent	USB Wideband Power Sensor	U2021XA	MY54250003	2020/08/04	2021/08/03
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2020/04/03	2021/04/02
WEINSCHEL	3dB Attenuator	Unknown	F-03-EM230	2019/11/29	2020/11/28
WEINSCHEL	10dB Attenuator	5324	AU3842	2019/11/29	2020/11/28
Unknown	RF Cable	Unknown	2301 276	2019/11/29	2020/11/28

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE**Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})]^{1/2}$

≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result**For Wi-Fi:**

Wi-Fi: please refer to the report number: RSZ200904001-SA.

Result: Compliance.**For BLE:**

Mode	Frequency (MHz)	Max Tune-up Conducted Power (dBm)	Max Tune-up Conducted Power (mW)	Calculated Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BLE	2480	6.0	3.98	5	1.25	3.0	Yes

Result: No SAR test is required.

Antennas Location:**Antenna Distance To Edge**

Antenna Distance To Edge(mm)					
Antenna	Back	Left	Right	Top	Bottom
WLAN/BT Antenna	< 5	< 5	263	112	32

Note: When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine RF Exposure.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached and the antenna gain is 1.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

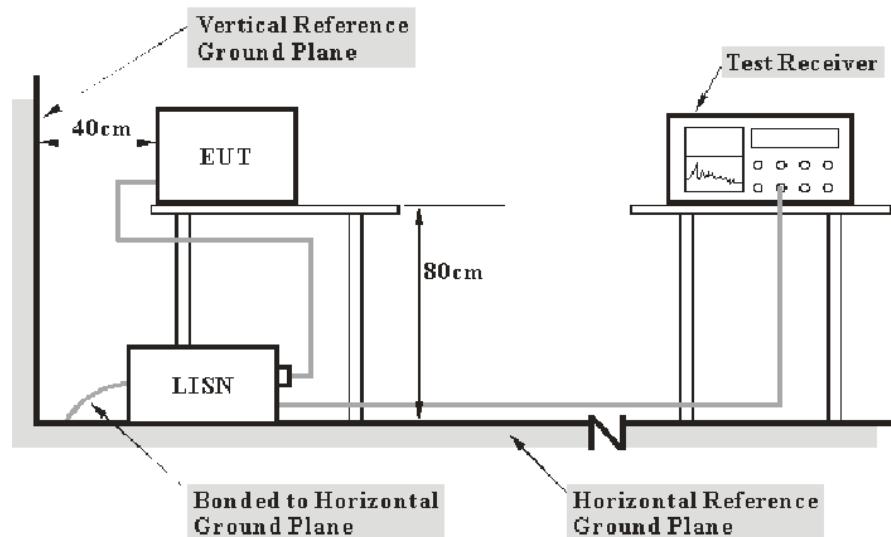
Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup



- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

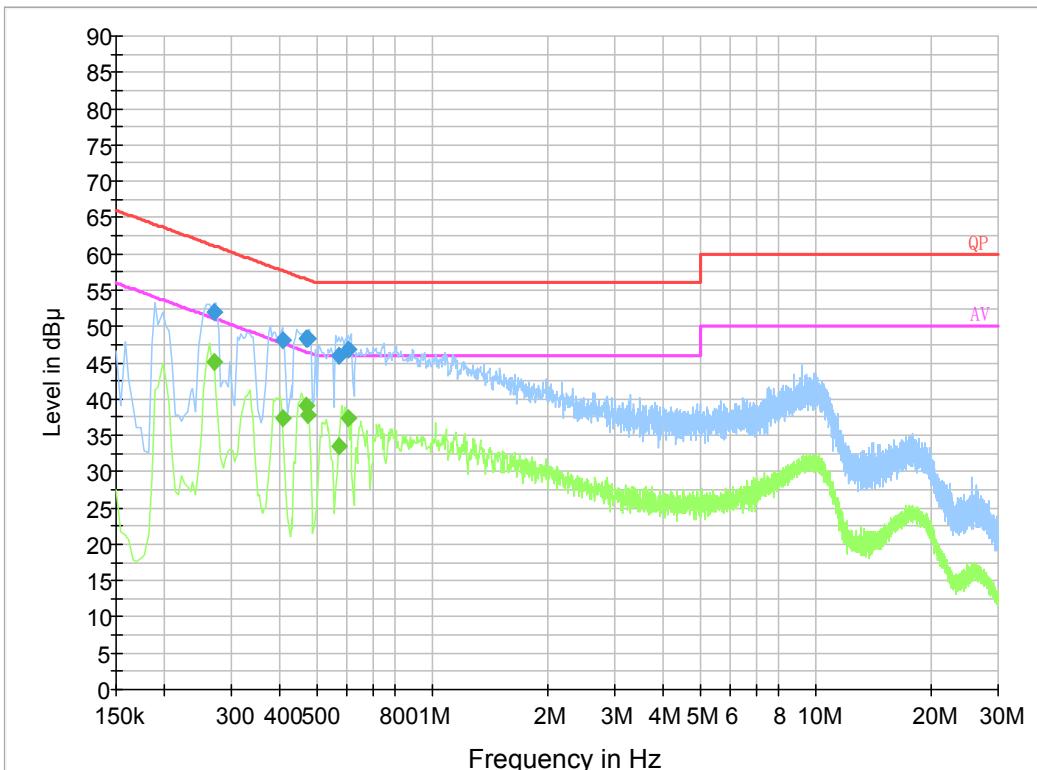
Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2020-09-17.

EUT operation mode: Transmitting & charging

BLE Mode: (worst case at low channel)

AC 120V/60 Hz, Line

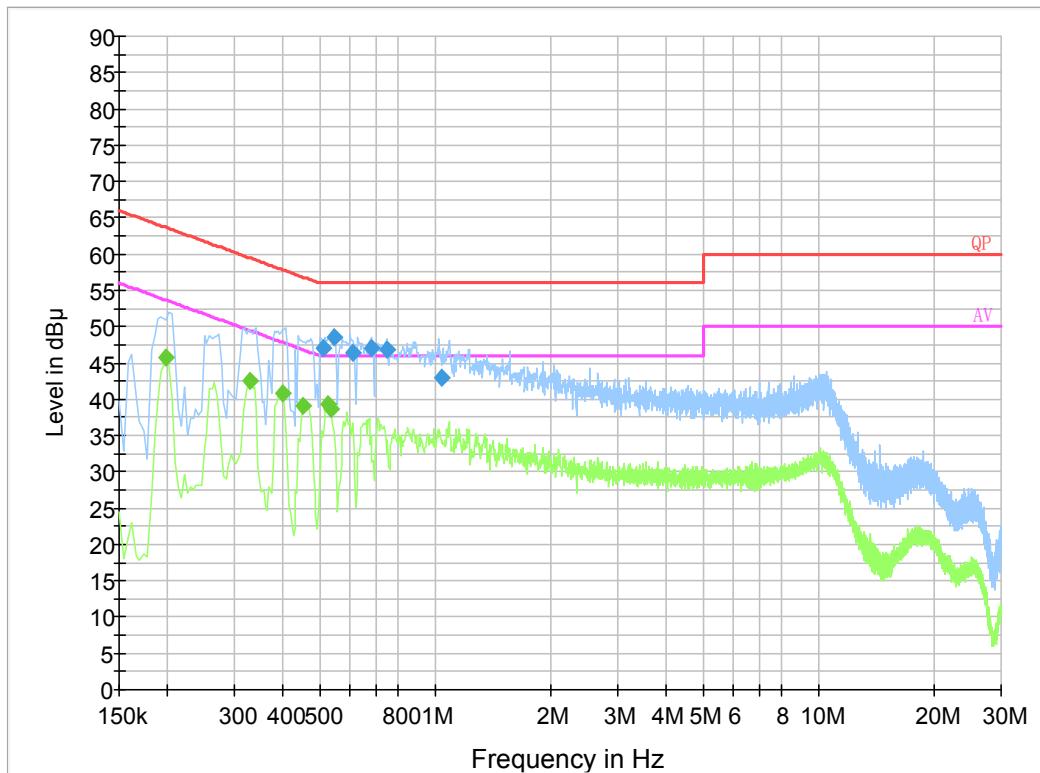


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.269500	52.0	9.000	L1	19.8	9.1	61.1
0.407850	48.0	9.000	L1	19.9	9.7	57.7
0.470830	48.3	9.000	L1	19.8	8.2	56.5
0.474770	48.4	9.000	L1	19.8	8.0	56.4
0.570430	46.0	9.000	L1	19.8	10.0	56.0
0.604790	46.9	9.000	L1	19.8	9.1	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.269500	45.1	9.000	L1	19.8	6.0	51.1
0.407850	37.4	9.000	L1	19.9	10.3	47.7
0.470830	39.1	9.000	L1	19.8	7.4	46.5
0.474770	37.8	9.000	L1	19.8	8.6	46.4
0.570430	33.5	9.000	L1	19.8	12.5	46.0
0.604790	37.4	9.000	L1	19.8	8.6	46.0

AC 120V/60 Hz, Neutral:**Final Result 1**

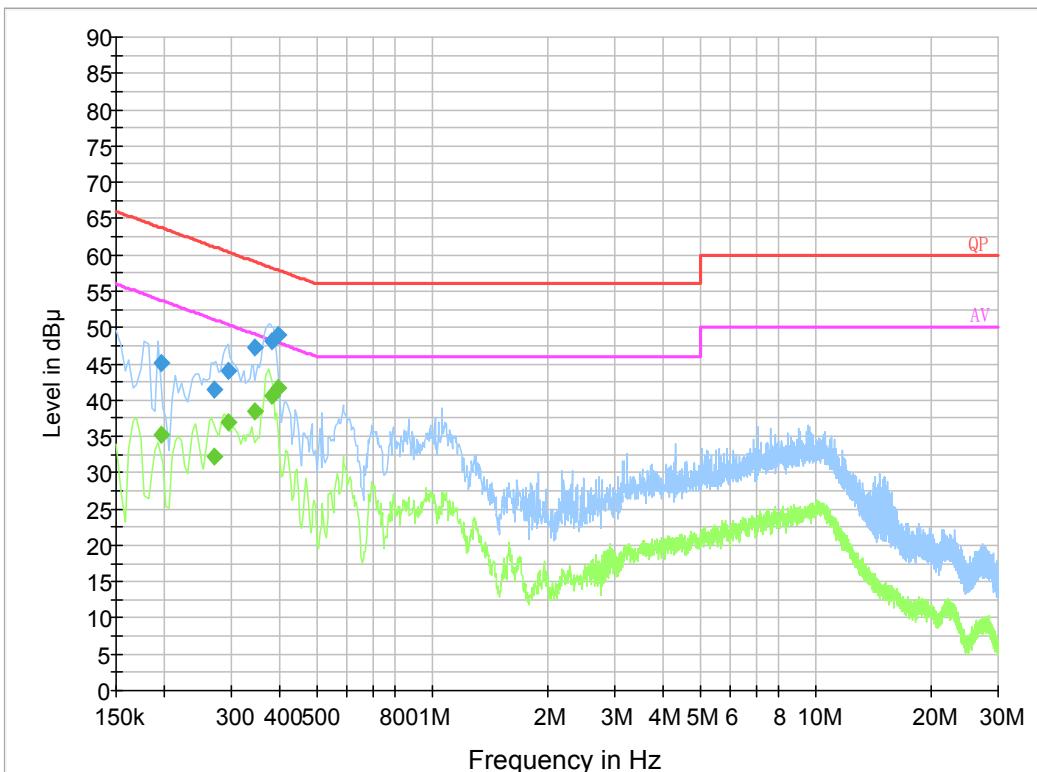
Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.510230	47.1	9.000	N	19.8	8.9	56.0
0.545810	48.5	9.000	N	19.8	7.5	56.0
0.608970	46.3	9.000	N	19.8	9.7	56.0
0.683770	47.0	9.000	N	19.8	9.0	56.0
0.750750	46.8	9.000	N	19.8	9.2	56.0
1.041390	43.0	9.000	N	19.8	13.0	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.198000	45.7	9.000	N	19.8	8.0	53.7
0.330000	42.5	9.000	N	19.8	7.0	49.5
0.402000	40.9	9.000	N	19.8	6.9	47.8
0.454000	39.2	9.000	N	19.8	7.6	46.8
0.526000	39.2	9.000	N	19.8	6.8	46.0
0.538000	38.6	9.000	N	19.8	7.4	46.0

Wi-Fi Mode: (worst case at 802.11n40 mode, middle channel)

Line

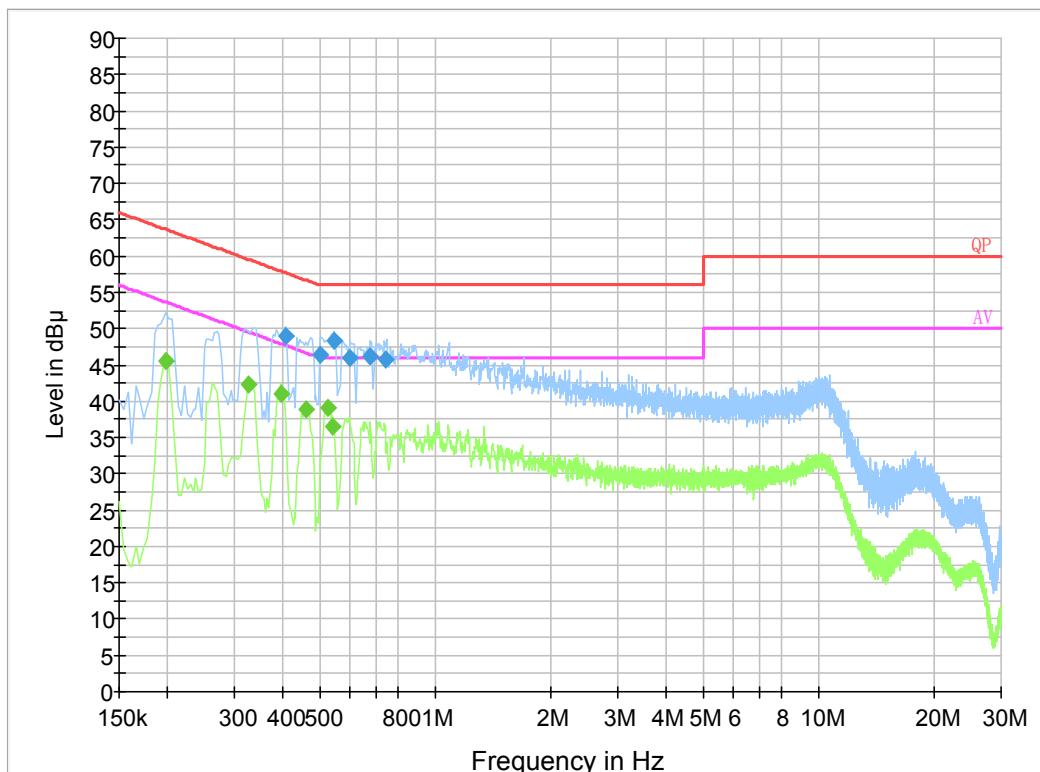


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.197500	45.1	9.000	L1	19.8	18.6	63.7
0.269500	41.5	9.000	L1	19.8	19.6	61.1
0.293500	44.0	9.000	L1	19.7	16.4	60.4
0.344750	47.3	9.000	L1	19.9	11.8	59.1
0.383670	48.0	9.000	L1	19.9	10.2	58.2
0.395850	49.1	9.000	L1	19.9	8.8	57.9

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.197500	35.3	9.000	L1	19.8	18.4	53.7
0.269500	32.1	9.000	L1	19.8	19.0	51.1
0.293500	36.8	9.000	L1	19.7	13.6	50.4
0.344750	38.5	9.000	L1	19.9	10.6	49.1
0.383670	40.5	9.000	L1	19.9	7.7	48.2
0.395850	41.6	9.000	L1	19.9	6.3	47.9

Neutral:**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.407850	48.9	9.000	N	19.8	8.8	57.7
0.502470	46.5	9.000	N	19.8	9.5	56.0
0.545810	48.4	9.000	N	19.8	7.6	56.0
0.596970	45.9	9.000	N	19.8	10.1	56.0
0.679830	46.3	9.000	N	19.8	9.7	56.0
0.742750	45.7	9.000	N	19.8	10.3	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.198000	45.5	9.000	N	19.8	8.2	53.7
0.326000	42.2	9.000	N	19.8	7.4	49.6
0.398000	41.0	9.000	N	19.8	6.9	47.9
0.462000	38.9	9.000	N	19.8	7.8	46.7
0.526000	39.1	9.000	N	19.8	6.9	46.0
0.542000	36.6	9.000	N	19.8	9.4	46.0

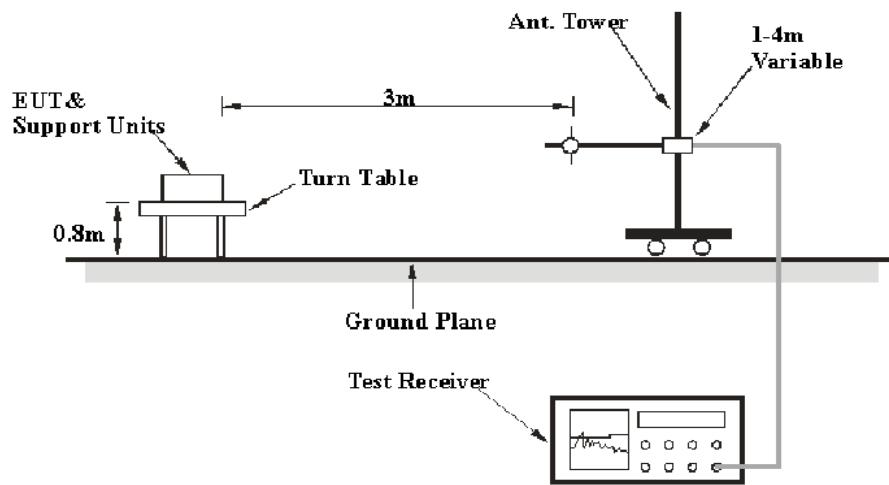
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

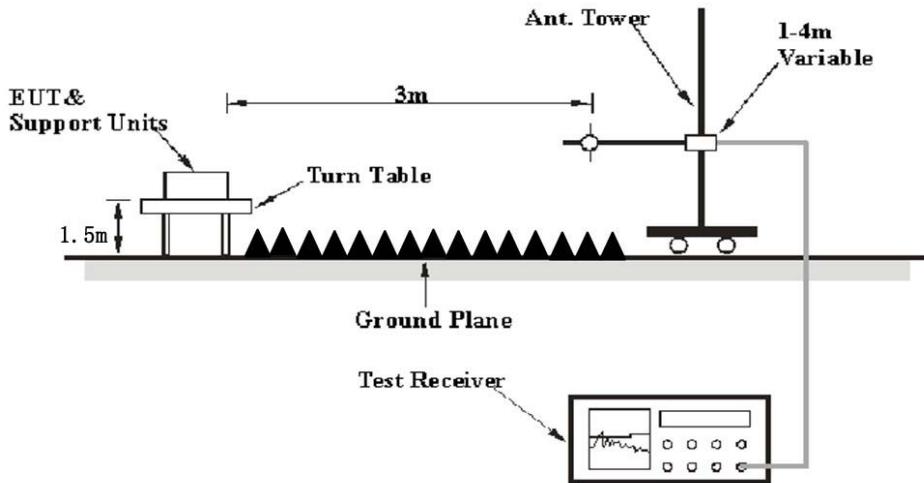
FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:



Above 1GHz:



The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	>1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

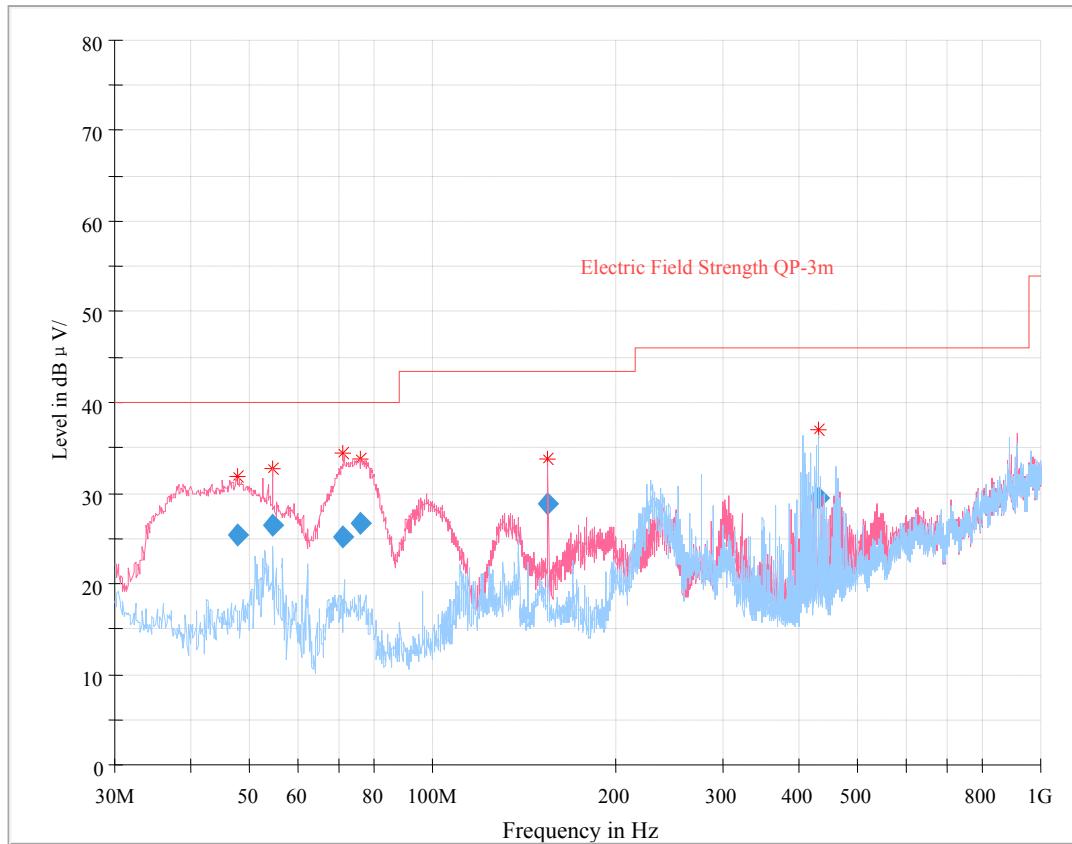
Environmental Conditions

Temperature:	30~31.1 °C
Relative Humidity:	54~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Harris He on 2020-09-18 for below 1GHz and by Leven Gan on 2020-09-14 and 2020-09-18 for above 1GHz.

EUT operation mode: Transmitting

30 MHz~1 GHz: (worst case at 802.11n40 mode, middle channel)



Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
47.690875	25.39	40.00	14.61	130.0	V	339.0	-18.6
54.682250	26.42	40.00	13.58	125.0	V	0.0	-19.9
71.091625	25.09	40.00	14.91	103.0	V	217.0	-20.5
76.278750	26.66	40.00	13.34	110.0	V	230.0	-20.2
155.003375	28.84	43.50	14.66	112.0	V	331.0	-14.3
429.888375	29.47	46.00	16.53	104.0	H	270.0	-9.1

1 GHz-25 GHz(BLE):

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2389.56	28.46	PK	213	1.7	H	31.87	60.33	74	13.67
2389.56	15.28	Ave.	213	1.7	H	31.87	47.15	54	6.85
2484.47	28.29	PK	105	1.5	H	32.13	60.42	74	13.58
2484.47	15.25	Ave.	105	1.5	H	32.13	47.38	54	6.62
4804.00	43.78	PK	86	1.1	H	6.28	50.06	74	23.94
4804.00	31.54	Ave.	86	1.1	H	6.28	37.82	54	16.18
Middle Channel (2440 MHz)									
4880.00	43.75	PK	353	2.2	H	6.76	50.51	74	23.49
4880.00	31.47	Ave.	353	2.2	H	6.76	38.23	54	15.77
High Channel (2480 MHz)									
2388.84	28.37	PK	198	1.1	H	31.87	60.24	74	13.76
2388.84	15.23	Ave.	198	1.1	H	31.87	47.10	54	6.90
2483.56	28.33	PK	45	1.4	H	32.13	60.46	74	13.54
2483.56	15.21	Ave.	45	1.4	H	32.13	47.34	54	6.66
4960.00	43.69	PK	91	1.1	H	6.80	50.49	74	23.51
4960.00	32.49	Ave.	91	1.1	H	6.80	39.29	54	14.71

1 GHz-25 GHz:**802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2388.61	28.26	PK	320	1.6	H	31.87	60.13	74	13.87
2388.61	14.34	Ave.	320	1.6	H	31.87	46.21	54	7.79
2484.53	28.14	PK	71	2.2	H	32.13	60.27	74	13.73
2484.53	14.31	Ave.	71	2.2	H	32.13	46.44	54	7.56
4824.00	45.98	PK	3	1.7	H	6.28	52.26	74	21.74
4824.00	38.78	Ave.	3	1.7	H	6.28	45.06	54	8.94
Middle Channel (2437MHz)									
4874.00	45.44	PK	346	2.2	H	6.76	52.20	74	21.80
4874.00	36.97	Ave.	346	2.2	H	6.76	43.73	54	10.27
High Channel (2462 MHz)									
2389.74	28.27	PK	141	2.4	H	31.87	60.14	74	13.86
2389.74	14.36	Ave.	141	2.4	H	31.87	46.23	54	7.77
2484.63	28.33	PK	228	1.9	H	32.13	60.46	74	13.54
2484.63	14.42	Ave.	228	1.9	H	32.13	46.55	54	7.45
4924.00	45.28	PK	291	1.6	H	6.76	52.04	74	21.96
4924.00	36.13	Ave.	291	1.6	H	6.76	42.89	54	11.11

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2388.47	28.78	PK	288	2.4	H	31.87	60.65	74	13.35
2388.47	14.33	Ave.	288	2.4	H	31.87	46.20	54	7.80
2484.88	28.51	PK	26	2.1	H	32.13	60.64	74	13.36
2484.88	14.32	Ave.	26	2.1	H	32.13	46.45	54	7.55
4824.00	44.64	PK	96	1.8	H	6.28	50.92	74	23.08
4824.00	31.23	Ave.	96	1.8	H	6.28	37.51	54	16.49
Middle Channel (2437MHz)									
4874.00	44.37	PK	187	1.7	H	6.76	51.13	74	22.87
4874.00	30.01	Ave.	187	1.7	H	6.76	36.77	54	17.23
High Channel (2462 MHz)									
2389.74	28.64	PK	121	1.0	H	31.87	60.51	74	13.49
2389.74	14.35	Ave.	121	1.0	H	31.87	46.22	54	7.78
2483.69	29.28	PK	280	1.6	H	32.13	61.41	74	12.59
2483.69	14.43	Ave.	280	1.6	H	32.13	46.56	54	7.44
4924.00	44.20	PK	88	2.3	H	6.76	50.96	74	23.04
4924.00	30.24	Ave.	88	2.3	H	6.76	37.00	54	17.00

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2412 MHz)									
2388.96	28.70	PK	326	2.1	H	31.87	60.57	74	13.43
2388.96	14.37	Ave.	326	2.1	H	31.87	46.24	54	7.76
2485.41	28.44	PK	292	1.6	H	32.13	60.57	74	13.43
2485.41	14.35	Ave.	292	1.6	H	32.13	46.48	54	7.52
4824.00	44.37	PK	335	1.4	H	6.28	50.65	74	23.35
4824.00	30.86	Ave.	335	1.4	H	6.28	37.14	54	16.86
Middle Channel (2437MHz)									
4874.00	44.63	PK	330	1.8	H	6.76	51.39	74	22.61
4874.00	30.38	Ave.	330	1.8	H	6.76	37.14	54	16.86
High Channel (2462 MHz)									
2387.97	28.61	PK	148	2.1	H	31.87	60.48	74	13.52
2387.97	14.39	Ave.	148	2.1	H	31.87	46.26	54	7.74
2484.53	28.42	PK	73	1.5	H	32.13	60.55	74	13.45
2484.53	14.48	Ave.	73	1.5	H	32.13	46.61	54	7.39
4924.00	44.31	PK	42	1.2	H	6.76	51.07	74	22.93
4924.00	29.99	Ave.	42	1.2	H	6.76	36.75	54	17.25

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2422 MHz)									
2389.47	28.75	PK	163	2.0	H	31.87	60.62	74	13.38
2389.47	14.48	Ave.	163	2.0	H	31.87	46.35	54	7.65
2484.53	28.67	PK	158	2.2	H	32.13	60.80	74	13.20
2484.53	14.43	Ave.	158	2.2	H	32.13	46.56	54	7.44
4844.00	44.60	PK	62	1.1	H	6.28	50.88	74	23.12
4844.00	30.91	Ave.	62	1.1	H	6.28	37.19	54	16.81
Middle Channel (2437 MHz)									
4874.00	44.71	PK	307	1.4	H	6.76	51.47	74	22.53
4874.00	30.66	Ave.	307	1.4	H	6.76	37.42	54	16.58
High Channel (2452 MHz)									
2388.12	28.64	PK	127	1.3	H	31.87	60.51	74	13.49
2388.12	14.47	Ave.	127	1.3	H	31.87	46.34	54	7.66
2483.94	28.65	PK	208	2.0	H	32.13	60.78	74	13.22
2483.94	14.53	Ave.	208	2.0	H	32.13	46.66	54	7.34
4904.00	44.68	PK	31	2.4	H	6.76	51.44	74	22.56
4904.00	30.26	Ave.	31	2.4	H	6.76	37.02	54	16.98

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

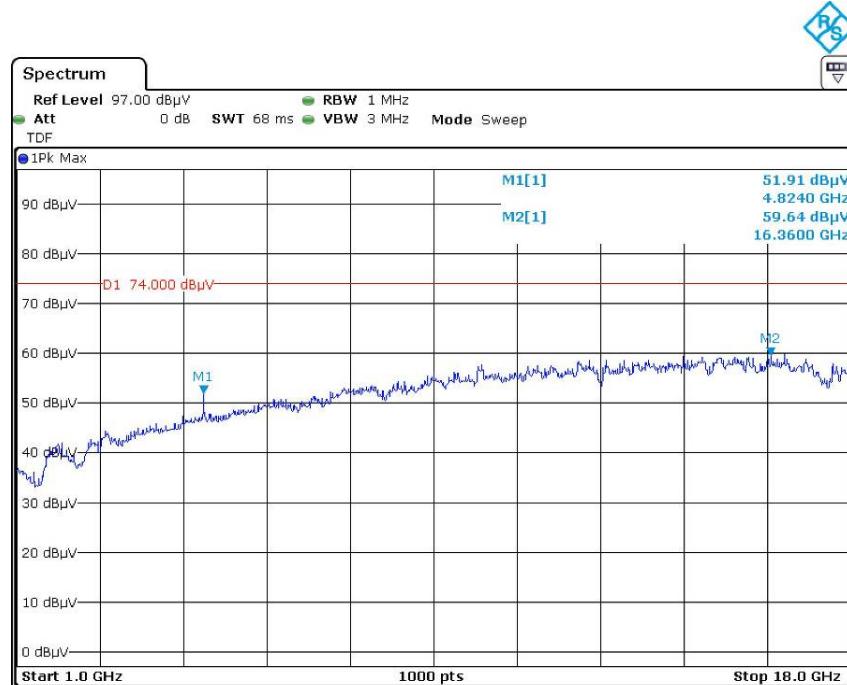
Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

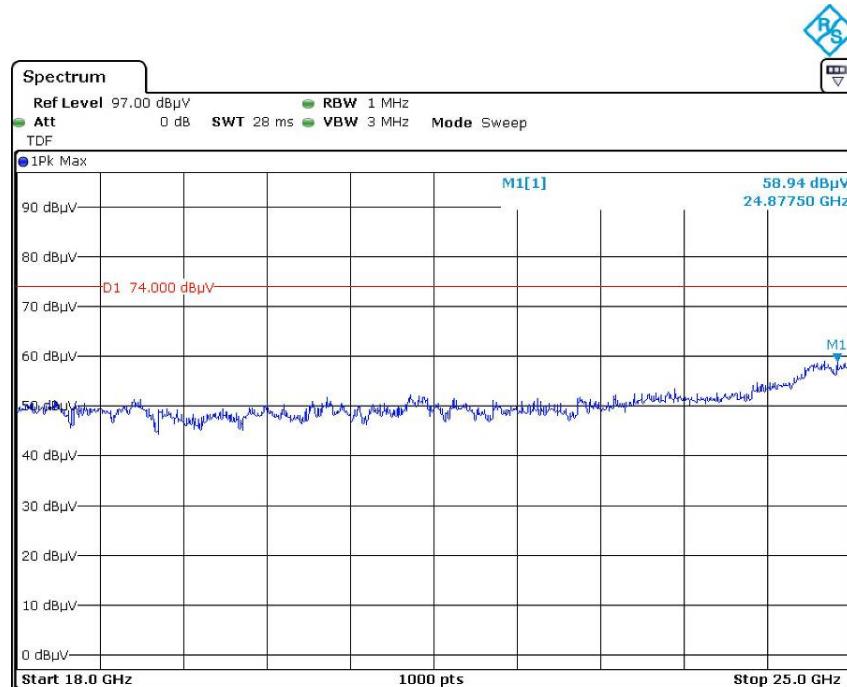
The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.

**Pre-scan with Wi-Fi 802.11b Mode, low channel
Horizontal**

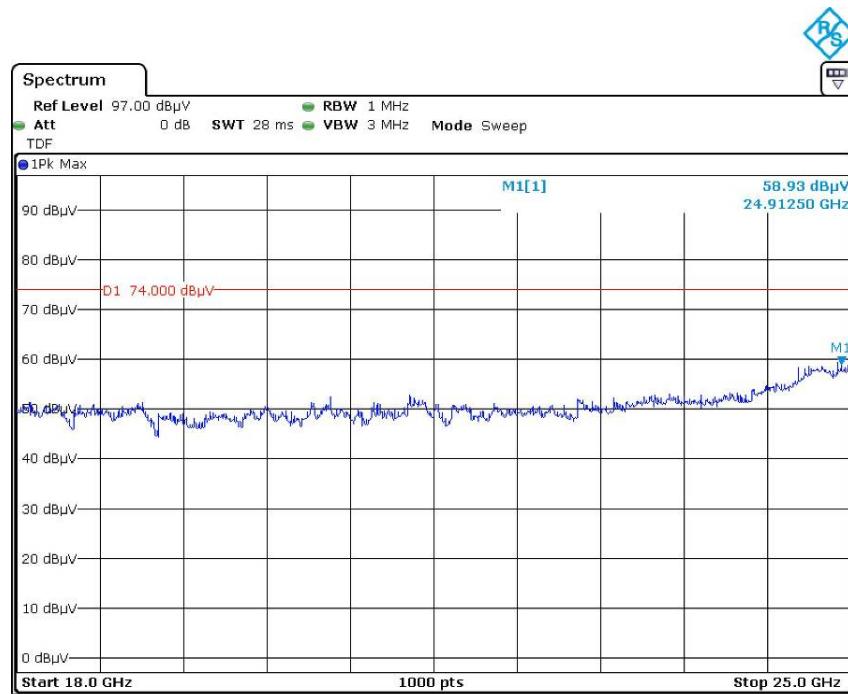
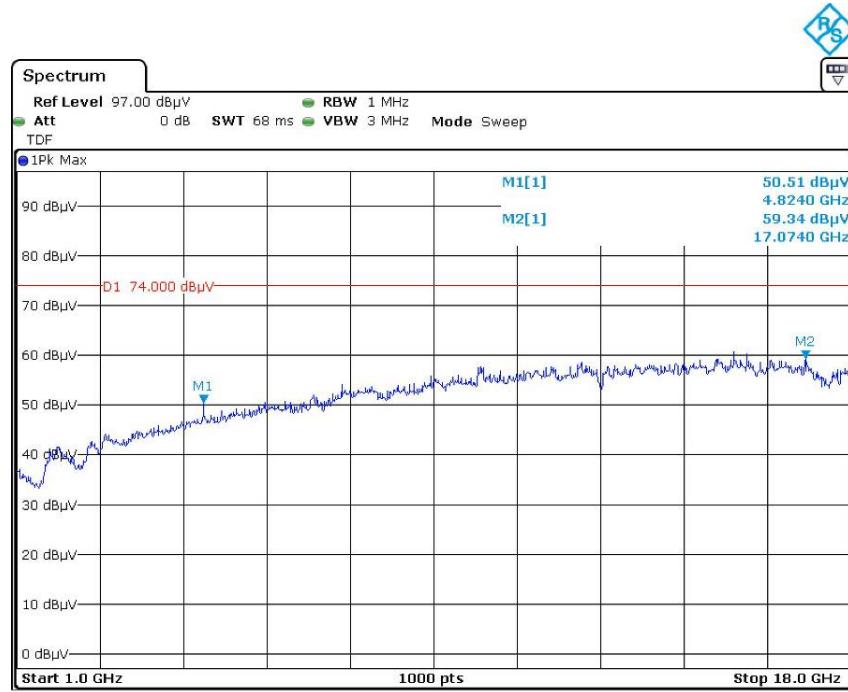


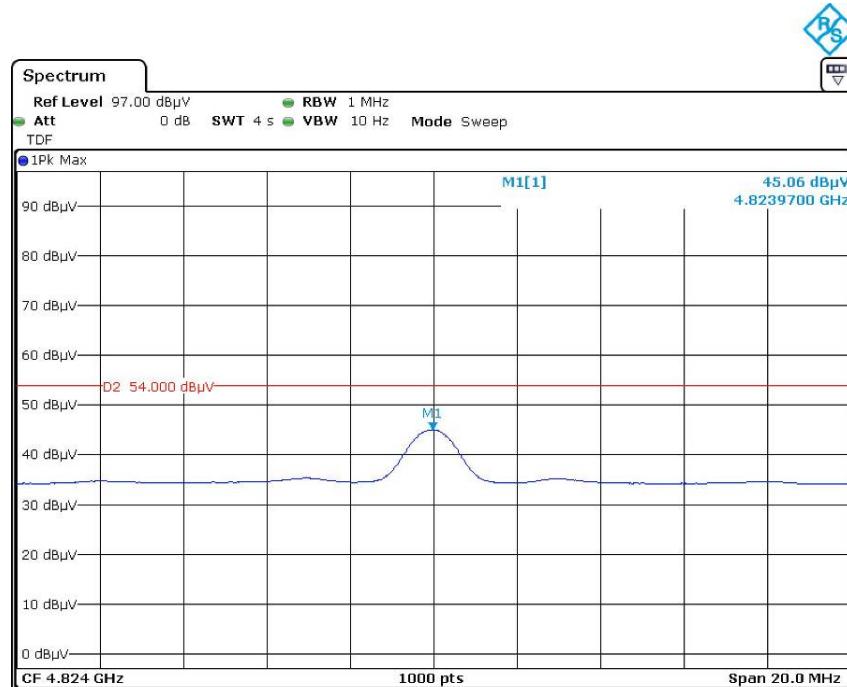
Date: 18.SEP.2020 20:44:12



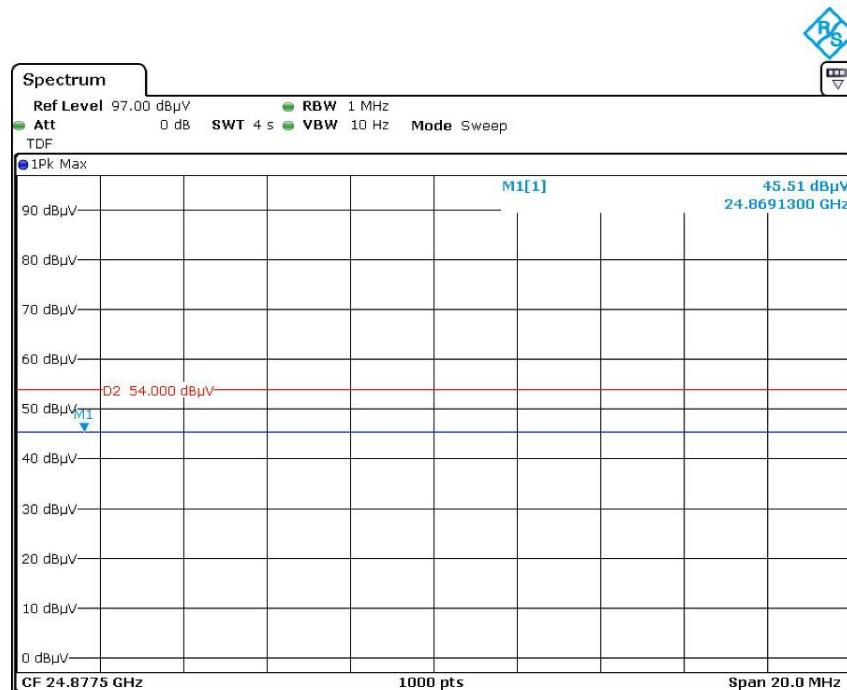
Date: 18.SEP.2020 21:31:00

Vertical



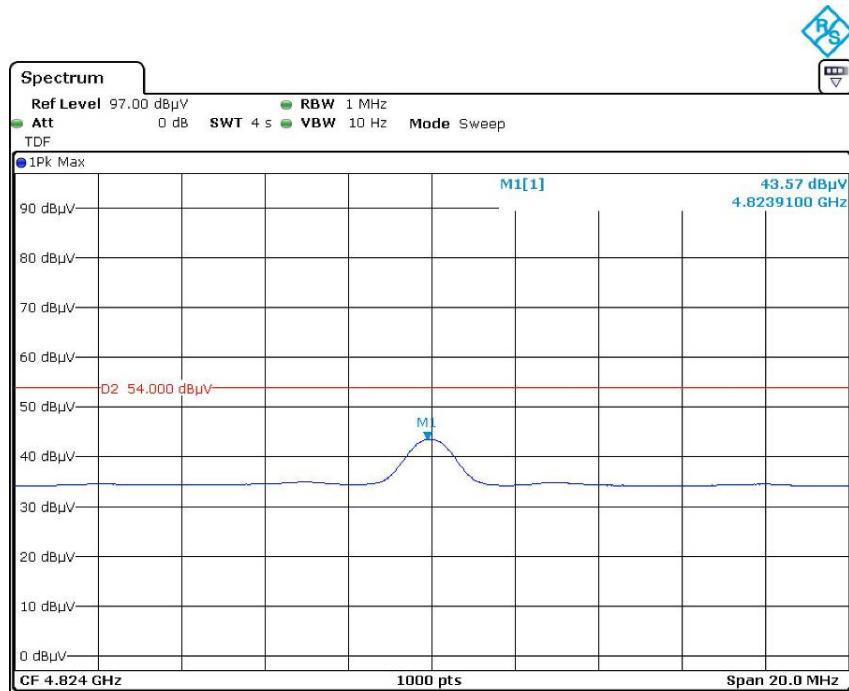
**Pre-scan for Average
Horizontal**

Date: 18.SEP.2020 20:48:34

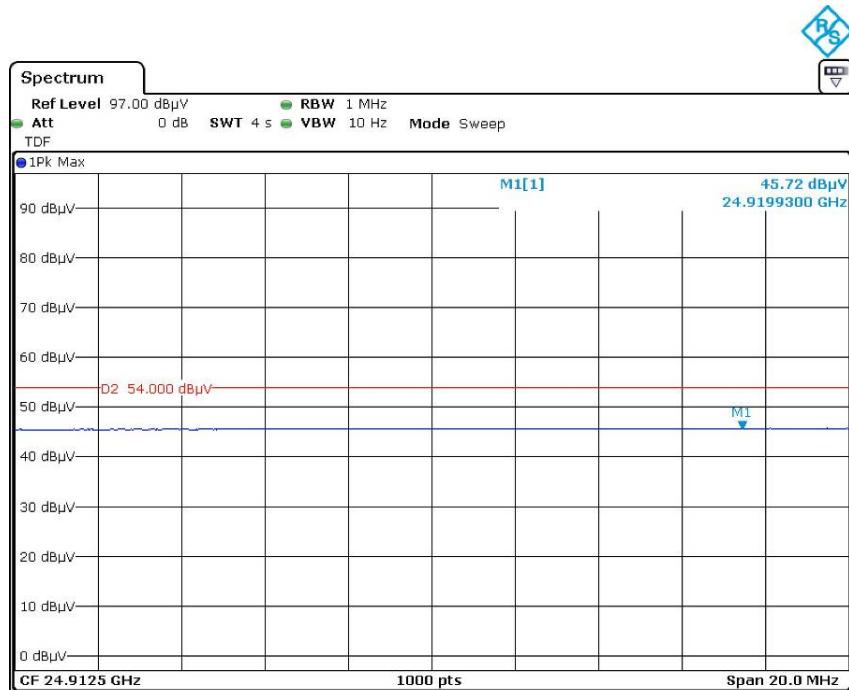


Date: 18.SEP.2020 21:34:22

Vertical



Date: 18.SEP.2020 20:57:24



Date: 18.SEP.2020 21:42:26


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hailey Yang from 2020-09-16 to 2020-09-27.

Test Result: Pass.

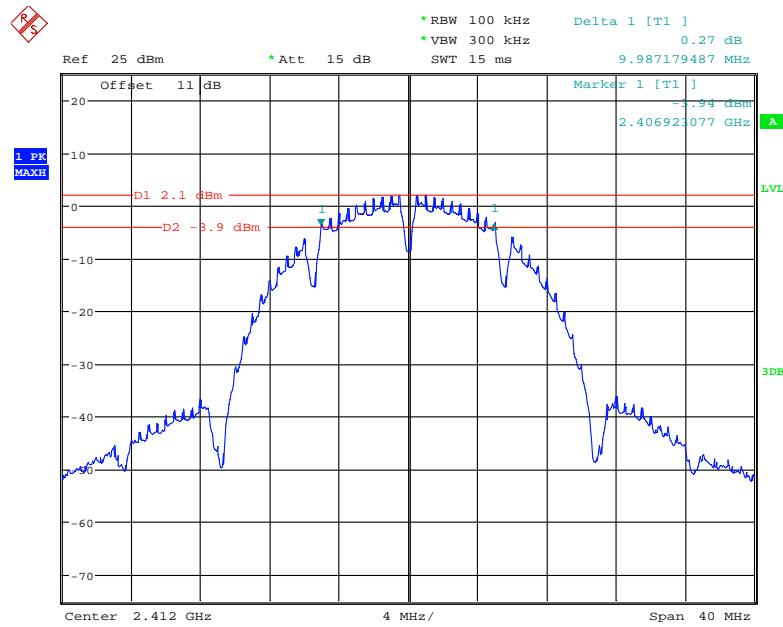
Please refer to the following table and plots.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	9.987	≥500
Middle	2437	10.115	≥500
High	2462	10.115	≥500
802.11g			
Low	2412	16.513	≥500
Middle	2437	16.615	≥500
High	2462	16.603	≥500
802.11n-HT20 mode			
Low	2412	17.769	≥500
Middle	2437	17.756	≥500
High	2462	17.718	≥500
802.11n-HT40 mode			
Low	2422	35.692	≥500
Middle	2437	35.718	≥500
High	2452	35.461	≥500

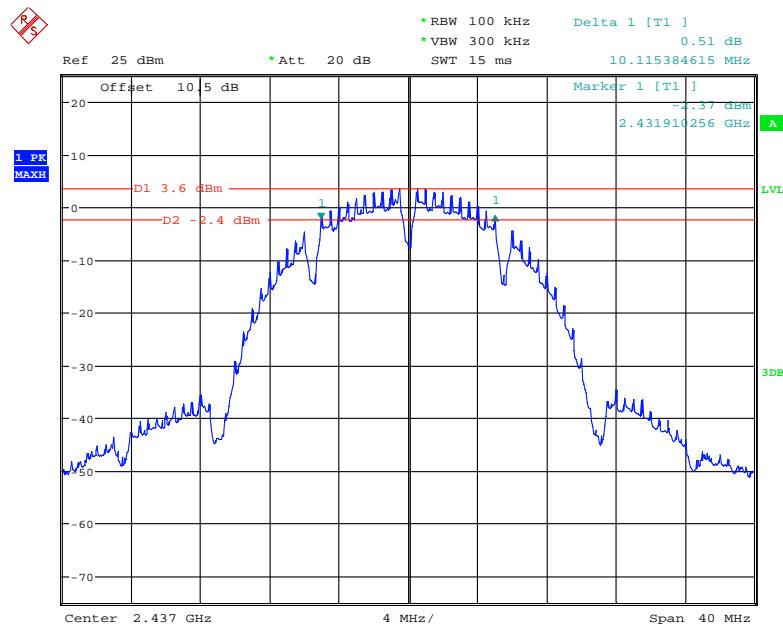
Channel	Frequency (MHz)	6 dB Emission Bandwidth(MHz)	Limit (kHz)
BLE mode			
Low	2402	0.701	≥500
Middle	2440	0.608	≥500
High	2480	0.704	≥500

802.11b Low Channel

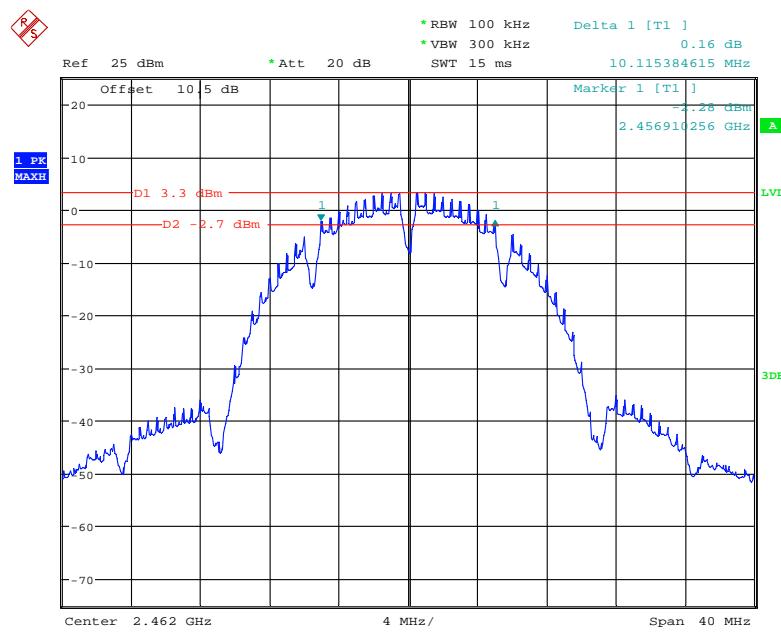


Date: 16.SEP.2020 16:33:52

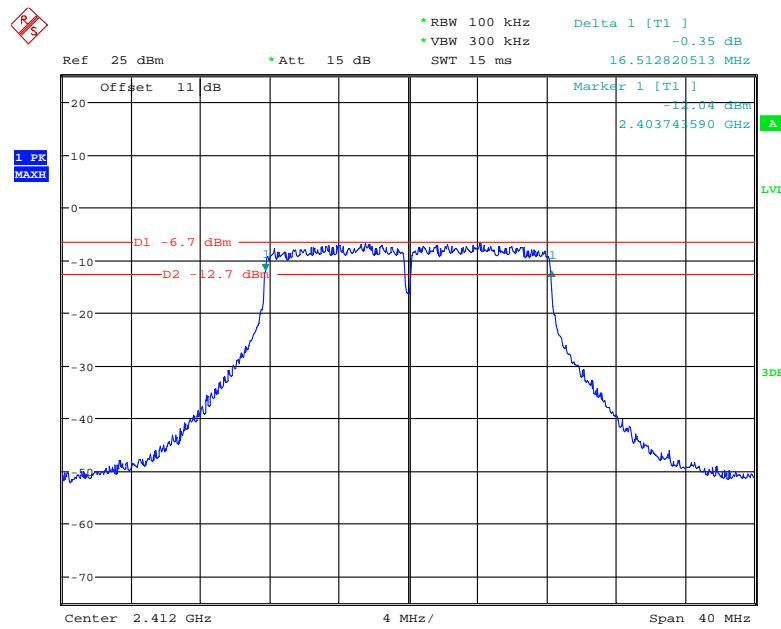
802.11b Middle Channel



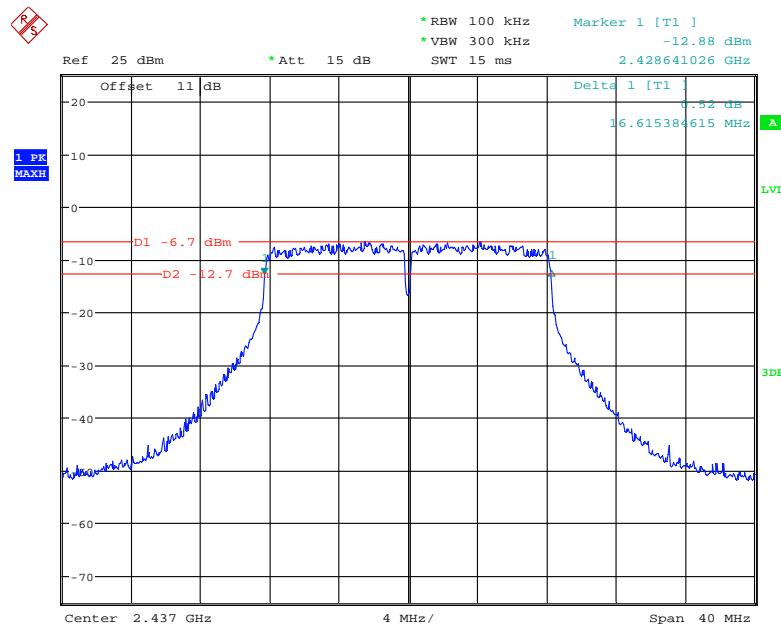
Date: 27.SEP.2020 19:01:20

802.11b High Channel

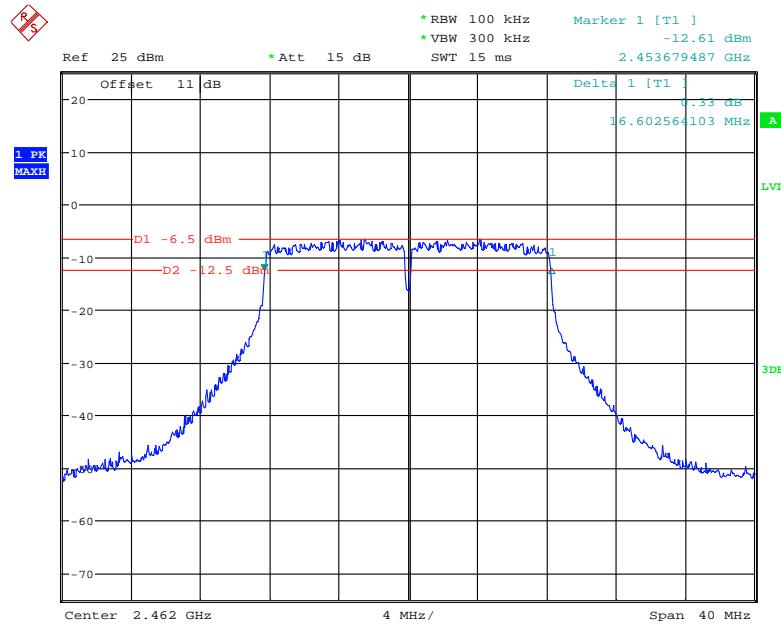
Date: 27.SEP.2020 18:58:41

802.11g Low Channel

Date: 16.SEP.2020 17:24:51

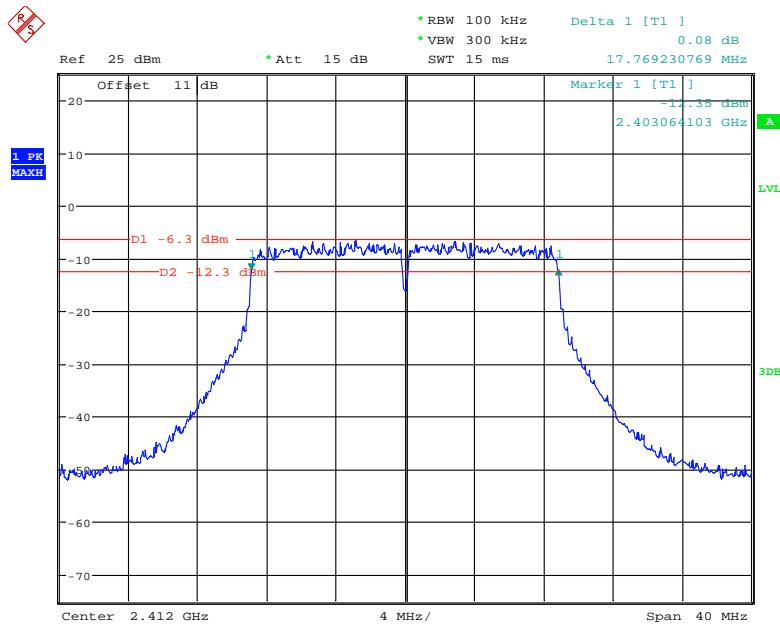
802.11g Middle Channel

Date: 16.SEP.2020 18:52:51

802.11g High Channel

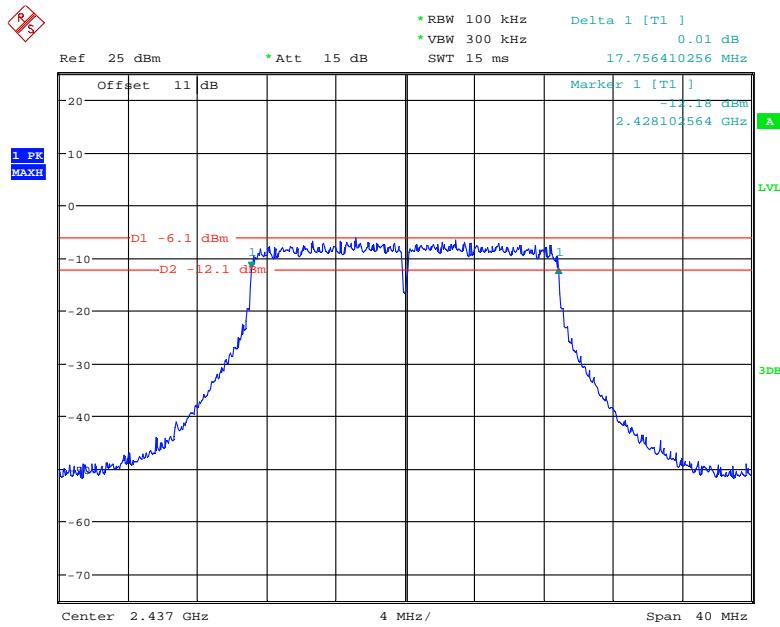
Date: 16.SEP.2020 17:28:37

802.11n-HT20 Low Channel



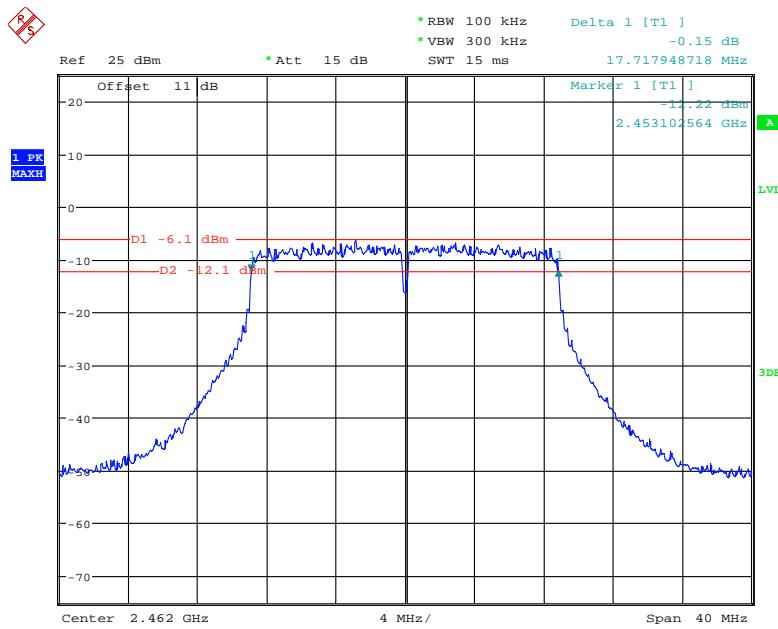
Date: 16.SEP.2020 17:31:21

802.11n-HT20 Middle Channel



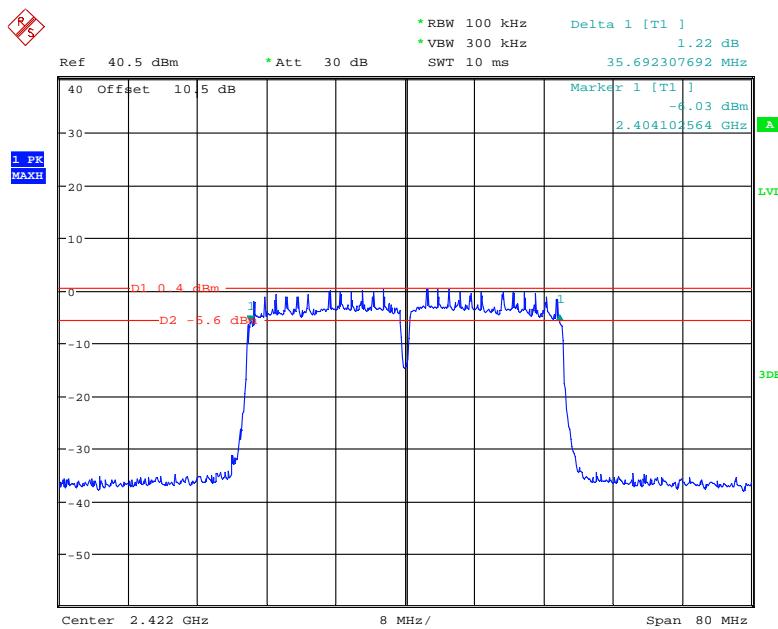
Date: 16.SEP.2020 17:32:44

802.11n-HT20 High Channel

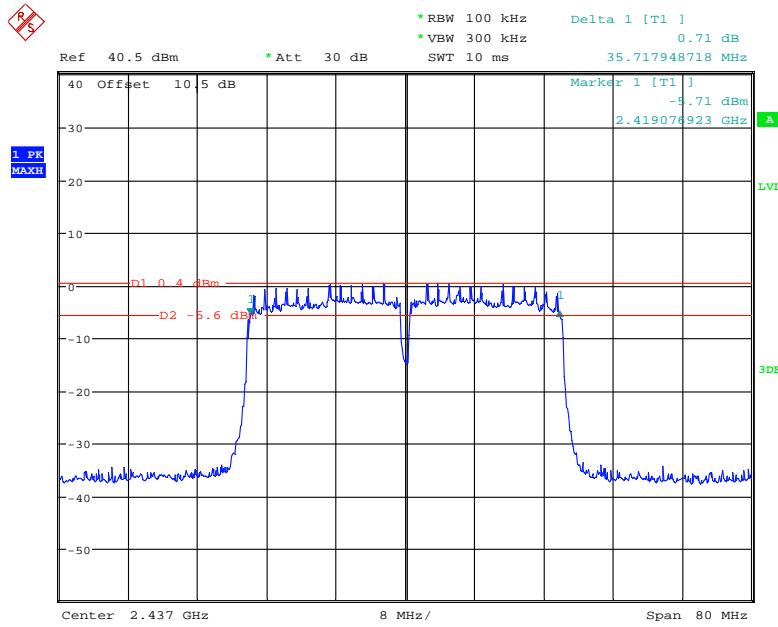


Date: 16.SEP.2020 17:35:58

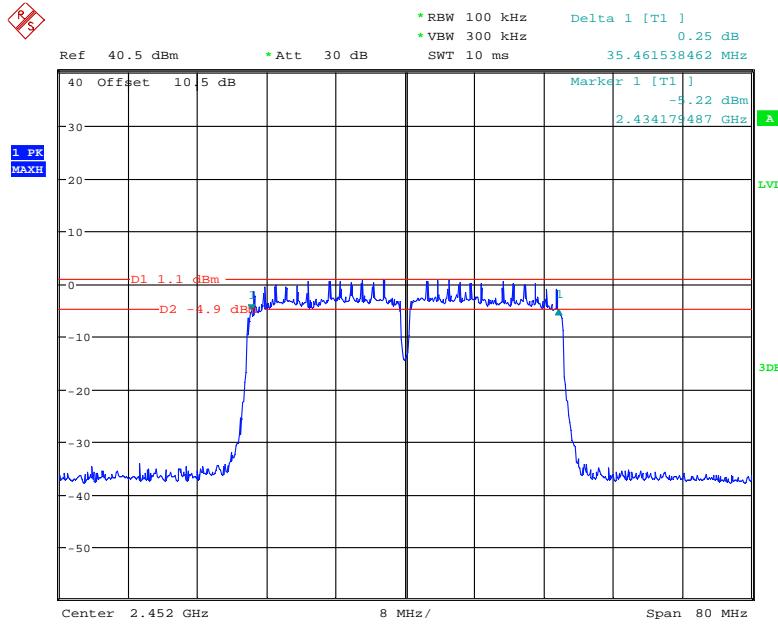
802.11n-HT40 Low Channel



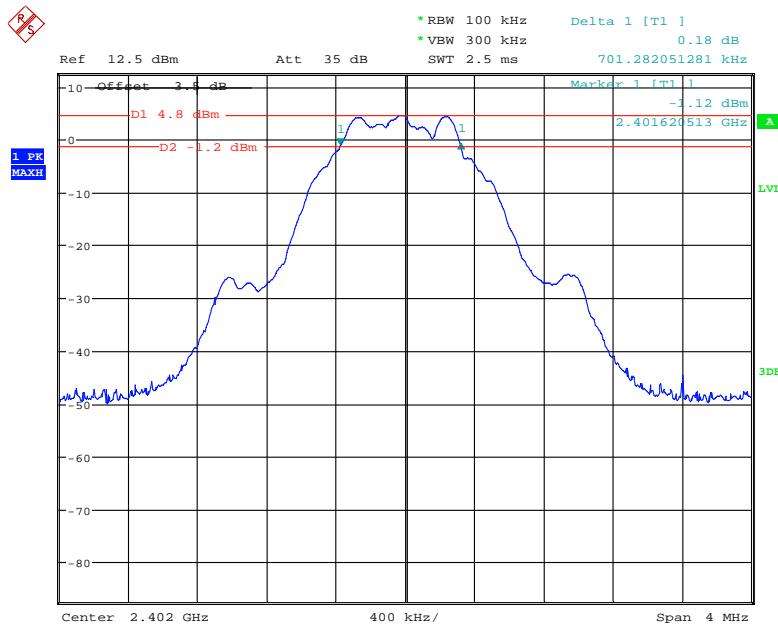
Date: 27.SEP.2020 21:05:26

802.11n-HT40 Middle Channel

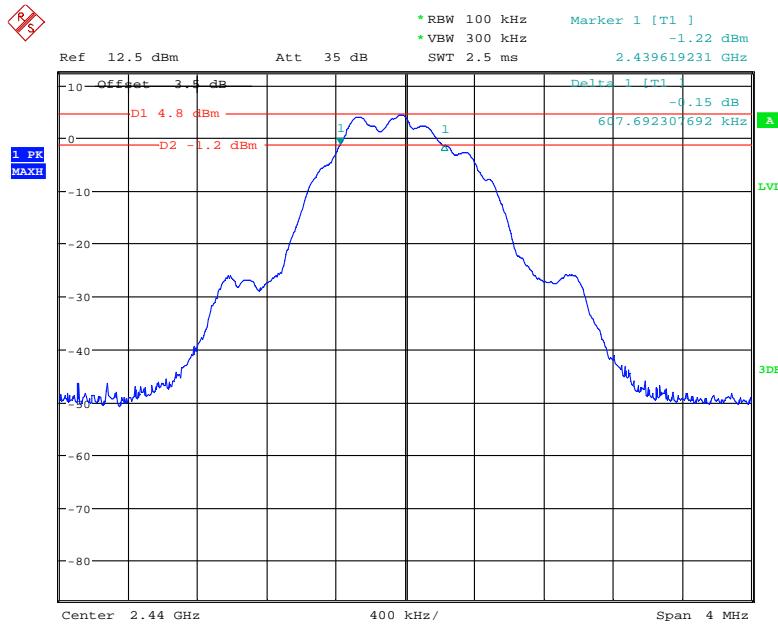
Date: 27.SEP.2020 20:51:38

802.11n-HT40 High Channel

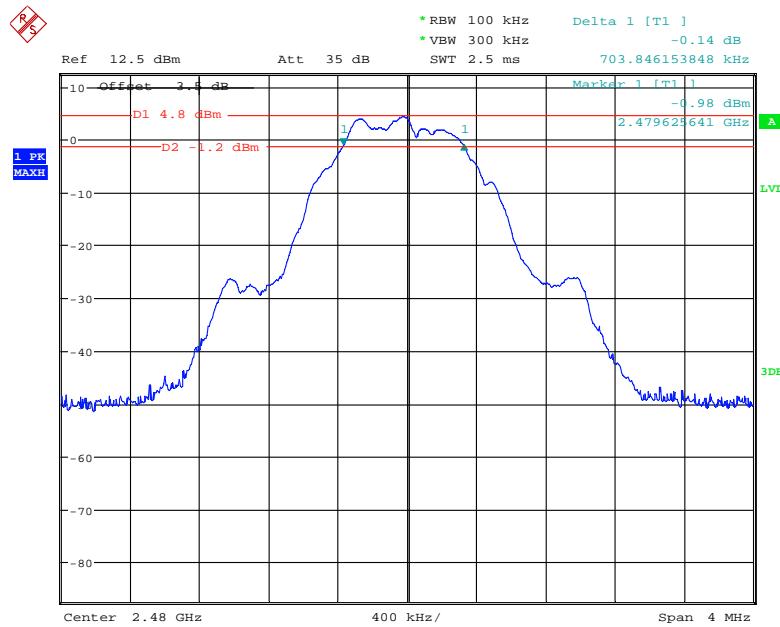
Date: 27.SEP.2020 21:00:15

BLE Low Channel

Date: 19.SEP.2020 15:26:25

BLE Middle Channel

Date: 19.SEP.2020 15:27:52

BLE High Channel

Date: 19.SEP.2020 15:28:49

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hailey Yang from 2020-09-16 to 2020-09-22.

EUT operation mode: Transmitting

Wi-Fi mode

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b				
Low	2412	15.40	12.28	30
Middle	2437	15.53	12.53	30
High	2462	15.60	12.37	30
802.11g				
Low	2412	15.56	8.78	30
Middle	2437	15.66	9.14	30
High	2462	15.80	8.89	30
802.11n HT20				
Low	2412	15.69	8.70	30
Middle	2437	15.84	9.03	30
High	2462	15.85	8.79	30
802.11n HT40				
Low	2422	15.64	8.83	30
Middle	2437	16.18	9.26	30
High	2452	16.07	9.65	30

BLE mode

Channel	Frequency (MHz)	Max Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	5.46	30	Pass
Middle	2440	5.24	30	Pass
High	2480	5.03	30	Pass

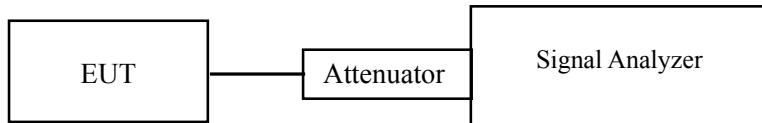
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

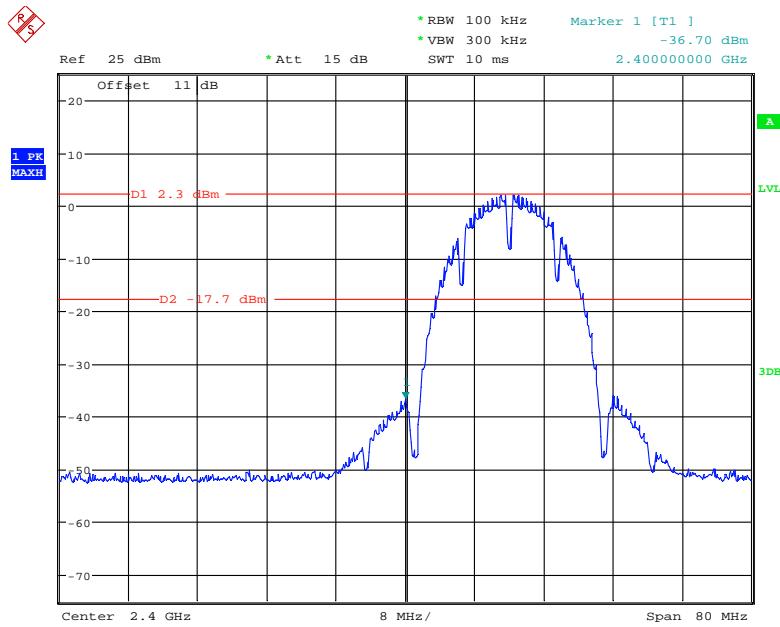
Temperature:	24~25 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hailey Yang from 2020-09-16 to 2020-09-29.

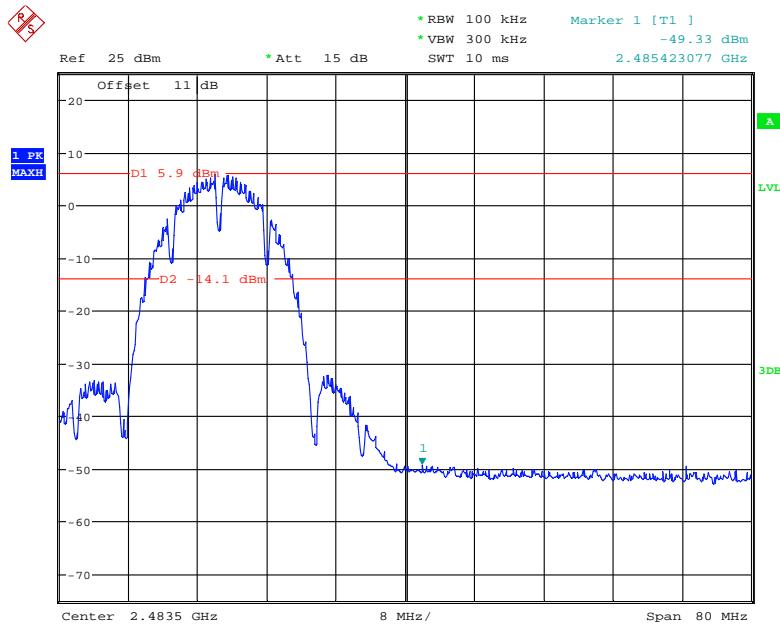
EUT operation mode: Transmitting

Test Result: Compliance

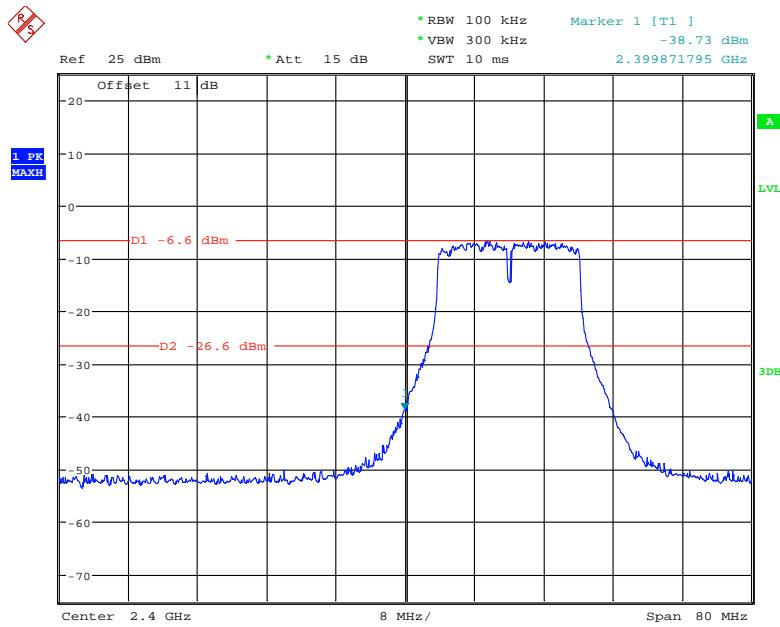
Please refer to the following plots.

802.11b: Band Edge, Left Side

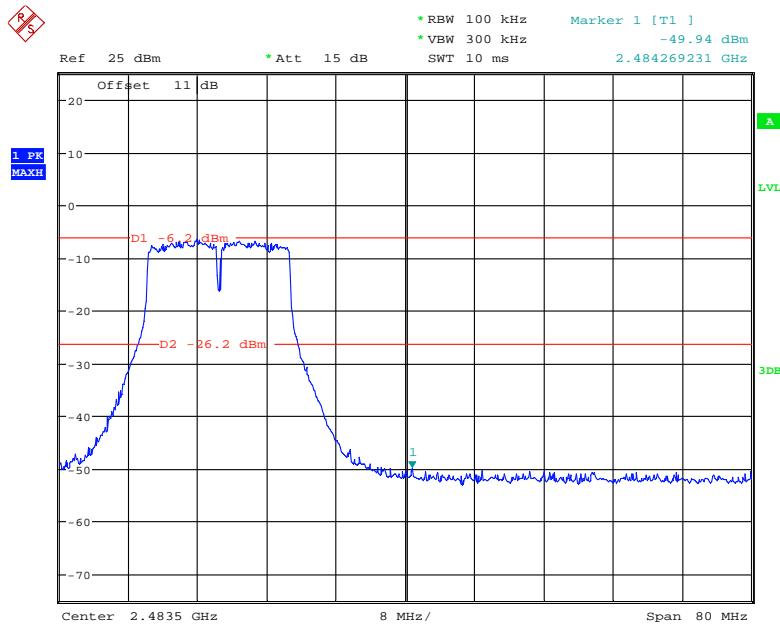
Date: 16.SEP.2020 19:41:52

802.11b: Band Edge, Right Side

Date: 16.SEP.2020 19:44:17

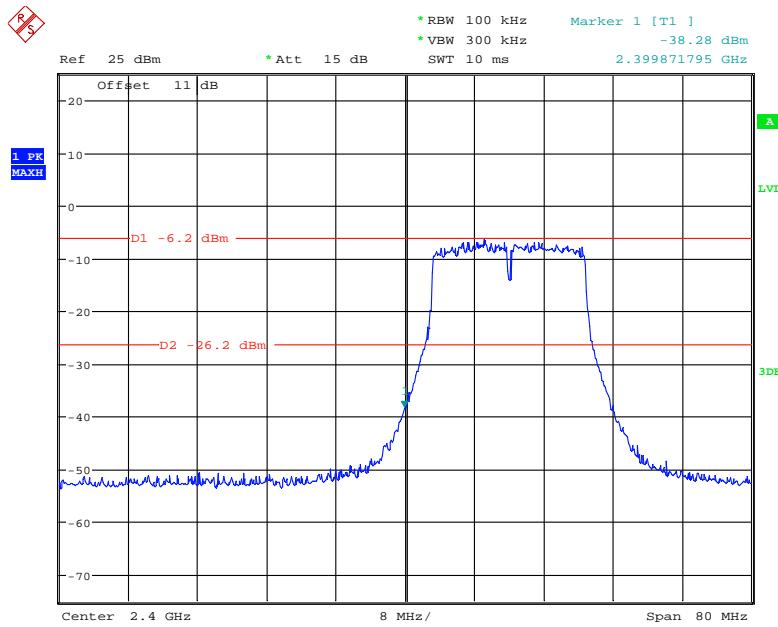
802.11g: Band Edge, Left Side

Date: 16.SEP.2020 19:46:13

802.11g: Band Edge, Right Side

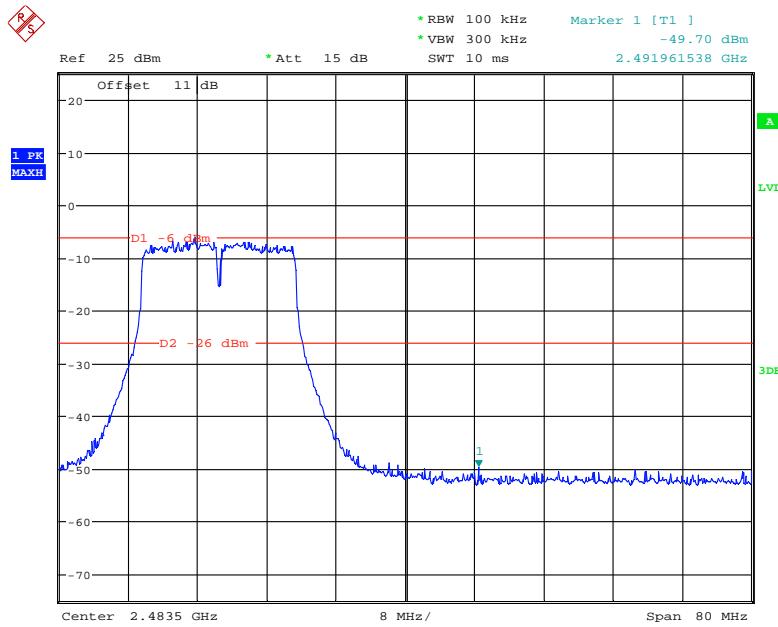
Date: 16.SEP.2020 19:48:30

802.11n-HT20: Band Edge, Left Side



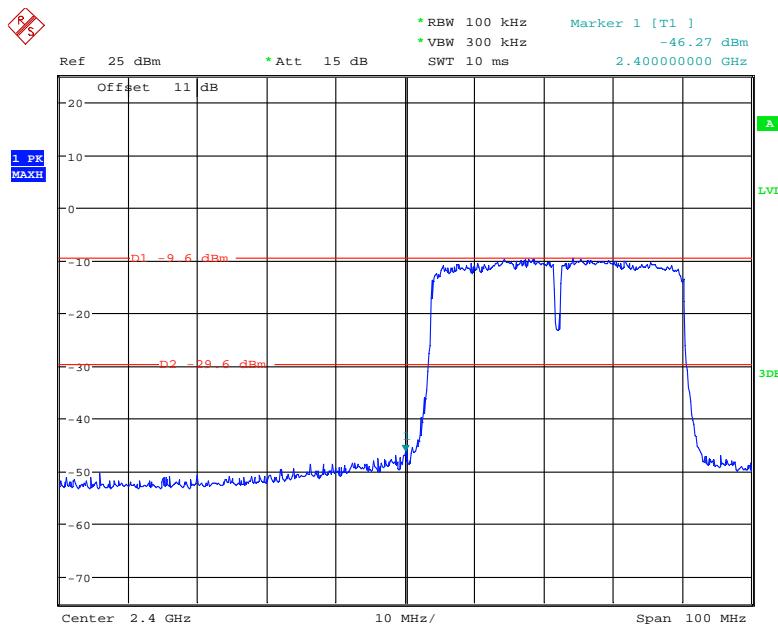
Date: 16.SEP.2020 19:49:50

802.11n-HT20: Band Edge, Right Side



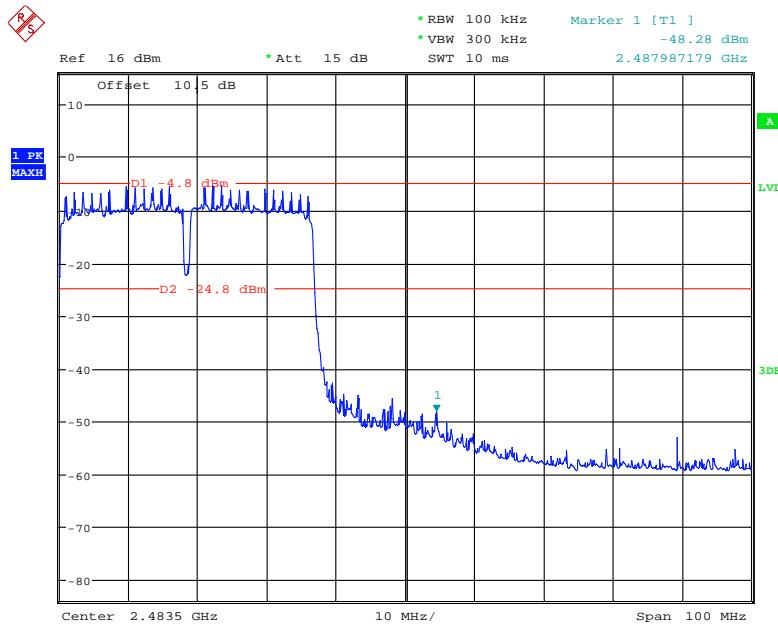
Date: 16.SEP.2020 19:54:29

802.11n-HT40: Band Edge, Left Side

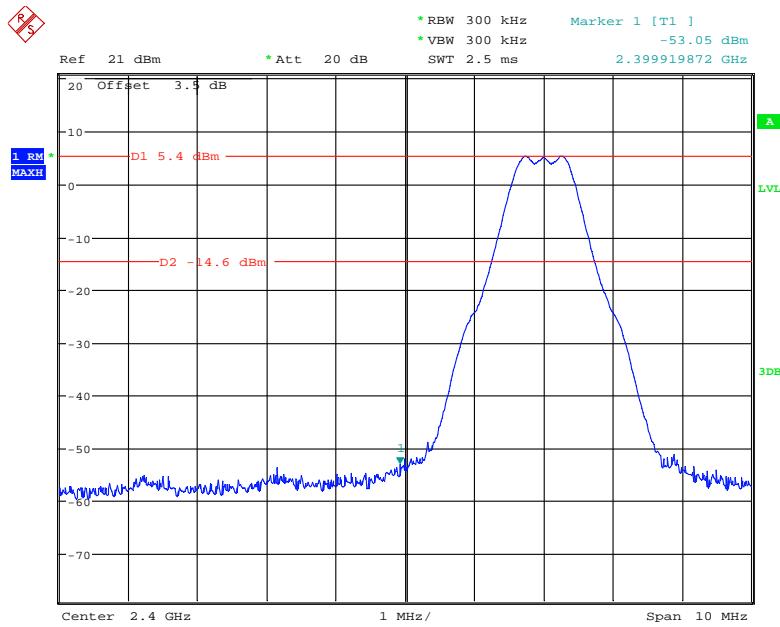


Date: 16.SEP.2020 19:56:52

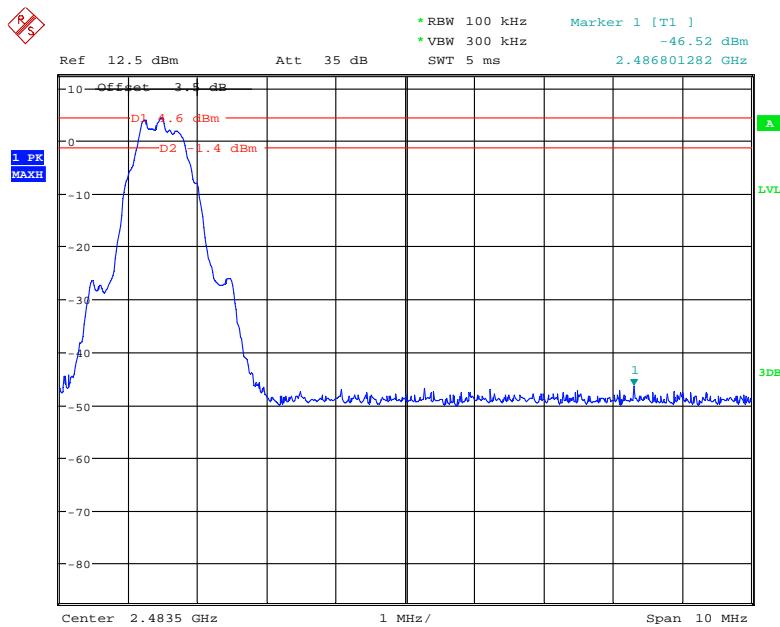
802.11n-HT40: Band Edge, Right Side



Date: 23.SEP.2020 18:55:40

BLE: Band Edge, Left Side

Date: 29.SEP.2020 15:41:11

BLE: Band Edge, Right Side

Date: 19.SEP.2020 15:30:21


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

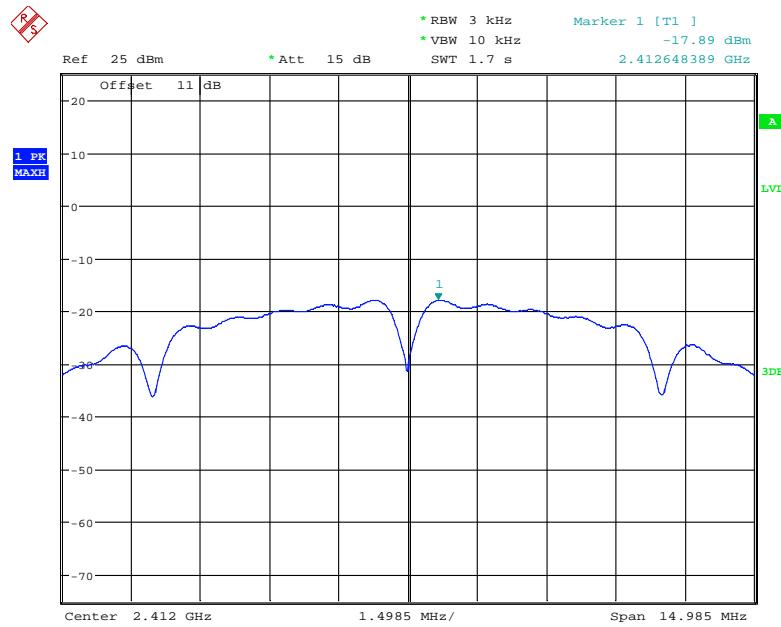
Temperature:	24~25 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hailey Yang from 2020-09-16 to 2020-09-23.

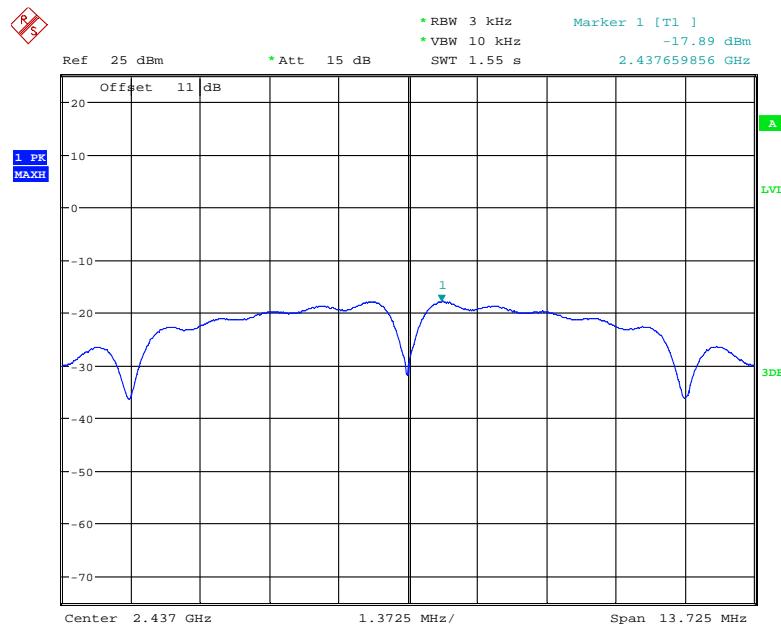
EUT operation mode: Transmitting

Test Result: Pass

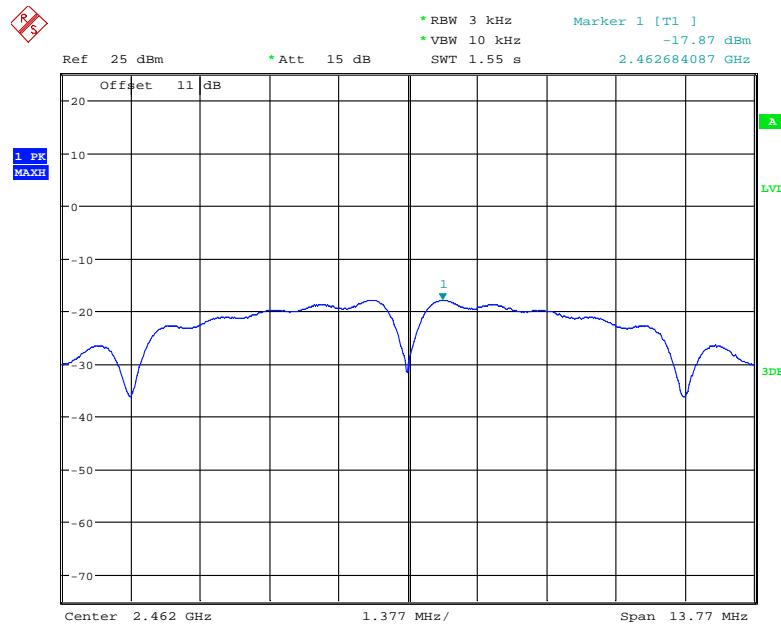
Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-17.89	≤8
Middle	2437	-17.89	≤8
High	2462	-17.87	≤8
802.11g mode			
Low	2412	-20.97	≤8
Middle	2437	-21.30	≤8
High	2462	-18.14	≤8
802.11n-HT20 mode			
Low	2412	-20.48	≤8
Middle	2437	-20.77	≤8
High	2462	-20.86	≤8
802.11n-HT40 mode			
Low	2422	-21.26	≤8
Middle	2437	-20.75	≤8
High	2452	-23.12	≤8
BLE mode			
Low	2402	-12.02	≤8
Middle	2440	-10.21	≤8
High	2480	-11.50	≤8

Power Spectral Density, 802.11b Low Channel

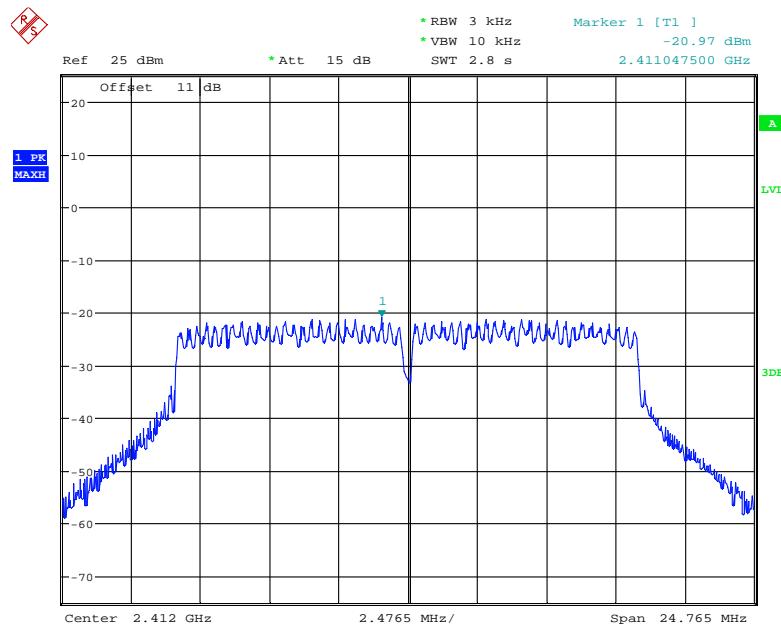
Date: 16.SEP.2020 19:08:57

Power Spectral Density, 802.11b Middle Channel

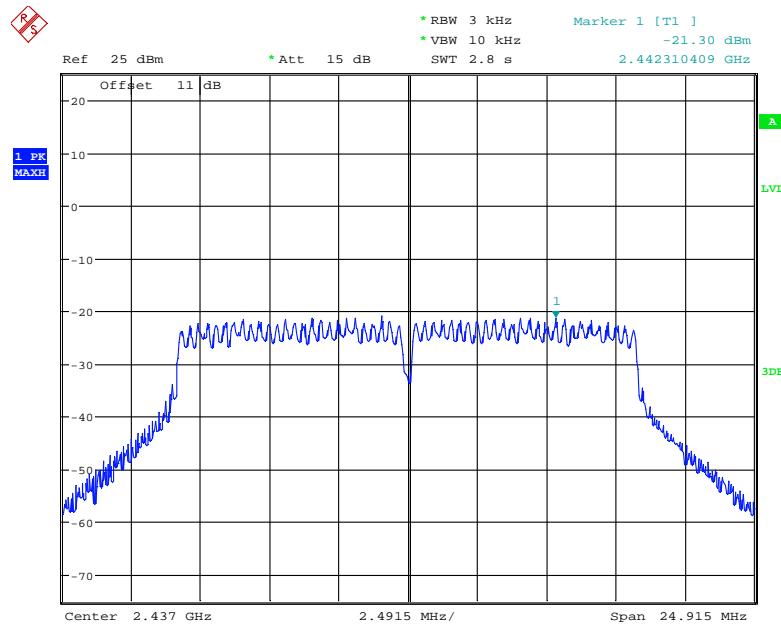
Date: 16.SEP.2020 19:11:32

Power Spectral Density, 802.11b High Channel

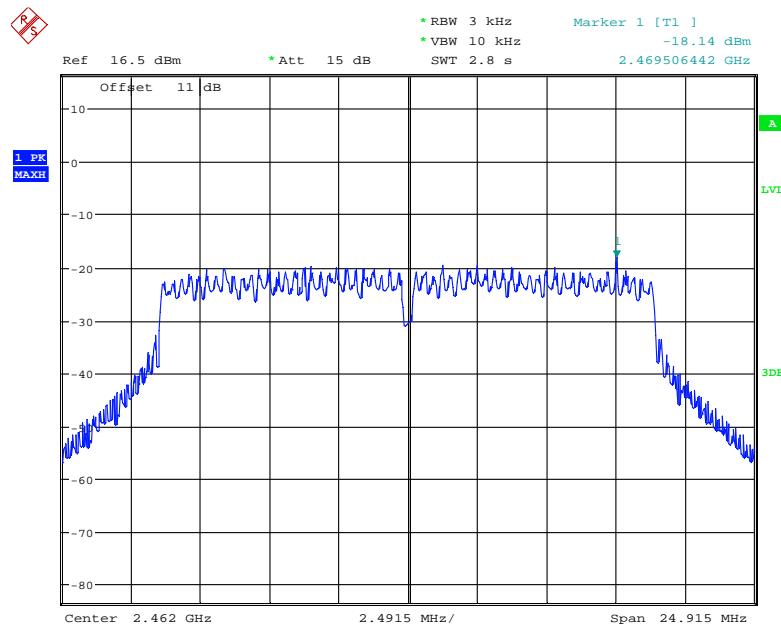
Date: 16.SEP.2020 19:12:43

Power Spectral Density, 802.11g Low Channel

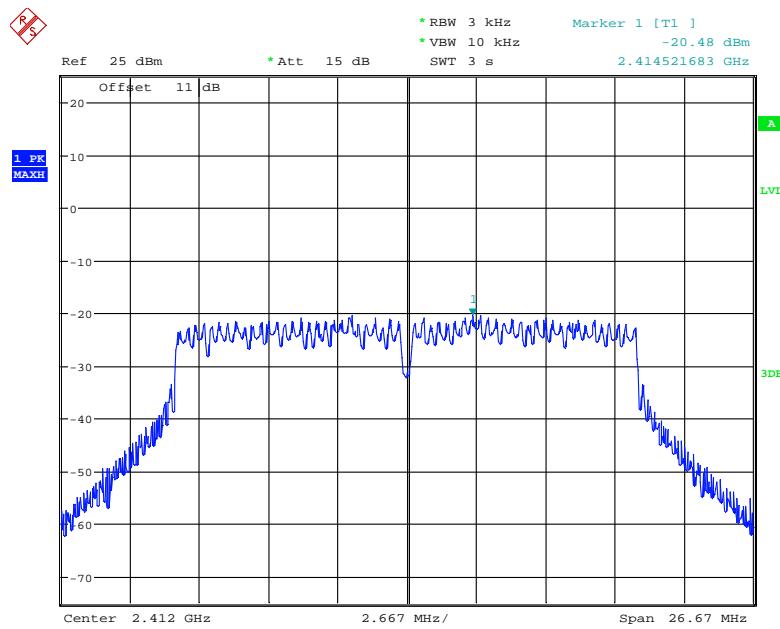
Date: 16.SEP.2020 19:14:42

Power Spectral Density, 802.11g Middle Channel

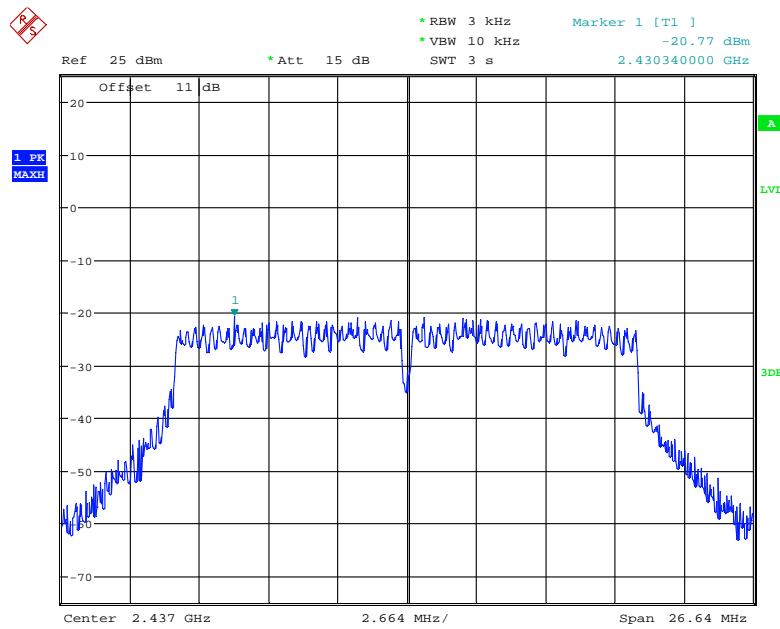
Date: 16.SEP.2020 19:16:03

Power Spectral Density, 802.11g High Channel

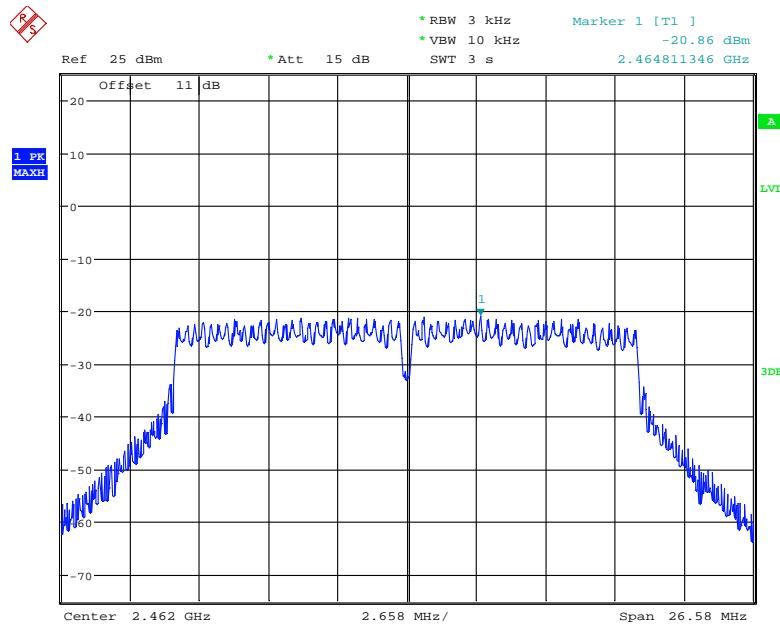
Date: 23.SEP.2020 19:06:36

Power Spectral Density, 802.11n-HT20 Low Channel

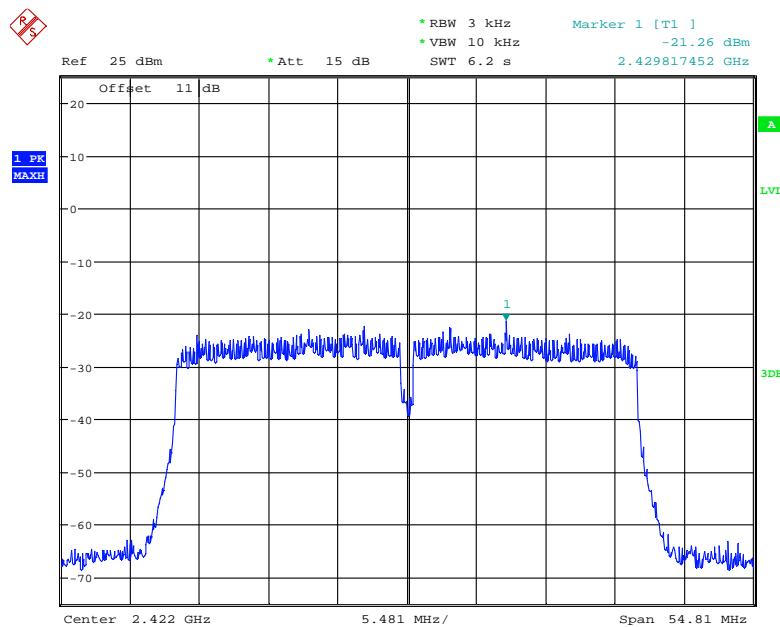
Date: 16.SEP.2020 19:35:01

Power Spectral Density, 802.11n-HT20 Middle Channel

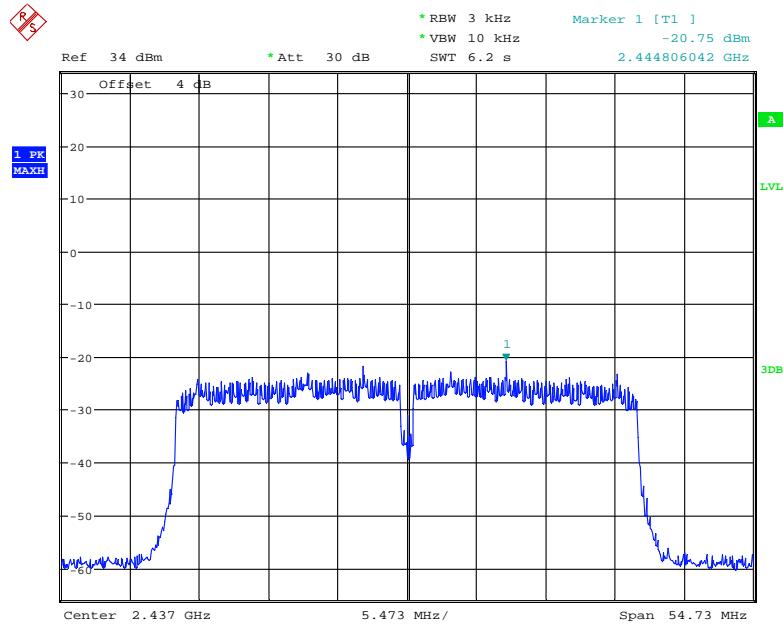
Date: 16.SEP.2020 19:31:35

Power Spectral Density, 802.11n-HT20 High Channel

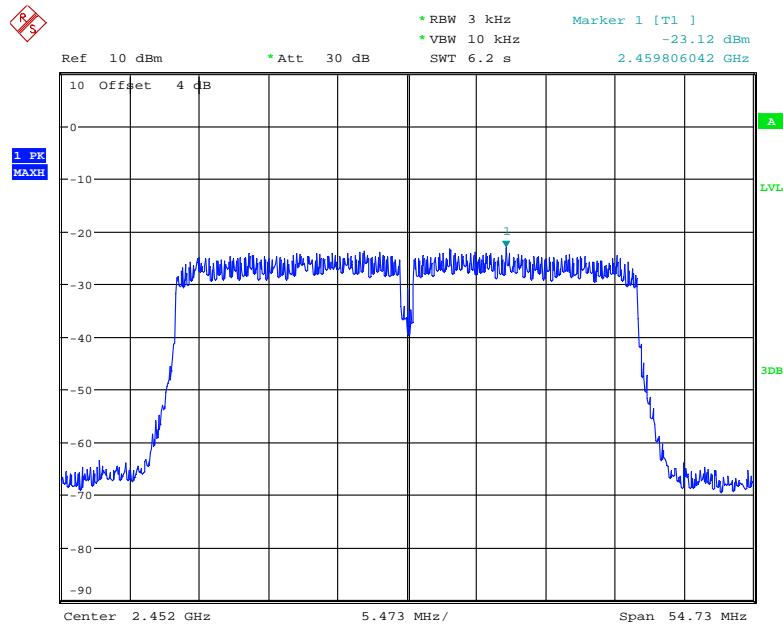
Date: 16.SEP.2020 19:32:30

Power Spectral Density, 802.11n-HT40 Low Channel

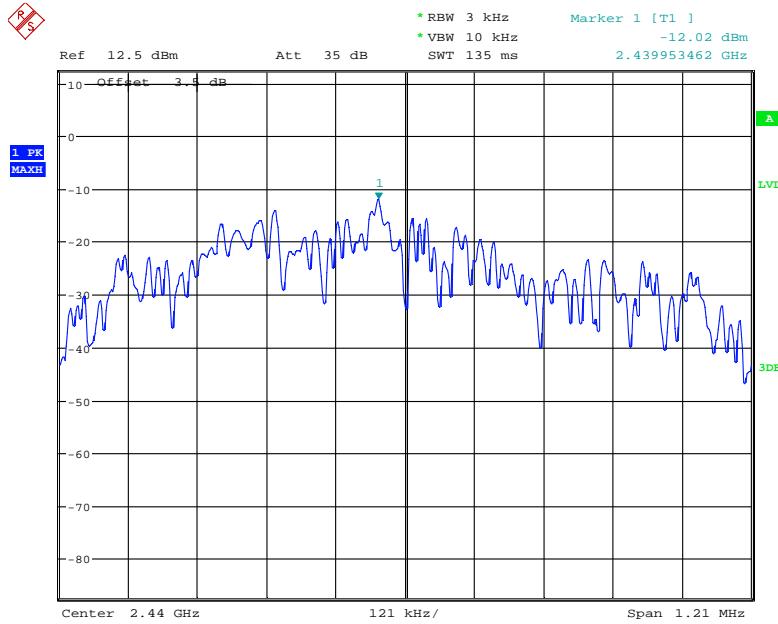
Date: 16.SEP.2020 19:23:14

Power Spectral Density, 802.11n-HT40 Middle Channel

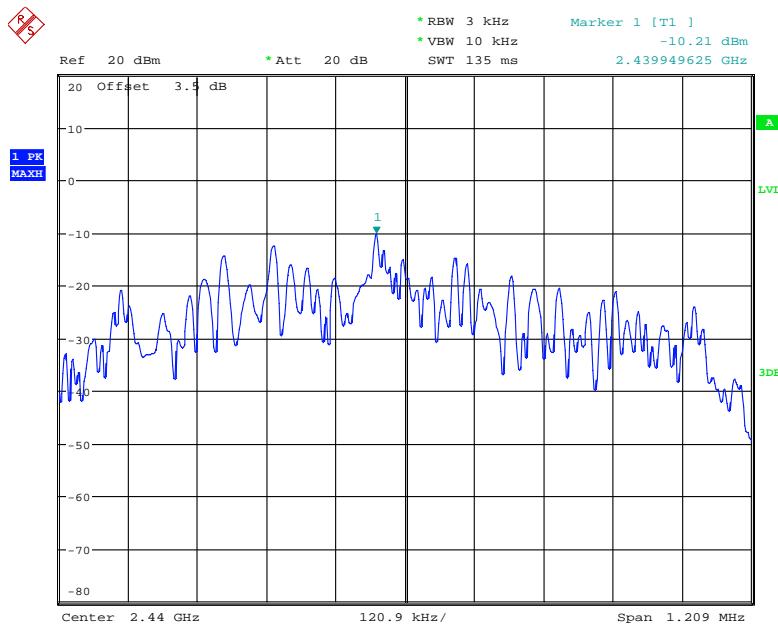
Date: 21.SEP.2020 17:33:34

Power Spectral Density, 802.11n-HT40 High Channel

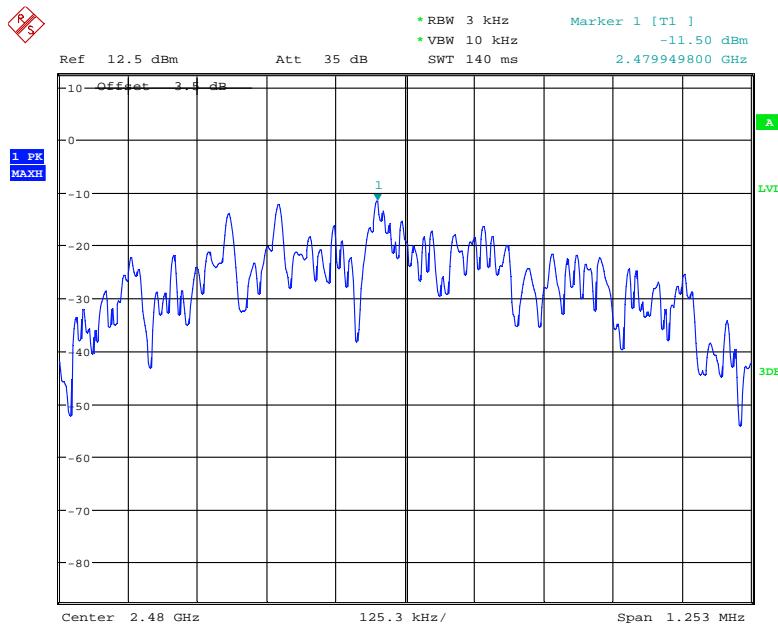
Date: 21.SEP.2020 17:35:36

Power Spectral Density, BLE Low Channel

Date: 19.SEP.2020 15:44:32

Power Spectral Density, BLE Middle Channel

Date: 22.SEP.2020 17:45:15

Power Spectral Density, BLE High Channel

Date: 19.SEP.2020 15:43:07

******* END OF REPORT *******