



CH165

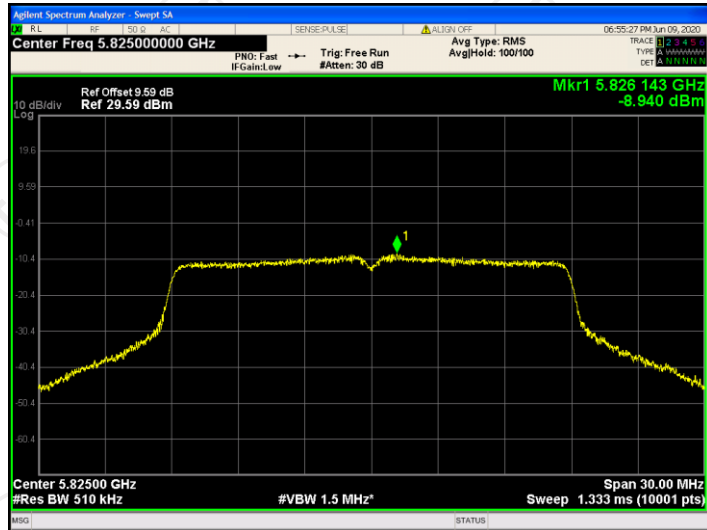


CH151

11ac(VHT40)

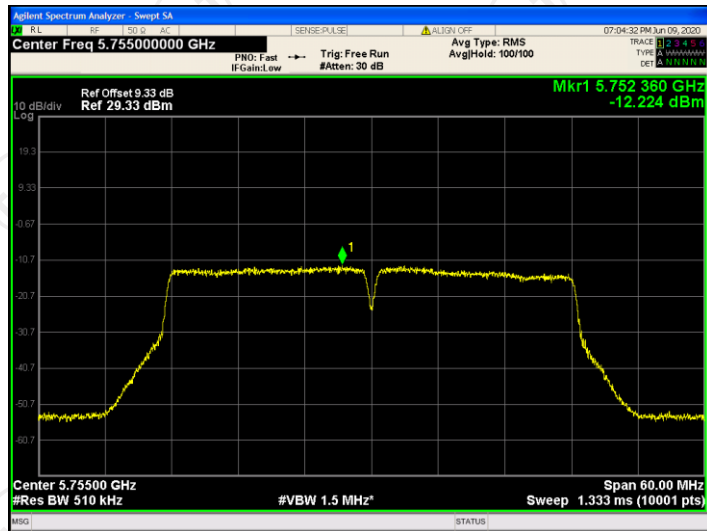


CH159

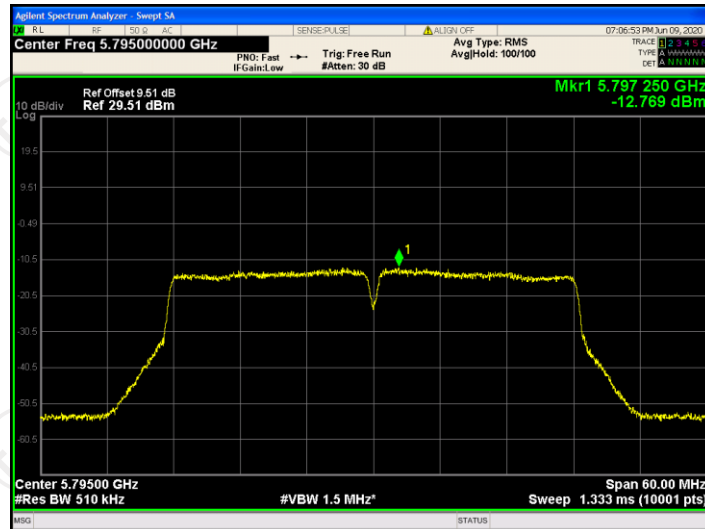


11ac(VHT80)

CH155

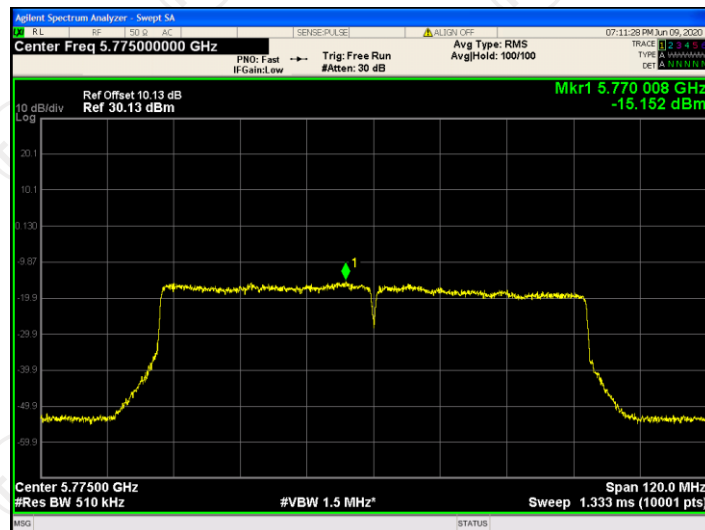


6.7. Band edge

6.7.1. Test Specification

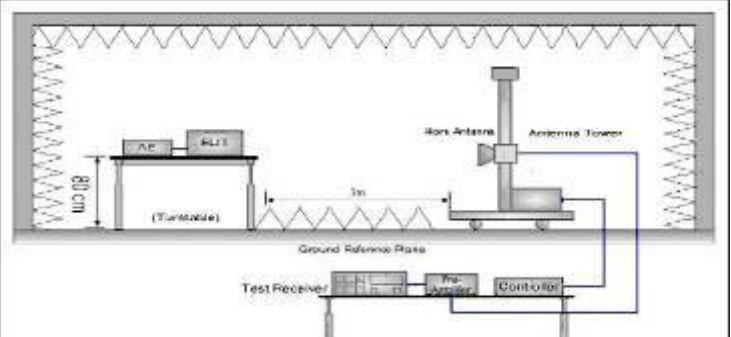Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	For Band 1: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$ For Band 3(5715-5725MHz&5850-5860MHz): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 78.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -17\text{dBm}$ For Band 3(other un-restricted band): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$
Test Setup:	
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then

	reported in a data sheet.
Test Result:	PASS

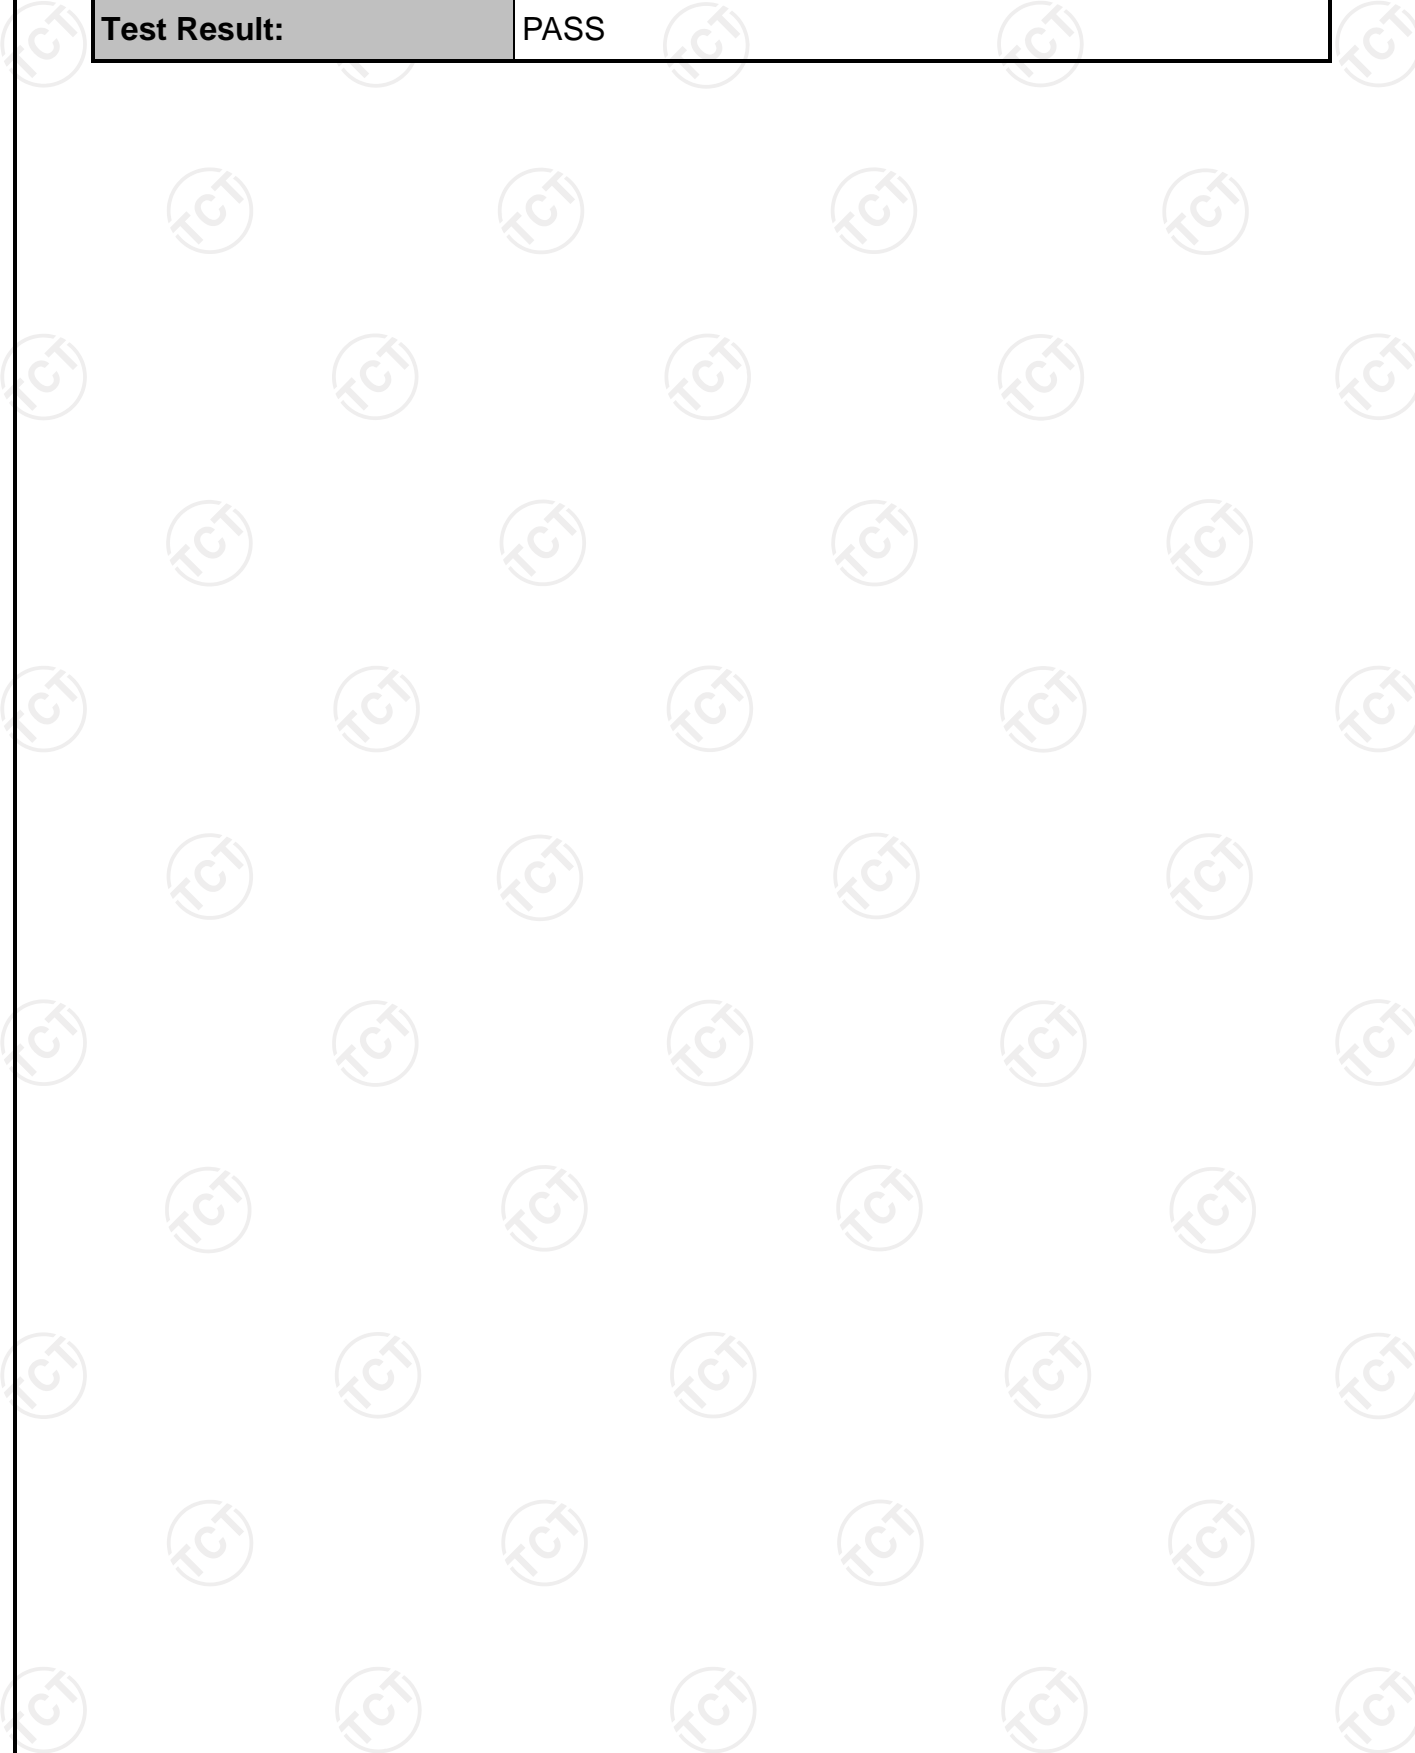

6.7.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	ROHDE&SCHWARZ	ESIB7	100197	Jul. 27, 2021
Spectrum Analyzer	ROHDE&SCHWARZ	FSQ40	200061	Sep. 11, 2020
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 02, 2021
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 02, 2021
Pre-amplifier	HP	8447D	2727A05017	Oct. 27, 2020
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 04, 2022
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jul. 27, 2021
Horn Antenna	A-INFO	LB-180400-KF	J211020657	Sep. 11, 2021
Line-4	TCT	RE-high-04	N/A	Sep. 02, 2021
Line-8	TCT	RE-01	N/A	Jul. 27, 2021
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.7.3. Test Data

802.11 a	CH	Freq. (MHz)	Read_level (dBuV/m)	Factor (dB)	Peak (dBuV/m)	Limit (dBuV/m) (Peak)	Limit (dBuV/m) (Avg)	Over	Ant. Pol. H/V
Band 1	Lowest	5150	43.17	5.82	48.99	74	54	-5.01	H
		5150	38.84	5.82	44.66	74	54	-9.34	V
	Highest	5350	43.69	6.17	49.86	74	54	-4.14	H
		5350	39.51	6.17	45.68	74	54	-8.32	V
Band 3	Lowest	5725	43.04	5.82	48.86	68.2	/	-19.34	H
		5725	38.29	5.82	44.11	68.2	/	-24.09	V
	Highest	5850	46.53	6.52	53.05	68.2	/	-15.15	H
		5850	42.90	6.52	49.42	68.2	/	-18.78	V

Remark: Factor(dB)=Ant. Factor+Cable Loss-Amp. Factor

802.11 n HT20	CH	Freq. (MHz)	Read_level (dBuV/m)	Factor (dB)	Peak (dBuV/m)	Limit (dBuV/m) (Peak)	Limit (dBuV/m) (Avg)	Over	Ant. Pol. H/V
Band 1	Lowest	5150	44.26	6.96	51.22	74	54	-2.78	H
		5150	41.84	6.96	48.80	74	54	-5.20	V
	Highest	5350	45.07	6.17	51.24	74	54	-2.76	H
		5350	42.66	6.17	48.83	74	54	-5.17	V
Band 3	Lowest	5725	41.14	8.21	49.35	68.2	/	-18.85	H
		5725	42.33	8.21	50.54	68.2	/	-17.66	V
	Highest	5850	44.79	8.87	53.66	68.2	/	-14.54	H
		5850	40.65	8.87	49.52	68.2	/	-18.68	V

Remark: Factor(dB)=Ant. Factor+Cable Loss-Amp. Factor

802.11 n HT40	CH	Freq. (MHz)	Read_level (dBuV/m)	Factor (dB)	Peak (dBuV/m)	Limit (dBuV/m) (Peak)	Limit (dBuV/m) (Avg)	Over	Ant. Pol. H/V
Band 1	Lowest	5150	43.16	5.82	48.98	74	54	-5.02	H
		5150	38.52	5.82	44.34	74	54	-9.66	V
	Highest	5350	45.44	6.17	51.61	74	54	-2.39	H
		5350	42.98	6.17	49.15	74	54	-4.85	V

Band 3	Lowest	5725	43.54	5.82	49.36	68.2	/	-18.84	H
		5725	38.21	5.82	44.03	68.2	/	-24.17	V
	Highest	5850	45.78	6.52	52.30	68.2	/	-15.90	H
		5850	42.66	6.52	49.18	68.2	/	-19.02	V

Remark: Factor(dB)=Ant. Factor+Cable Loss-Amp. Factor

802.11 ac HT20	CH	Freq. (MHz)	Read_level (dBuV/m)	Factor (dB)	Peak (dBuV/m)	Limit (dBuV/m) (Peak)	Limit (dBuV/m) (Avg)	Over	Ant. Pol. H/V
Band 1	Lowest	5150	42.85	6.96	49.81	74	54	-4.19	H
		5150	41.36	6.96	48.32	74	54	-5.68	V
	Highest	5350	45.12	6.17	51.29	74	54	-2.71	H
		5350	42.05	6.17	48.22	74	54	-5.78	V

Band 3	Lowest	5725	41.79	8.21	50.00	68.2	/	-18.20	H
		5725	42.53	8.21	50.74	68.2	/	-17.46	V
	Highest	5850	44.08	8.87	52.95	68.2	/	-15.25	H
		5850	40.47	8.87	49.34	68.2	/	-18.86	V

Remark: Factor(dB)=Ant. Factor+Cable Loss-Amp. Factor

802.11 ac HT40	CH	Freq. (MHz)	Read_level (dBuV/m)	Factor (dB)	Peak (dBuV/m)	Limit (dBuV/m) (Peak)	Limit (dBuV/m) (Avg)	Over	Ant. Pol. H/V
Band 1	Lowest	5150	43.79	5.82	49.61	74	54	-4.39	H
		5150	38.56	5.82	44.38	74	54	-9.62	V
	Highest	5350	43.41	6.17	49.58	74	54	-4.42	H
		5350	39.80	6.17	45.97	74	54	-8.03	V


Band 3	Lowest	5725	44.27	5.82	50.09	68.2	/	-18.11	H
		5725	38.86	5.82	44.68	68.2	/	-23.52	V
	Highest	5850	45.03	6.52	51.55	68.2	/	-16.65	H
		5850	43.69	6.52	50.21	68.2	/	-17.99	V

Remark: Factor(dB)=Ant. Factor+Cable Loss-Amp. Factor

802.11 ac HT80	CH	Freq. (MHz)	Read_level (dBuV/m)	Factor (dB)	Peak (dBuV/m)	Limit (dBuV/m) (Peak)	Limit (dBuV/m) (Avg)	Over	Ant. Pol. H/V
Band 1	Lowest	5150	43.48	6.96	6.96	50.44	74	54	H
		5150	41.62	6.96	6.96	48.58	74	54	V
	Highest	5350	43.75	6.17	6.17	49.92	74	54	H
		5350	39.31	6.17	6.17	45.48	74	54	V
Band 3	Lowest	5725	40.69	8.21	48.90	68.2	/	-19.30	H
		5725	41.48	8.21	49.69	68.2	/	-18.51	V
	Highest	5850	45.31	8.87	54.18	68.2	/	-14.02	H
		5850	40.74	8.87	49.61	68.2	/	-18.59	V
Remark: Factor(dB)=Ant. Factor+Cable Loss-Amp. Factor									

Band 3 Band-edge for RF Conducted Emissions


802.11a
/LCH

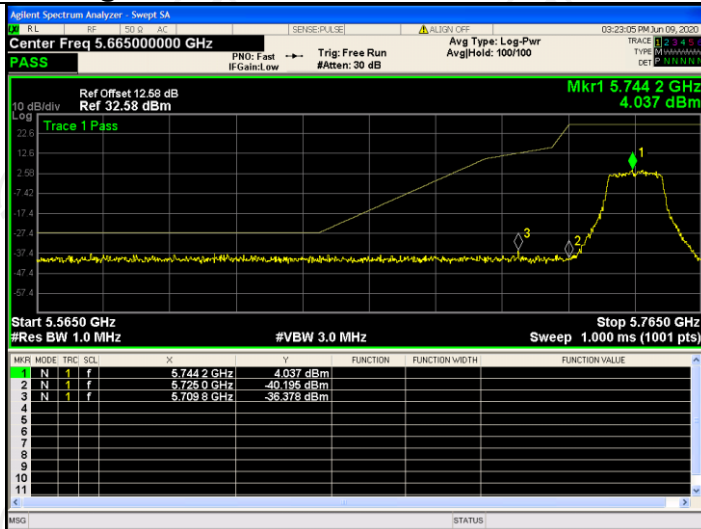


802.11a
/HCH




802.11n
HT20 / LCH

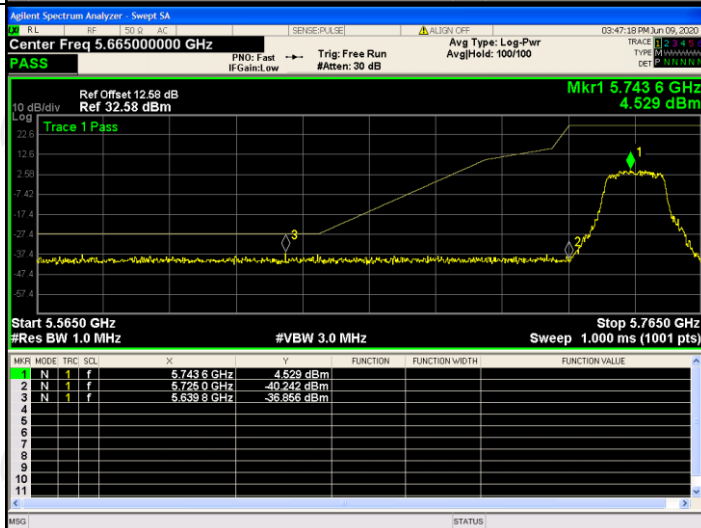


802.11n
HT20 / HCH

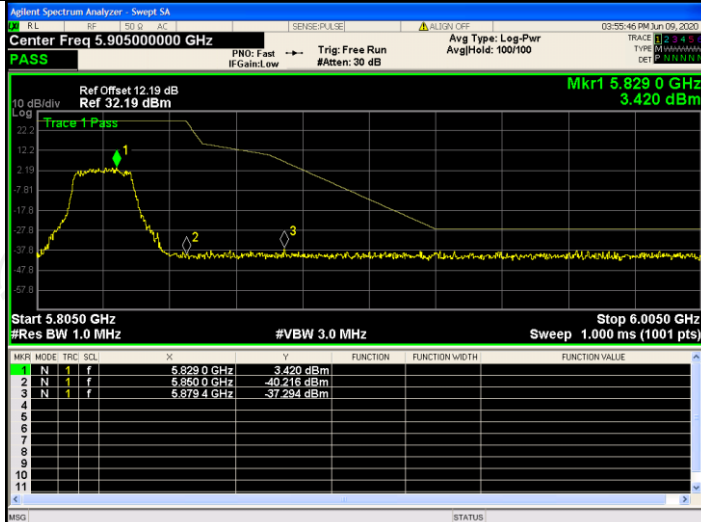

802.11n
HT40 / LCH

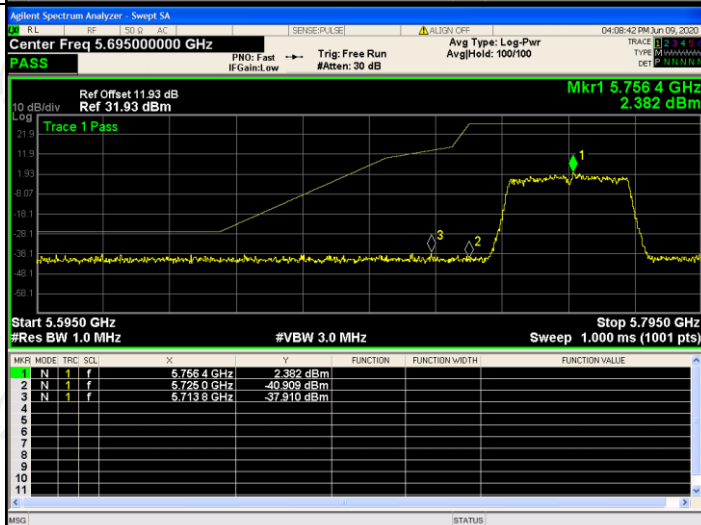


802.11n
HT40 / HCH

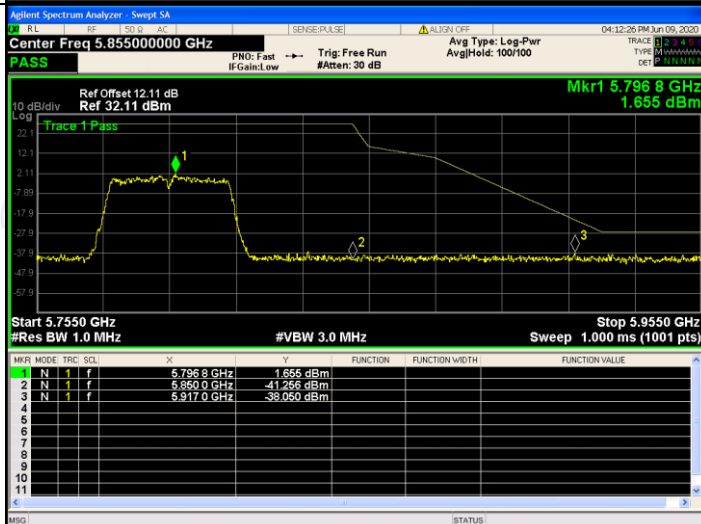


Band 3 Band-edge for RF Conducted Emissions


802.11ac
HT20 / LCH

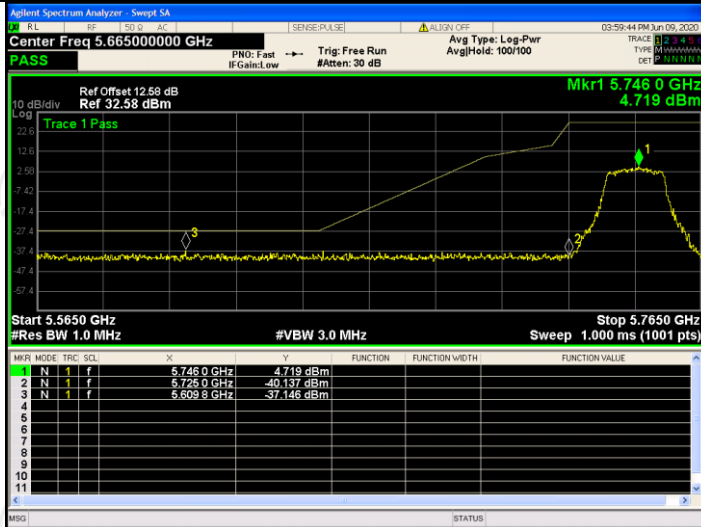


802.11ac
HT20 / HCH

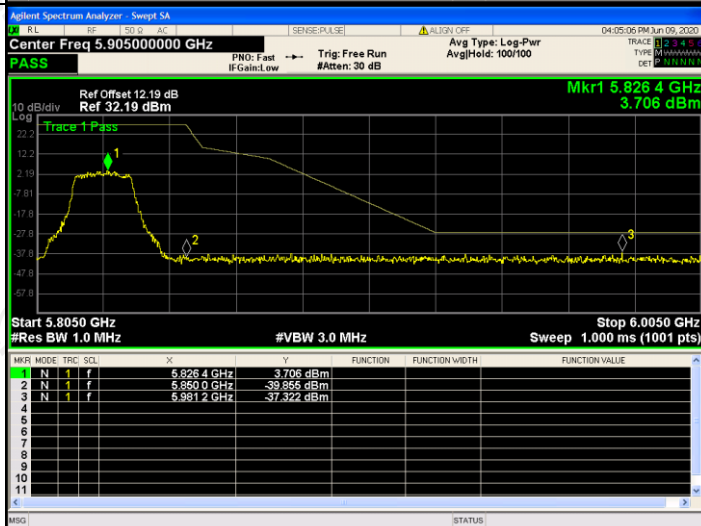

802.11ac
HT40 / LCH

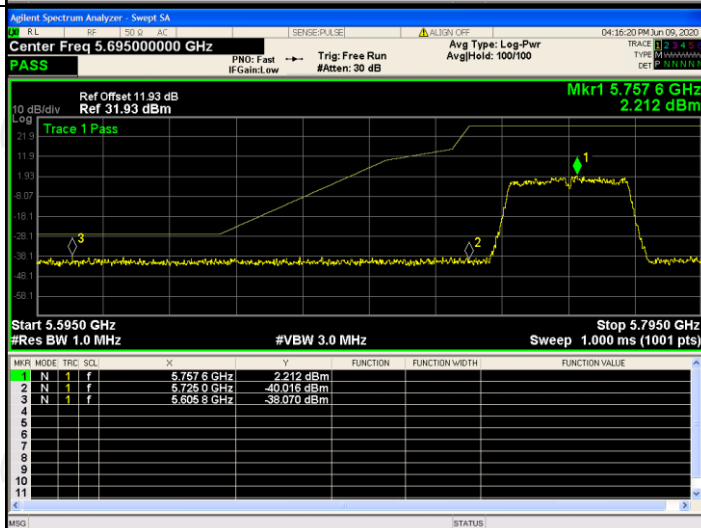


802.11ac
HT40 / HCH

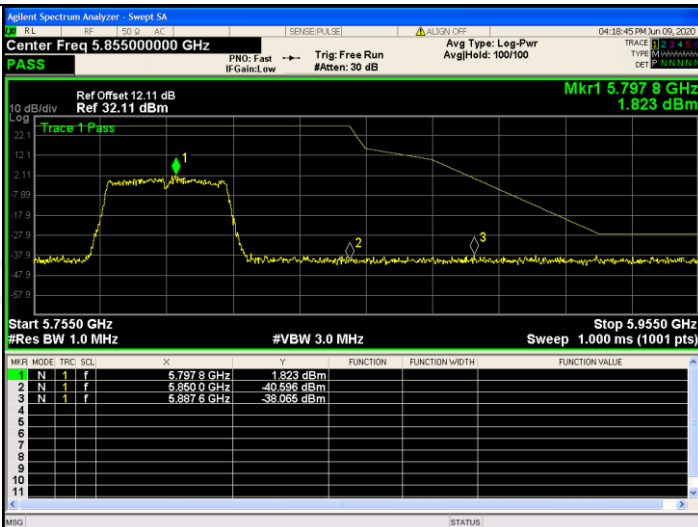


6.8. Unwanted Emission

6.8.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v02r01				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,				
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		
	0.009-0.490	2400/F(KHz)	300		
	0.490-1.705	24000/F(KHz)	30		
	1.705-30	30	30		
	30-88	100	3		
	88-216	150	3		
	216-960	200	3		
	Above 960	500	3		
		Frequency	Limit (dBuV/m @3m)	Detector	
	Above 1G	74.0	Peak		
		54.0	Average		
Test setup:	For radiated emissions below 30MHz				
	<p>Distance = 3m</p> <p>EUT</p> <p>Turn table</p> <p>Ground Plane</p> <p>Computer</p> <p>Pre -Amplifier</p> <p>Receiver</p>				
	30MHz to 1GHz				

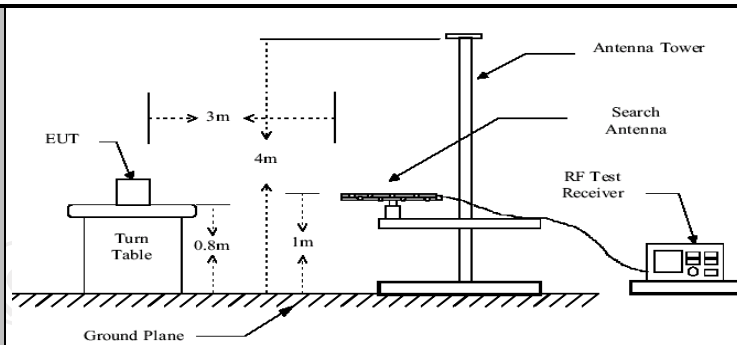

Above 1GHz

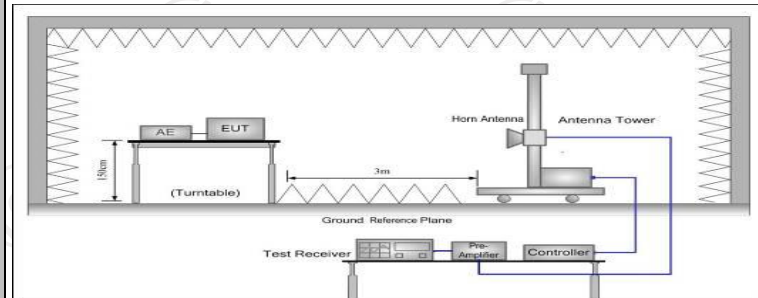

Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


Test results:

PASS

6.8.2. Test Data

Please refer to following diagram for individual
Below 1GHz


Horizontal:

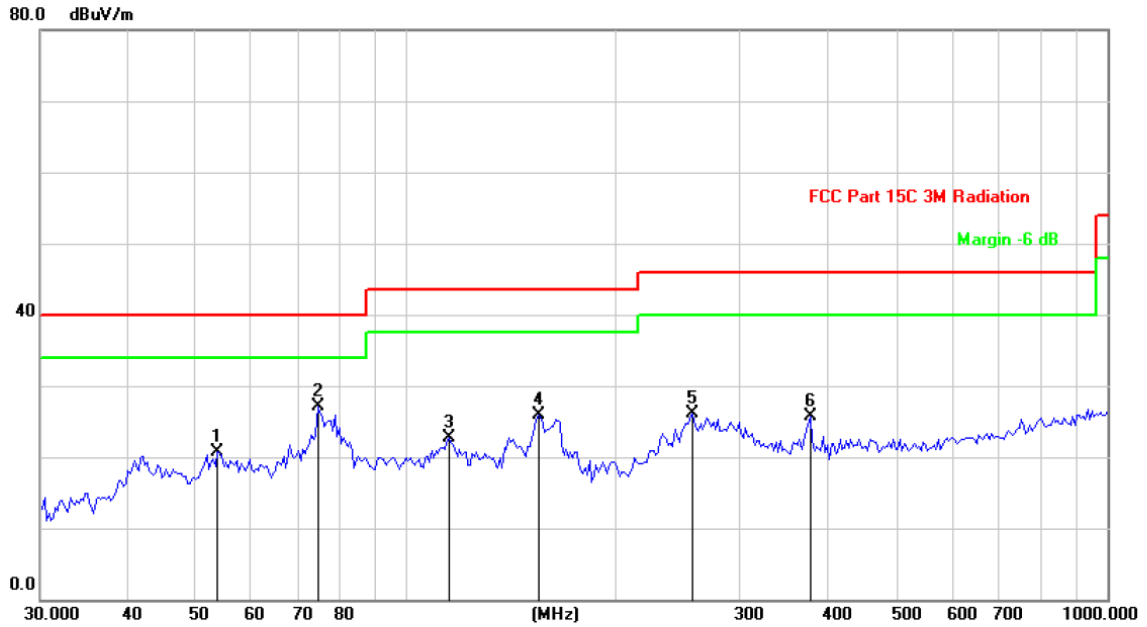

Site: Polarization: **Horizontal** Temperature: 25
Limit: FCC Part 15C 3M Radiation Power: AC 120V/60Hz Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		53.7558	31.60	-10.90	20.70	40.00	-19.30	peak
2	*	74.7934	43.17	-16.16	27.01	40.00	-12.99	peak
3		114.8224	32.78	-10.16	22.62	43.50	-20.88	peak
4		154.2427	41.94	-16.07	25.87	43.50	-17.63	peak
5		255.8223	38.53	-12.38	26.15	46.00	-19.85	peak
6		376.5227	34.98	-9.30	25.68	46.00	-20.32	peak

Vertical:

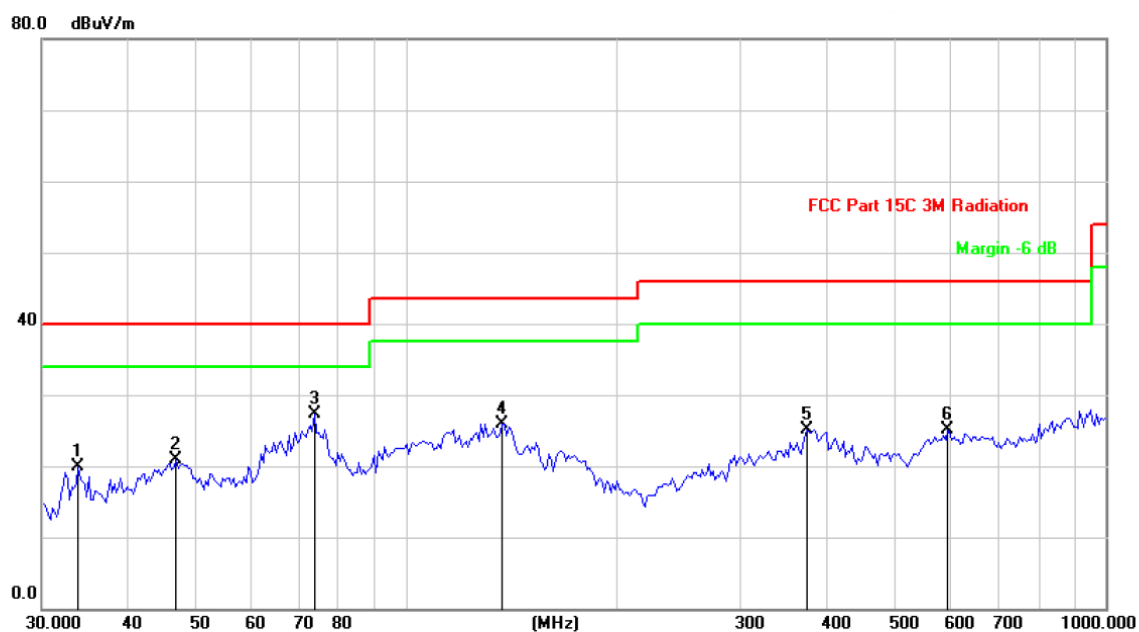

Site: Polarization: **Vertical** Temperature: 25
 Limit: FCC Part 15C 3M Radiation Power: AC 120V/60Hz Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		33.8066	30.84	-11.02	19.82	40.00	-20.18	peak
2		46.7077	31.29	-10.36	20.93	40.00	-19.07	peak
3	*	73.7496	43.40	-16.04	27.36	40.00	-12.64	peak
4		136.8745	41.81	-15.88	25.93	43.50	-17.57	peak
5		373.8860	34.53	-9.34	25.19	46.00	-20.81	peak
6		594.5143	30.95	-5.92	25.03	46.00	-20.97	peak

Note: 1. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40) 802.11nac(VHT80), and the worst case Mode (Highest channel and 802.11n(HT40)) was submitted only.

3. Measurement (dBuV) = Reading level + Correction Factor, correction Factor= Antenna Factor + Cable loss - Pre-amplifier.

Modulation Type: Band 1									
11a CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10360	H	40.43	---	8.02	48.45	---	74	54	-5.55
15540	H	38.85	---	9.87	48.72	---	74	54	-5.28
---	H	---	---	---	---	---	---	---	---
10360	V	39.96	---	8.02	47.98	---	74	54	-6.02
15540	V	35.55	---	9.87	45.42	---	74	54	-8.58
---	V	---	---	---	---	---	---	---	---
11a CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10400	H	41.26	---	7.97	49.23	---	74	54	-4.77
15600	H	36.44	---	9.83	46.27	---	74	54	-7.73
---	H	---	---	---	---	---	---	---	---
10400	V	42.96	---	7.97	50.93	---	74	54	-3.07
15600	V	40.05	---	9.83	49.88	---	74	54	-4.12
---	V	---	---	---	---	---	---	---	---
11a CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10480	H	40.72	---	7.97	48.69	---	74	54	-5.31
15720	H	37.36	---	9.83	47.19	---	74	54	-6.81
---	H	---	---	---	---	---	---	---	---
10480	V	41.55	---	7.97	49.52	---	74	54	-4.48
15720	V	38.49	---	9.83	48.32	---	74	54	-5.68
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10360	H	41.53	---	8.02	49.55	---	74	54	-4.45
15540	H	38.75	---	9.87	48.62	---	74	54	-5.38
---	H	---	---	---	---	---	---	---	---
10360	V	41.68	---	8.02	49.70	---	74	54	-4.30
15540	V	37.59	---	9.87	47.46	---	74	54	-6.54
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10400	H	40.69	---	7.97	48.66	---	74	54	-5.34
15600	H	38.02	---	9.83	47.85	---	74	54	-6.15
---	H	---	---	---	---	---	---	---	---
10400	V	43.02	---	7.97	50.99	---	74	54	-3.01
15600	V	40.31	---	9.83	50.14	---	74	54	-3.86
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH48: 5240MHz									

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10480	H	40.48	---	7.97	48.45	---	74	54	-5.55
15720	H	37.93	---	9.83	47.76	---	74	54	-6.24
---	H	---	---	---	---	---	---	---	---
10480	V	41.57	---	7.97	49.54	---	74	54	-4.46
15720	V	39.22	---	9.83	49.05	---	74	54	-4.95
---	V	---	---	---	---	---	---	---	---

11n(HT40)CH38: 5190MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10380	H	42.37	---	7.75	50.12	---	74	54	-3.88
15570	H	38.02	---	9.87	47.89	---	74	54	-6.11
---	H	---	---	---	---	---	---	---	---
10380	V	41.58	---	7.75	49.33	---	74	54	-4.67
15570	V	36.94	---	9.87	46.81	---	74	54	-7.19
---	V	---	---	---	---	---	---	---	---

11n(HT40)CH46: 5230MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10460	H	42.25	---	7.97	50.22	---	74	54	-3.78
15690	H	39.71	---	9.83	49.54	---	74	54	-4.46
---	H	---	---	---	---	---	---	---	---
10460	V	42.44	---	7.97	50.41	---	74	54	-3.59
15690	V	40.21	---	9.83	50.04	---	74	54	-3.96
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH36: 5180MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10360	H	42.58	---	8.02	50.60	---	74	54	-3.40
15540	H	38.76	---	9.87	48.63	---	74	54	-5.37
---	H	---	---	---	---	---	---	---	---
10360	V	41.33	---	8.02	49.35	---	74	54	-4.65
15540	V	37.82	---	9.87	47.69	---	74	54	-6.31
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH40: 5200MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10400	H	42.65	---	7.97	50.62	---	74	54	-3.38
15600	H	39.37	---	9.83	49.20	---	74	54	-4.80
---	H	---	---	---	---	---	---	---	---
10400	V	41.88	---	7.97	49.85	---	74	54	-4.15
15600	V	38.75	---	9.83	48.58	---	74	54	-5.42
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10480	H	39.78	---	7.97	47.75	---	74	54	-6.25
15720	H	35.56	---	9.83	45.39	---	74	54	-8.61
---	H	---	---	---	---	---	---	---	---
10480	V	41.37	---	7.97	49.34	---	74	54	-4.66
15720	V	39.59	---	9.83	49.42	---	74	54	-4.58
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH38: 5190MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10380	H	43.15	---	7.75	50.90	---	74	54	-3.10
15570	H	40.29	---	9.87	50.16	---	74	54	-3.84
---	H	---	---	---	---	---	---	---	---
10380	V	40.35	---	7.75	48.10	---	74	54	-5.90
15570	V	38.29	---	9.87	48.16	---	74	54	-5.84
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH46: 5230MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10460	H	41.63	---	7.97	49.60	---	74	54	-4.40
15690	H	37.92	---	9.83	47.75	---	74	54	-6.25
---	H	---	---	---	---	---	---	---	---
10460	V	42.94	---	7.97	50.91	---	74	54	-3.09
15690	V	39.46	---	9.83	49.29	---	74	54	-4.71
---	V	---	---	---	---	---	---	---	---
11ac(VHT80) CH42:5210									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
10420	H	42.35	---	7.96	50.31	---	74	54	-3.69
15630	H	38.74	---	9.84	48.58	---	74	54	-5.42
---	H	---	---	---	---	---	---	---	---
10420	V	42.89	---	7.96	50.85	---	74	54	-3.15
15630	V	38.52	---	9.84	48.36	---	74	54	-5.64
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Modulation Type: Band 3									
11a(HT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11490	H	40.27	---	8.09	48.36	---	74	54	-5.64
17235	H	38.39	---	9.67	48.06	---	74	54	-5.94
---	H	---	---	---	---	---	---	---	---
11490	V	42.55	---	8.09	50.64	---	74	54	-3.36
17235	V	40.59	---	9.67	50.26	---	74	54	-3.74
---	V	---	---	---	---	---	---	---	---

11a(HT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11570	H	42.71	---	8.10	50.81	---	74	54	-3.19
17355	H	39.02	---	9.65	48.67	---	74	54	-5.33
---	H	---	---	---	---	---	---	---	---
11570	V	40.56	---	8.10	48.66	---	74	54	-5.34
17355	V	37.93	---	9.65	47.58	---	74	54	-6.42
---	V	---	---	---	---	---	---	---	---

11a(HT20) CH161: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11650	H	41.38	---	8.12	49.50	---	74	54	-4.50
17475	H	39.64	---	9.62	49.26	---	74	54	-4.74
---	H	---	---	---	---	---	---	---	---
11650	V	41.72	---	8.12	49.84	---	74	54	-4.16
17475	V	39.34	---	9.62	48.96	---	74	54	-5.04
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH151: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11510	H	41.96	---	8.09	50.05	---	74	54	-3.95
17265	H	38.47	---	9.67	48.14	---	74	54	-5.86
---	H	---	---	---	---	---	---	---	---
11510	V	42.42	---	8.09	50.51	---	74	54	-3.49
17265	V	39.51	---	9.67	49.18	---	74	54	-4.82
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH157: 5785MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11570	H	41.63	---	8.10	49.73	---	74	54	-4.27
17355	H	38.52	---	9.65	48.17	---	74	54	-5.83
---	H	---	---	---	---	---	---	---	---
11570	V	40.37	---	8.10	48.47	---	74	54	-5.53
17355	V	37.28	---	9.65	46.93	---	74	54	-7.07
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH165: 5825MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11650	H	40.57	---	8.12	48.69	---	74	54	-5.31
17475	H	38.42	---	9.62	48.04	---	74	54	-5.96
---	H	---	---	---	---	---	---	---	---
11650	V	42.65	---	8.12	50.77	---	74	54	-3.23
17475	V	39.37	---	9.62	48.99	---	74	54	-5.01
---	V	---	---	---	---	---	---	---	---

11n(HT40) CH151: 5755MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11510	H	42.57	---	8.09	50.66	---	74	54	-3.34
17265	H	40.21	---	9.67	49.88	---	74	54	-4.12
---	H	---	---	---	---	---	---	---	---
11510	V	42.36	---	8.09	50.45	---	74	54	-3.55
17265	V	39.47	---	9.67	49.14	---	74	54	-4.86
---	V	---	---	---	---	---	---	---	---

11n(HT40) CH159: 5795MHz

Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11590	H	41.55	---	8.10	49.65	---	74	54	-4.35
17385	H	39.29	---	9.65	48.94	---	74	54	-5.06
---	H	---	---	---	---	---	---	---	---
11590	V	41.81	---	8.10	49.91	---	74	54	-4.09
17385	V	38.93	---	9.65	48.58	---	74	54	-5.42
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11490	H	42.57	---	8.09	50.66	---	74	54	-3.34
17235	H	39.63	---	9.67	49.30	---	74	54	-4.70
---	H	---	---	---	---	---	---	---	---
11490	V	41.91	---	8.09	50.00	---	74	54	-4.00
17235	V	38.49	---	9.67	48.16	---	74	54	-5.84
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11570	H	40.49	---	8.10	48.59	---	74	54	-5.41
17355	H	38.15	---	9.65	47.80	---	74	54	-6.20
---	H	---	---	---	---	---	---	---	---
11570	V	39.32	---	8.10	47.42	---	74	54	-6.58
17355	V	37.37	---	9.65	47.02	---	74	54	-6.98
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11650	H	41.52	---	8.12	49.64	---	74	54	-4.36
17475	H	39.33	---	9.62	48.95	---	74	54	-5.05
---	H	---	---	---	---	---	---	---	---
11650	V	41.74	---	8.12	49.86	---	74	54	-4.14
17475	V	37.62	---	9.62	47.24	---	74	54	-6.76
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11510	H	41.86	---	8.09	49.95	---	74	54	-4.05
17265	H	38.22	---	9.67	47.89	---	74	54	-6.11
---	H	---	---	---	---	---	---	---	---
11510	V	42.47	---	8.09	50.56	---	74	54	-3.44
17265	V	39.35	---	9.67	49.02	---	74	54	-4.98
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11590	H	41.82	---	8.10	49.92	---	74	54	-4.08
17385	H	37.63	---	9.65	47.28	---	74	54	-6.72
---	H	---	---	---	---	---	---	---	---
11590	V	42.25	---	8.10	50.35	---	74	54	-3.65
17385	V	40.44	---	9.65	50.09	---	74	54	-3.91
---	V	---	---	---	---	---	---	---	---

11ac(VHT80) CH155: 5775MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
11550	H	41.69	---	8.09	49.78	---	74	54	-4.22
17325	H	37.73	---	9.66	47.39	---	74	54	-6.61
---	H	---	---	---	---	---	---	---	---
11550	V	42.45	---	8.09	50.54	---	74	54	-3.46
17325	V	38.52	---	9.66	48.18	---	74	54	-5.82
---	V	---	---	---	---	---	---	---	---

Note:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

6.9. Frequency Stability Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	<pre> graph LR SA[Spectrum Analyzer] --- EUT[EUT] subgraph TC [Temperature Chamber] EUT end P[AC/DC Power supply] --- EUT </pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	Pre-scan was performed at Antenna 0 and Antenna 1, the worst case was found. Only the test data of Antenna 0 was shown in this report.

Test plots as follows:

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5180
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.85	5180.0086	8600	PASS
35		5180.0065	6500	PASS
25		5180.0066	6600	PASS
15		5180.0071	7100	PASS
5		5180.0037	3700	PASS
0		5180.0042	4200	PASS
20		3.5	5180.0055	5500
	3.85	5180.0034	3400	PASS
	4.4	5180.0051	5100	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5200
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.85	5200.0090	9000	PASS
35		5200.0089	8900	PASS
25		5200.0078	7800	PASS
15		5200.0042	4200	PASS
5		5200.0065	6500	PASS
0		5200.0057	5700	PASS
20		3.5	5200.0048	4800
	3.85	5200.0031	3100	PASS
	4.4	5200.0020	2000	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5240
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.85	5240.0043	4300	PASS
35		5240.0028	2800	PASS
25		5240.0025	2500	PASS
15		5239.9991	-900	PASS
5		5239.9983	-1700	PASS
0		5239.9979	-2100	PASS
20		3.5	5240.0034	3400
	3.85	5240.0010	1000	PASS
	4.4	5239.9987	-1300	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5745
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.85	5745.0118	11800	PASS
35		5745.0086	8600	PASS
25		5745.0078	7800	PASS
15		5745.0035	3500	PASS
5		5744.9962	-3800	PASS
0		5744.9984	-1600	PASS
20		3.5	5745.0013	1300
	3.85	5745.0014	1400	PASS
	4.4	5745.0028	2800	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5785
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.85	5785.0082	8200	PASS
35		5785.0029	2900	PASS
25		5785.0021	2100	PASS
15		5785.0008	800	PASS
5		5785.0028	2800	PASS
0		5785.0037	3700	PASS
20		3.5	5785.0033	3300
	3.85	5785.0012	1200	PASS
	4.4	5784.9976	-2400	PASS

Test mode:		802.11ac(VHT20)	Frequency(MHz):	5825
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.85	5825.0097	9700	PASS
35		5825.0044	4400	PASS
25		5825.0022	2200	PASS
15		5824.9989	-1100	PASS
5		5824.9975	-2500	PASS
0		5824.9964	-3600	PASS
20		3.5	5825.0032	3200
	3.85	5825.0017	1700	PASS
	4.4	5825.0025	2500	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5190
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.85	5190.0122	12200	PASS
35		5190.0110	11000	PASS
25		5190.0104	10400	PASS
15		5190.0036	3600	PASS
5		5190.0068	6800	PASS
0		5190.0072	7200	PASS
20		3.5	5189.9930	-7000
	3.85	5189.9978	-2200	PASS
	4.4	5190.0046	4600	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5230
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.85	5230.0128	12800	PASS
35		5230.0120	12000	PASS
25		5230.0095	9500	PASS
15		5229.9983	-1700	PASS
5		5229.9981	-1900	PASS
0		5230.0053	5300	PASS
20		3.5	5230.0047	4700
	3.85	5230.0020	2000	PASS
	4.4	5229.9978	-2200	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5755
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.85	5755.0073	7300	PASS
35		5755.0120	12000	PASS
25		5755.0117	11700	PASS
15		5755.0096	9600	PASS
5		5755.0035	3500	PASS
0		5755.0077	7700	PASS
20		3.5	5755.0043	4300
	3.85	5755.0039	3900	PASS
	4.4	5755.0061	6100	PASS

Test mode:		802.11ac(VHT40)	Frequency(MHz):	5795
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.85	5795.0084	8400	PASS
35		5795.0021	2100	PASS
25		5795.0034	3400	PASS
15		5795.0016	1600	PASS
5		5795.0046	4600	PASS
0		5795.0059	5900	PASS
20		3.5	5795.0071	7100
	3.85	5794.9970	-3000	PASS
	4.4	5795.0065	6500	PASS

Appendix A: Photographs of Test Setup

Refer to the test report No. TCT200917E901

Appendix B: Photographs of EUT

Refer to the test report No. TCT200917E901

*******END OF REPORT*******