

# TEST REPORT

**Product Name** : Bluetooth module5.2  
**Brand Mark** : ABLUE TECH  
**Model No.** : PTR5620P  
**FCC ID** : 2AWMN-PTR5620P  
**Report Number** : BLA-EMC-202108-A9801  
**Date of Sample Receipt** : 2021/8/26  
**Date of Test** : 2021/8/26 to 2021/9/24  
**Date of Issue** : 2021/9/24  
**Test Standard** : 47 CFR Part 15, Subpart C 15.247  
**Test Result** : Pass

Prepared for:

**Shenzhen Chuanghongxin Intelligent technology Co.,Ltd**  
**Room 703 Of Wanhai Building B, 1031 South Sea Avenue,**  
**Nanshan District, Shenzhen, China**

Prepared by:

**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**  
**Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,**  
**Shenzhen, Guangdong Province, China**  
**TEL: +86-755-23059481**

Compiled by:

*Z.ason*

Review by:

*Sueels*

Approved by:

*Bluezhong*

Date:

2021/9/24



**REPORT REVISE RECORD**

<b>Version No.</b>	<b>Date</b>	<b>Description</b>
00	2021/9/24	Original
01	2021/10/13	The test model name is changed from PTR5620+-ANK to PTR5620P

BlueAsia

## TABLE OF CONTENTS

<b>1</b>	<b>TEST SUMMARY.....</b>	<b>5</b>
<b>2</b>	<b>GENERAL INFORMATION.....</b>	<b>6</b>
<b>3</b>	<b>GENERAL DESCRIPTION OF E.U.T.....</b>	<b>6</b>
<b>4</b>	<b>TEST ENVIRONMENT.....</b>	<b>7</b>
<b>5</b>	<b>TEST MODE.....</b>	<b>7</b>
<b>6</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>7</b>
<b>7</b>	<b>DESCRIPTION OF SUPPORT UNIT.....</b>	<b>8</b>
<b>8</b>	<b>LABORATORY LOCATION.....</b>	<b>8</b>
<b>9</b>	<b>TEST INSTRUMENTS LIST.....</b>	<b>9</b>
<b>10</b>	<b>CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....</b>	<b>13</b>
10.1	LIMITS.....	13
10.2	BLOCK DIAGRAM OF TEST SETUP.....	13
10.3	PROCEDURE.....	13
10.4	TEST DATA.....	15
<b>11</b>	<b>CONDUCTED BAND EDGES MEASUREMENT.....</b>	<b>19</b>
11.1	LIMITS.....	19
11.2	BLOCK DIAGRAM OF TEST SETUP.....	19
11.3	TEST DATA.....	20
<b>12</b>	<b>CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>21</b>
12.1	LIMITS.....	21
12.2	BLOCK DIAGRAM OF TEST SETUP.....	21
12.3	TEST DATA.....	22
<b>13</b>	<b>POWER SPECTRUM DENSITY.....</b>	<b>23</b>
13.1	LIMITS.....	23
13.2	BLOCK DIAGRAM OF TEST SETUP.....	23
13.3	TEST DATA.....	23
<b>14</b>	<b>CONDUCTED PEAK OUTPUT POWER.....</b>	<b>24</b>
14.1	LIMITS.....	24
14.2	BLOCK DIAGRAM OF TEST SETUP.....	24
14.3	TEST DATA.....	25

<b>15</b>	<b>MINIMUM 6DB BANDWIDTH.....</b>	<b>26</b>
15.1	LIMITS.....	26
15.2	BLOCK DIAGRAM OF TEST SETUP.....	26
15.3	TEST DATA.....	26
<b>16</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>27</b>
16.1	CONCLUSION.....	27
<b>17</b>	<b>RADIATED SPURIOUS EMISSIONS.....</b>	<b>28</b>
17.1	LIMITS.....	28
17.2	BLOCK DIAGRAM OF TEST SETUP.....	29
17.3	PROCEDURE.....	29
17.4	TEST DATA.....	31
<b>18</b>	<b>RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....</b>	<b>47</b>
18.1	LIMITS.....	47
18.2	BLOCK DIAGRAM OF TEST SETUP.....	48
18.3	PROCEDURE.....	48
18.4	TEST DATA.....	50
<b>19</b>	<b>APPENDIX.....</b>	<b>58</b>
	<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP.....</b>	<b>86</b>
	<b>APPENDIX B: PHOTOGRAPHS OF EUT.....</b>	<b>88</b>

## 1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass

## 2 GENERAL INFORMATION

<b>Applicant</b>	Shenzhen Chuanghongxin Intelligent technology Co.,Ltd
<b>Address</b>	Room 703 Of Wanhai Building B, 1031 South Sea Avenue, Nanshan District, Shenzhen, China
<b>Manufacturer</b>	Shenzhen Chuanghongxin Intelligent technology Co.,Ltd
<b>Address</b>	Room 703 Of Wanhai Building B, 1031 South Sea Avenue, Nanshan District, Shenzhen, China
<b>Factory</b>	Shenzhen Chuanghongxin Intelligent technology Co.,Ltd
<b>Address</b>	Room 703 Of Wanhai Building B, 1031 South Sea Avenue, Nanshan District, Shenzhen, China
<b>Product Name</b>	Bluetooth module5.2
<b>Test Model No.</b>	PTR5620P

## 3 GENERAL DESCRIPTION OF E.U.T.

<b>Hardware Version</b>	N/A
<b>Software Version</b>	N/A
<b>Operation Frequency:</b>	2402MHz-2480MHz
<b>Modulation Type:</b>	GFSK
<b>Channel Spacing:</b>	2MHz
<b>Number of Channels:</b>	40
<b>Antenna Type:</b>	integral Antenna
<b>Antenna Gain:</b>	2.0 dBi (provided by applicant)

#### 4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	3.3V

#### 5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation.
Remark: Full battery is used during all test except ac conducted emission.	

#### 6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

## 7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

## 8 LABORATORY LOCATION

All tests were performed at:  
BlueAsia of Technical Services(Shenzhen) Co., Ltd.  
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,  
China  
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673  
No tests were sub-contracted.

BlueAsia



## 9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Power Spectrum Density					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

**Test Equipment Of Conducted Peak Output Power**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

**Test Equipment Of Minimum 6dB Bandwidth**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

**Test Equipment Of Radiated Spurious Emissions**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11

Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

**Test Equipment Of Radiated Emissions which fall in the restricted bands**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A

Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

BlueAsia

## 10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

### 10.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 10.2 BLOCK DIAGRAM OF TEST SETUP

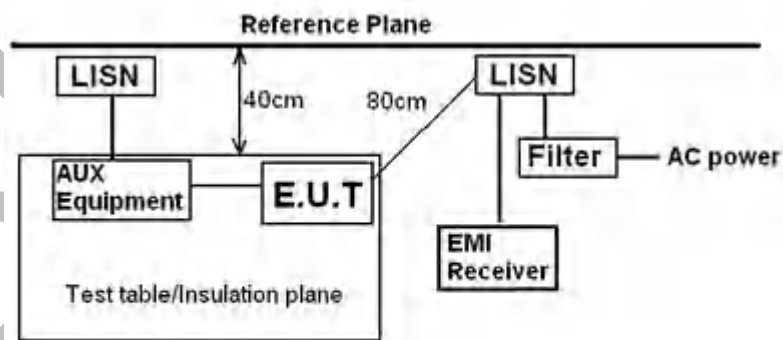

Remark:  
 E.U.T: Equipment Under Test  
 LISN: Line Impedance Stabilization Network  
 Test table height=0.8m

### 10.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

### 10.4 TEST DATA

BLE 1M

[TestMode: TX]; [Line: Line]; [Power:AC120V/60Hz]

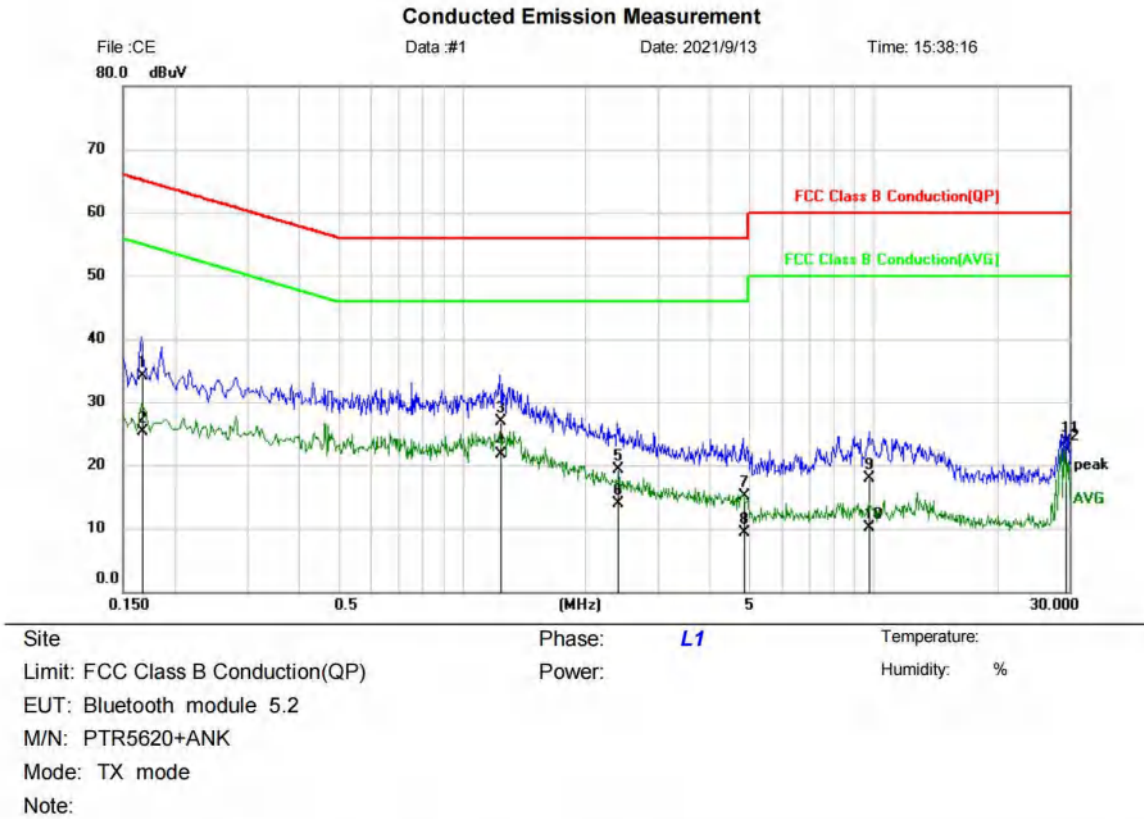


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1660	24.26	9.82	34.08	65.16	-31.08	QP	
2		0.1660	15.43	9.82	25.25	55.16	-29.91	AVG	
3		1.2420	17.08	9.92	27.00	56.00	-29.00	QP	
4	*	1.2420	11.81	9.92	21.73	46.00	-24.27	AVG	
5		2.3940	9.28	9.95	19.23	56.00	-36.77	QP	
6		2.3940	3.97	9.95	13.92	46.00	-32.08	AVG	
7		4.8420	5.07	10.02	15.09	56.00	-40.91	QP	
8		4.8420	-0.63	10.02	9.39	46.00	-36.61	AVG	
9		9.7739	7.60	10.21	17.81	60.00	-42.19	QP	
10		9.7739	-0.10	10.21	10.11	50.00	-39.89	AVG	
11		29.2380	13.12	10.49	23.61	60.00	-36.39	QP	!
12		29.2380	11.92	10.49	22.41	50.00	-27.59	AVG	!

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX]; [Line: Neutral]; [Power:AC120V/60Hz]

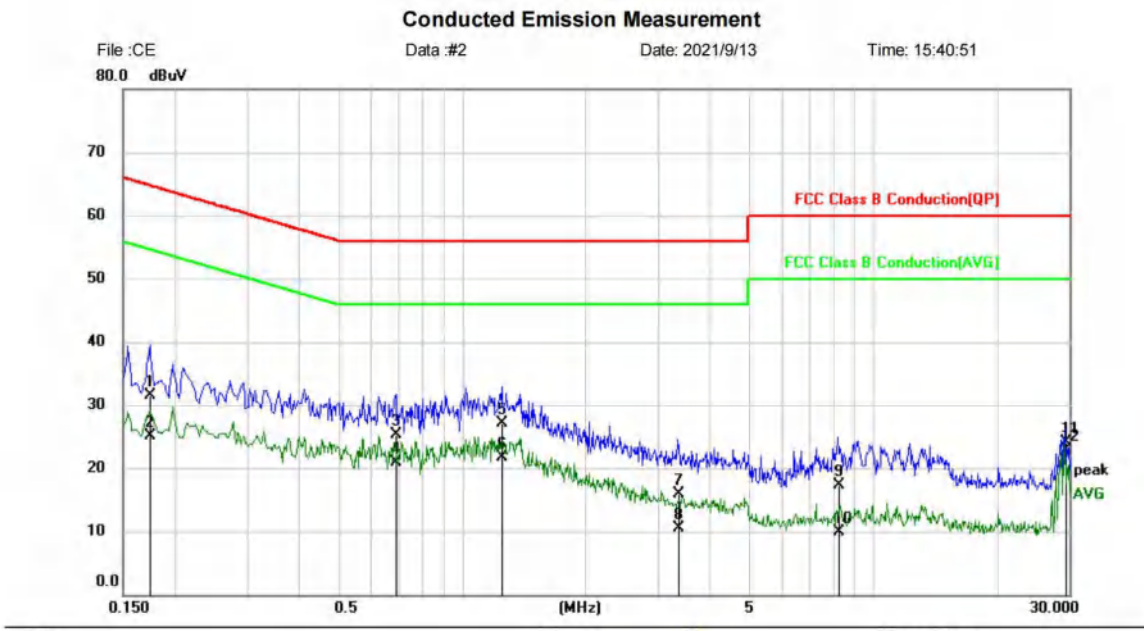

File :CE Data :#2 Date: 2021/9/13 Time: 15:40:51

Site Phase: **N** Temperature:   
Limit: FCC Class B Conduction(QP) Power: Humidity: %  
EUT: Bluetooth module 5.2  
M/N: PTR5620+ANK  
Mode: TX mode  
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1740	21.74	9.74	31.48	64.77	-33.29	QP	
2		0.1740	15.31	9.74	25.05	54.77	-29.72	AVG	
3		0.6900	15.52	9.82	25.34	56.00	-30.66	QP	
4		0.6900	10.99	9.82	20.81	46.00	-25.19	AVG	
5		1.2540	17.17	9.85	27.02	56.00	-28.98	QP	
6	*	1.2540	11.81	9.85	21.66	46.00	-24.34	AVG	
7		3.3460	5.94	9.90	15.84	56.00	-40.16	QP	
8		3.3460	0.65	9.90	10.55	46.00	-35.45	AVG	
9		8.2140	7.24	10.06	17.30	60.00	-42.70	QP	
10		8.2140	-0.17	10.06	9.89	50.00	-40.11	AVG	
11		29.2380	13.58	10.48	24.06	60.00	-35.94	QP	
12		29.2380	12.42	10.48	22.90	50.00	-27.10	AVG	


\*:Maximum data x:Over limit !:over margin (Reference Only)

**Test Result: Pass**



BLE 2M

[TestMode: TX]; [Line: Line] ; [Power:AC120V/60Hz]

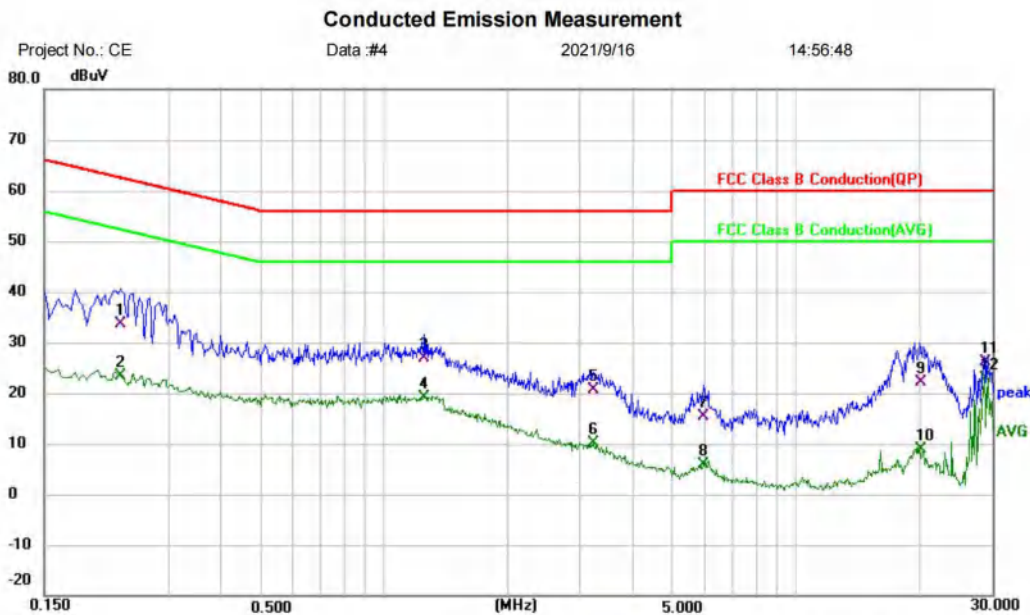

Site:      Phase: **L1**      Temperature: ( )

Limit: FCC Class B Conduction(QP)      Power:      Humidity: %RH

EUT: Bluetooth module 5.2

M/N: PTR5620+ANK

Mode: 2M TX mode

Note:


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2300	23.36	10.30	33.66	62.45	-28.79	QP	
2	0.2300	12.97	10.30	23.27	52.45	-29.18	AVG	
3	1.2579	16.99	9.93	26.92	56.00	-29.08	QP	
4 *	1.2579	9.21	9.93	19.14	46.00	-26.86	AVG	
5	3.2300	10.64	9.98	20.62	56.00	-35.38	QP	
6	3.2300	0.06	9.98	10.04	46.00	-35.96	AVG	
7	5.9899	5.35	10.05	15.40	60.00	-44.60	QP	
8	5.9899	-4.26	10.05	5.79	50.00	-44.21	AVG	
9	20.0140	11.72	10.43	22.15	60.00	-37.85	QP	
10	20.0140	-1.45	10.43	8.98	50.00	-41.02	AVG	
11	28.6860	15.56	10.49	26.05	60.00	-33.95	QP	
12	28.6860	12.39	10.49	22.88	50.00	-27.12	AVG	

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

**Test Result: Pass**

[TestMode: TX]; [Line: Nutral] ; [Power:AC120V/60Hz]

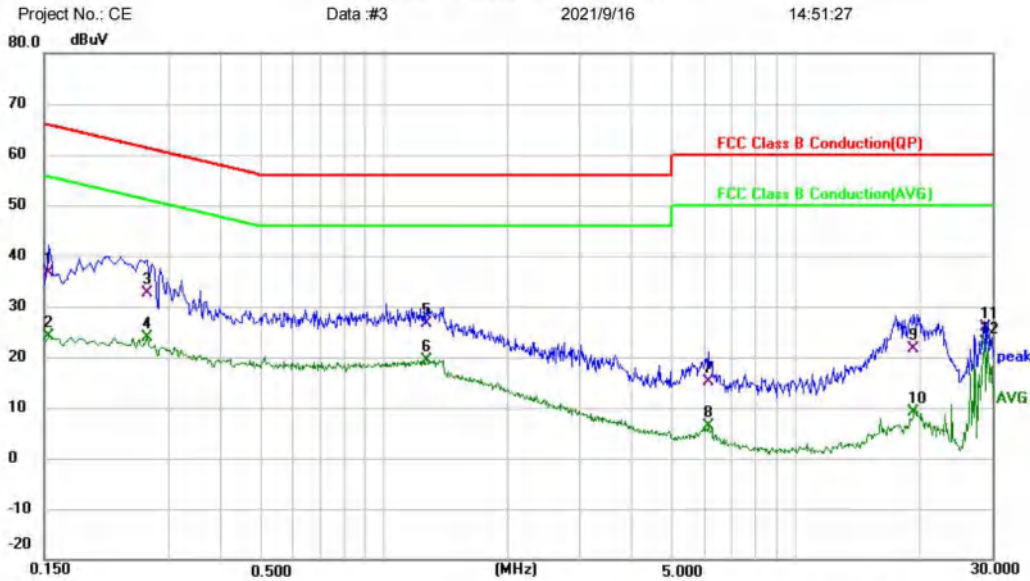**Conducted Emission Measurement**


Project No.: CE      Data: #3      2021/9/16      14:51:27  
 Site      Phase: **N**      Temperature: ( )  
 Limit: FCC Class B Conduction(QP)      Power:      Humidity: %RH  
 EUT: Bluetooth module 5.2  
 M/N: PTR5620+ANK  
 Mode: 2M TX mode  
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1539	26.70	10.03	36.73	65.79	-29.06	QP	
2	0.1539	14.13	10.03	24.16	55.79	-31.63	AVG	
3	0.2660	22.25	10.30	32.55	61.24	-28.69	QP	
4	0.2660	13.58	10.30	23.88	51.24	-27.36	AVG	
5	1.2700	16.88	9.85	26.73	56.00	-29.27	QP	
6 *	1.2700	9.61	9.85	19.46	46.00	-26.54	AVG	
7	6.1460	5.13	9.99	15.12	60.00	-44.88	QP	
8	6.1460	-3.54	9.99	6.45	50.00	-43.55	AVG	
9	19.3460	11.30	10.41	21.71	60.00	-38.29	QP	
10	19.3460	-1.19	10.41	9.22	50.00	-40.78	AVG	
11	28.6860	15.43	10.48	25.91	60.00	-34.09	QP	
12	28.6860	12.32	10.48	22.80	50.00	-27.20	AVG	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**


## 11 CONDUCTED BAND EDGES MEASUREMENT

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Sven
<b>Temperature</b>	25°C
<b>Humidity</b>	52%

### 11.1 LIMITS

<b>Limit:</b>	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

### 11.2 BLOCK DIAGRAM OF TEST SETUP

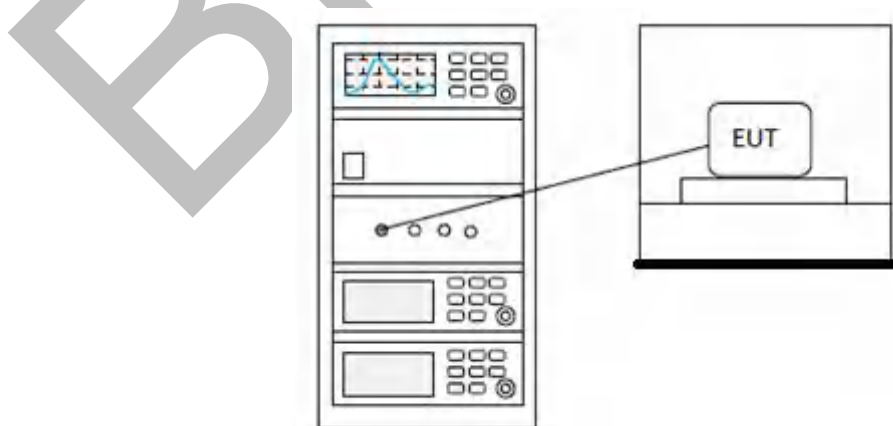

### 11.3 TEST DATA

**Pass: Please Refer To Appendix: For Details**

BlueAsia


## 12 CONDUCTED SPURIOUS EMISSIONS

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Sven
<b>Temperature</b>	25°C
<b>Humidity</b>	52%

### 12.1 LIMITS

<b>Limit:</b>	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

### 12.2 BLOCK DIAGRAM OF TEST SETUP

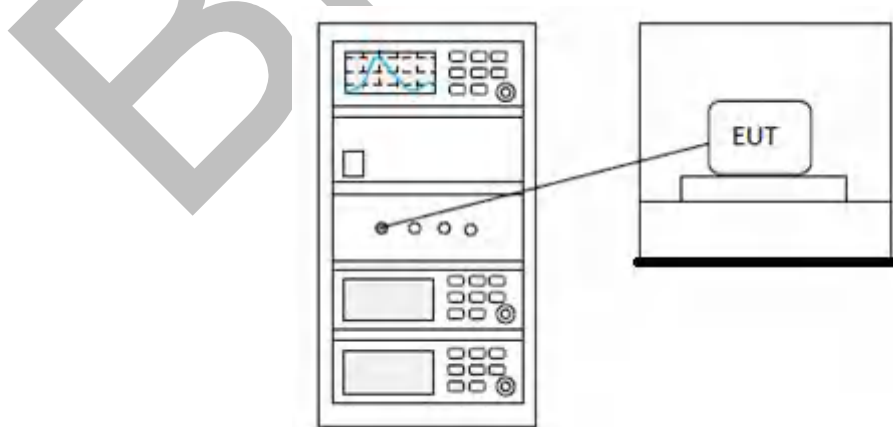

### 12.3 TEST DATA

**Pass: Please Refer To Appendix: For Details**

BlueAsia


### 13 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

#### 13.1 LIMITS

**Limit:**  $\leq 8\text{dBm}$  in any 3 kHz band during any time interval of continuous transmission

#### 13.2 BLOCK DIAGRAM OF TEST SETUP

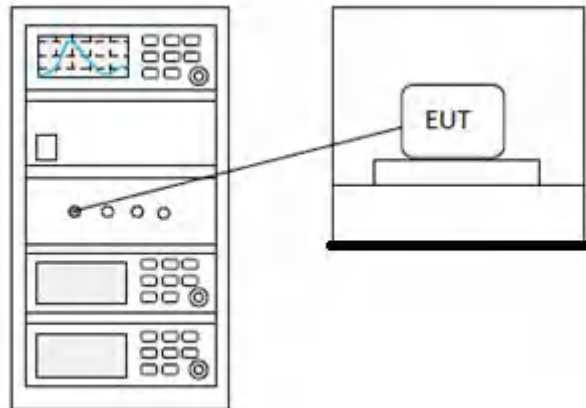

#### 13.3 TEST DATA

**Pass: Please Refer To Appendix: For Details**


## 14 CONDUCTED PEAK OUTPUT POWER

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Sven
<b>Temperature</b>	25°C
<b>Humidity</b>	52%

### 14.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 14.2 BLOCK DIAGRAM OF TEST SETUP

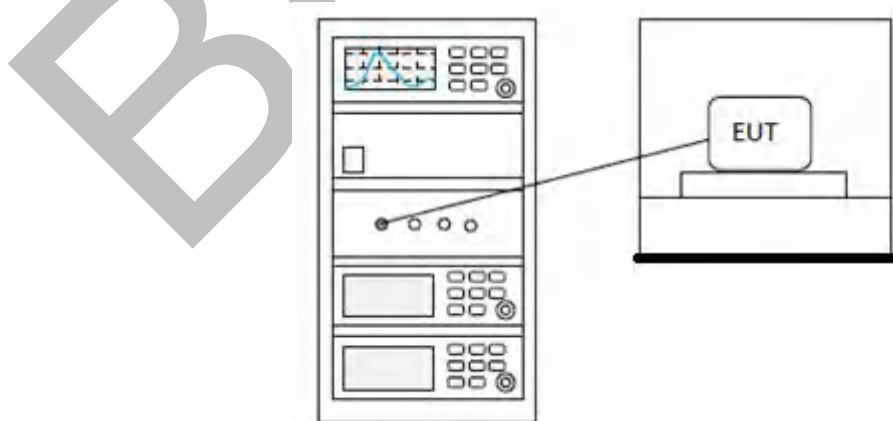



### 14.3 TEST DATA

**Pass: Please Refer To Appendix: For Details**

BlueAsia


## 15 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

### 15.1 LIMITS

Limit:	$\geq 500$ kHz
--------	----------------

### 15.2 BLOCK DIAGRAM OF TEST SETUP

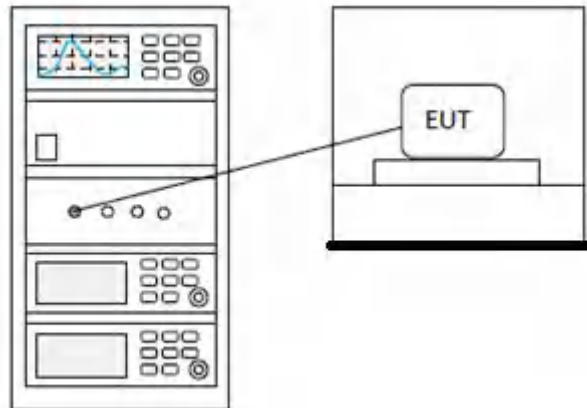

### 15.3 TEST DATA

**Pass: Please Refer To Appendix: For Details**

## 16 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


### 16.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB board and no consideration of replacement. The best case gain of the antenna is 2.0 dBi.

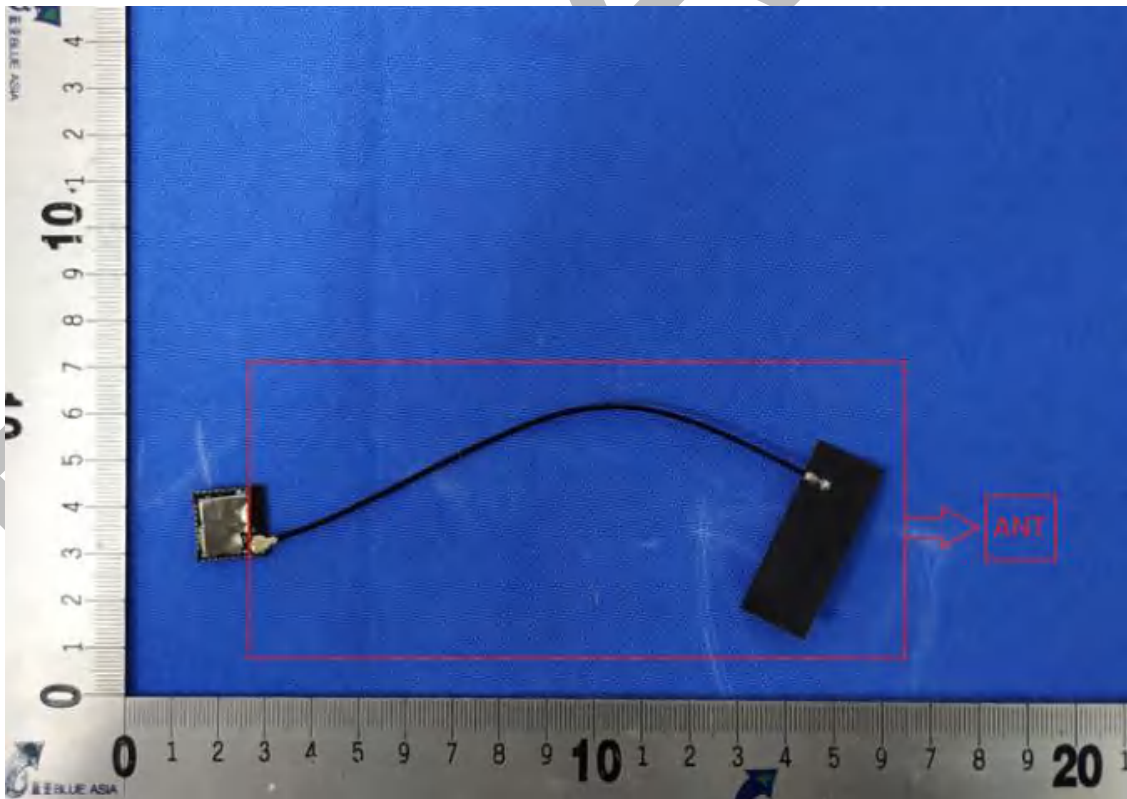

## 17 RADIATED SPURIOUS EMISSIONS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.4,6.5,6.6
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Sven
<b>Temperature</b>	25°C
<b>Humidity</b>	52%

### 17.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 17.2 BLOCK DIAGRAM OF TEST SETUP

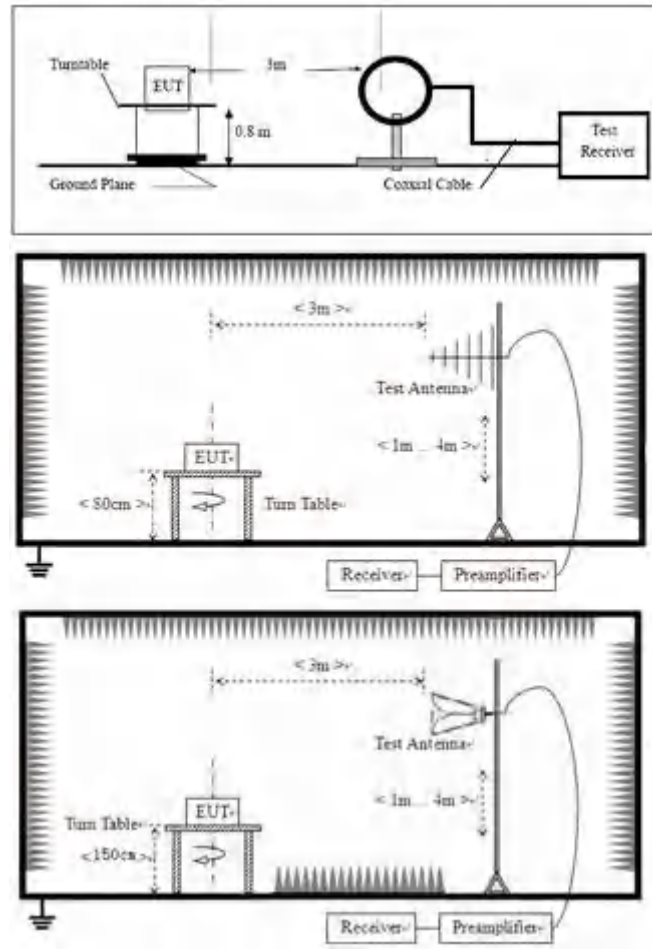

## 17.3 PROCEDURE

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

### 17.4 TEST DATA

BLE 1M

[TestMode: TX]; [Polarity: Horizontal]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202108-A98
EUT: Bluetooth module5.2	Test Engineer: York
M/N: PTR5620+-ANK	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2021-09-09 13:56:28

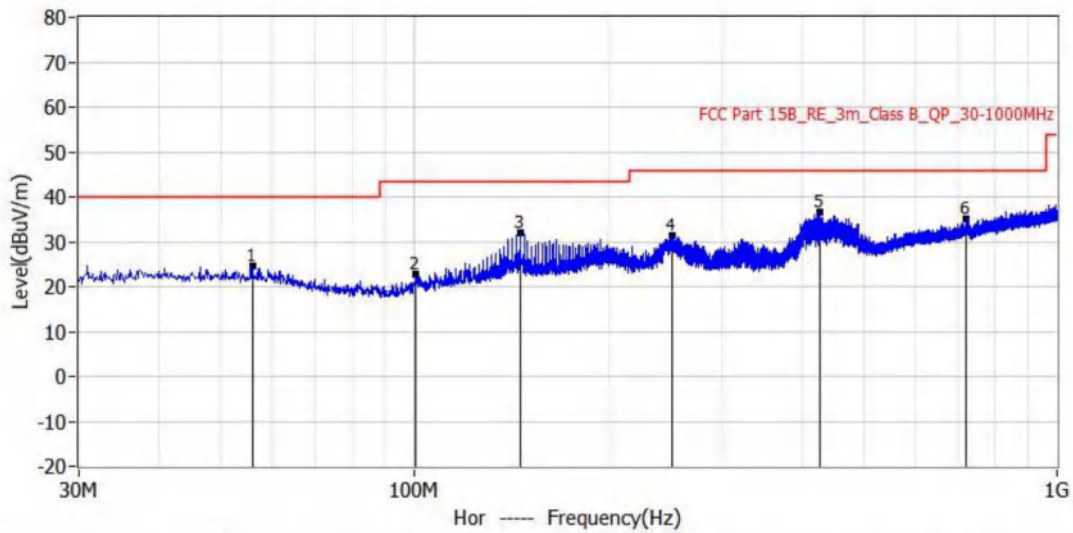


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	55.826MHz	40.0	24.6	-15.4	1.0	23.6	QP	Hor	100.0	0.0
2*	100.204MHz	43.5	22.7	-20.8	2.1	20.6	QP	Hor	100.0	0.0
3*	145.915MHz	43.5	32.1	-11.4	8.5	23.6	QP	Hor	100.0	23.0
4*	251.645MHz	46.0	31.5	-14.5	8.8	22.7	QP	Hor	100.0	283.0
5*	426.366MHz	46.0	36.5	-9.5	8.9	27.6	QP	Hor	100.0	152.0
6*	721.731MHz	46.0	35.1	-10.9	2.7	32.4	QP	Hor	100.0	0.0

**Test Result: Pass**

[TestMode: TX]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202108-A98
EUT: Bluetooth module5.2	Test Engineer: York
M/N: PTR5620+-ANK	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2021-09-09 13:58:12

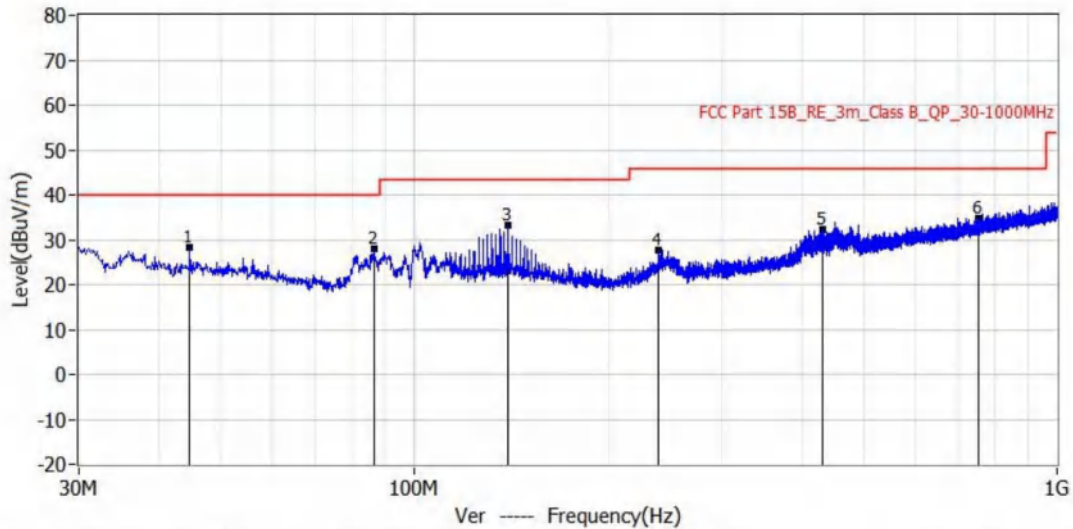


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	44.671MHz	40.0	28.3	-11.7	4.3	24.0	QP	Ver	100.0	332.0
2*	86.503MHz	40.0	27.9	-12.1	8.4	19.5	QP	Ver	100.0	147.0
3*	139.853MHz	43.5	33.3	-10.2	9.6	23.7	QP	Ver	100.0	307.0
4*	240.005MHz	46.0	27.8	-18.2	5.0	22.8	QP	Ver	100.0	357.0
5*	431.580MHz	46.0	32.4	-13.6	4.8	27.6	QP	Ver	100.0	48.0
6*	753.256MHz	46.0	34.8	-11.2	1.7	33.1	QP	Ver	100.0	113.0

**Test Result: Pass**



[TestMode: TX Low channel]; [Polarity: Horizontal]

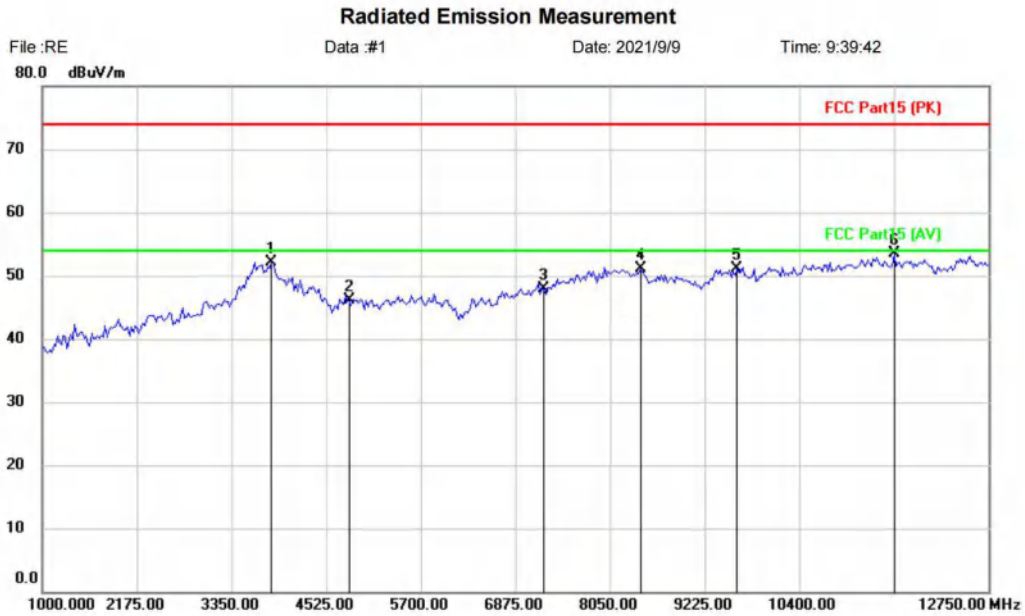

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3843.500	45.01	7.12	52.13	74.00	-21.87	peak		
2		4804.000	42.45	3.71	46.16	74.00	-27.84	peak		
3		7206.000	42.01	5.96	47.97	74.00	-26.03	peak		
4		8426.000	42.93	8.24	51.17	74.00	-22.83	peak		
5		9608.000	41.82	9.29	51.11	74.00	-22.89	peak		
6	*	11575.000	41.50	12.02	53.52	74.00	-20.48	peak		

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX Low channel]; [Polarity: Vertical]

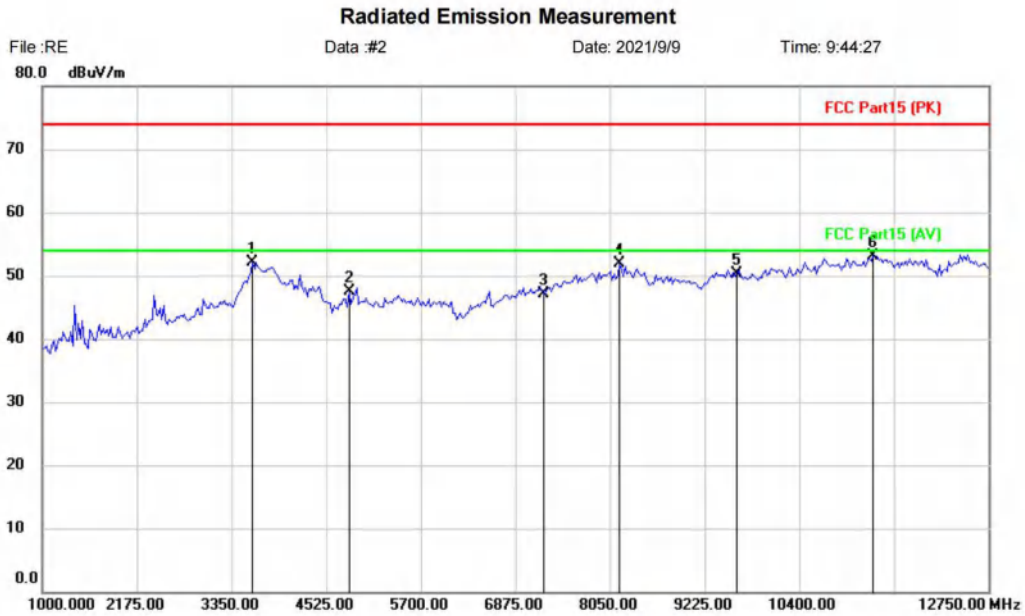

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3608.500	44.25	7.80	52.05	74.00	-21.95	peak		
2		4804.000	43.83	3.71	47.54	74.00	-26.46	peak		
3		7206.000	41.23	5.96	47.19	74.00	-26.81	peak		
4		8167.500	43.64	8.17	51.81	74.00	-22.19	peak		
5		9608.000	40.99	9.29	50.28	74.00	-23.72	peak		
6	*	11316.500	41.19	11.88	53.07	74.00	-20.93	peak		

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX middle channel]; [Polarity: Horizontal]

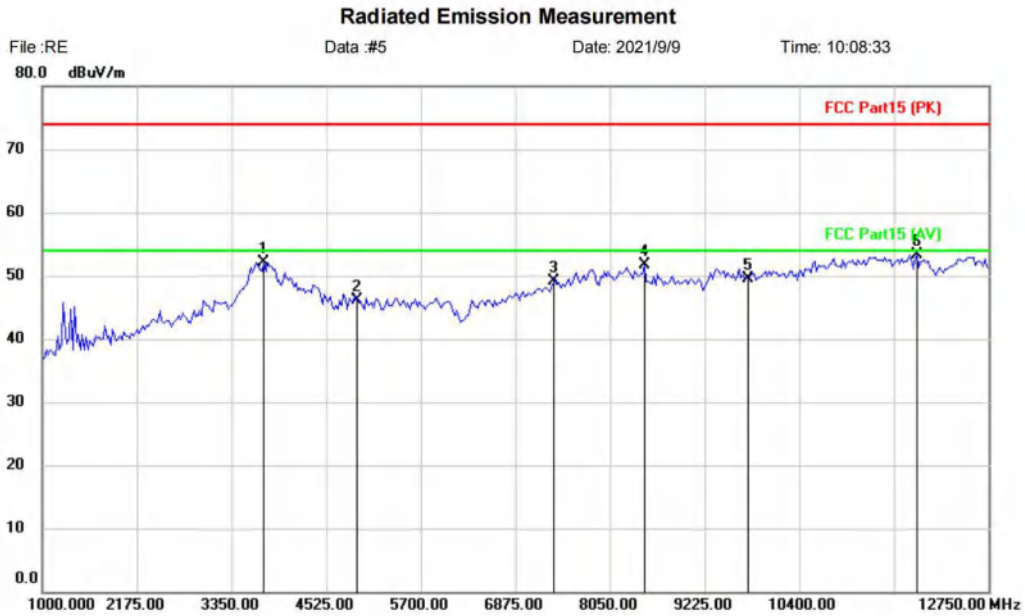

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-M		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3749.500	44.39	7.69	52.08	74.00	-21.92	peak		
2		4882.000	42.73	3.36	46.09	74.00	-27.91	peak		
3		7323.000	42.75	6.43	49.18	74.00	-24.82	peak		
4		8473.000	43.54	8.17	51.71	74.00	-22.29	peak		
5		9764.000	39.86	9.63	49.49	74.00	-24.51	peak		
6	*	11857.000	41.93	11.47	53.40	74.00	-20.60	peak		

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

**Test Result: Pass**

[TestMode: TX middle channel]; [Polarity: Vertical]

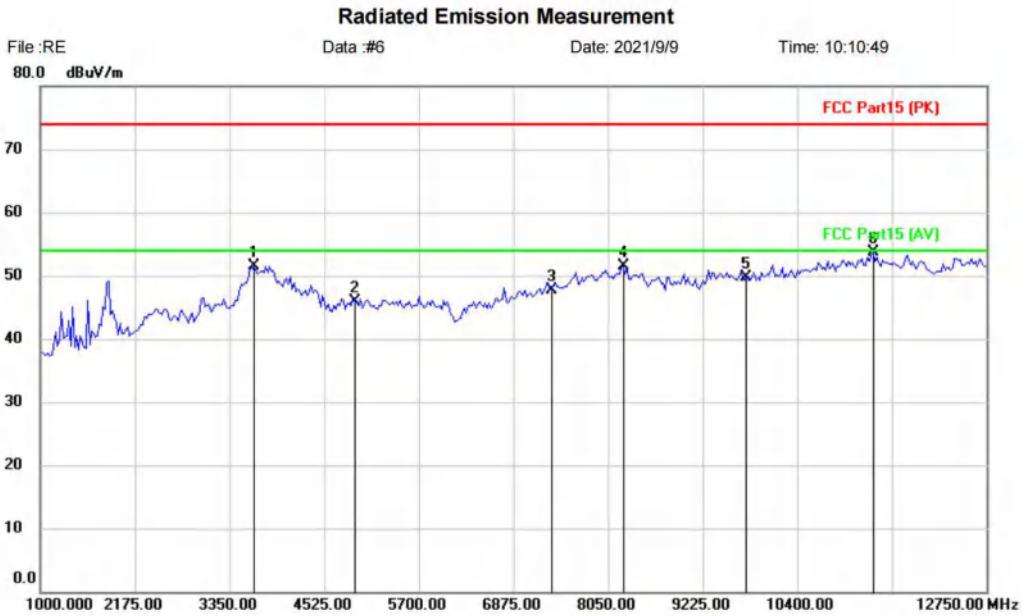

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-M		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3655.500	43.84	7.76	51.60	74.00	-22.40	peak		
2		4882.000	42.59	3.36	45.95	74.00	-28.05	peak		
3		7323.000	41.27	6.43	47.70	74.00	-26.30	peak		
4		8238.000	43.37	8.22	51.59	74.00	-22.41	peak		
5		9764.000	40.00	9.63	49.63	74.00	-24.37	peak		
6	*	11340.000	41.79	11.85	53.64	74.00	-20.36	peak		

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Horizontal]

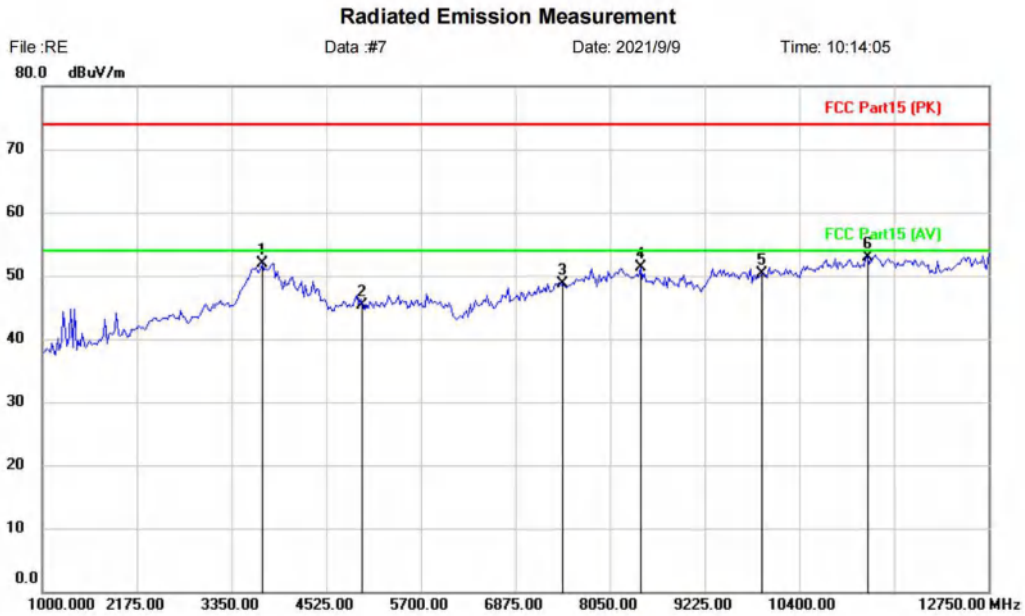

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3726.000	44.25	7.70	51.95	74.00	-22.05	peak		
2		4960.000	41.51	3.75	45.26	74.00	-28.74	peak		
3		7440.000	41.76	6.86	48.62	74.00	-25.38	peak		
4		8426.000	42.99	8.24	51.23	74.00	-22.77	peak		
5		9920.000	40.20	10.16	50.36	74.00	-23.64	peak		
6	*	11246.000	40.94	11.98	52.92	74.00	-21.08	peak		

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Vertical]

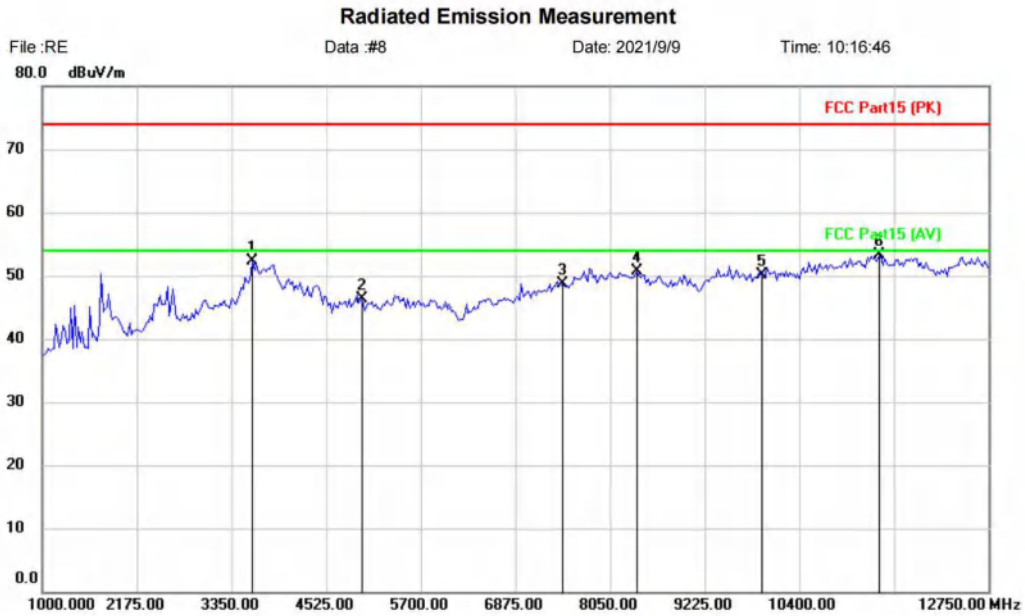

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3608.500	44.56	7.80	52.36	74.00	-21.64	peak		
2		4960.000	42.50	3.75	46.25	74.00	-27.75	peak		
3		7440.000	41.87	6.86	48.73	74.00	-25.27	peak		
4		8379.000	42.52	8.27	50.79	74.00	-23.21	peak		
5		9920.000	39.90	10.16	50.06	74.00	-23.94	peak		
6	*	11387.000	41.56	11.78	53.34	74.00	-20.66	peak		

\*:Maximum data    x:Over limit    !:over margin


<Reference Only

**Test Result: Pass**

**BLE 2M**

[TestMode: TX]; [Polarity: Horizontal]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202108-A98
EUT: Bluetooth module5.2	Test Engineer: York
M/N: PTR5620+-ANK	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2021-09-15 10:34:59

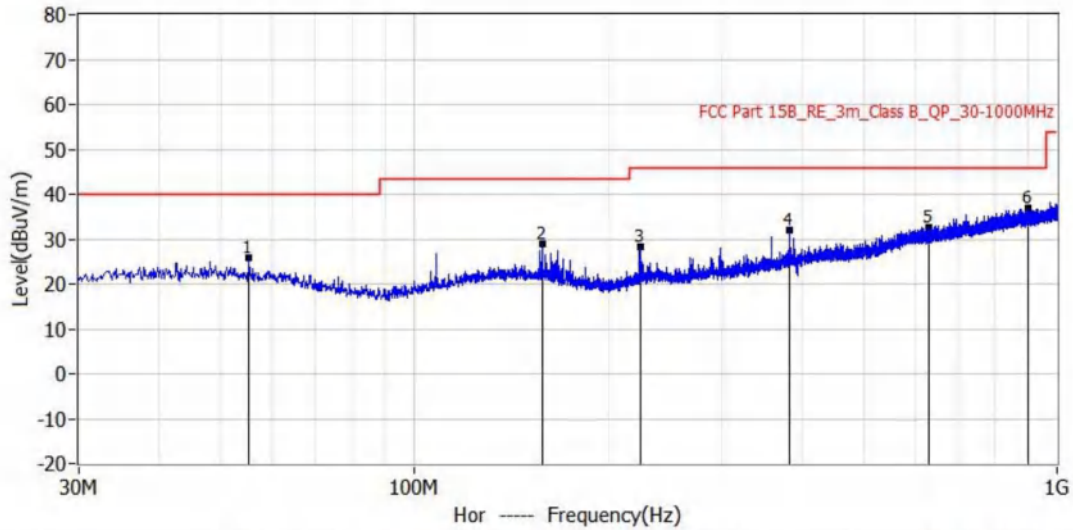


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	55.220MHz	40.0	25.9	-14.1	2.3	23.6	QP	Hor	100.0	182.0
2*	158.040MHz	43.5	29.0	-14.5	5.7	23.3	QP	Hor	100.0	0.0
3*	224.606MHz	46.0	28.2	-17.8	6.2	22.0	QP	Hor	100.0	309.0
4*	382.959MHz	46.0	31.9	-14.1	5.2	26.7	QP	Hor	100.0	331.0
5*	630.066MHz	46.0	32.7	-13.3	1.2	31.5	QP	Hor	100.0	56.0
6*	903.364MHz	46.0	36.8	-9.2	1.8	35.0	QP	Hor	100.0	279.0

**Test Result: Pass**

[TestMode: TX]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202108-A98
EUT: Bluetooth module5.2	Test Engineer: York
M/N: PTR5620+-ANK	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2021-09-15 10:32:25

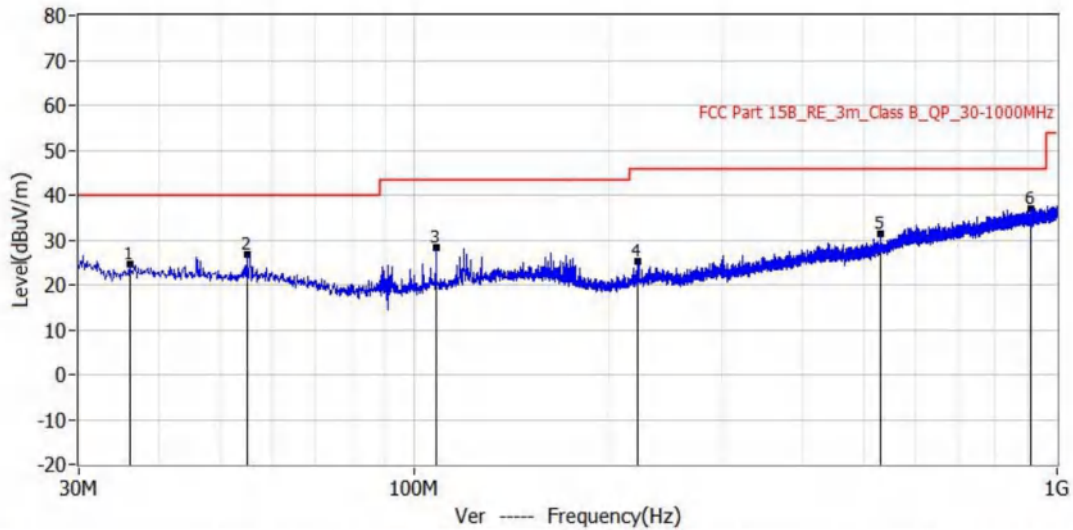


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	35.941MHz	40.0	24.7	-15.3	1.0	23.7	QP	Ver	100.0	0.0
2*	54.735MHz	40.0	26.7	-13.3	3.0	23.7	QP	Ver	100.0	267.0
3*	107.964MHz	43.5	28.2	-15.3	6.7	21.5	QP	Ver	100.0	229.0
4*	222.424MHz	46.0	25.3	-20.7	3.4	21.9	QP	Ver	100.0	330.0
5*	531.248MHz	46.0	31.5	-14.5	2.2	29.3	QP	Ver	100.0	5.0
6*	908.456MHz	46.0	37.0	-9.0	1.9	35.1	QP	Ver	100.0	154.0

**Test Result: Pass**



[TestMode: TX Low channel]; [Polarity: Horizontal]

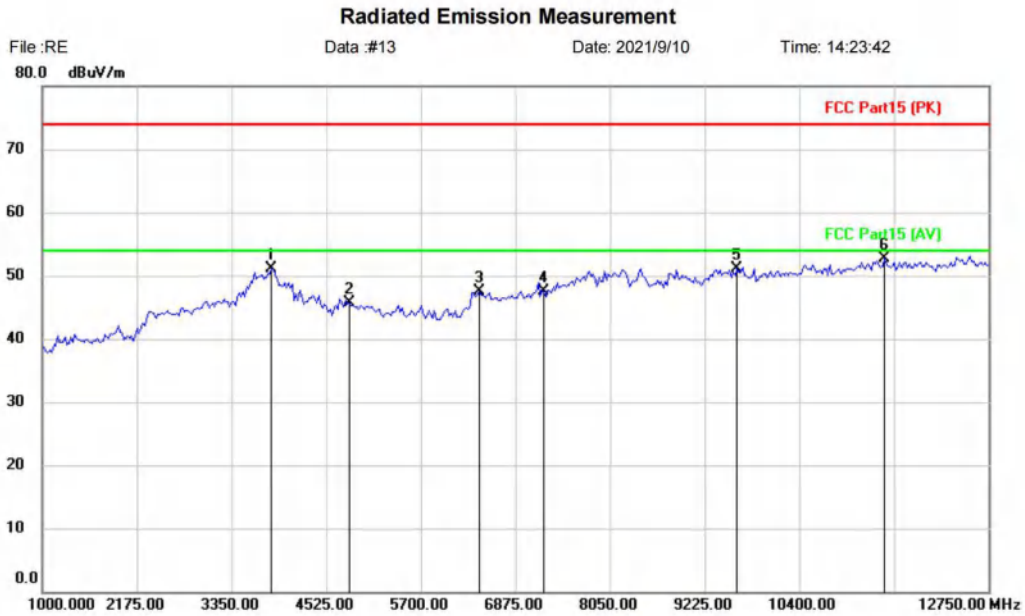

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3843.500	44.01	7.12	51.13	74.00	-22.87	peak		
2		4804.000	41.95	3.71	45.66	74.00	-28.34	peak		
3		6428.500	43.46	3.95	47.41	74.00	-26.59	peak		
4		7206.000	41.51	5.96	47.47	74.00	-26.53	peak		
5		9608.000	41.82	9.29	51.11	74.00	-22.89	peak		
6	*	11457.500	40.86	11.84	52.70	74.00	-21.30	peak		

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX Low channel]; [Polarity: Vertical]

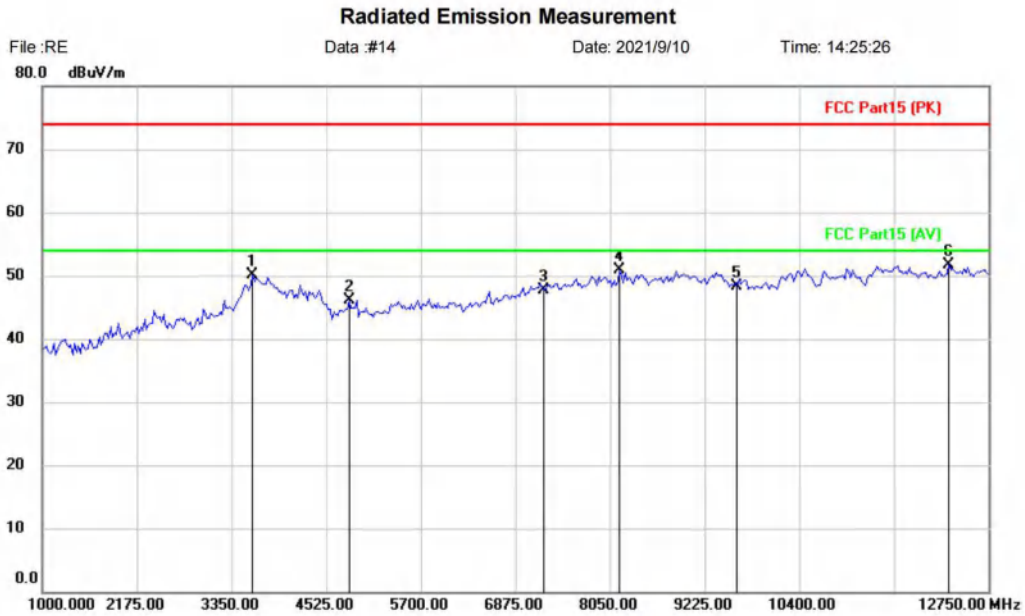

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3608.500	42.26	7.79	50.05	74.00	-23.95	peak		
2		4804.000	42.33	3.71	46.04	74.00	-27.96	peak		
3		7206.000	41.73	5.96	47.69	74.00	-26.31	peak		
4		8167.500	42.64	8.17	50.81	74.00	-23.19	peak		
5		9608.000	38.99	9.29	48.28	74.00	-25.72	peak		
6	*	12256.500	40.37	11.43	51.80	74.00	-22.20	peak		

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

**Test Result: Pass**

[TestMode: TX middle channel]; [Polarity: Horizontal]

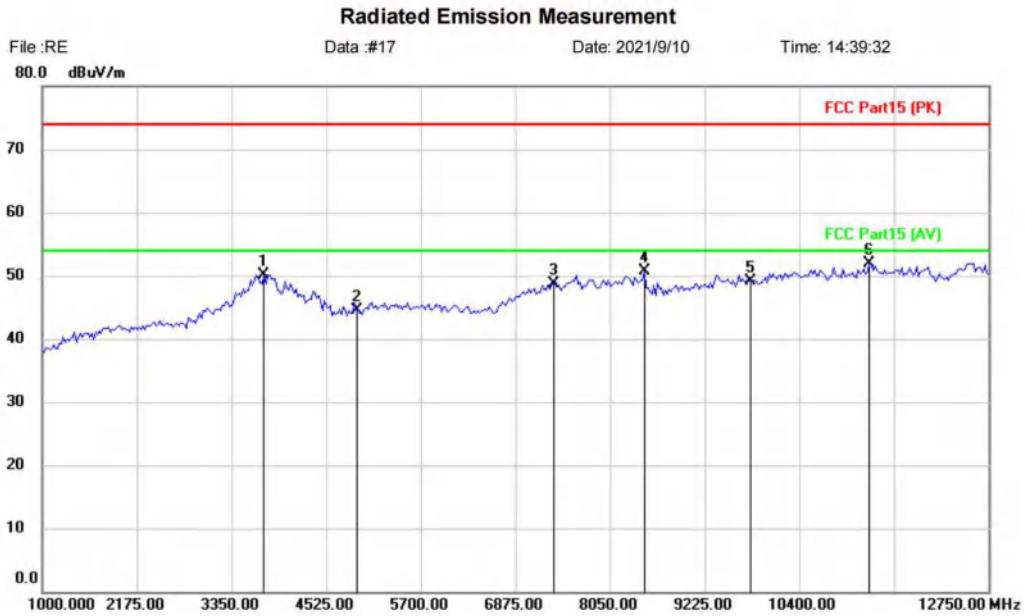

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-M		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3749.500	42.39	7.69	50.08	74.00	-23.92	peak		
2		4884.000	41.25	3.34	44.59	74.00	-29.41	peak		
3		7326.000	42.24	6.44	48.68	74.00	-25.32	peak		
4		8473.000	42.54	8.17	50.71	74.00	-23.29	peak		
5		9768.000	39.54	9.63	49.17	74.00	-24.83	peak		
6	*	11269.500	39.94	11.94	51.88	74.00	-22.12	peak		

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX middle channel]; [Polarity: Vertical]

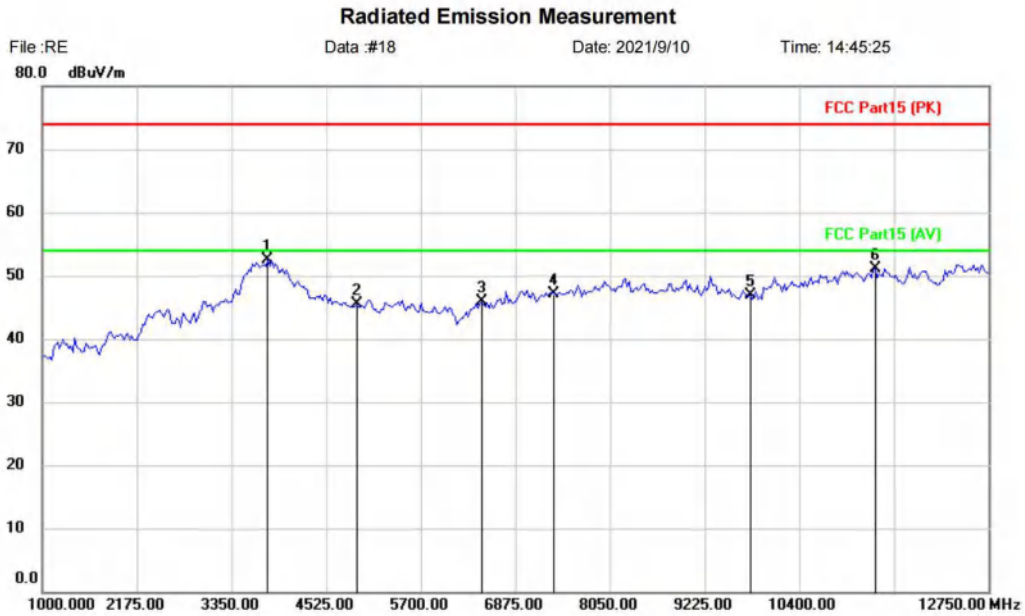

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-M		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	3796.500	44.92	7.65	52.57	74.00	-21.43	peak			
2		4884.000	42.11	3.34	45.45	74.00	-28.55	peak			
3		6452.000	41.90	4.02	45.92	74.00	-28.08	peak			
4		7326.000	40.76	6.44	47.20	74.00	-26.80	peak			
5		9768.000	37.36	9.63	46.99	74.00	-27.01	peak			
6		11340.000	39.29	11.85	51.14	74.00	-22.86	peak			

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Horizontal]

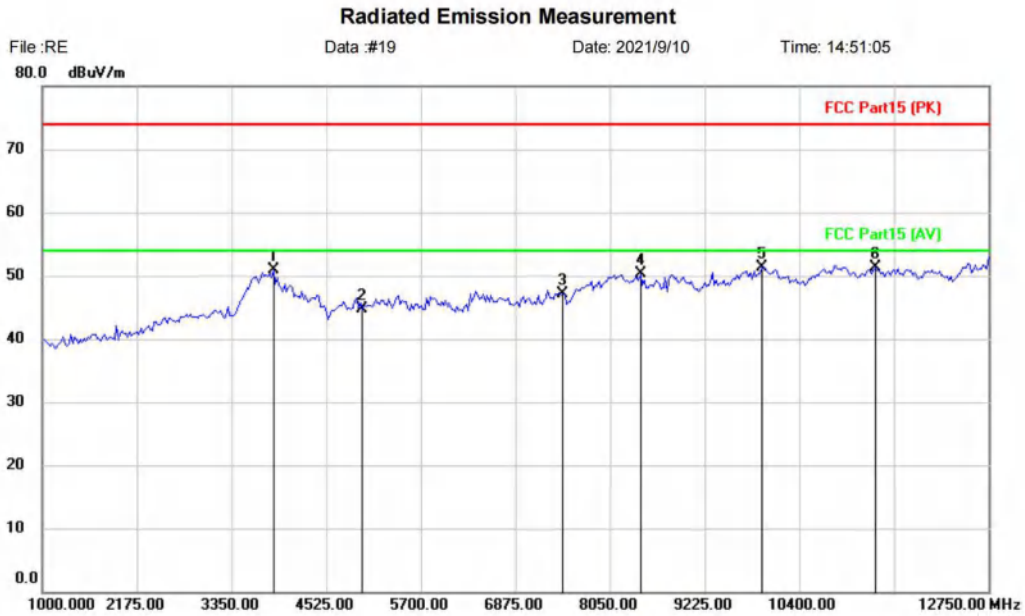

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3867.000	44.02	6.82	50.84	74.00	-23.16	peak		
2		4960.000	41.01	3.75	44.76	74.00	-29.24	peak		
3		7440.000	40.26	6.86	47.12	74.00	-26.88	peak		
4		8426.000	41.99	8.24	50.23	74.00	-23.77	peak		
5	*	9920.000	41.20	10.16	51.36	74.00	-22.64	peak		
6		11340.000	39.39	11.85	51.24	74.00	-22.76	peak		

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Vertical]

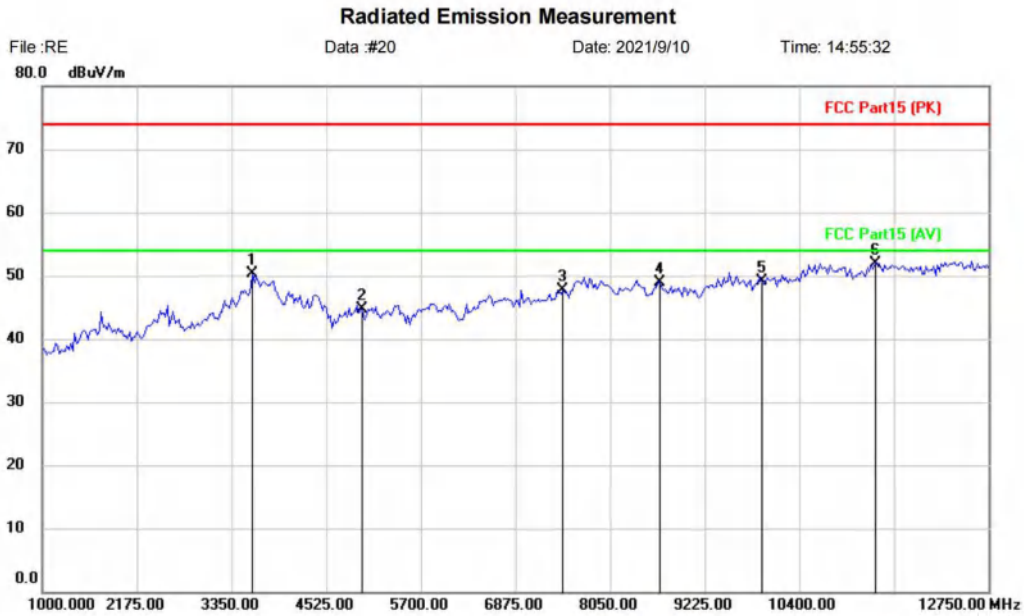

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		3608.500	42.57	7.79	50.36	74.00	-23.64	peak		
2		4960.000	41.00	3.75	44.75	74.00	-29.25	peak		
3		7440.000	40.87	6.86	47.73	74.00	-26.27	peak		
4		8661.000	41.05	7.91	48.96	74.00	-25.04	peak		
5		9920.000	38.90	10.16	49.06	74.00	-24.94	peak		
6	*	11340.000	40.15	11.85	52.00	74.00	-22.00	peak		

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

**Test Result: Pass**

## 18 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.10.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Sven
<b>Temperature</b>	25°C
<b>Humidity</b>	52%

### 18.1 LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

## 18.2 BLOCK DIAGRAM OF TEST SETUP

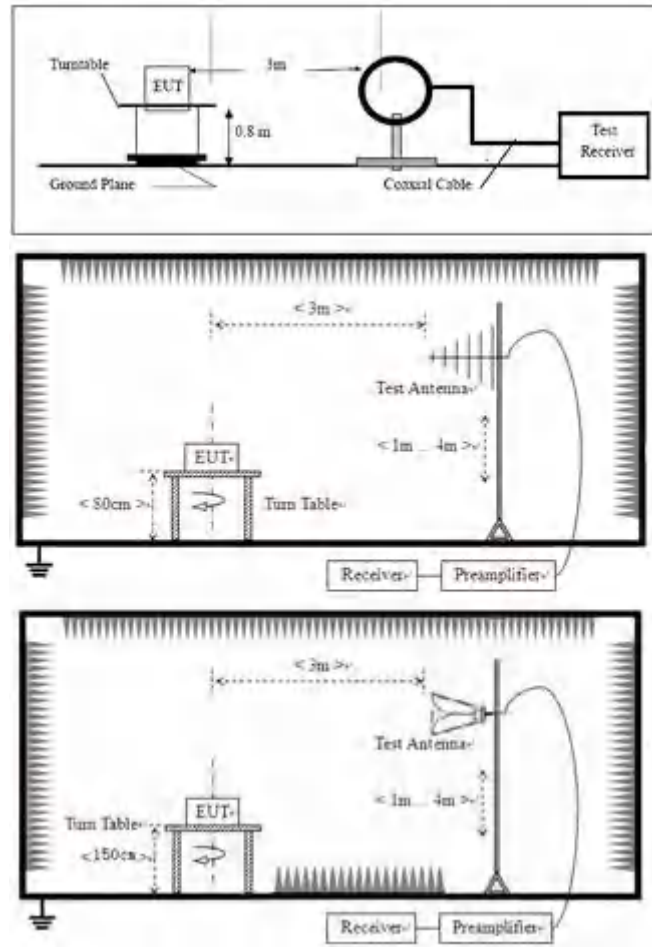

## 18.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.



- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1:  $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

### 18.4 TEST DATA

BLE 1M

[TestMode: TX Low channel]; [Polarity: Horizontal]

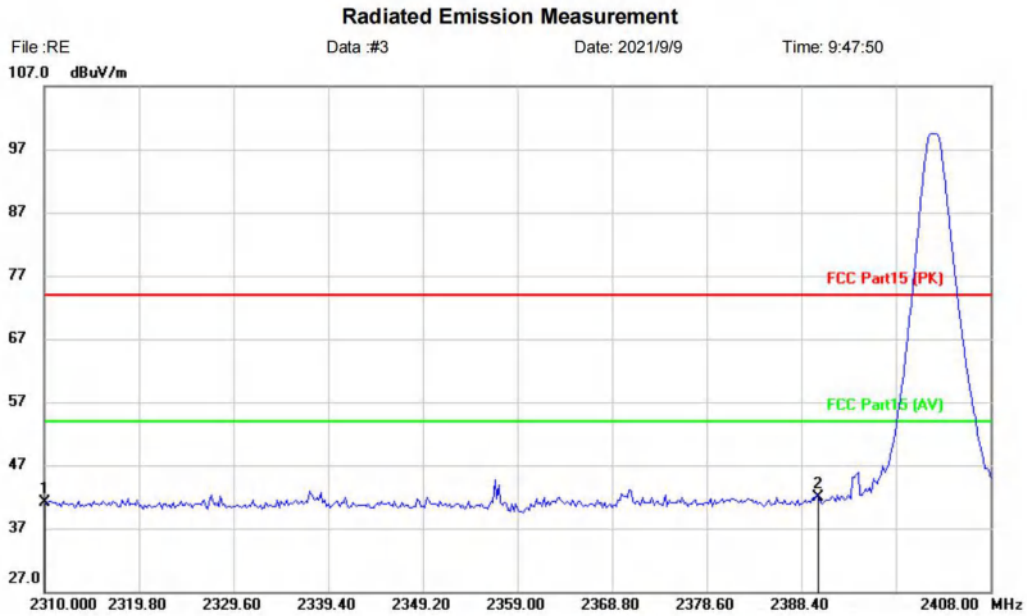

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.75	-4.61	41.14	74.00	-32.86	peak		
2	*	2390.000	46.17	-4.27	41.90	74.00	-32.10	peak		

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

**Test Result: Pass**

[TestMode: TX Low channel]; [Polarity: Vertical]

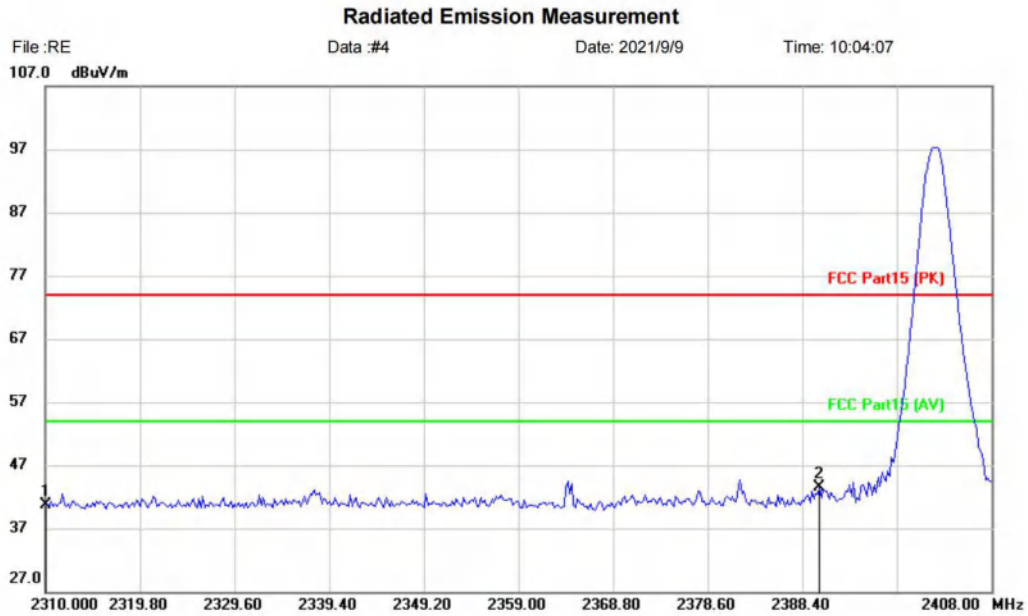

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.24	-4.61	40.63	74.00	-33.37	peak		
2	*	2390.000	47.78	-4.27	43.51	74.00	-30.49	peak		

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Horizontal]

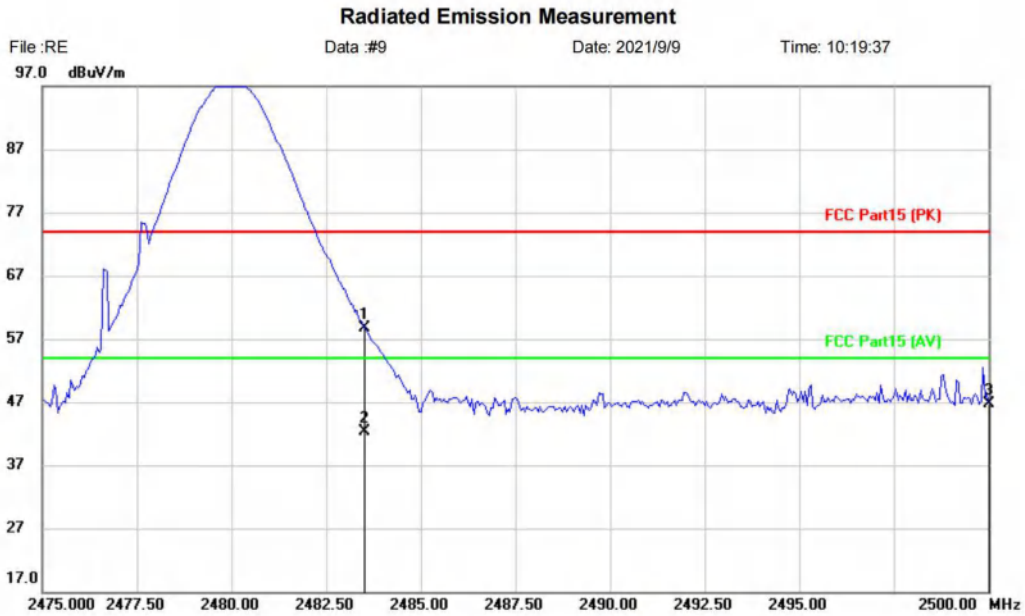

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	62.45	-3.84	58.61	74.00	-15.39	peak		
2	*	2483.500	46.05	-3.84	42.21	54.00	-11.79	AVG		
3		2500.000	50.48	-3.78	46.70	74.00	-27.30	peak		

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Vertical]

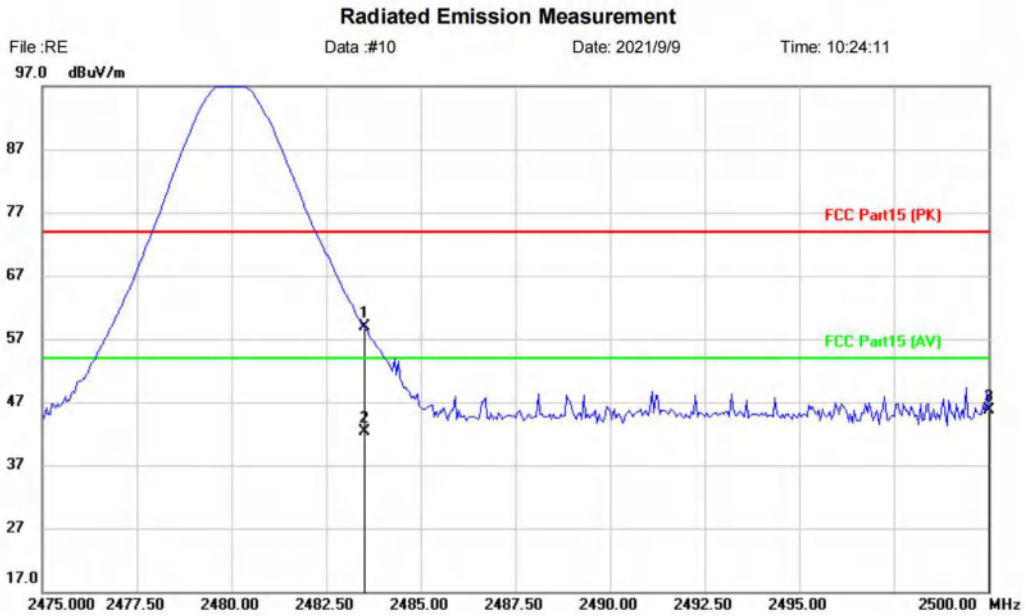

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	62.82	-3.84	58.98	74.00	-15.02	peak		
2	*	2483.500	46.14	-3.84	42.30	54.00	-11.70	AVG		
3		2500.000	49.51	-3.78	45.73	74.00	-28.27	peak		


\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

**Test Result: Pass**

BLE 2M

[TestMode: TX Low channel]; [Polarity: Horizontal]

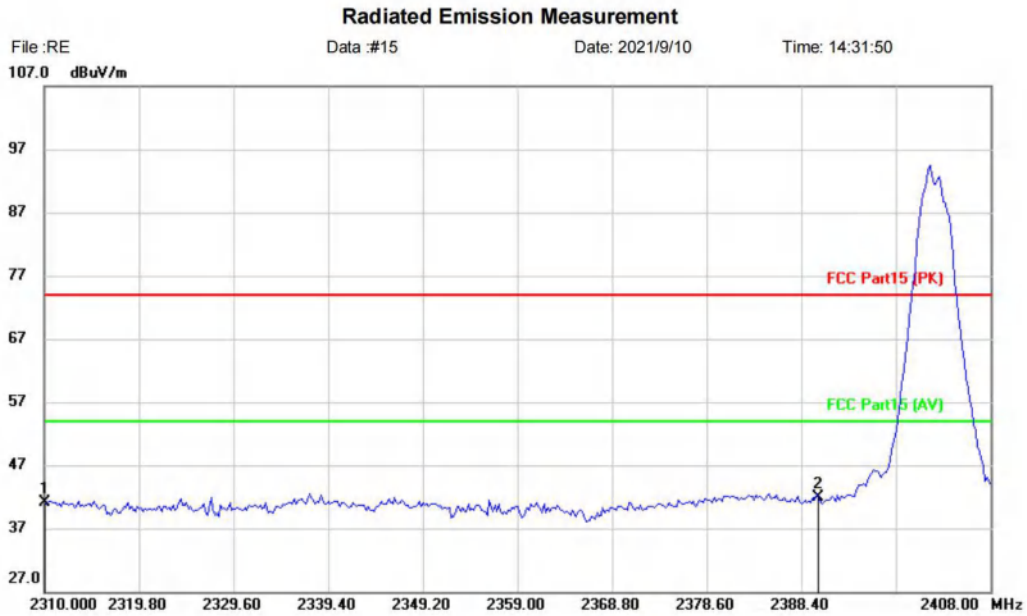

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.75	-4.61	41.14	74.00	-32.86	peak		
2	*	2390.000	46.17	-4.27	41.90	74.00	-32.10	peak		

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX Low channel]; [Polarity: Vertical]

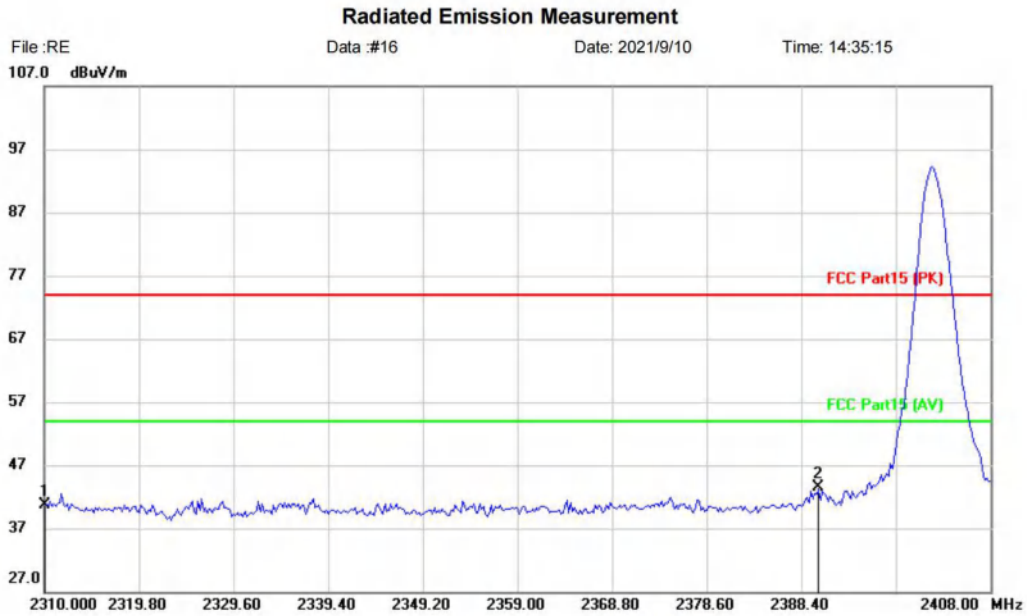

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	45.24	-4.61	40.63	74.00	-33.37	peak		
2	*	2390.000	47.78	-4.27	43.51	74.00	-30.49	peak		

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**

[TestMode: TX high channel]; [Polarity: Horizontal]

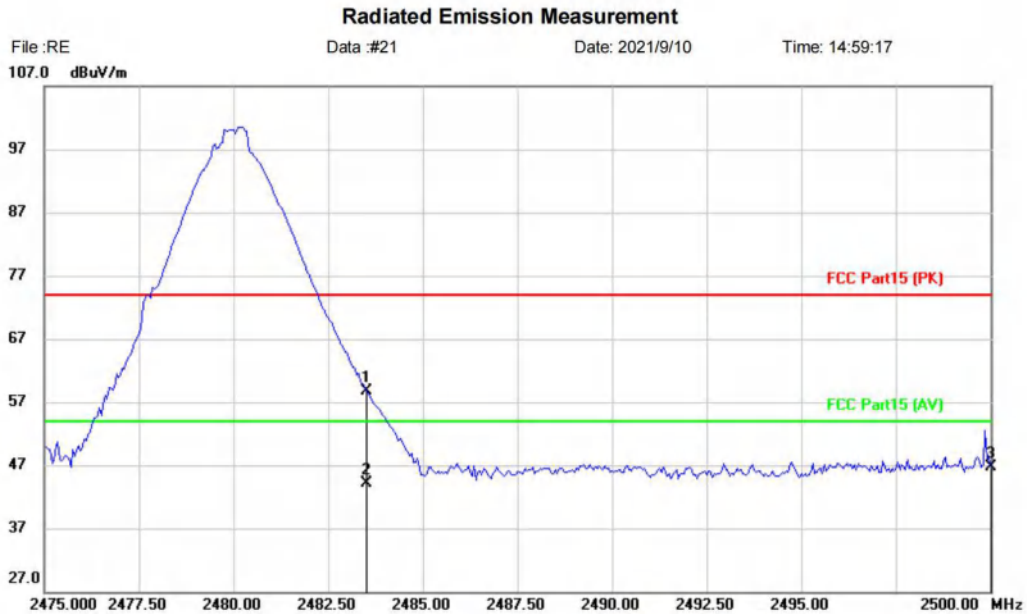

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	62.45	-3.84	58.61	74.00	-15.39	peak		
2	*	2483.500	48.02	-3.84	44.18	54.00	-9.82	AVG		
3		2500.000	50.48	-3.78	46.70	74.00	-27.30	peak		


\*:Maximum data    x:Over limit    !:over margin

<Reference Only

**Test Result: Pass**



[TestMode: TX high channel]; [Polarity: Vertical]

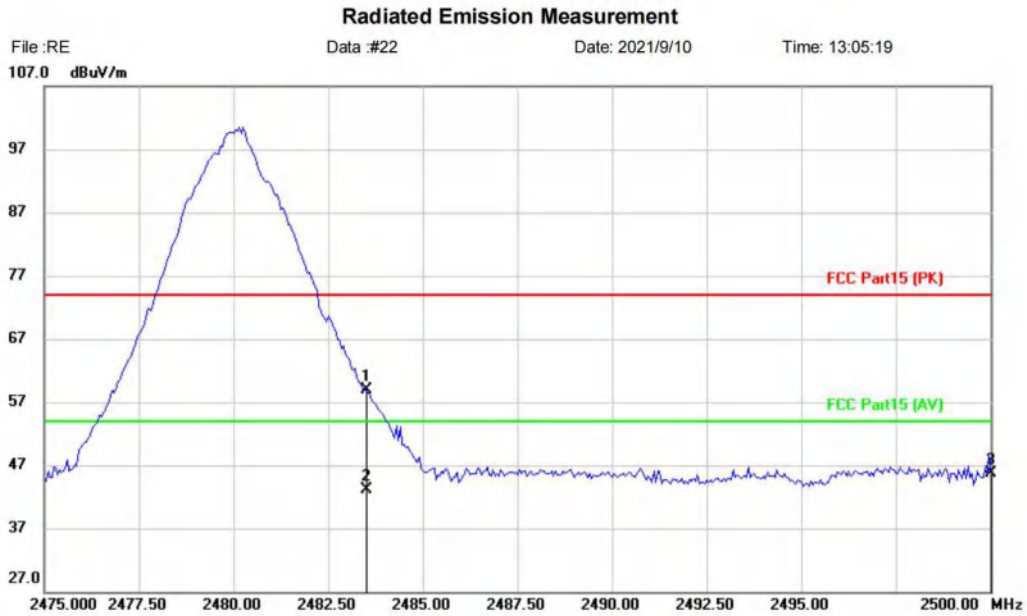

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Bluetooth module5.2	Distance:	
M/N: PTR5620+-ANK		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2483.500	62.82	-3.84	58.98	74.00	-15.02	peak	
2	*	2483.500	46.99	-3.84	43.15	54.00	-10.85	AVG	
3		2500.000	49.51	-3.78	45.73	74.00	-28.27	peak	

\*:Maximum data    x:Over limit    !:over margin

<Reference Only


**Test Result: Pass**

## 19 APPENDIX


### Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	2.834	2.834	30	Pass
NVNT	BLE 1M	2442	Ant1	2.423	2.423	30	Pass
NVNT	BLE 1M	2480	Ant1	1.585	1.585	30	Pass
NVNT	BLE 2M	2402	Ant1	2.842	2.842	30	Pass
NVNT	BLE 2M	2442	Ant1	2.449	2.449	30	Pass
NVNT	BLE 2M	2480	Ant1	1.607	1.607	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

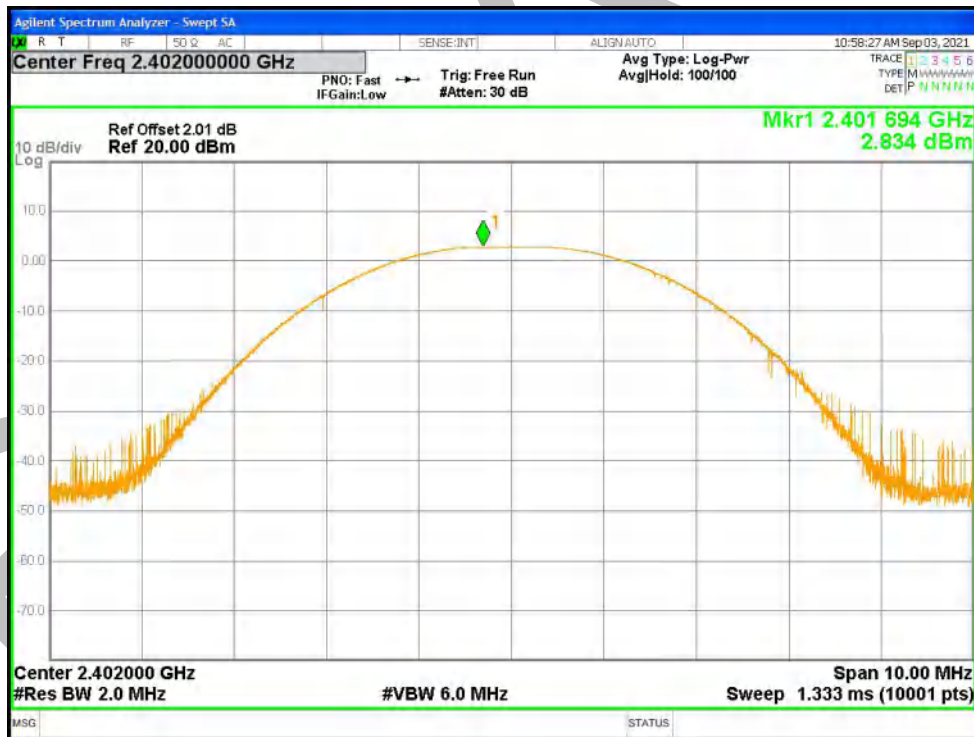


Power NVNT BLE 1M 2442MHz Ant1

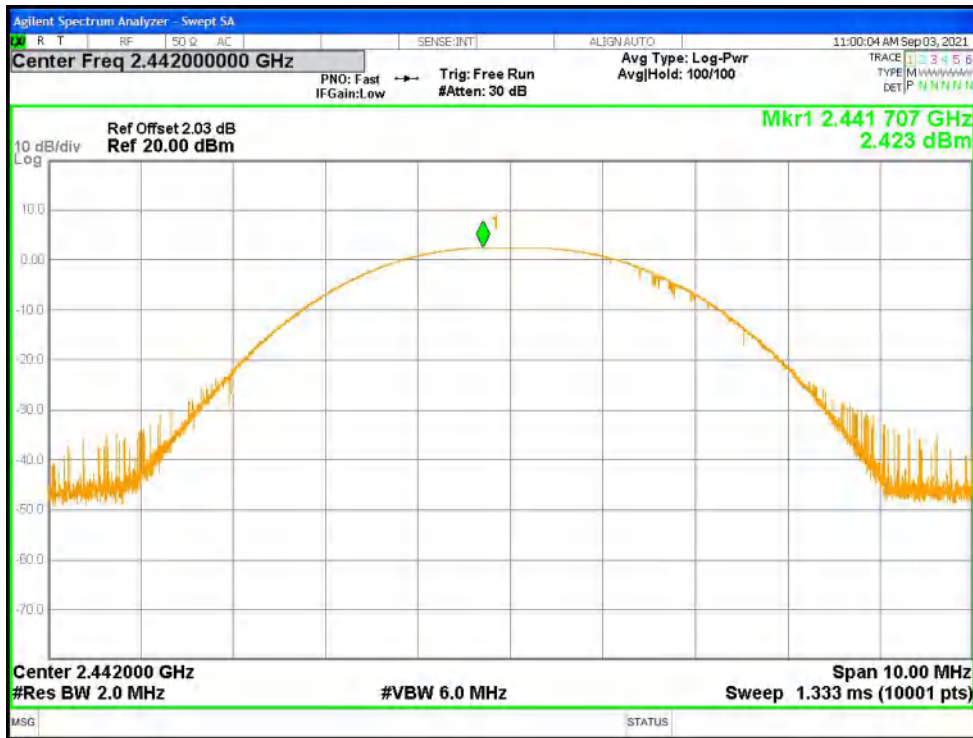


Power NVNT BLE 1M 2480MHz Ant1

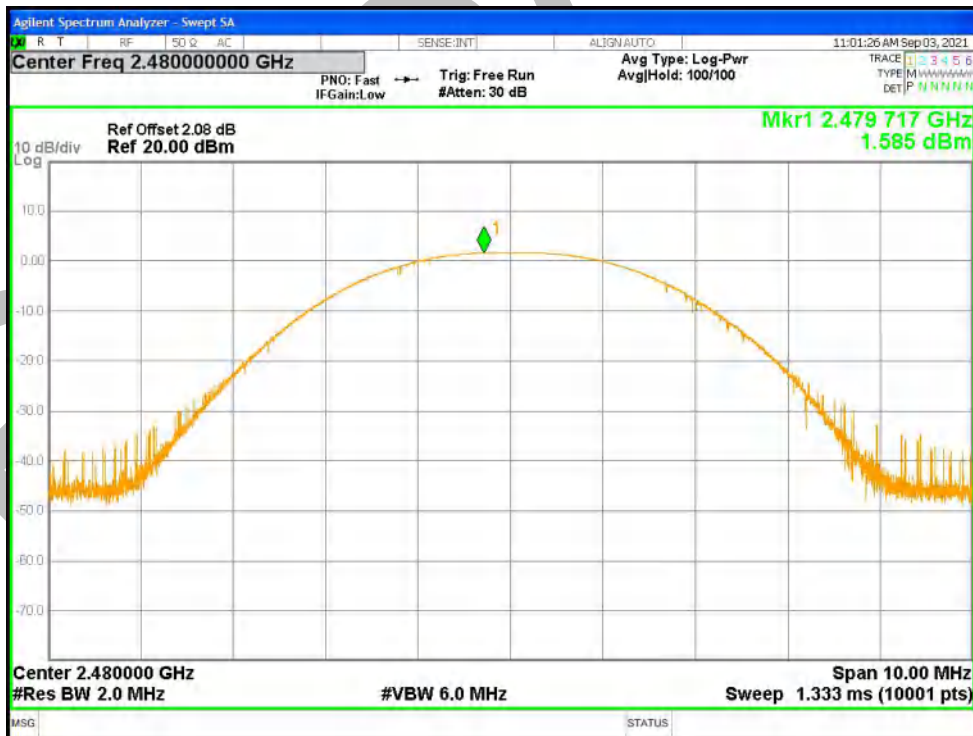


Power NVNT BLE 2M 2402MHz Ant1

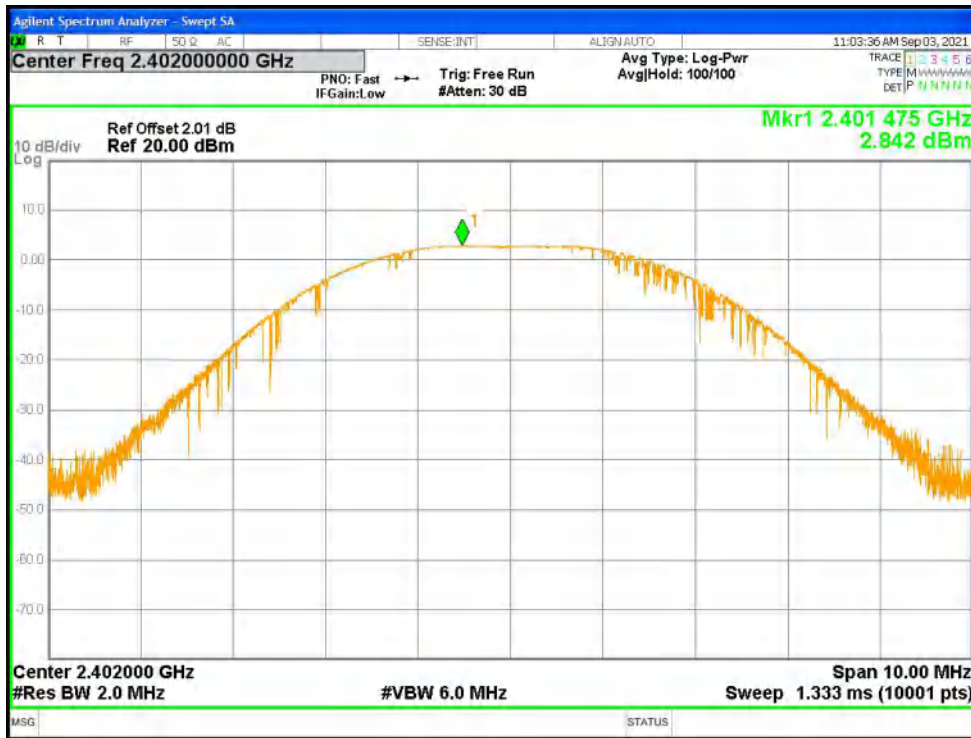

Power NVNT BLE 2M 2442MHz Ant1

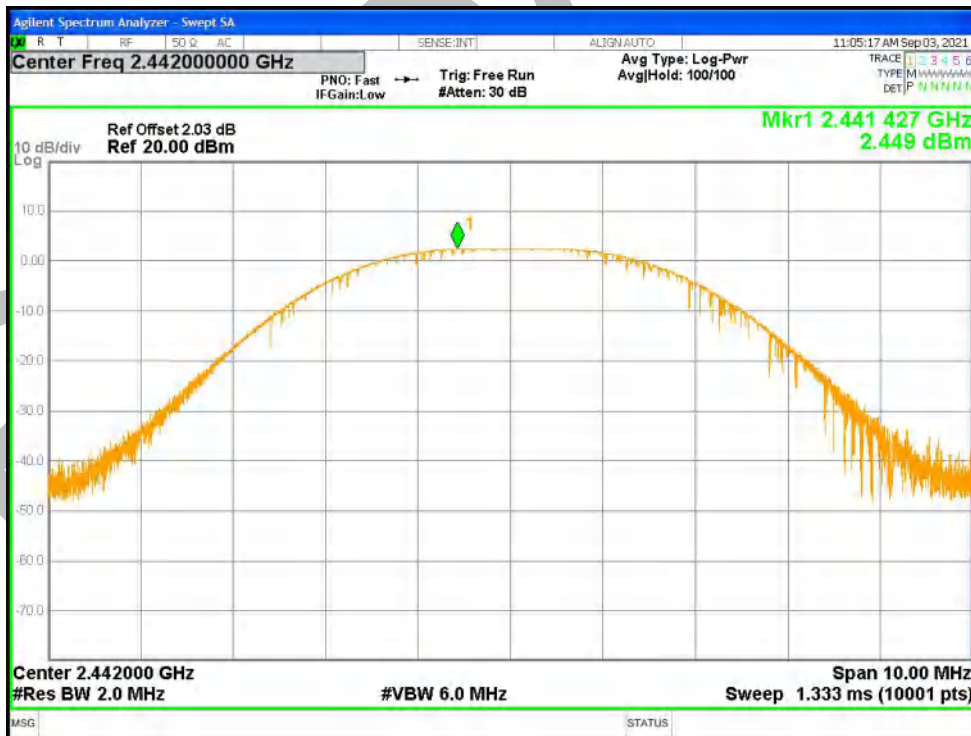


## Power NVNT BLE 2M 2480MHz Ant1

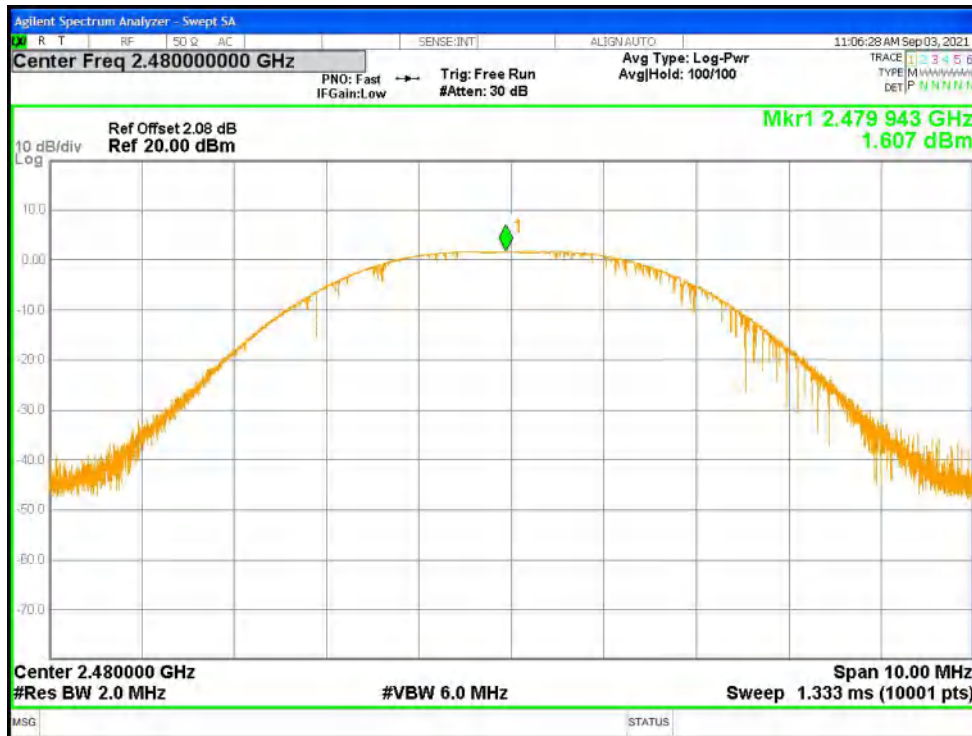


**-6dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.686	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.671	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.669	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.127	0.5	Pass
NVNT	BLE 2M	2442	Ant1	1.171	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.025	0.5	Pass

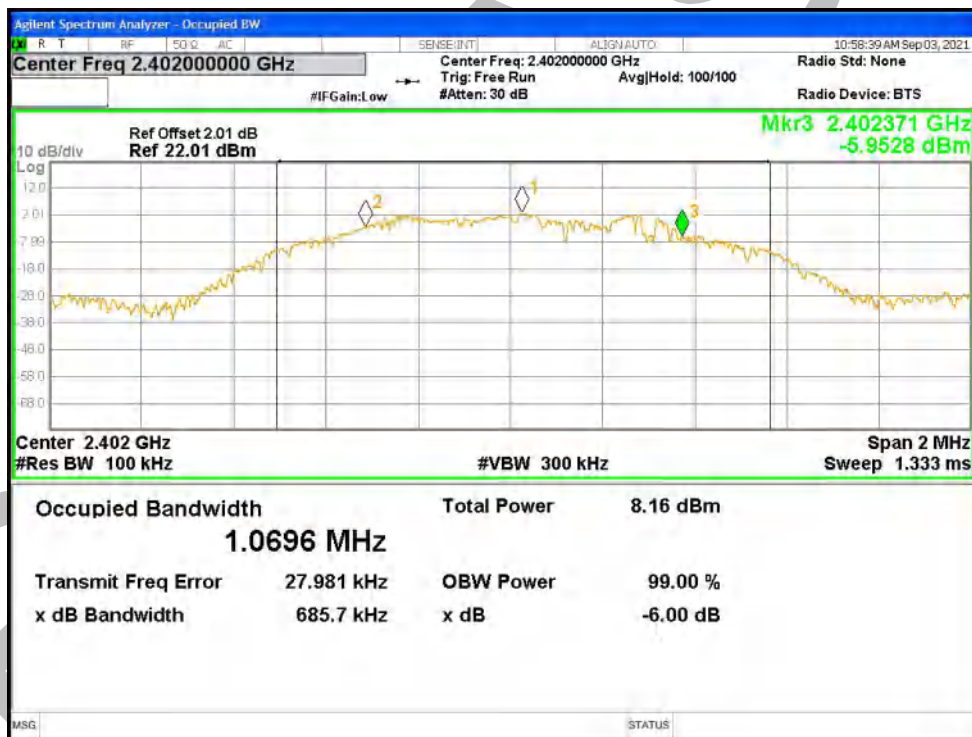**-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1**


-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

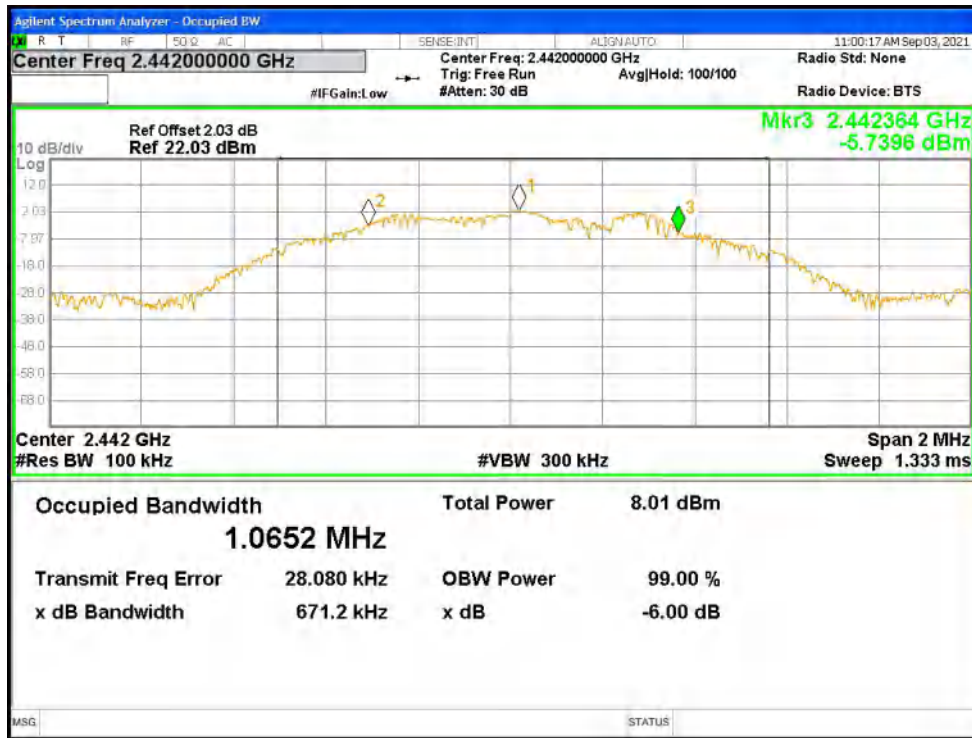


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

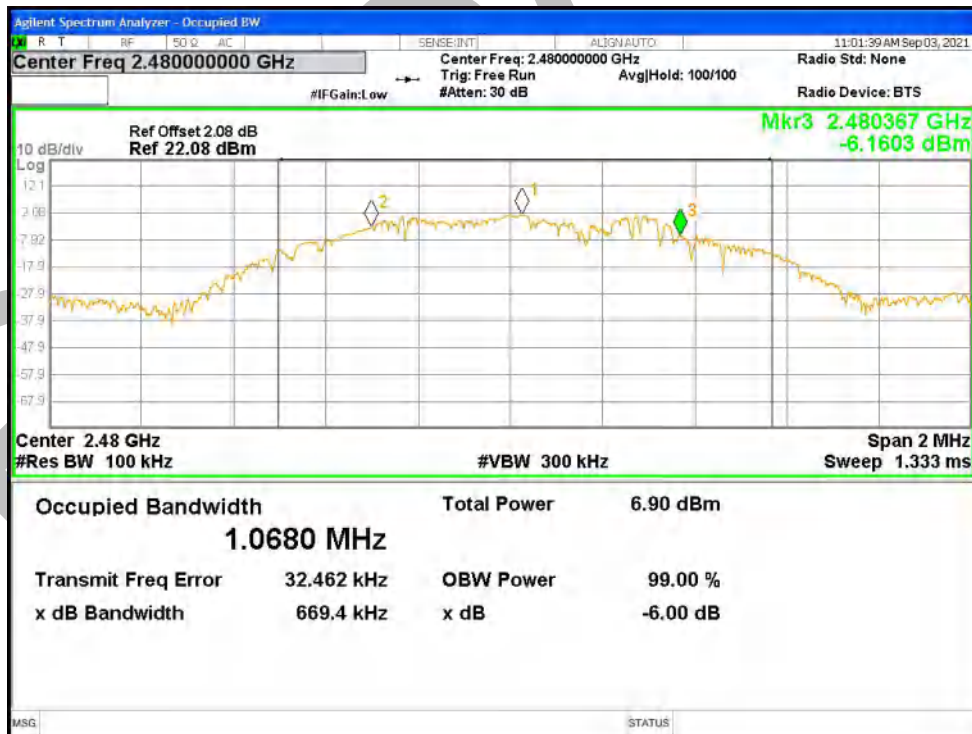

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1




-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1

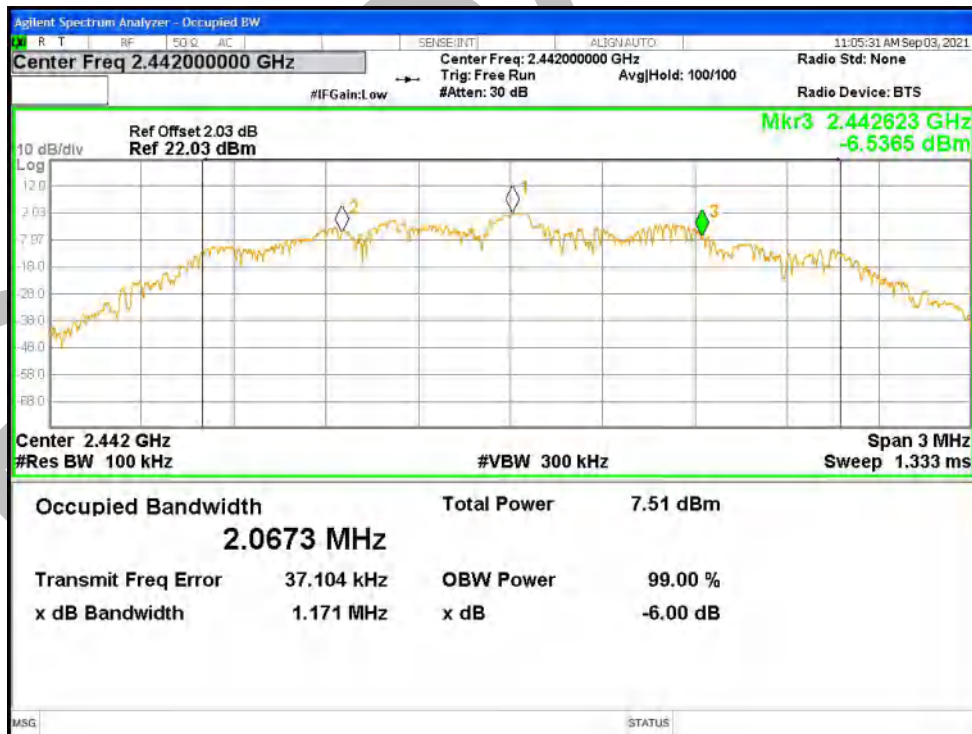




-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

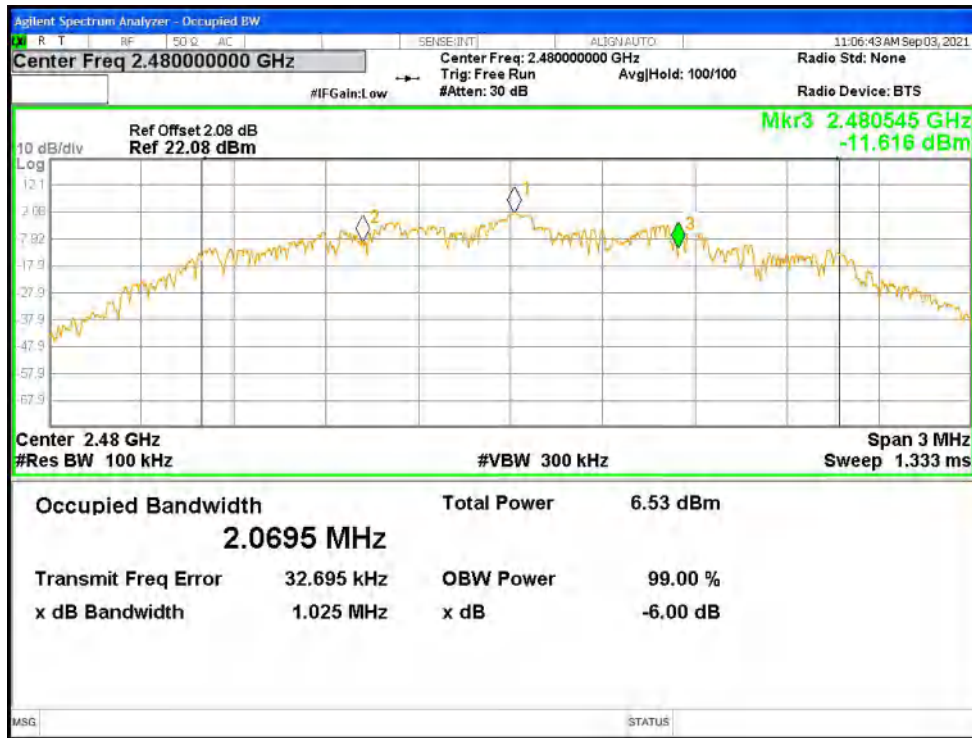


**Occupied Channel Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.035951056
NVNT	BLE 1M	2442	Ant1	1.035729007
NVNT	BLE 1M	2480	Ant1	1.037149724
NVNT	BLE 2M	2402	Ant1	2.030645051
NVNT	BLE 2M	2442	Ant1	2.042117694
NVNT	BLE 2M	2480	Ant1	2.025316197

OBW NVNT BLE 1M 2402MHz Ant1

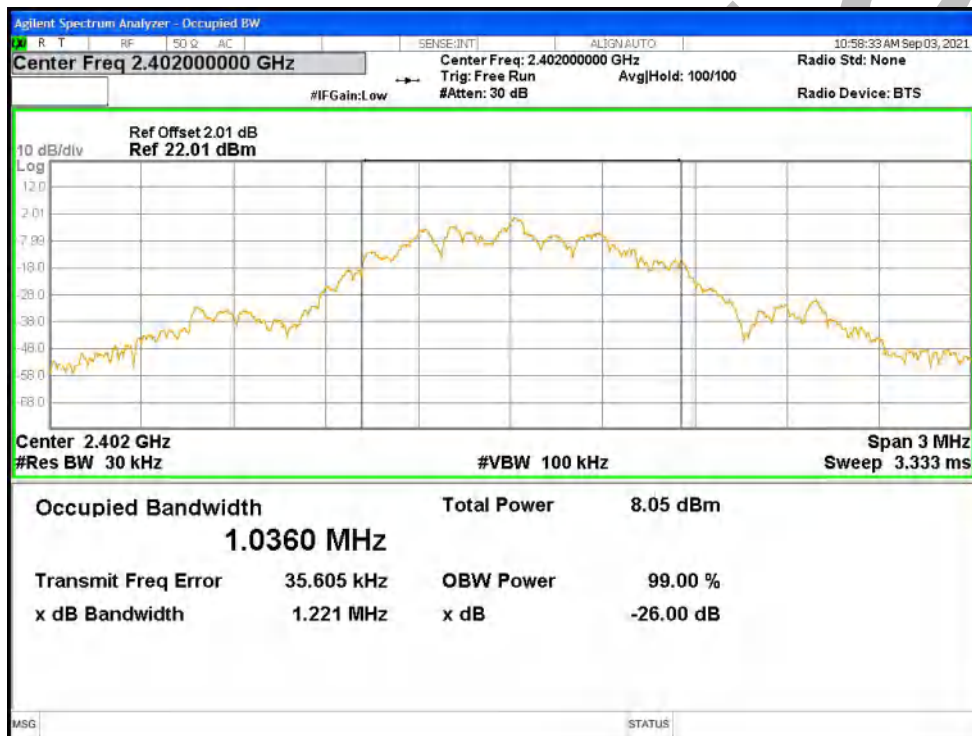


OBW NVNT BLE 1M 2442MHz Ant1

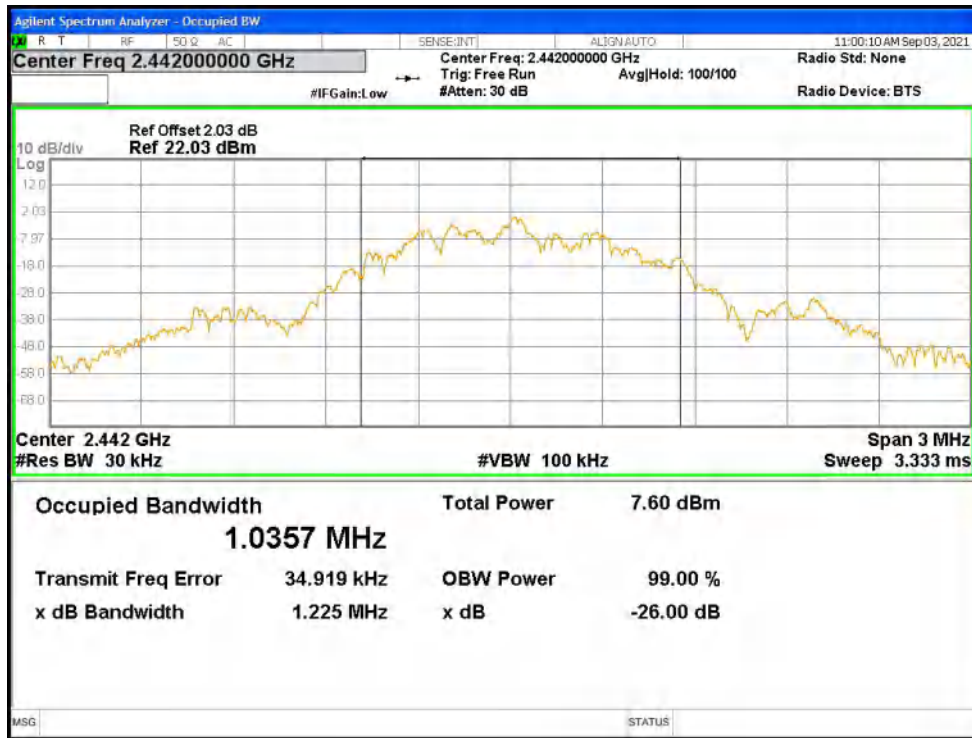


OBW NVNT BLE 1M 2480MHz Ant1




OBW NVNT BLE 2M 2402MHz Ant1

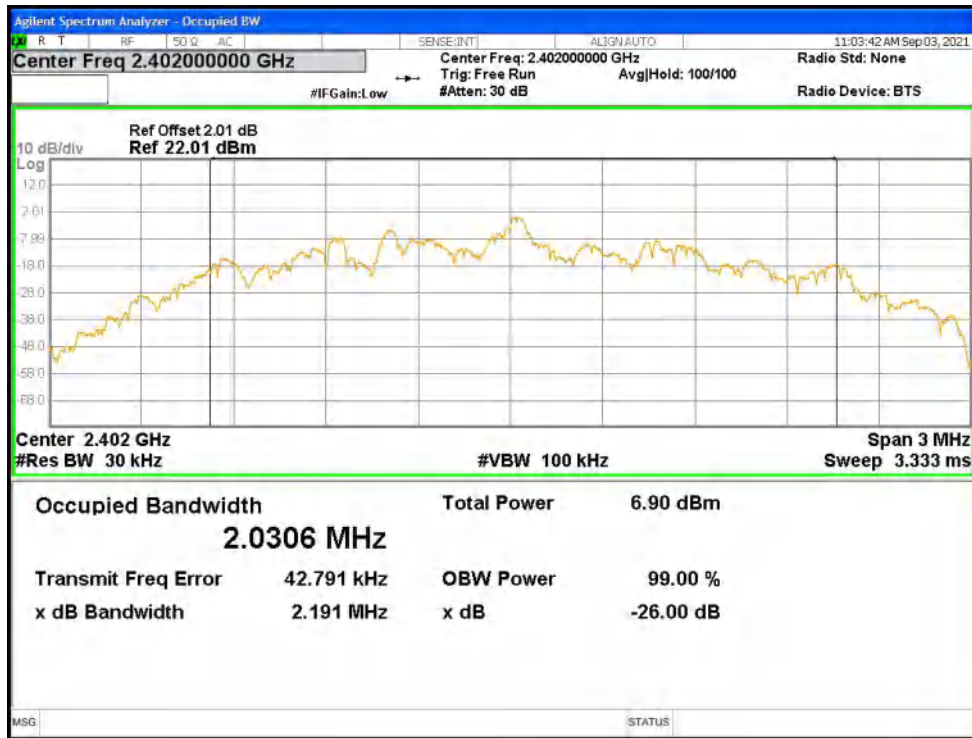

OBW NVNT BLE 2M 2442MHz Ant1

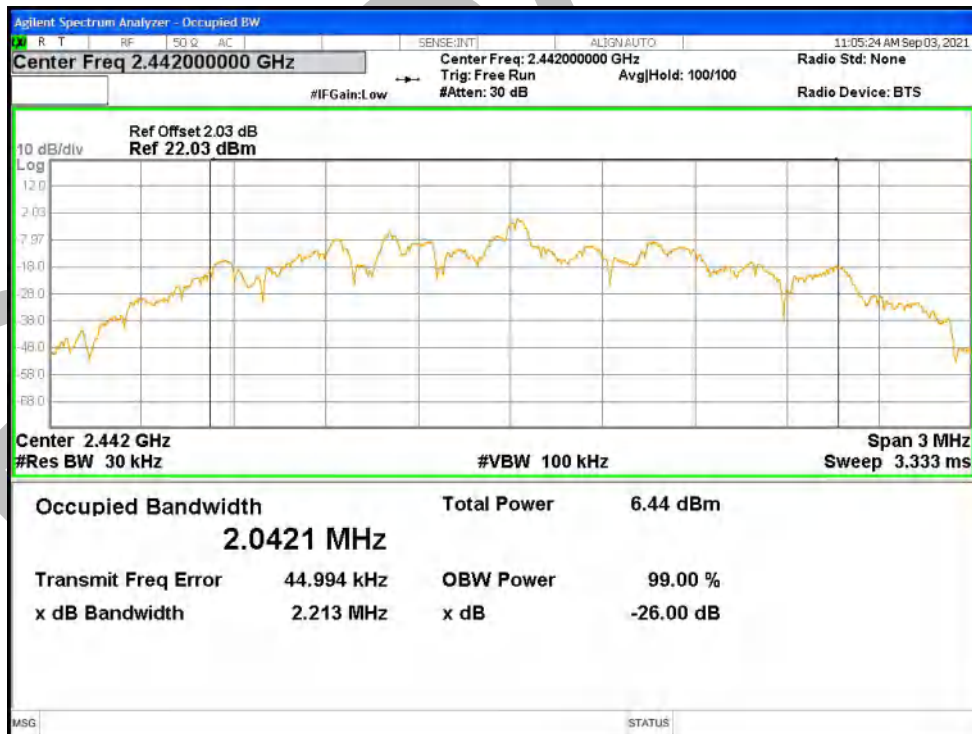

OBW NVNT BLE 2M 2480MHz Ant1

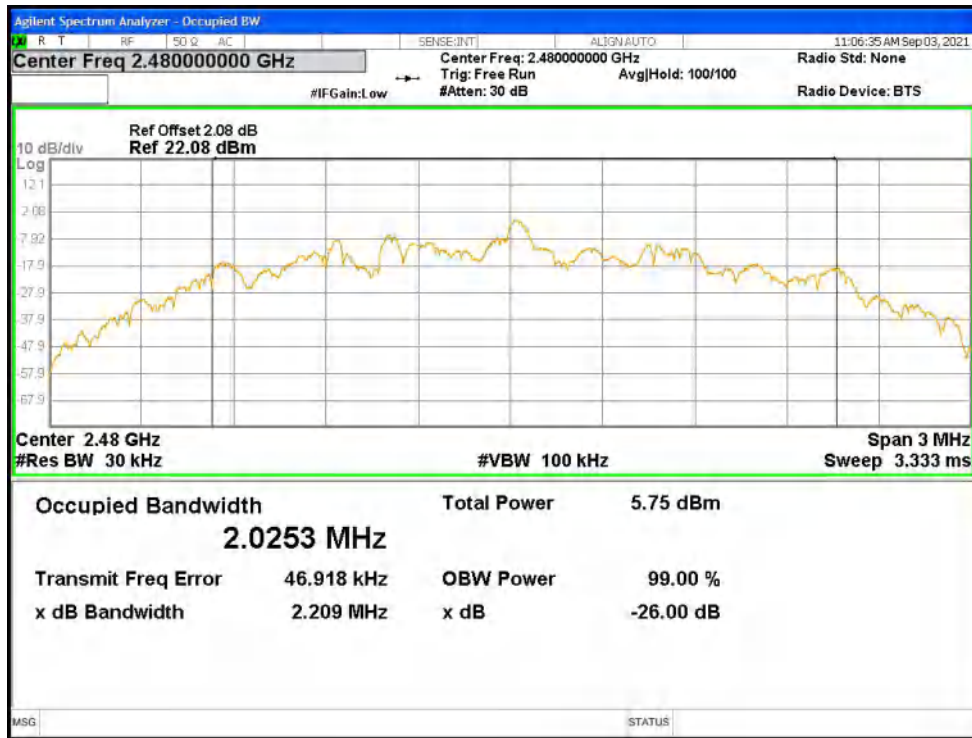

**Maximum Power Spectral Density Level**

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.809	8	Pass
NVNT	BLE 1M	2442	Ant1	-7.212	8	Pass
NVNT	BLE 1M	2480	Ant1	-8.055	8	Pass
NVNT	BLE 2M	2402	Ant1	-7.441	8	Pass
NVNT	BLE 2M	2442	Ant1	-7.881	8	Pass
NVNT	BLE 2M	2480	Ant1	-8.674	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1




PSD NVNT BLE 1M 2442MHz Ant1



PSD NVNT BLE 1M 2480MHz Ant1



PSD NVNT BLE 2M 2402MHz Ant1

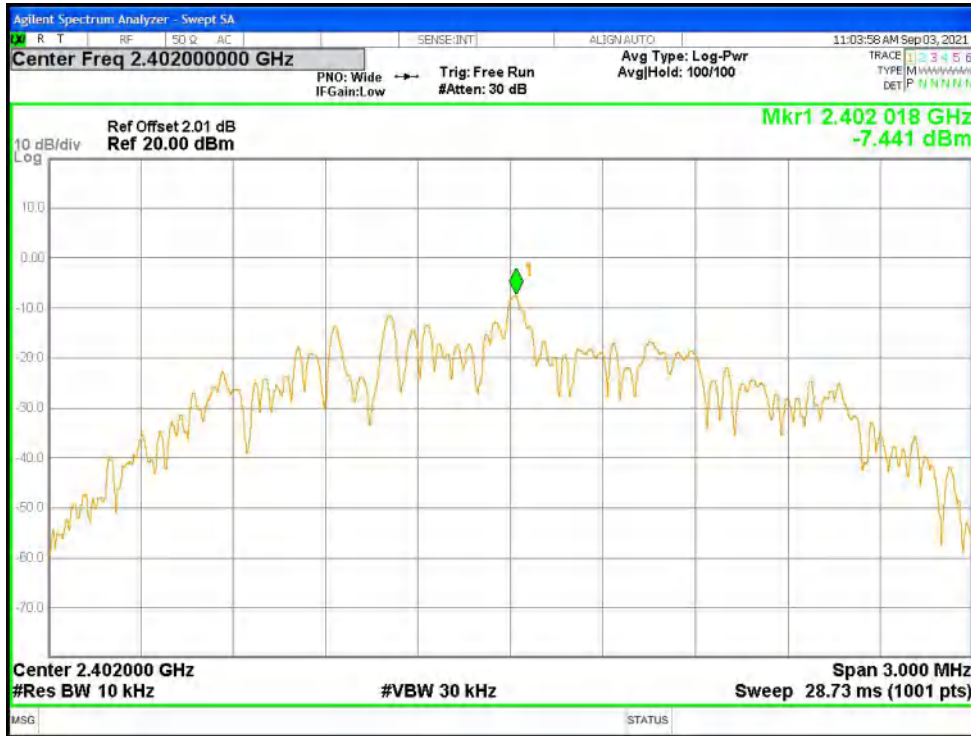

PSD NVNT BLE 2M 2442MHz Ant1





## PSD NVNT BLE 2M 2480MHz Ant1




**Band Edge**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-58.3	-30	Pass
NVNT	BLE 1M	2480	Ant1	-56.26	-30	Pass
NVNT	BLE 2M	2402	Ant1	-58.57	-30	Pass
NVNT	BLE 2M	2480	Ant1	-54.86	-30	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref




Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

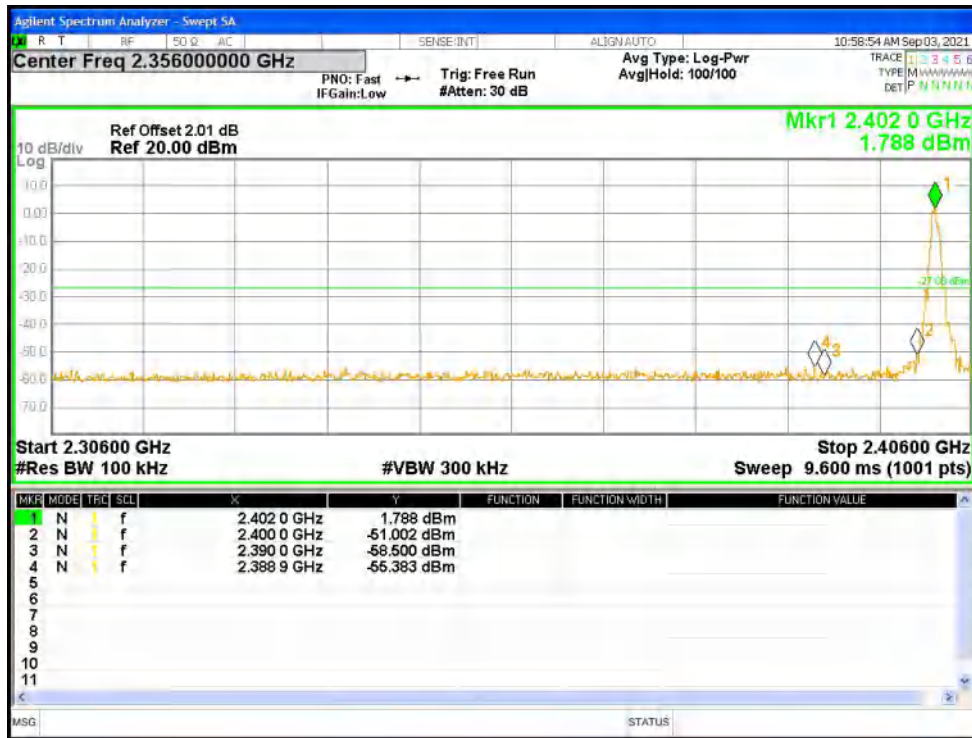

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref




Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

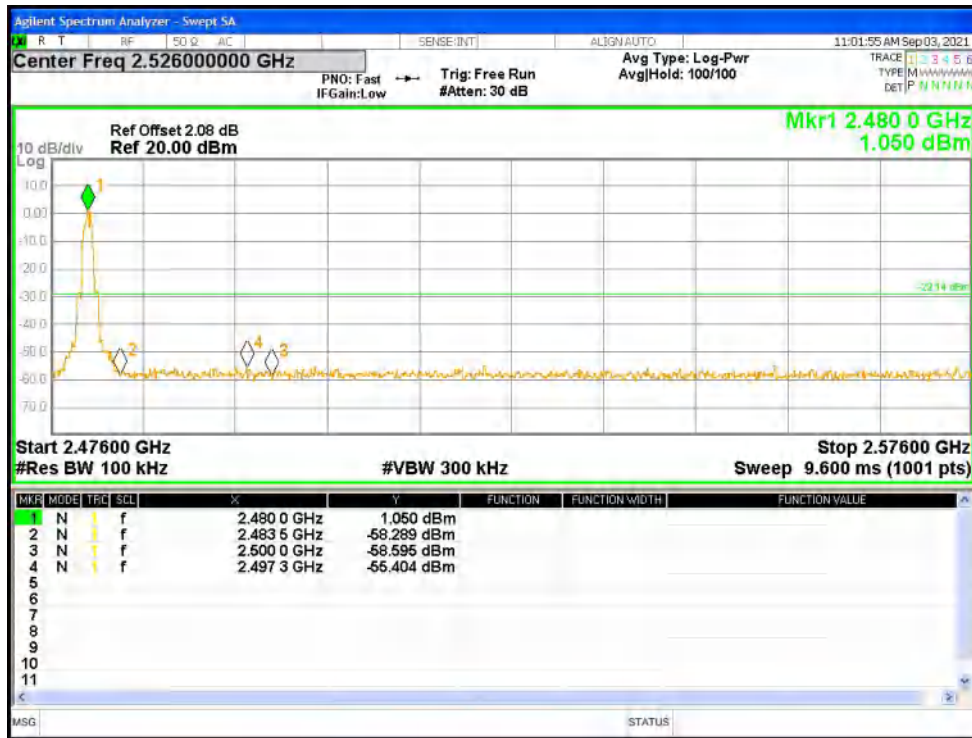

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref




Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

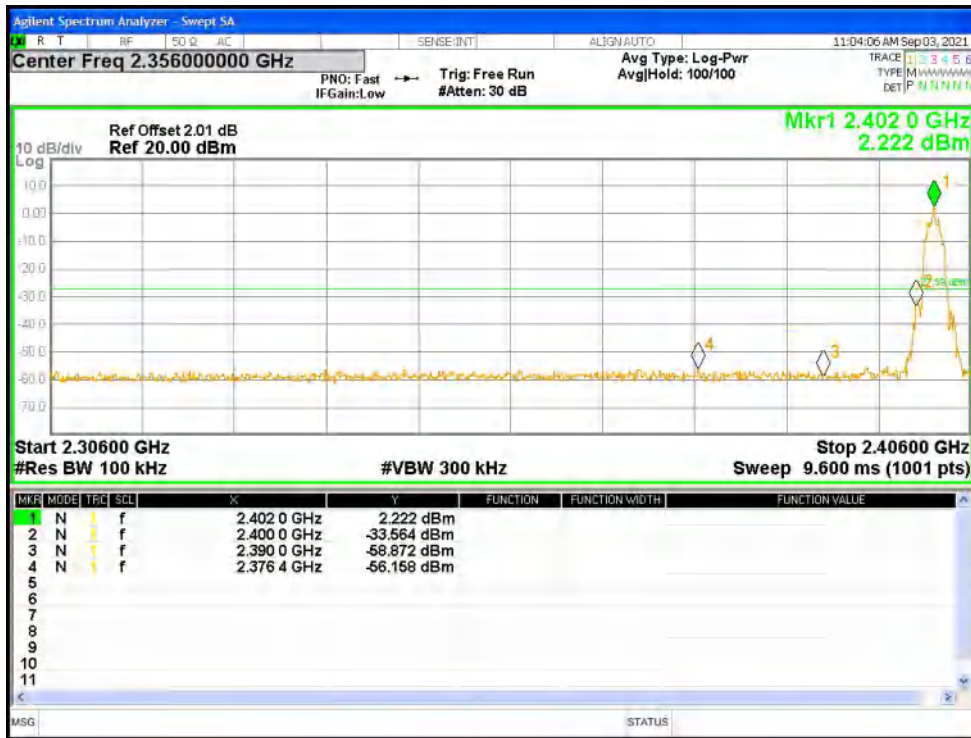

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref



Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

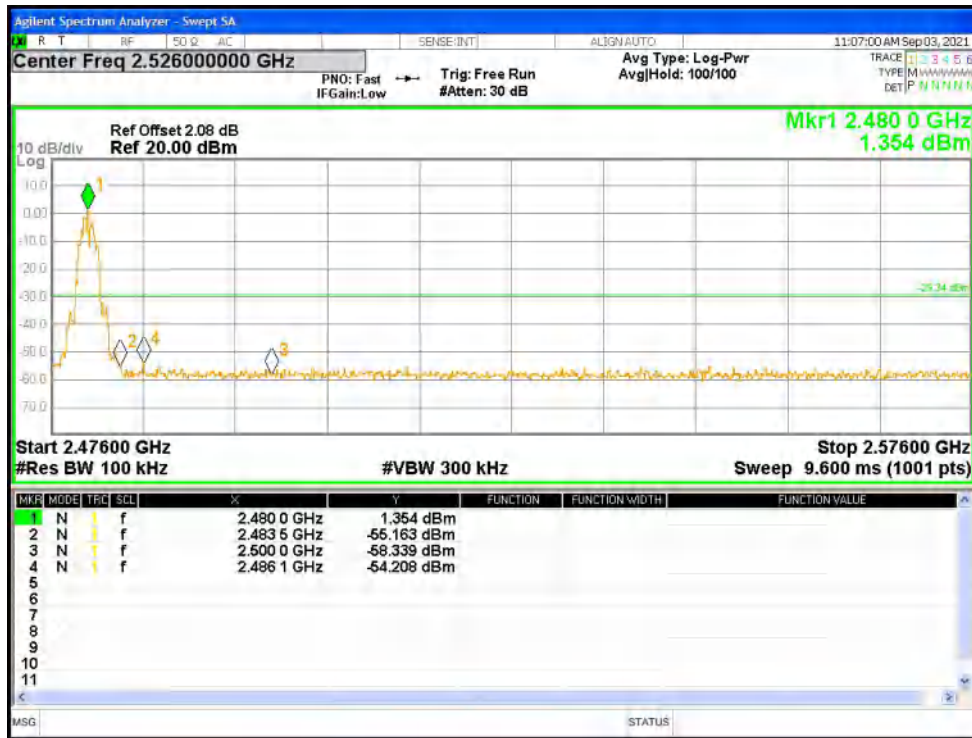

BlueAsia


**Conducted RF Spurious Emission**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-47.9	-30	Pass
NVNT	BLE 1M	2442	Ant1	-47.91	-30	Pass
NVNT	BLE 1M	2480	Ant1	-45.91	-30	Pass
NVNT	BLE 2M	2402	Ant1	-47.82	-30	Pass
NVNT	BLE 2M	2442	Ant1	-47.83	-30	Pass
NVNT	BLE 2M	2480	Ant1	-46.29	-30	Pass

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref



Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

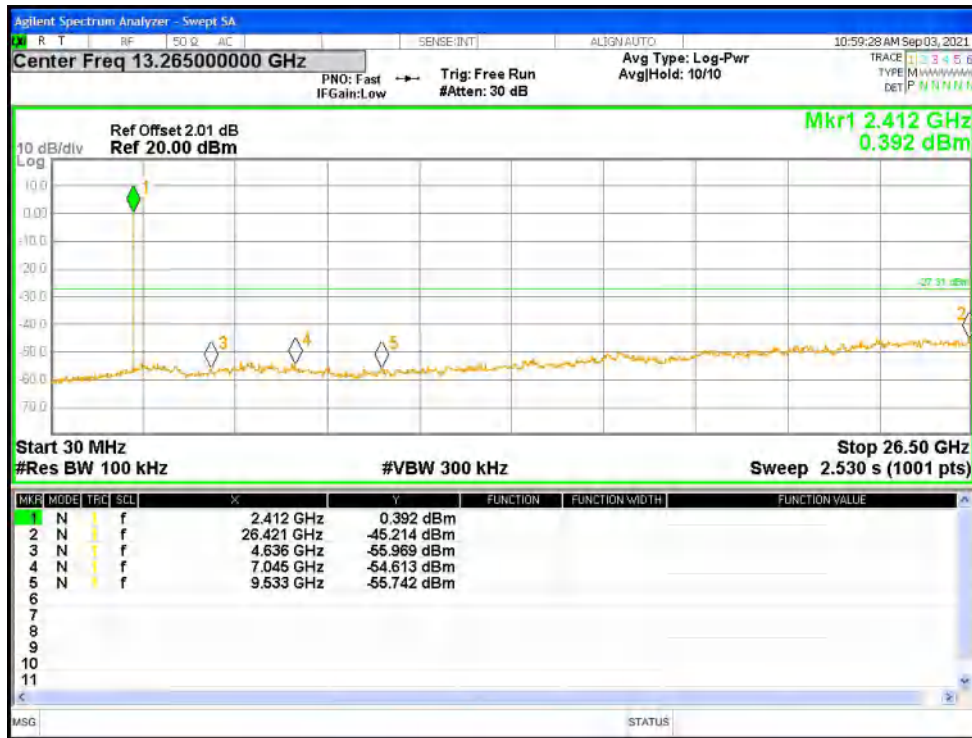


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref






Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

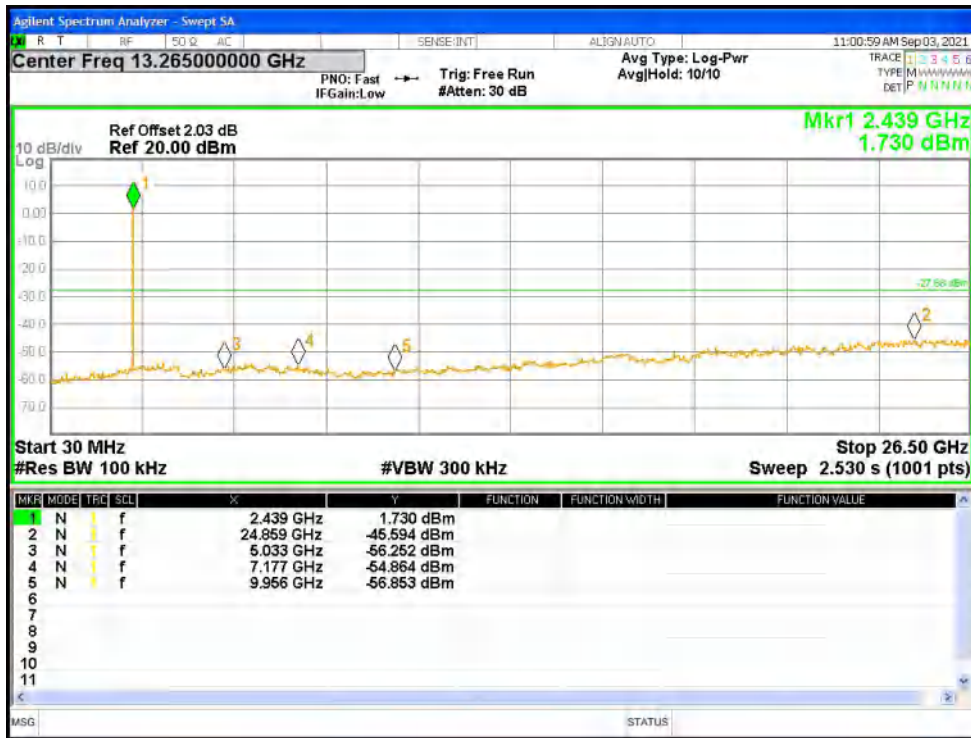

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

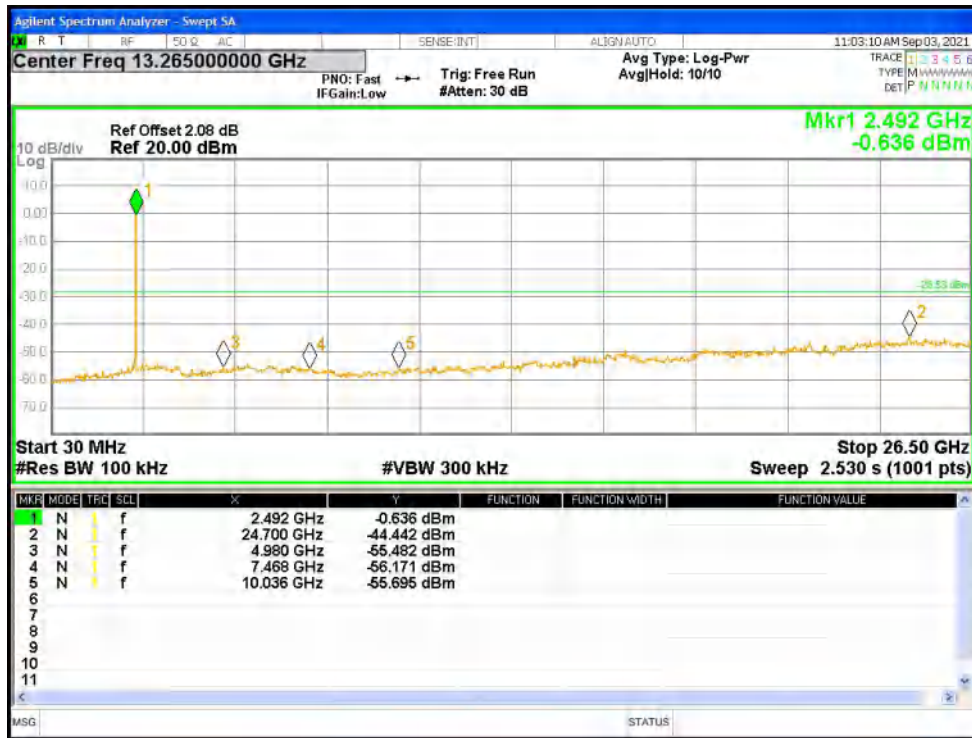

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

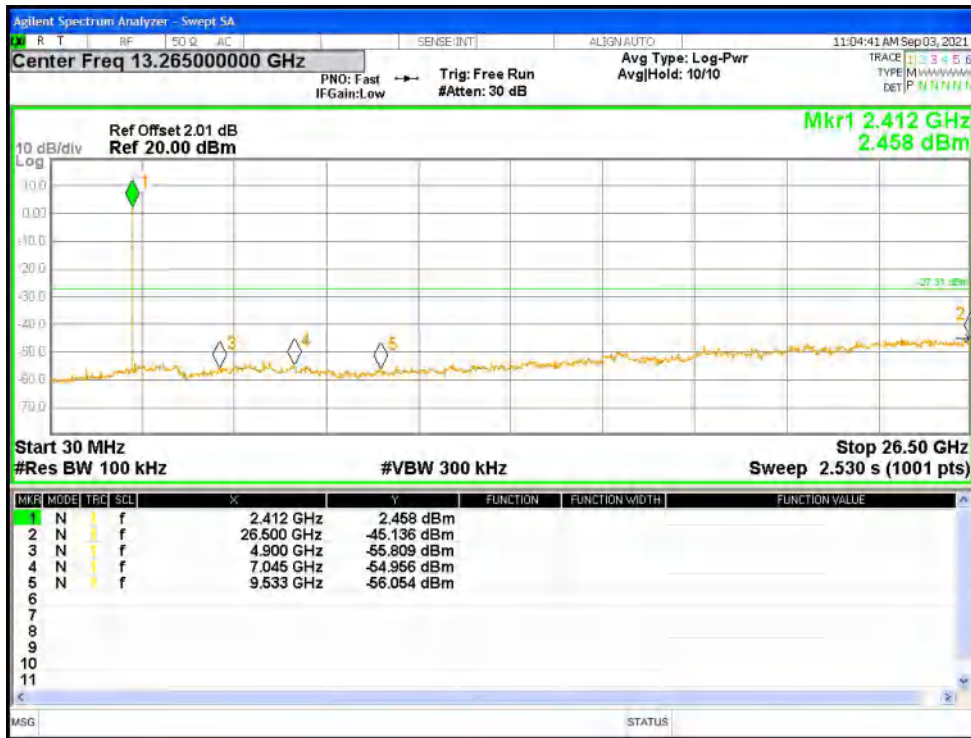

Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Emission

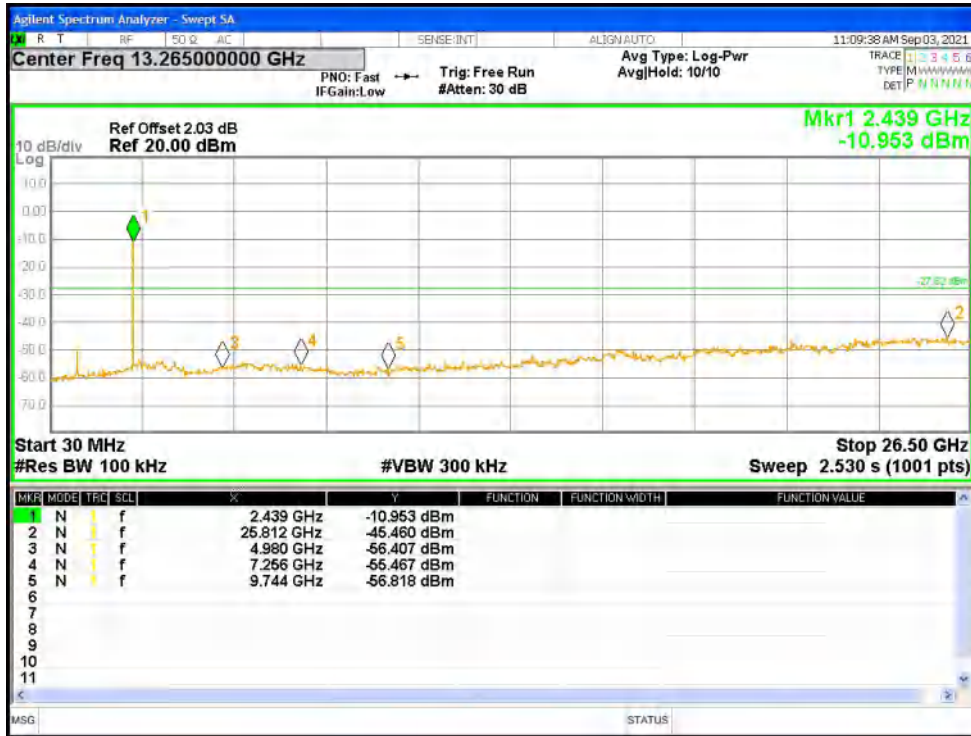

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref



Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

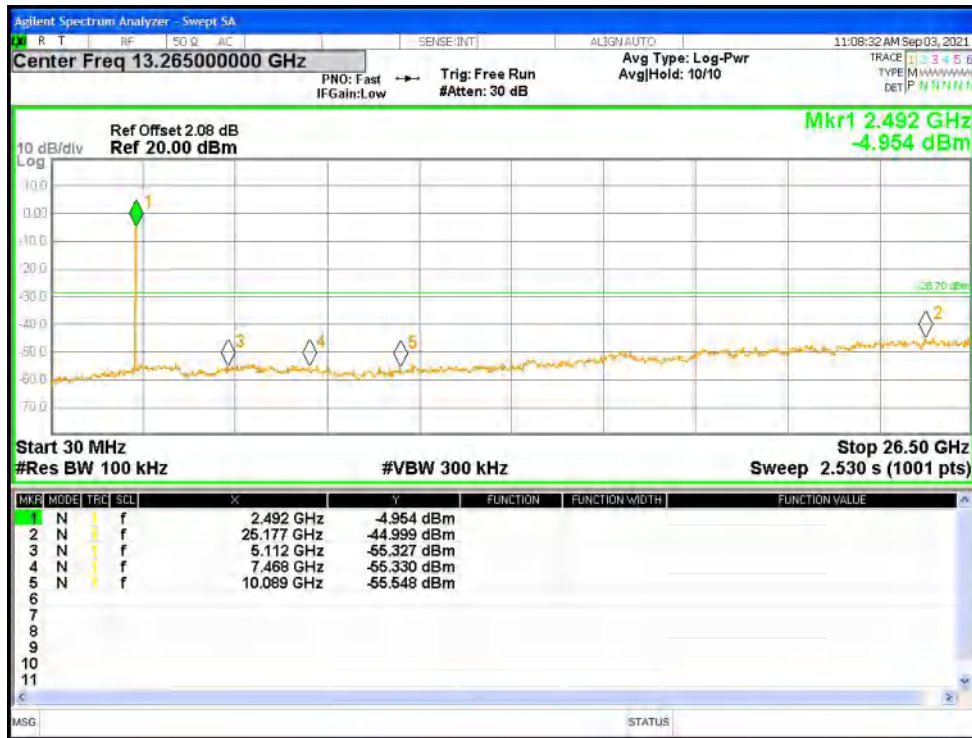


BlueAsia


## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

### Conducted Emissions at AC Power Line (150kHz-30MHz)



### Radiated Spurious Emissions


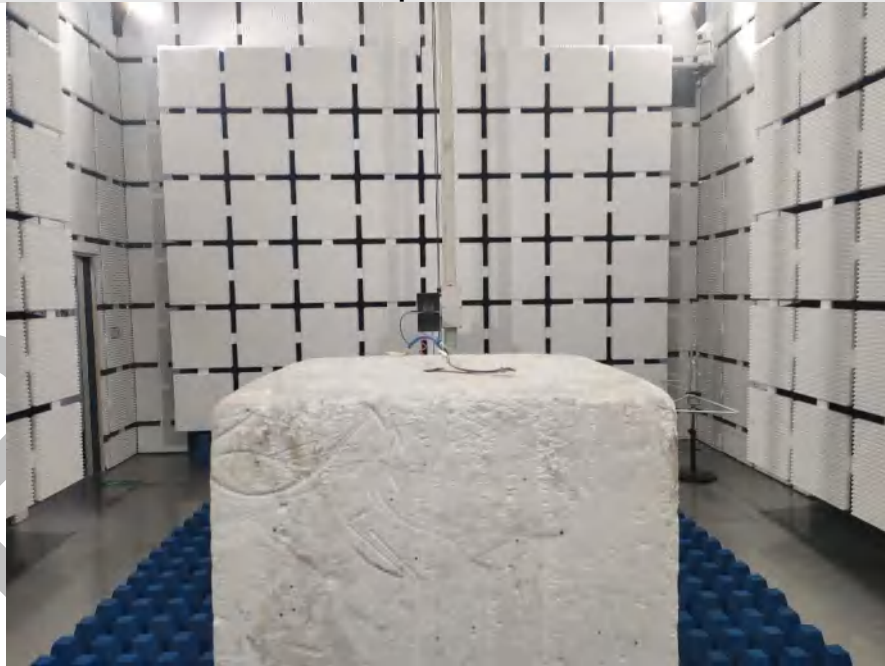


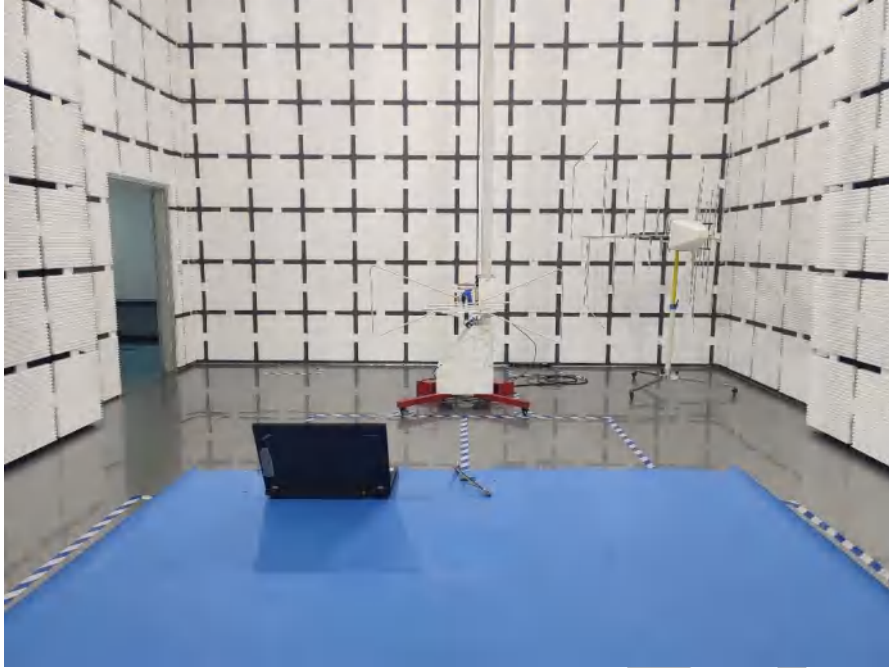



**Radiated Emissions which fall in the restricted bands**






**APPENDIX B: PHOTOGRAPHS OF EUT**

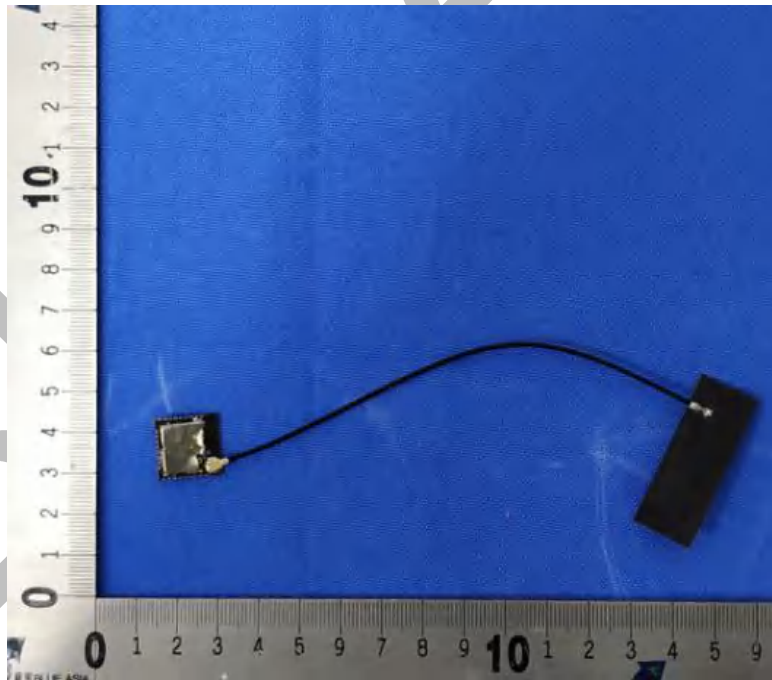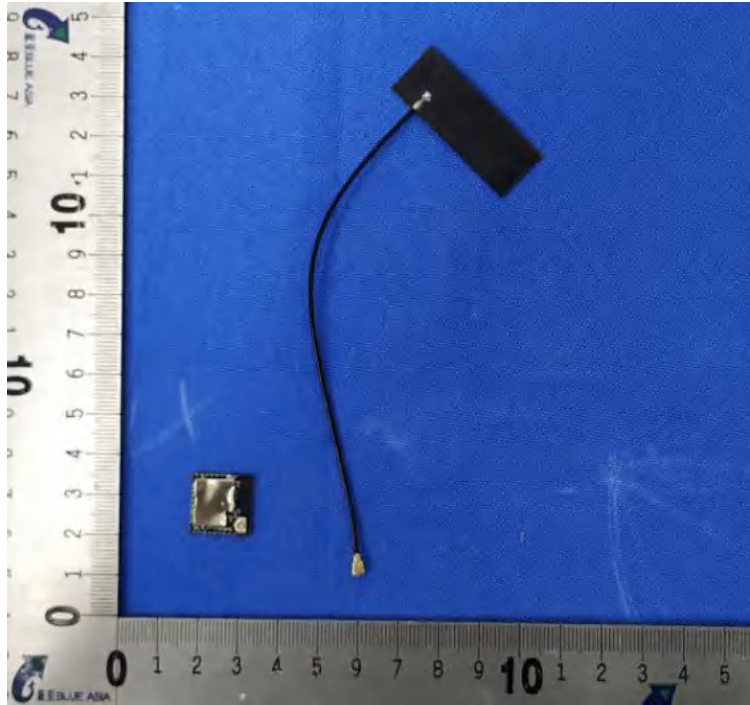



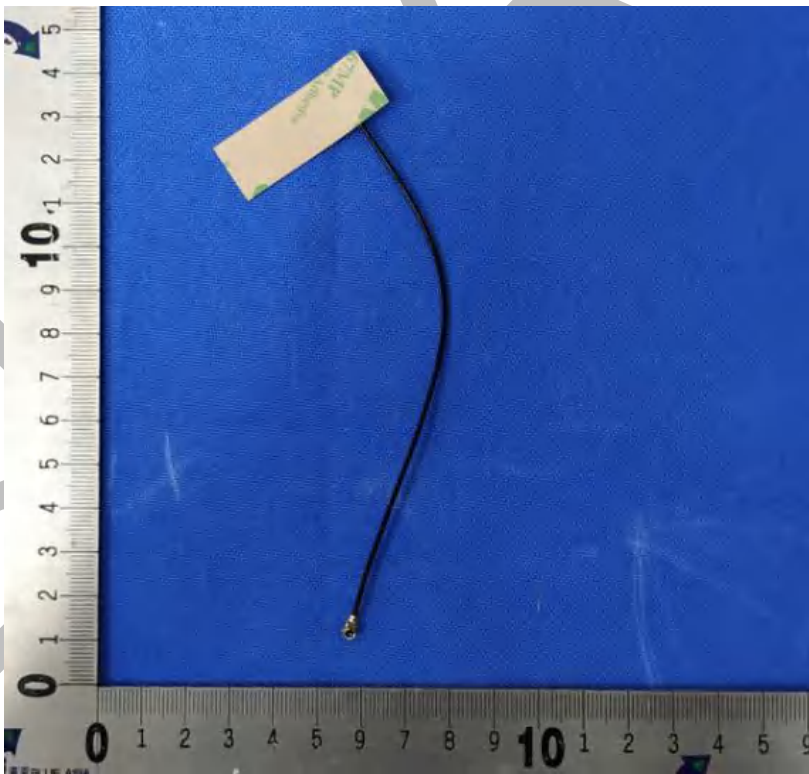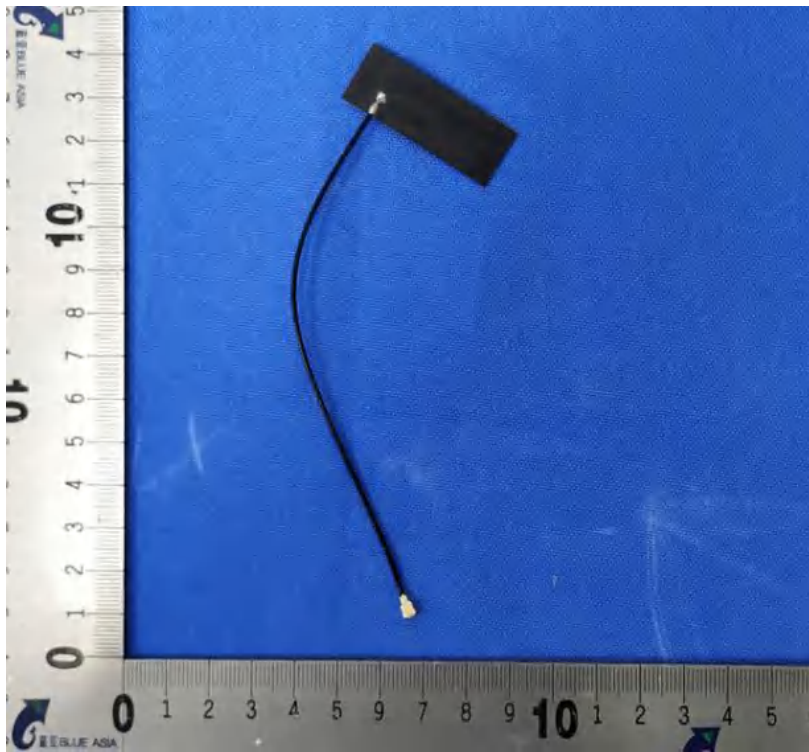

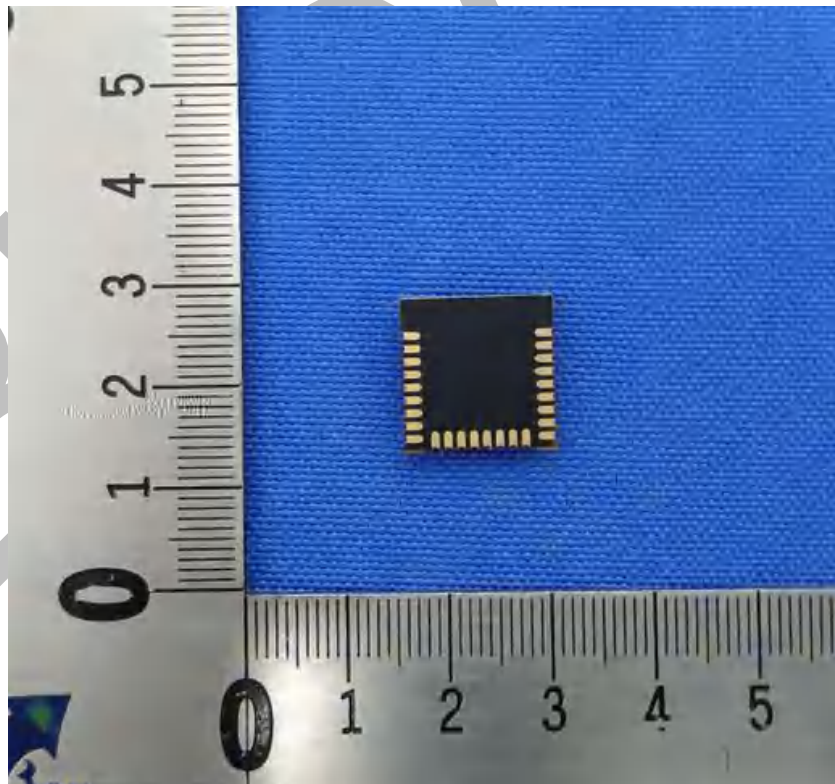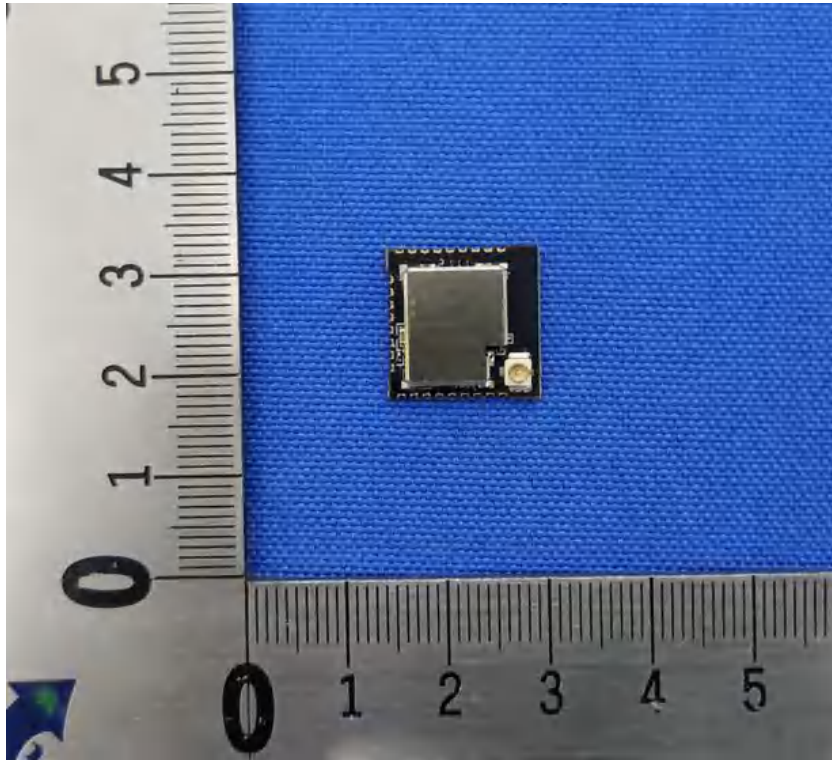

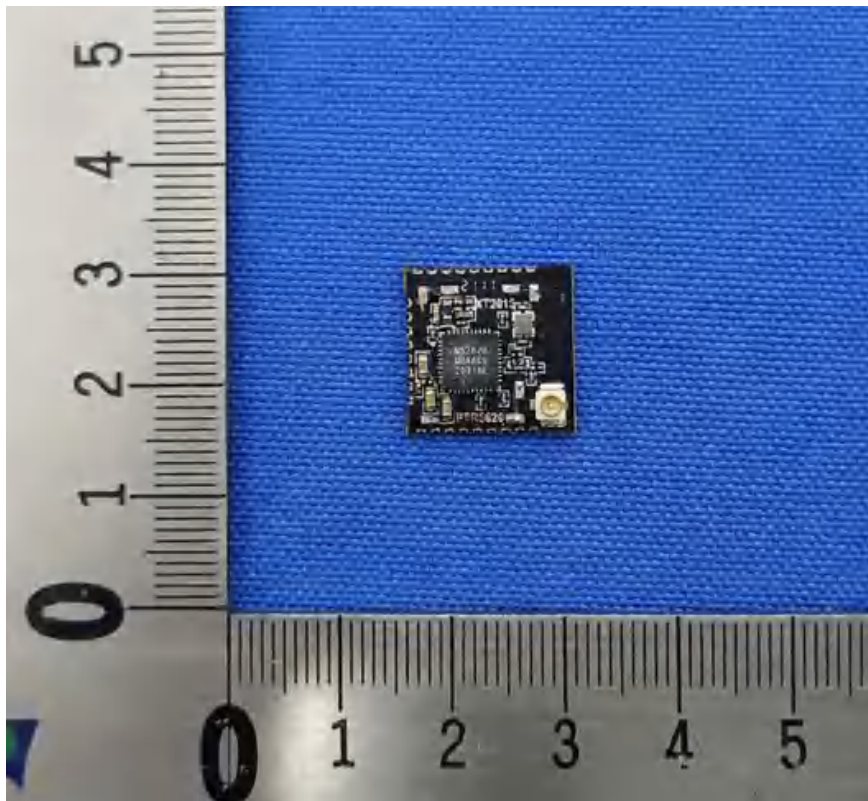

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.