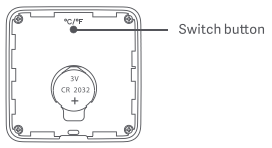
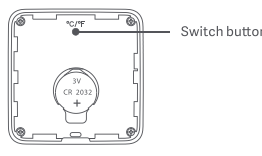
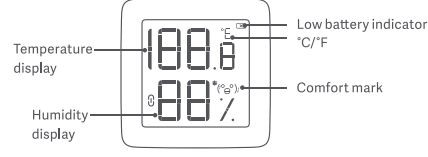
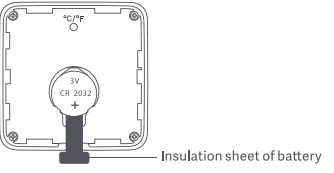
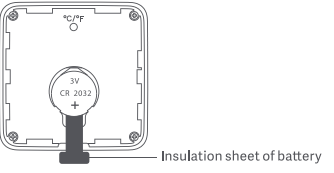
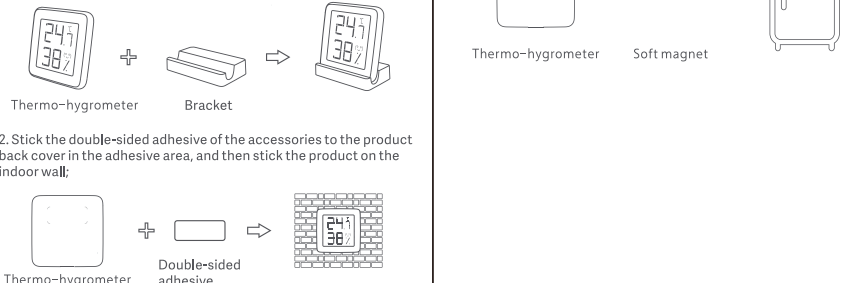


<p><b>Add devices</b></p> <ul style="list-style-type: none"> <li>Open Meawow App, click the "Add Sub-device" button on the " " page at the upper right corner of "Smart Gateway" page.</li> <li>Select "Temperature and Humidity Sensor" on the page of "Select Device Type".</li> <li>Remove the back cover of the hygrothermograph, and press the switch button for 5 seconds. Confirm the icon "°C" or "°F" on the screen is flashing, which means the hygrothermograph starts the network distribution mode.</li> <li>After the device is successfully added, it can be found in the "My Home" list.</li> </ul> 	<p><b>Smart Linkage</b></p> <p>After the device is successfully added, click the "Smart" module on the main interface of the App device to set the smart and linkage functions, such as:</p> <ul style="list-style-type: none"> <li>Set the temperature and humidity comfort zone. When the ambient conditions are out of the comfort zone, the phone will send notices and reminders.</li> <li>Set to "Turn on the air conditioner when the ambient temperature is higher than 32°C/89.6°F".</li> </ul> <p>* Some smart linkage functions need to be used with other devices. For more information, please consult the official customer service.</p> <p>Tips: Due to the upgrade and update of App, the actual operation may be slightly different from the above description. Please follow the guidance in the current App.</p>	<p><b>Temperature unit switch</b></p> <p>After removing the back cover when the product is in standby state, you will see the "°C"/"°F" switch button on the back of the product. Use along object to press this button. The temperature unit will switch between "°C" and "°F".</p>  <p>Note: In standby mode, long press this button for 12 seconds, and the hygrothermograph will be restored to factory settings.</p> <p>Notices</p> <ol style="list-style-type: none"> <li>Keep it away from high temperature, high humidity and other harsh environment.</li> <li>Wipe the dirt on product surface with soft cloth dipped with neutral detergent.</li> <li>This product is used as a healthy living article, not as a measuring instrument.</li> </ol>	<p><b>CE FCC</b></p> <p>We, Measmart Technology INC hereby declare that this equipment is in full compliance with the applicable US and European's Directives, European Norms, and its amendments.</p> <p><b>FCC Warning</b></p> <p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p>Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p>	<ul style="list-style-type: none"> <li>Reorient or relocate the receiving antenna.</li> <li>Increase the separation between the equipment and receiver.</li> <li>Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</li> <li>Consult the dealer or an experienced radio/TV technician for help.</li> </ul> <p>The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.</p> <p>Manufacturer: Miaomiaoe Technology (Beijing) Co., Ltd. Address: No. 1-Y1-06, 1F, Tower A, Innovation Building, No. 11 HEPINGLI East Street, Dongcheng District, Beijing, China</p> <p style="text-align: right;">Operation manual version: v1.0</p>	<p><b>Operation Manual of Bluetooth Hygrothermograph</b></p>
---	---	---	---	---	--

正面

<p><b>Introduction</b></p> <p>Thank you for using the product. The product is an indoor hygrothermograph with Bluetooth features. Equipped with advanced digital sensors, it can perform rapid and accurate measurement of temperature and humidity. The product can be connected to Meawow APP, enabling us to view the real-time temperature and humidity as well as history record on the cell phone, and alerting us to adjust to an appropriate environment and cultivate a healthy lifestyle.</p> <p><b>Specification</b></p> <p>Name: Meawow Bluetooth Hygrothermograph Model: MHO-C402 Material: ABS+PC+PMMA Size: 64.5mm*64.5mm*9.7mm Net weight: 36g Rated voltage: 3V Battery model: CR2032 Wireless connection: Bluetooth 5.0 FCC ID: ZAWW0MHO-C402 Temperature measurement range: 0°C - 60°C, 32°F - 140°F Temperature display resolution: 0.1°C Humidity measurement range: 1%RH - 99%RH Humidity display resolution: 1%RH</p>	<p><b>Screen display information</b></p>  <p>Temperature display: °C/°F</p> <p>Humidity display: %RH</p> <p>Low battery indicator: [Battery icon]</p> <p>Comfort mark: [Comfort icon]</p> <p>Note: Illustrations of product, accessories, and user interface in the user manual are for reference purposes only. Actual product and functions may vary due to product enhancements.</p> <p>Screen refresh prompt</p> <p>To improve the display effect of the screen and eliminate the residual shadows, the screen will be refreshed globally every 30 minutes (the screen font and background color flicker in white and black reversely).</p>	<p><b>Description of comfort mark</b></p> <p>Display corresponding expressions to remind the user according to the temperature and humidity changes in the environment</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Humidity</th> <th colspan="3">Temperature</th> </tr> <tr> <th>18°C ≤ T &lt; 24°C 64.4°F ≤ T &lt; 75.2°F</th> <th>18°C ≤ T ≤ 28°C 64.4°F ≤ T ≤ 82.4°F</th> <th>T &gt; 28°C 82.4°F</th> </tr> </thead> <tbody> <tr> <td>H &lt; 40%</td> <td>(°C)</td> <td>(°C)</td> <td>(°C)</td> </tr> <tr> <td>40% ≤ H ≤ 65%</td> <td>(°C)</td> <td>(°C)</td> <td>(°C)</td> </tr> <tr> <td>H &gt; 65%</td> <td>(°C)</td> <td>(°C)</td> <td>(°C)</td> </tr> </tbody> </table> <p>Low battery indicator</p> <p>When this icon appears in the upper right corner of the screen, it indicates that the battery is too low and shall be replaced.</p> 	Humidity	Temperature			18°C ≤ T < 24°C 64.4°F ≤ T < 75.2°F	18°C ≤ T ≤ 28°C 64.4°F ≤ T ≤ 82.4°F	T > 28°C 82.4°F	H < 40%	(°C)	(°C)	(°C)	40% ≤ H ≤ 65%	(°C)	(°C)	(°C)	H > 65%	(°C)	(°C)	(°C)	<p><b>Use instructions</b></p> <p><b>Battery installation</b></p> <p>For first use, it needs to remove the insulation sheet below the battery.</p> <p>If the battery needs to be replaced, please open the back cover from the opening position at the back bottom of the product body, put a CR2032 button battery into the battery compartment with the negative pole downward, and then press hard on the buckle to close the back cover.</p> 	<p><b>Installation and use method of product</b></p> <p>After the product works normally, it can be installed indoors in the following ways:</p> <ol style="list-style-type: none"> <li>Put the product into the bracket of the accessories, and then put it on the table, TV cabinet and other plastic surfaces that the product can be placed.</li> <li>Stick the double-sided adhesive of the accessories to the product back cover in the adhesive area, and then stick the product on the indoor wall.</li> <li>Stick the soft magnet of the accessories to the product back cover in the adhesive area, and then absorb the product on the surface of magnetic objects such as refrigerator.</li> </ol> 
Humidity	Temperature																						
	18°C ≤ T < 24°C 64.4°F ≤ T < 75.2°F	18°C ≤ T ≤ 28°C 64.4°F ≤ T ≤ 82.4°F	T > 28°C 82.4°F																				
H < 40%	(°C)	(°C)	(°C)																				
40% ≤ H ≤ 65%	(°C)	(°C)	(°C)																				
H > 65%	(°C)	(°C)	(°C)																				

背面

专色:  Pantone cold gray 11c