



Report No.: FCC 2006002 File reference No.: 2020-06-11

Applicant: Shenzhen VITAL Trading Co., LTD.

Product: Harry Potter Deathly Hallows Bluetooth Speaker

Model No.: 4334362

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 11, 2020

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC2006002 Page 2 of 89

Date: 2020-06-11



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 89

Report No.: FCC2006002

Date: 2020-06-11



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	25
8.0	Maximum Output Power	37
9.0	Carrier Frequency Separation.	40
10.0	Number of Hopping Channel.	50
11.0	Time of Occupancy (Dwell Time).	54
12.0	Out of Band Measurement.	61
13.0	Antenna Requirement	78
14.0	FCC ID Label.	79
15.0	Photo of Test Setup and EUT View.	80

Report No.: FCC2006002

Date: 2020-06-11



Page 4 of 89

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen VITAL Trading Co., LTD.

Address: Rm.2705, Block A, Harbin Mansion, No. 7045, Beihuan Rd., Lianhua Street, Futian District,

Shenzhen

Telephone: 15012694947 Fax: 0755-83828561

1.3 Description of EUT

Product: Harry Potter Deathly Hallows Bluetooth Speaker

Manufacturer: Shenzhen VITAL Trading Co., LTD.

Address: Rm.2705, Block A, Harbin Mansion, No. 7045, Beihuan Rd., Lianhua Street, Futian

District, Shenzhen

Trademark: N/A
Model Number: 4334362
Additional Model Number: N/A
Additional Trademark: N/A

Type of Modulation GFSK, 月/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channels for Bluetooth

Antenna: PCB antennas used. The gain of the antennas is -0.58dBi Input: DC5V, 1A or built-in 3.7V, 850mAh Li-ion battery

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2006002 Page 5 of 89

Date: 2020-06-11

Hardware Version: V1.0 Software Version: V1.0

Submitted Sample: 1 Samples

1.5 **Test Duration** 2020-06-01 to 2020-06-11

Test Uncertainty 1.6

> Conducted Emissions Uncertainty = 3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty =6.0dB Occupied Channel Bandwidth Uncertainty = 5%

1.7 Test Engineer

Terry Tang The sample tested by

Print Name: Terry Tang

Page 6 of 89

Report No.: FCC2006002

Date: 2020-06-11



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ESPI Test Receiver R&S		100379	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2019-06-20	2020-06-20
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2020-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2019-08-22	2020-08-21
Power sensor	Anritsu	MA2491A	32263	2019-08-22	2020-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2020-01-16	2021-01-15
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

Page 7 of 89

Report No.: FCC2006002

Date: 2020-06-11



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 89


Report No.: FCC2006002

Date: 2020-06-11



5. Power Line Conducted Emission Test

5.1 Schematics of the test

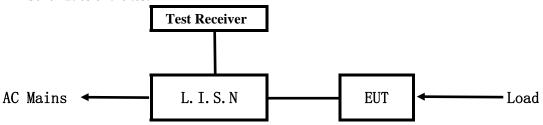


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

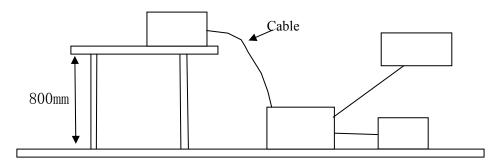

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: FCC2006002 Page 9 of 89

Date: 2020-06-11



A. EUT

Device	Manufacturer	Model	FCC ID
Harry Potter Deathly	Shanghan WITAI Trading Co. LTD	4334362	2AWNFHPDHBS
Hallows Bluetooth Speaker	Shenzhen VITAL Trading Co., LTD.	4334302	ZAWNFAPDABS

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	Chenyang	UP0920	Input:100-240V~, 50/60Hz, 0.5A;
			Output: DC5V or 9V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)			
(MHz)	Quasi-peak Level Average Leve		Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0		
5.00 ~ 30.00	73.0	60.0	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

AC 120V 60Hz

The report refers only to the sample tested and does not apply to the bulk.

Date: 2020-06-11

Report No.: FCC2006002



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

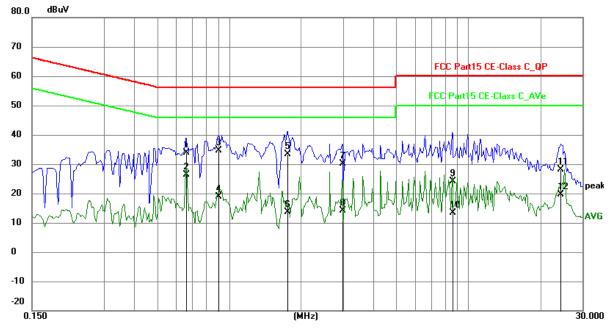

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBu∀)	Margin (dB)	Detector	P/F
1	0.6609	24.20	9.78	33.98	56.00	-22.02	QP	Р
2	0.6609	16.56	9.78	26.34	46.00	-19.66	AVG	Р
3	0.9027	24.90	9.79	34.69	56.00	-21.31	QP	Р
4	0.9027	8.99	9.79	18.78	46.00	-27.22	AVG	Р
5	1.7529	23.59	9.80	33.39	56.00	-22.61	QP	Р
6	1.7529	3.77	9.80	13.57	46.00	-32.43	AVG	Р
7	2.9775	20.41	9.84	30.25	56.00	-25.75	QP	Р
8	2.9775	4.31	9.84	14.15	46.00	-31.85	AVG	Р
9	8.5848	14.08	10.09	24.17	60.00	-35.83	QP	Р
10	8.5848	3.29	10.09	13.38	50.00	-36.62	AVG	Р
11	24.3486	17.24	10.95	28.19	60.00	-31.81	QP	Р
12	24.3486	8.75	10.95	19.70	50.00	-30.30	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2020-06-11



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

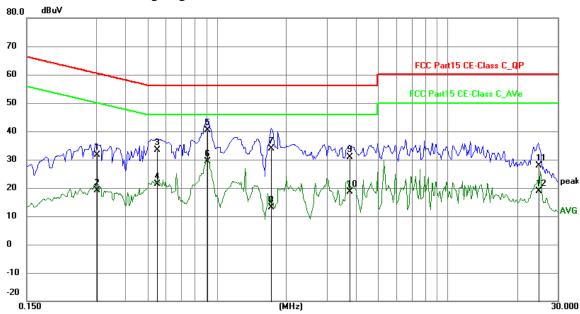

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.3021	21.76	9.76	31.52	60.18	-28.66	QP	Р
2	0.3021	9.46	9.76	19.22	50.18	-30.96	AVG	Р
3	0.5517	23.68	9.77	33.45	56.00	-22.55	QP	Р
4	0.5517	11.50	9.77	21.27	46.00	-24.73	AVG	Р
5	0.9066	30.71	9.79	40.50	56.00	-15.50	QP	Р
6	0.9066	19.49	9.79	29.28	46.00	-16.72	AVG	Р
7	1.7217	24.06	9.80	33.86	56.00	-22.14	QP	Р
8	1.7217	3.33	9.80	13.13	46.00	-32.87	AVG	Р
9	3.7449	21.05	9.88	30.93	56.00	-25.07	QP	Р
10	3.7449	8.72	9.88	18.60	46.00	-27.40	AVG	Р
11	24.6918	17.01	10.97	27.98	60.00	-32.02	QP	Р
12	24.6918	7.88	10.97	18.85	50.00	-31.15	AVG	Р

Report No.: FCC2006002 Page 12 of 89


Date: 2020-06-11



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

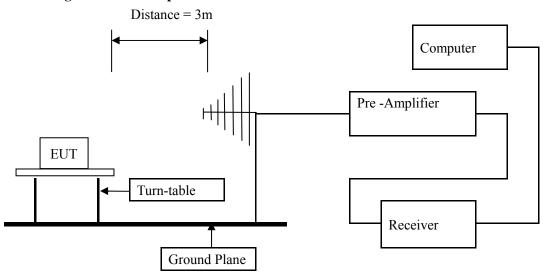

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC2006002 Page 13 of 89

Date: 2020-06-11



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Battery full charged during tests.
- 5. The three modulation modes of GFSK, Pi/4D-QPSK, and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.
- 6. X, Y, Z are all have been tested, only worse case is reported

Report No.: FCC2006002

Date: 2020-06-11



Page 14 of 89

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass


Page 15 of 89 Report No.: FCC2006002


Date: 2020-06-11



Test Figure:

H



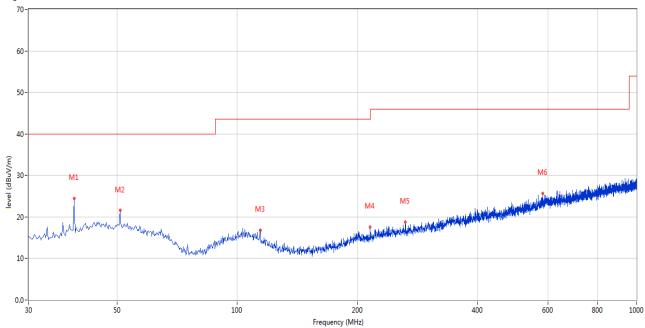


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	52.547	33.55	-11.46	40.0	-6.45	Peak	360.00	200	Н	Pass
2	82.124	35.58	-17.17	40.0	-4.42	Peak	16.00	200	Н	Pass
3	141.037	30.52	-17.26	43.5	-12.98	Peak	337.00	200	Н	Pass
4	173.767	29.45	-15.88	43.5	-14.05	Peak	39.00	200	Н	Pass
5	276.318	33.04	-11.61	46.0	-12.96	Peak	360.00	200	Н	Pass
6	378.628	32.92	-9.29	46.0	-13.08	Peak	125.00	100	Н	Pass

Page 16 of 89 Report No.: FCC2006002

Date: 2020-06-11



Test Figure:

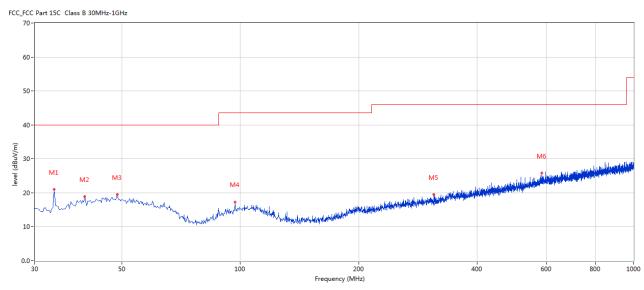

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	33.637	20.96	-14.31	40.0	-19.04	Peak	203.00	100	V	Pass
2	40.182	18.95	-12.35	40.0	-21.05	Peak	205.00	100	V	Pass
3	48.668	19.54	-11.22	40.0	-20.46	Peak	277.00	100	V	Pass
4	96.913	17.32	-13.96	43.5	-26.18	Peak	142.00	200	V	Pass
5	310.745	19.47	-10.72	46.0	-26.53	Peak	48.00	200	V	Pass
6	584.701	25.79	-5.44	46.0	-20.21	Peak	121.00	200	٧	Pass

Report No.: FCC2006002 Page 17 of 89

Date: 2020-06-11



Operation Mode: Transmitting under Low Channel (2402MHz)

	Ü	, ,	
Frequency (MHz)	Level@3m (dBμV/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

			<u></u>
Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4882		Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: FCC2006002 Page 18 of 89

Date: 2020-06-11



Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \text{V/m} \)
4960	1	Н	74(Peak)/ 54(AV)
4960	-	V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

Report No.: FCC2006002 Page 19 of 89


Date: 2020-06-11



Please refer to the following test plots for details:

Low Channel: Vertical

FCC_FCC Part 15B Class B 1GHz-18GHz - 2

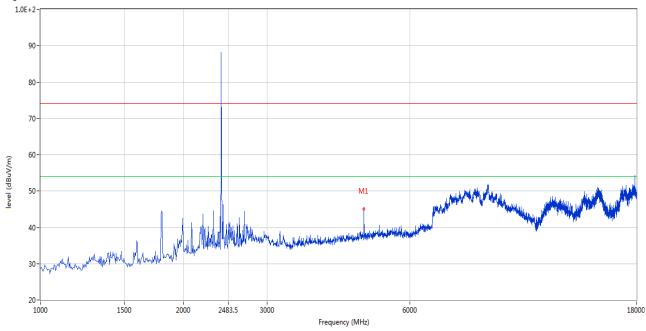


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	4802.799	45.05	3.12	54.0	-8.95	Peak	95.00	100	V	Pass

Page 20 of 89 Report No.: FCC2006002

Date: 2020-06-11



Low Channel: Horizontal

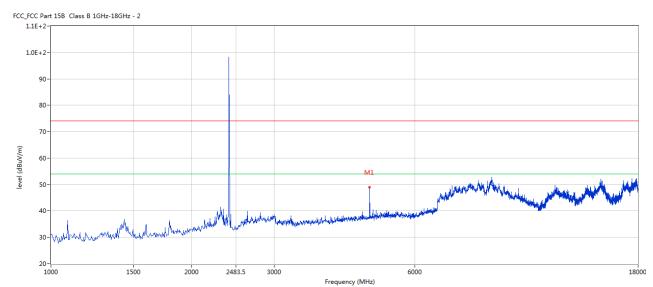


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4802.799	49.89	3.12	54.0	-4.11	Peak	214.00	100	Н	Pass

Page 21 of 89 Report No.: FCC2006002

Date: 2020-06-11



Middle Channel: Horizontal

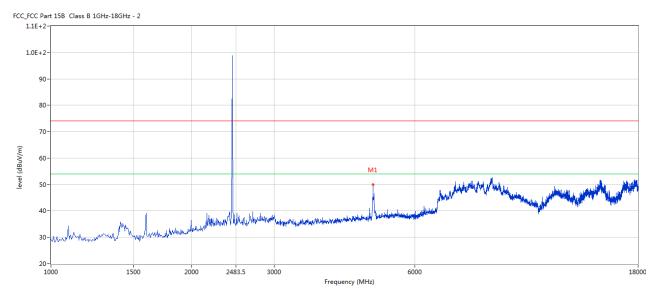


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4879.280	50.04	3.20	54.0	-3.96	Peak	224.00	100	Н	Pass

Page 22 of 89 Report No.: FCC2006002

Date: 2020-06-11



Middle Channel: Vertical

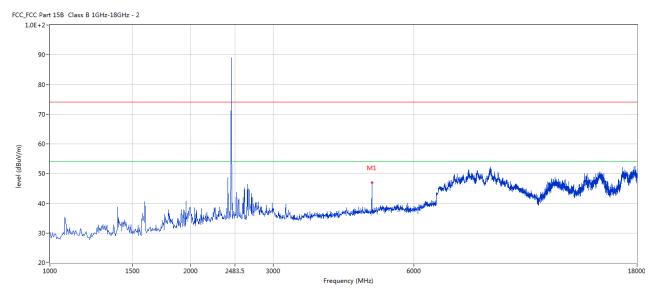

1	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	1	4883.529	46.89	3.20	54.0	-7.11	Peak	180.00	100	٧	Pass


Page 23 of 89 Report No.: FCC2006002

Date: 2020-06-11



High Channel: Horizontal



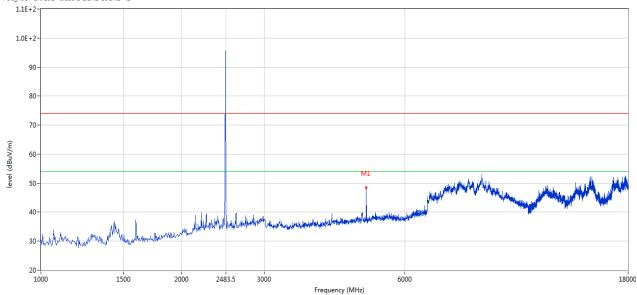


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	49.31	3.36	54.0	-4.69	Peak	234.00	100	Н	Pass

Page 24 of 89 Report No.: FCC2006002

Date: 2020-06-11



High Channel: Vertical

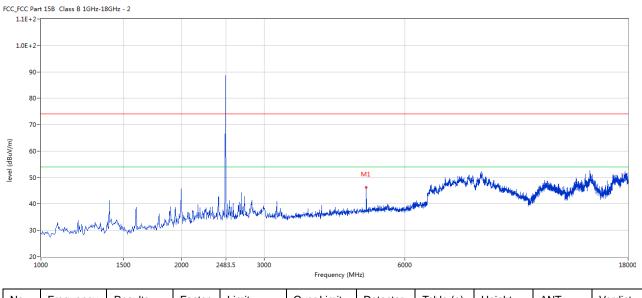

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	46.31	3.36	54.0	-7.69	Peak	166.00	100	V	Pass

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

2. For the radiated emissions above 18G and below 30MHz, it is the floor noise.

Report No.: FCC2006002

Date: 2020-06-11



Page 25 of 89

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

EUT	Harry Potter	Deathly Hallows Bluetooth	Model	4334362
		Speaker		
Mode	Ke	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail
Low	2402	824		Pass
Middle	2441	2441 827		Pass
High	2480	830		Pass

Page 26 of 89


Date: 2020-06-11

Report No.: FCC2006002



Test Figure:

1. Condition: Low Channel

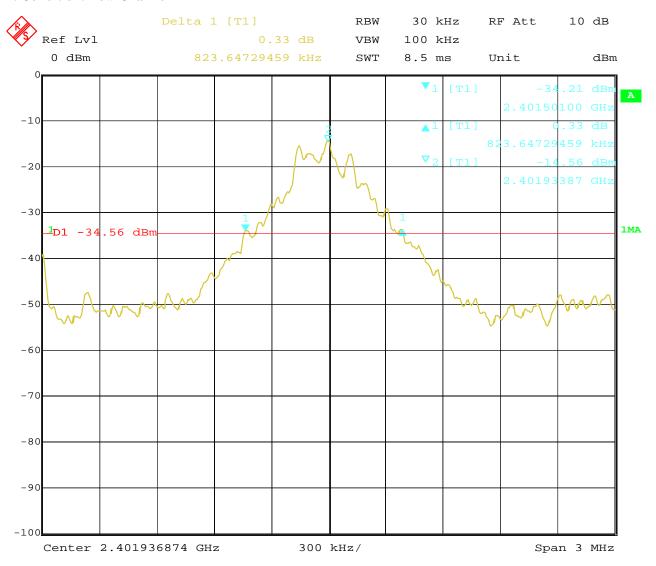


Date: 10.JUN.2020 09:57:11 Report No.: FCC2006002 Page 27 of 89

Date: 2020-06-11



2. Condition: Middle Channel

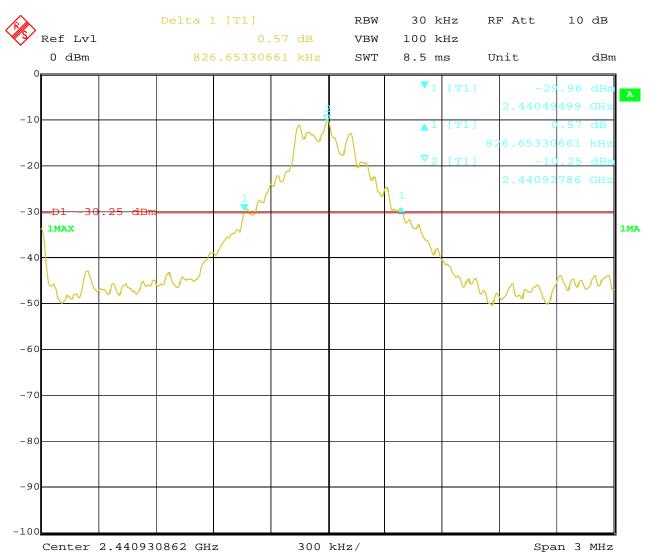


10.JUN.2020 09:56:01 Date:

Report No.: FCC2006002 Page 28 of 89

Date: 2020-06-11



3. High Channel

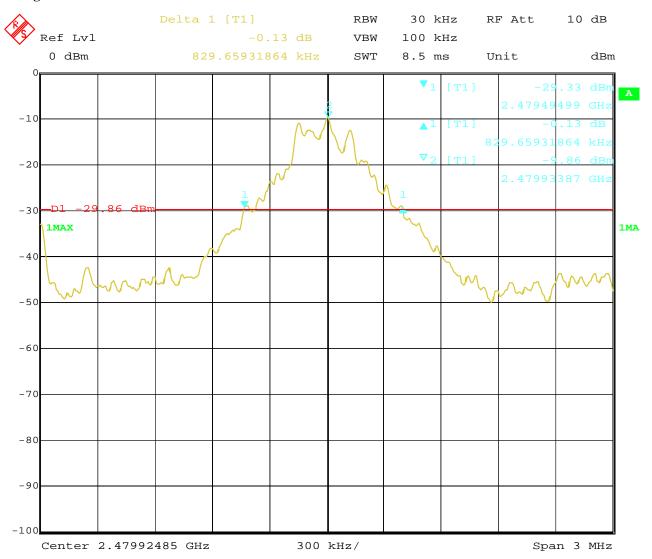

10.JUN.2020 09:54:42 Date:

Page 29 of 89 Report No.: FCC2006002

Date: 2020-06-11



Test Result

Type of Modulation: JI/4DQPSK

EUT	Harry Potter Dea	thly Hallows Bluetooth Speaker	Model	4334362
Mode	K	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1214		Pass
Middle	2441	1208		Pass
High	2480	1208		Pass


Report No.: FCC2006002 Page 30 of 89

Date: 2020-06-11



Test Figure:


1. Condition: Low Channel

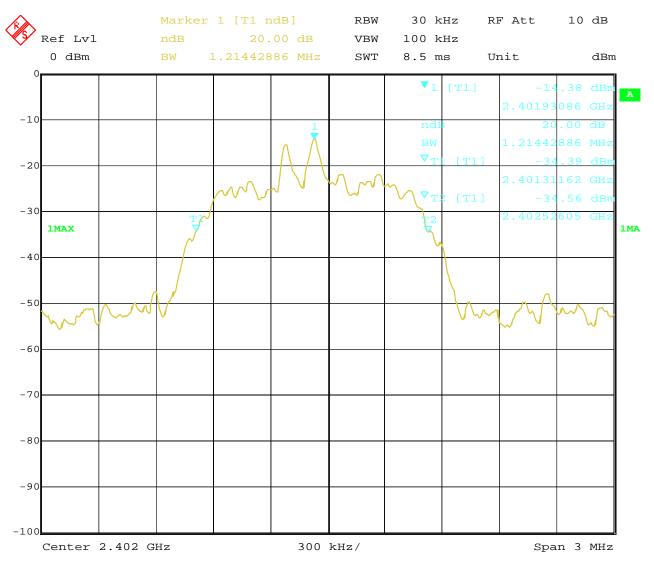

Date: 10.JUN.2020 10:19:26 Page 31 of 89

Report No.: FCC2006002 Date: 2020-06-11

2. Condition: Middle Channel

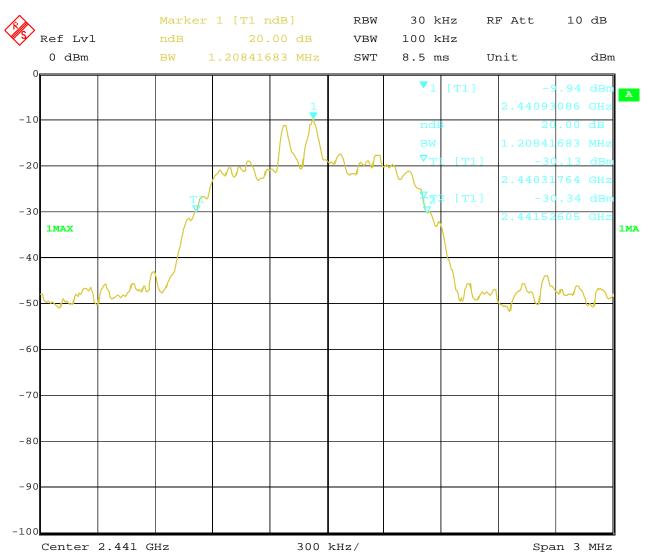


10.JUN.2020 Date: 10:17:34 Report No.: FCC2006002 Page 32 of 89

Date: 2020-06-11



3. High Channel

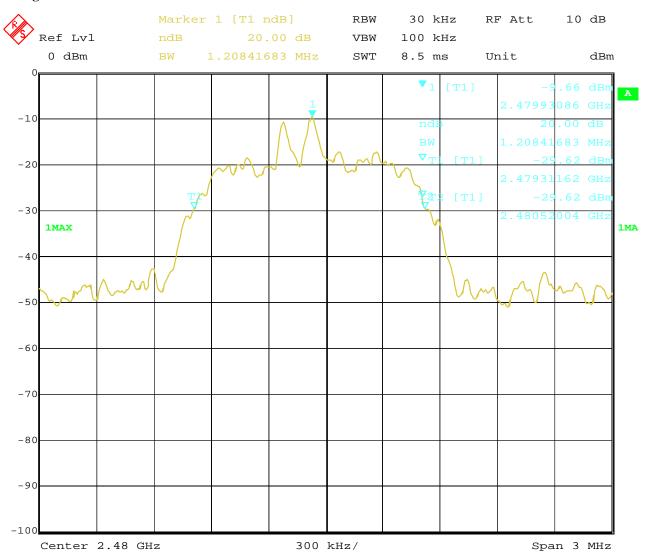

10.JUN.2020 10:11:10 Date:

Page 33 of 89 Report No.: FCC2006002

Date: 2020-06-11



Test Result

Type of Modulation: 8DPSK

EUT	Harry Potter Dea	thly Hallows Bluetooth Speaker	Model	4334362
Mode	K	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1214		Pass
Middle	2441	1208		Pass
High	2480	1208		Pass


Report No.: FCC2006002 Page 34 of 89

Date: 2020-06-11



Test Figure:

1. Condition: Low Channel

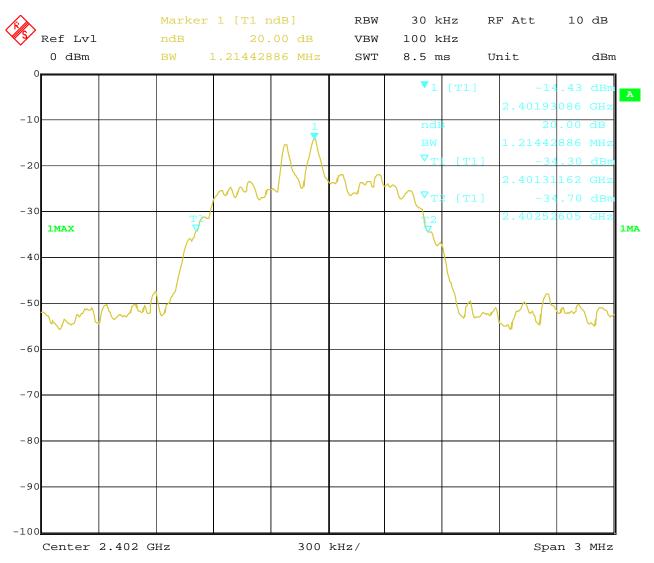


Date: 10.JUN.2020 10:21:28 Report No.: FCC2006002 Page 35 of 89

Date: 2020-06-11



2. Condition: Middle Channel

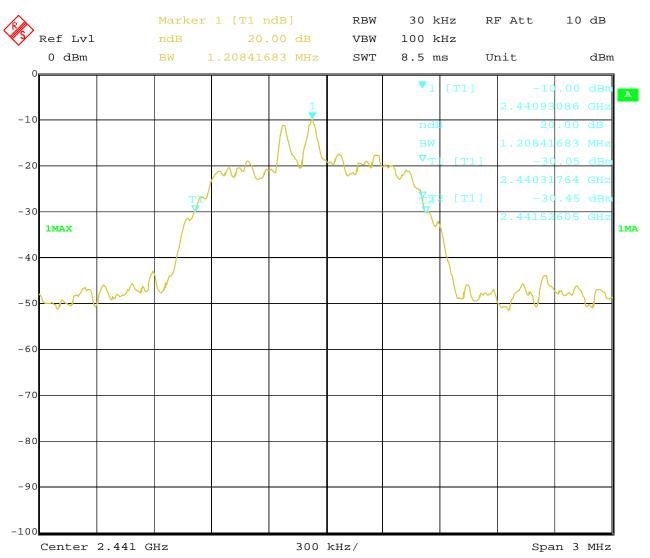


10.JUN.2020 Date: 10:15:56 Report No.: FCC2006002 Page 36 of 89

Date: 2020-06-11



3. High Channel

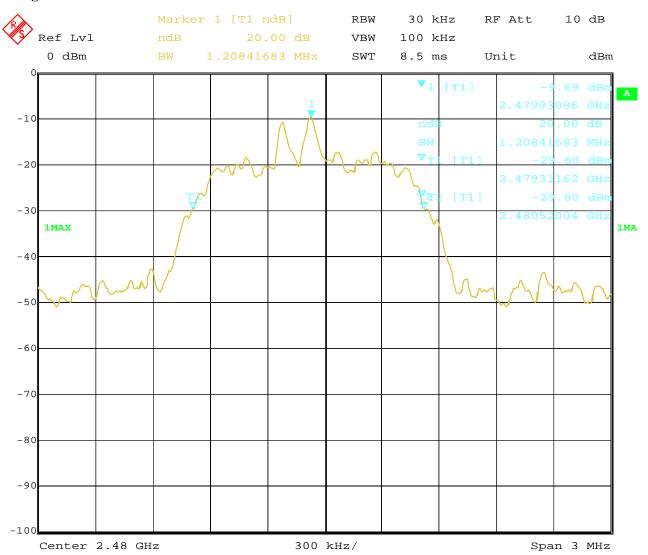

10.JUN.2020 10:14:32 Date:

Date: 2020-06-11



Page 37 of 89

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm or 21dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = 3MHz, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = 10MHz, RBW=3MHz;

Sweep = auot; Detector function = PK; Trace = max hold

- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Date: 2020-06-11



Page 38 of 89

8.4Test Results

Type of Modulation: GFSK

EUT	Harry Potter	Harry Potter Deathly Hallows Bluetooth Speaker			4334362
Mode	Ke	Keep Transmitting Input Voltage		Voltage	DC3.7V
Temperature	e	24 deg. C, Humidity		idity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit	Pass/ Fail
	(14112)	Peak		(dBm)	
Low	2402	-11.40		30	Pass
Middle	2441	-7.31		30	Pass
High	2480	-6.91		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Report No.: FCC2006002 Page 39 of 89

Date: 2020-06-11



Type of Modulation: $\sqrt{1/4}$ DQPSK

EUT		Harry Potter Deathly Hallows Bluetooth Speaker		N	Model	4334362
Mode		Ke	ep Transmitting	Input Voltage		DC3.7V
Temperature			24 deg. C,	Humi	idity	56% RH
Channel	Channel Frequency (MHz)		Max. Power Output (dBm)		Peak Power Limit	Pass/ Fail
			Peak		(dBm)	
Low		2402	-12.18		21	Pass
Middle		2441	-8.19		21	Pass
High		2480	-7.66		21	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Type of Modulation: 8DPSK

EUT	Harry Potter I	Harry Potter Deathly Hallows Bluetooth		Model	4334362
	Speaker				
Mode	Mode Keep Transmitting		Input Voltage		DC3.7V
Temperature	e	24 deg. C,	Н	umidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-12.18		21	Pass
Mid	2441	-8.04		21	Pass
High	2480	-7.66		21	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Date: 2020-06-11



Page 40 of 89

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 41 of 89

Report No.: FCC2006002

Date: 2020-06-11




9.4Test Result

Type of Modulation: GFSK

EUT	Harry Potter Deathly Hal	Model		4334362		
	Speaker					
Mode	Hopping O	Input Voltage		DC3.7V		
Temperature	24 deg. C,		Humidity		56% RH	
Carrier I	Frequency Separation		Limit		Pass/ Fail	
	1MHz	≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass	

Test Plots

1. Condition: Low Channel

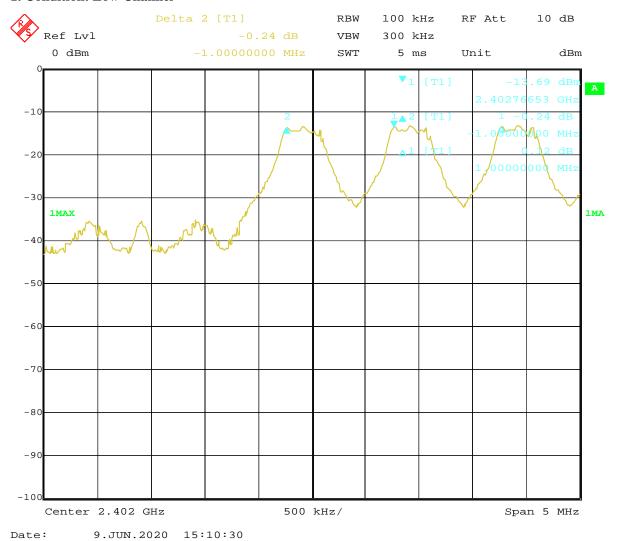

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC2006002 Page 42 of 89

Date: 2020-06-11



2. Condition: Middle Channel

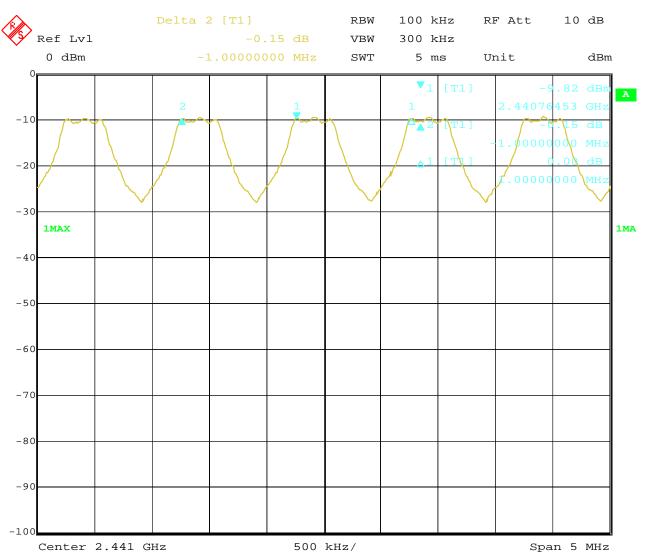


9.JUN.2020 15:40:40 Date:

Report No.: FCC2006002 Page 43 of 89

Date: 2020-06-11



3. High Channel

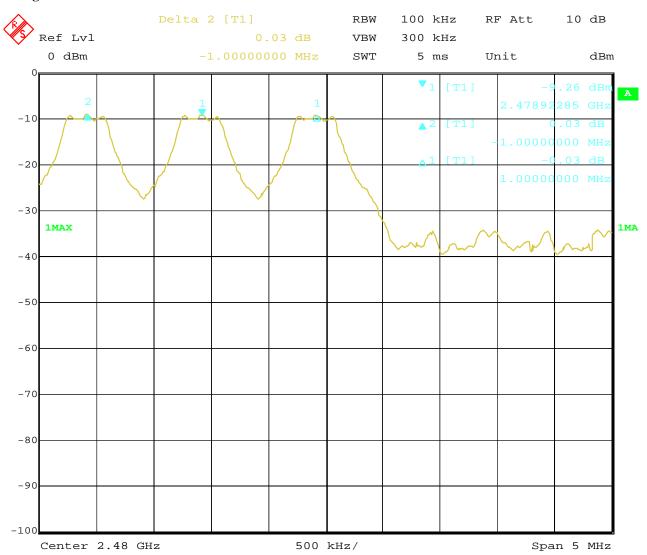

9.JUN.2020 16:01:26 Date:

Page 44 of 89

Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: Л/4DQPSK

EUT	Harry Potter Deathly Hal	Model		4334362	
	Speaker				
Mode	Hopping O	Input Voltage		DC3.7V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation			Limit		Pass/ Fail
	1MHz	≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

Test Plots

1. Condition: Low Channel

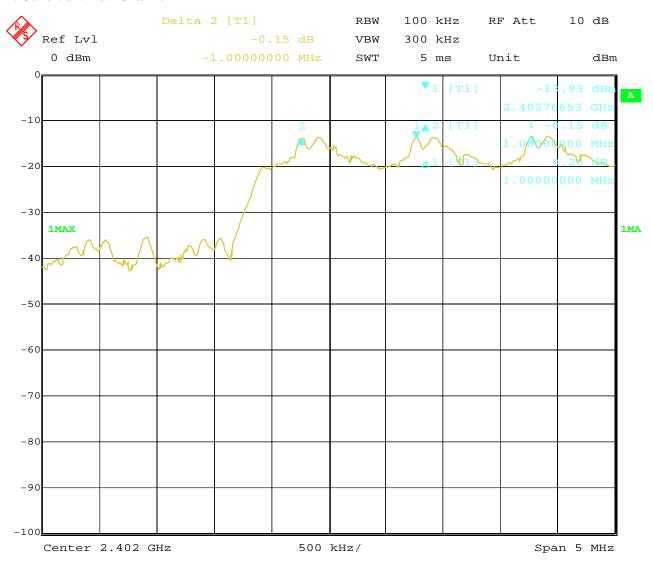

9.JUN.2020 16:51:48 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC2006002 Page 45 of 89

Date: 2020-06-11



2. Condition: Middle Channel

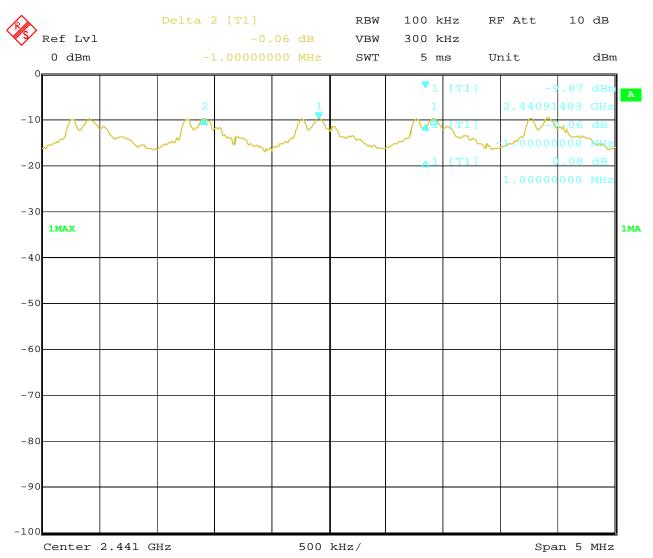


9.JUN.2020 Date: 16:36:43 Report No.: FCC2006002 Page 46 of 89

Date: 2020-06-11



3. High Channel

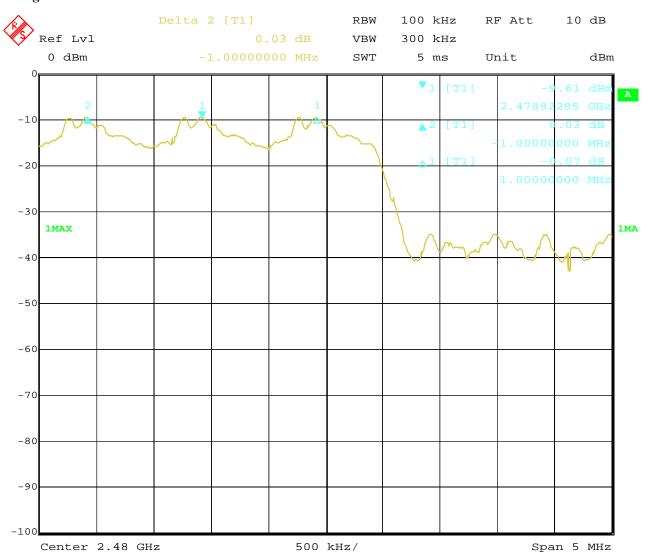

9.JUN.2020 Date: 16:21:07

Page 47 of 89

Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: 8DPSK

EUT	Harry Potter Deathly Hal	Model		4334362	
	Speaker				
Mode	Hopping O	Input Voltage		DC3.7V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation			Limit		Pass/ Fail
	1MHz	≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

Test Plots

1. Condition: Low Channel

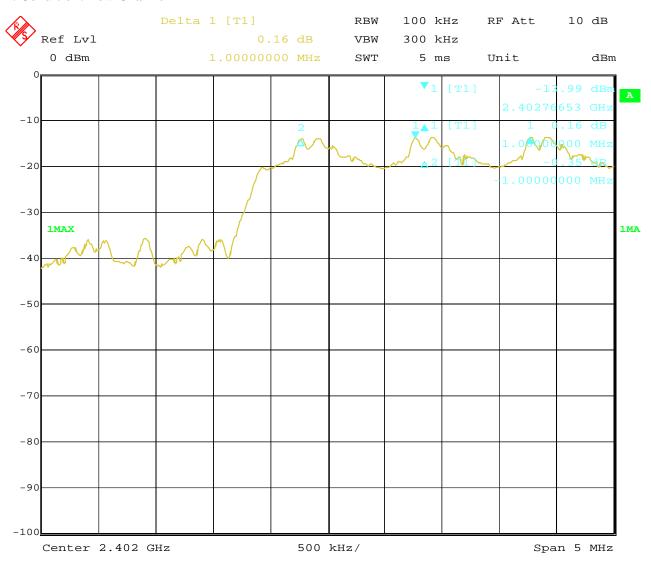

9.JUN.2020 17:08:45 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC2006002 Page 48 of 89

Date: 2020-06-11



2. Condition: Middle Channel

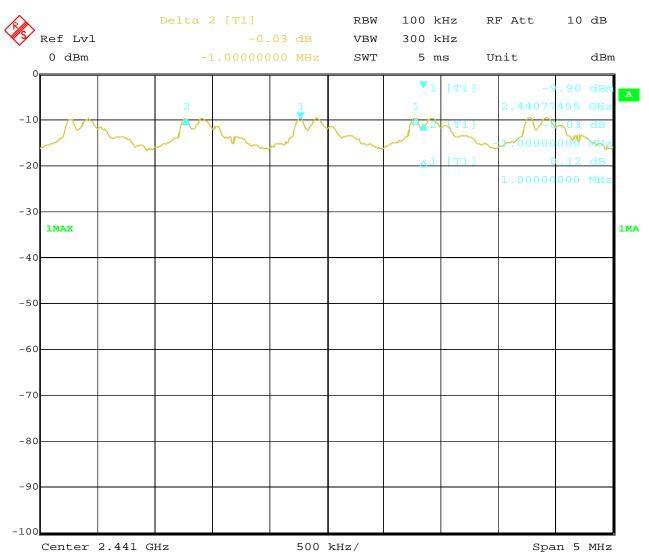


9.JUN.2020 Date: 17:26:58 Report No.: FCC2006002 Page 49 of 89

Date: 2020-06-11



3. High Channel

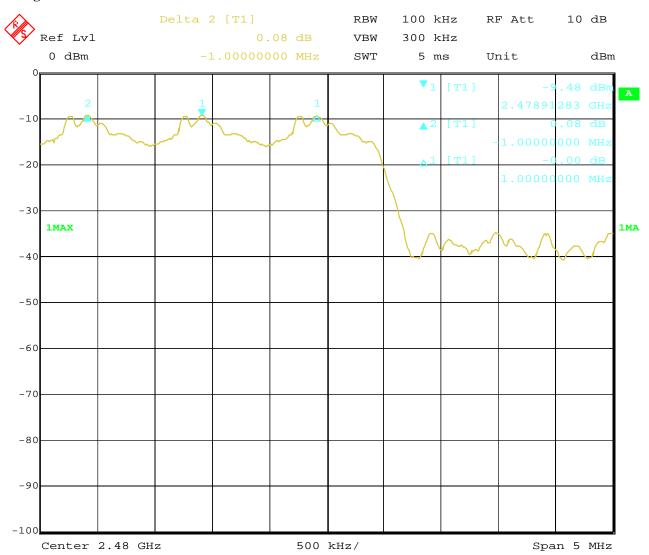

9.JUN.2020 18:00:38 Date:

Date: 2020-06-11



Page 50 of 89

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100kHz, VBW=300kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Date: 2020-06-11




10.4Test Result

Type of Modulation: GFSK

EUT	_	er Deathly Hallows tooth Speaker	Model		4334362	
Mode	Hopping On		Input Voltage	DC3.7V		
Temperature	2	24 deg. C,	Humidity		56% RH	
Operating Frequency		Number of hopp	oing channels	Limit	Pass/ Fail	
2402-2480MHz		79		≥ 15	Pass	

Test Plot

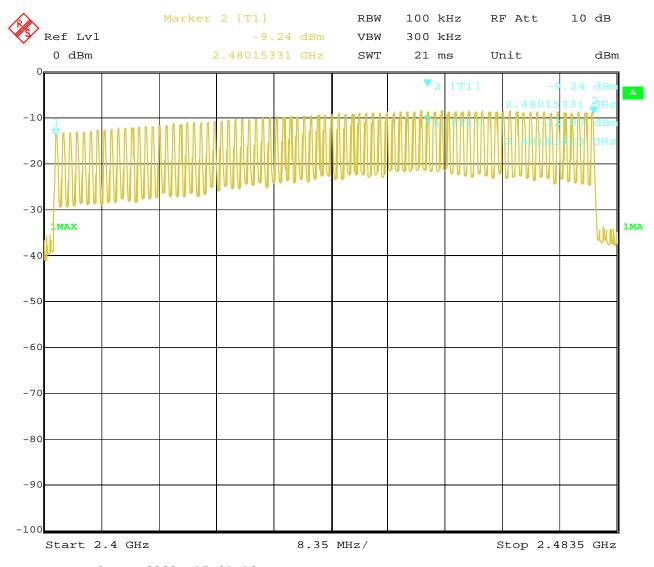

Date: 9.JUN.2020 15:01:10

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 52 of 89

Report No.: FCC2006002


Date: 2020-06-11



Type of Modulation: $\sqrt{1/4}$ DQPSK

EUT	Harry Potter Deathly Hallows		M	Iodel		4334362
	Bluetooth Speaker					
Mode	Hopping On		Input Voltage			DC3.7V
Temperature		24 deg. C,	Hum	idity		56% RH
Operating Frequency		Number of hoppin channels	g	Lir	nit	Pass/ Fail
2402-2480MHz		79		≥ ¹	15	Pass

Test Plot

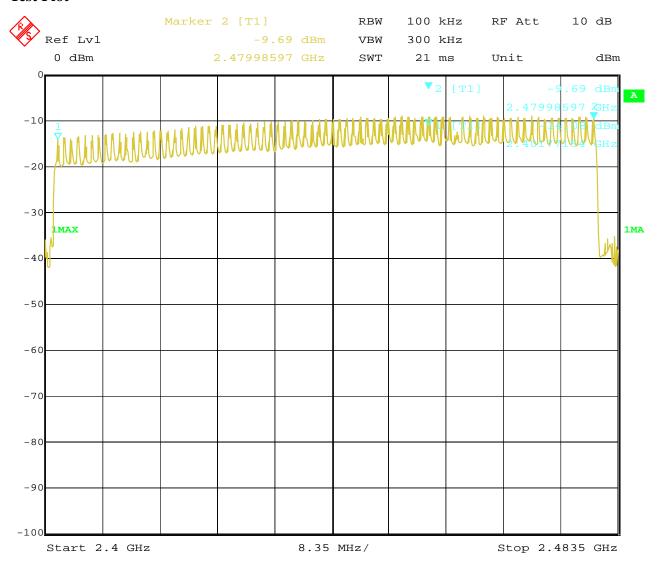

10.JUN.2020 09:24:10 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 53 of 89

Report No.: FCC2006002


Date: 2020-06-11



Type of Modulation: 8DPSK

EUT	Harry Potter Deathly Hallows		Mo	odel		4334362
	Blue	tooth Speaker				
Mode Hopping On		opping On	Input V	oltage		DC3.7V
Temperature	2	24 deg. C,	Humidi	ity		56% RH
Operating Frequency		Number of hopp channels	oing	Lit	mit	Pass/ Fail
2402-2480MHz		79		<u>></u>	15	Pass

Test Plot

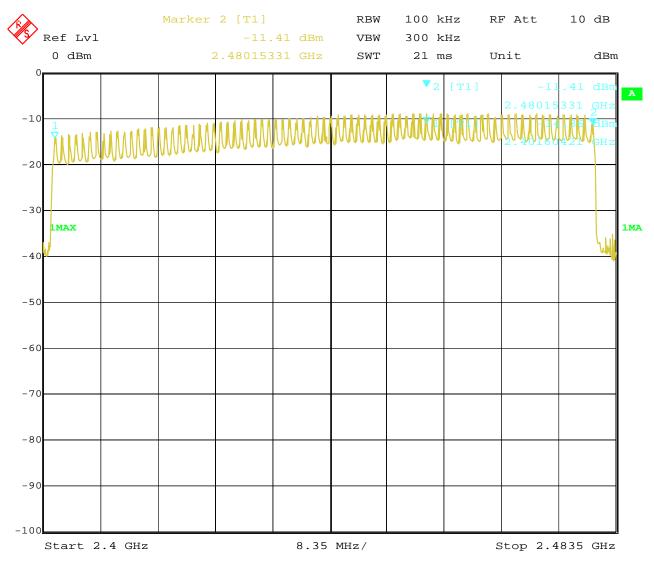

Date: 10.JUN.2020 09:20:39

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2020-06-11



Page 54 of 89

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: FCC2006002 Page 55 of 89

Date: 2020-06-11



11.4 Test Result

Type of Modulation: GFSK

EUT	Harry Potter I	Harry Potter Deathly Hallows		4	334362
	Bluetoo	th Speaker			
Mode	Keep Tr	Input Voltage		DC3.7V	
Temperature	e 24 d	eg. C,	Humidity	5	56% RH
Channel	Reading	Hoping	g Rate	Actual	Limit
			DH5		
Middle	2.986ms	266.667	7 hop/s	0.319s	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.

Page 56 of 89


Report No.: FCC2006002

Date: 2020-06-11



Test Plots:

DH5

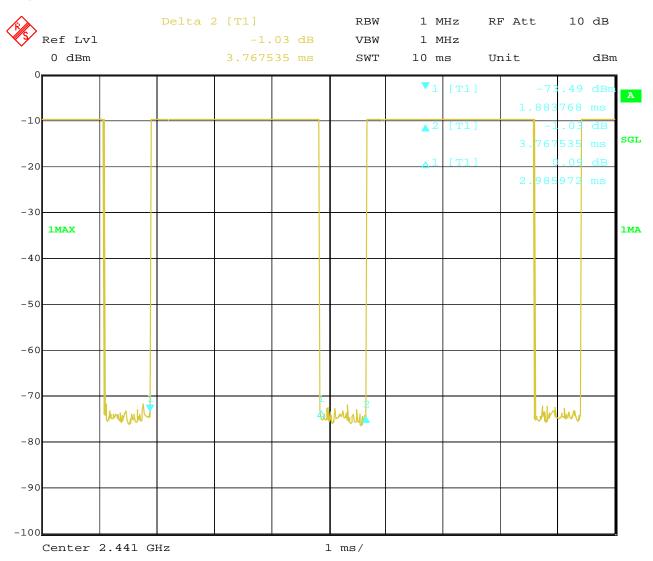

Date: 10.JUN.2020 10:50:04

Date: 2020-06-11



Page 57 of 89

Test Result

Type of Modulation: JI/4DQPSK

EUT	Harry Potter l	Harry Potter Deathly Hallows		4	1334362
	Bluetoo	th Speaker			
Mode	Keep Tr	ansmitting	Input Voltage]	DC3.7V
Temperatur	re 24 c	leg. C,	Humidity	4	56% RH
Channel	Reading	Hoping	g Rate	Actual	Limit
			DH5		
Middle	2.986ms	266.66	7 hop/s	0.319s	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.

Page 58 of 89


Report No.: FCC2006002

Date: 2020-06-11



Test Plots:

2DH5

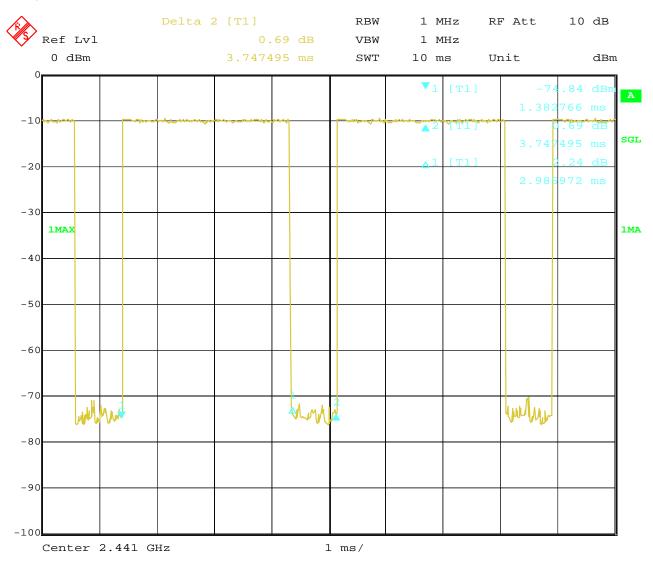

Date: 10.JUN.2020 10:56:18 Report No.: FCC2006002 Page 59 of 89

Date: 2020-06-11



Type of Modulation: 8DPSK

EUT	Harry Potter I	Harry Potter Deathly Hallows		4	334362
	Bluetoot	th Speaker			
Mode	Keep Tra	Keep Transmitting		DC3.7V	
Temperature	e 24 d	eg. C,	Humidity	5	56% RH
Channel	Reading	Hoping	g Rate	Actual	Limit
			DH5		
Middle	3.006ms	266.667	7 hop/s	0.321s	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.

Page 60 of 89


Report No.: FCC2006002

Date: 2020-06-11



Test Plots:

3DH5

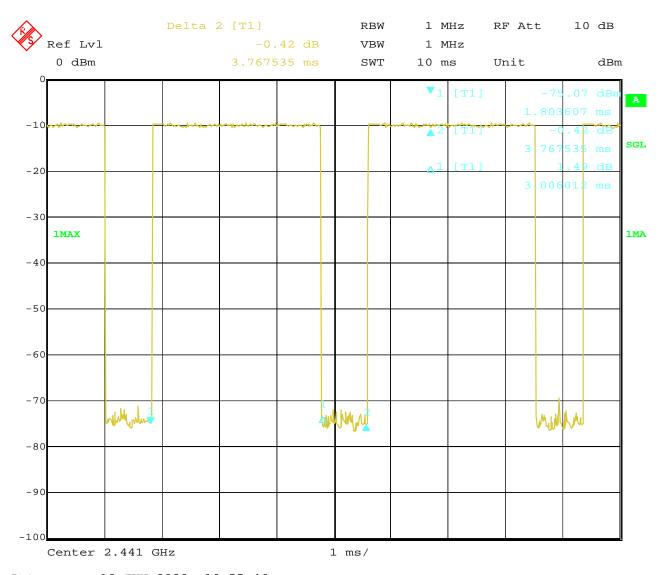

10.JUN.2020 10:55:46 Date:


Date: 2020-06-11



Page 61 of 89

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Report No.: FCC2006002 Page 62 of 89

Date: 2020-06-11




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

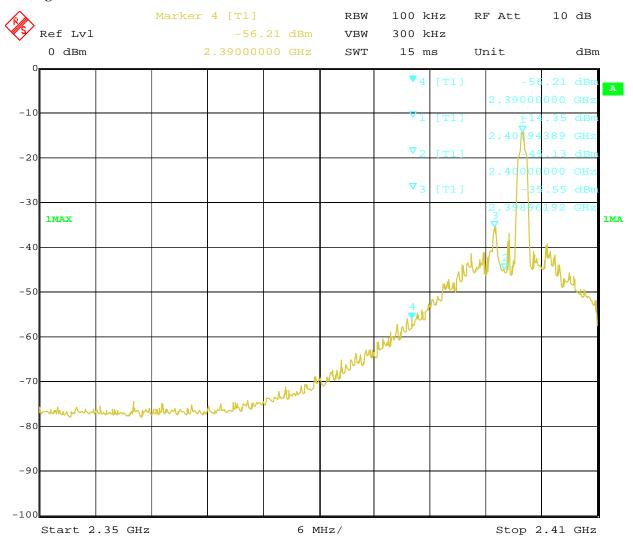

Date: 10.JUN.2020 09:58:16

Page 63 of 89

Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: GFSK

12.4 Band Edge Test Result

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

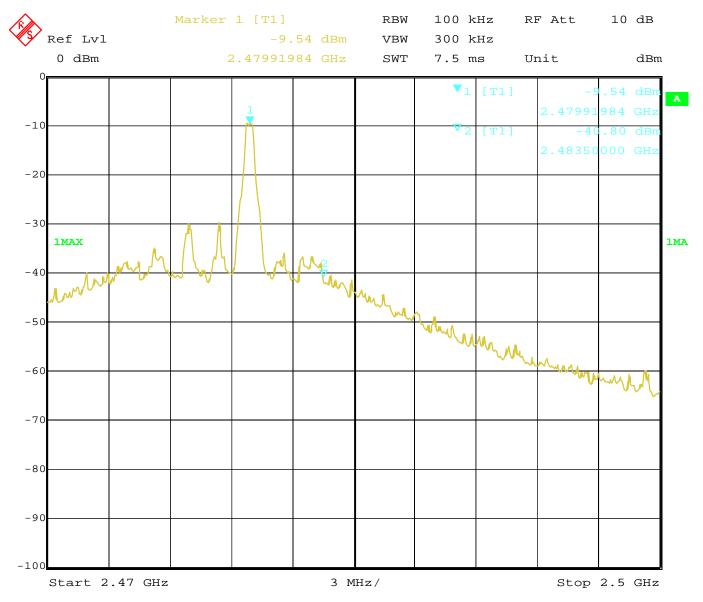

10.JUN.2020 10:09:17 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC2006002 Page 64 of 89

Date: 2020-06-11




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

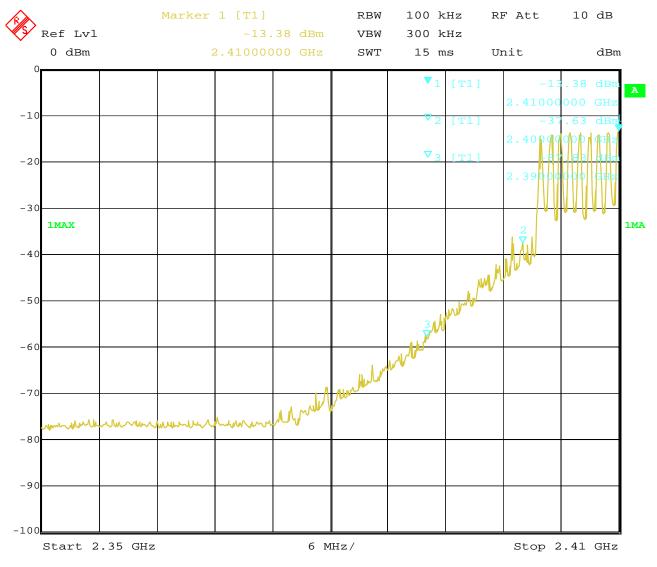

10.JUN.2020 Date: 09:49:05

Page 65 of 89 Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

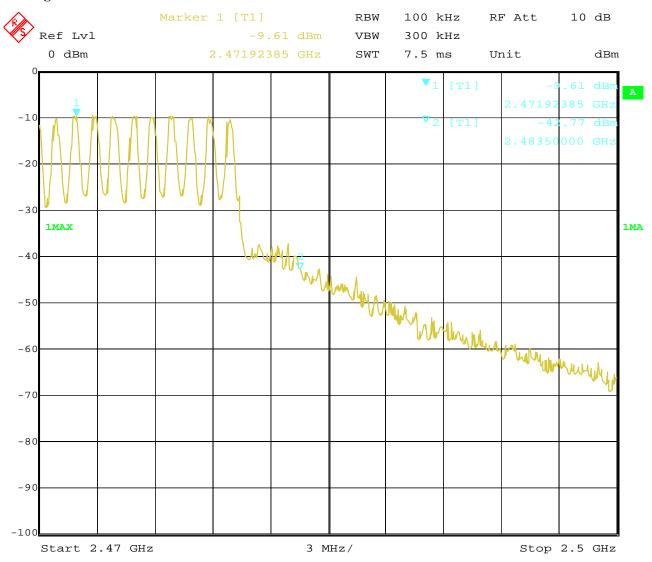

10.JUN.2020 Date: 09:50:46

Page 66 of 89

Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: $\sqrt{1/4}$ DQPSK

12.4 Out of Band Test Result

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

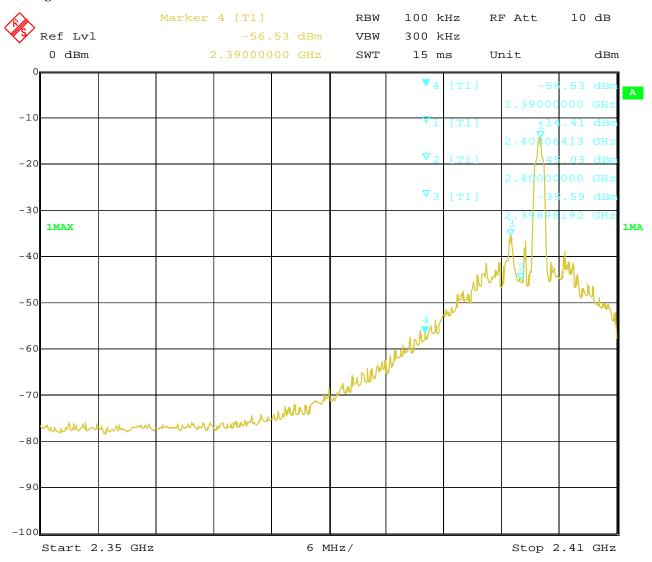

Date: 10.JUN.2020 09:59:30

Page 67 of 89 Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: Л/4DQPSK

Band Edge Test Result 12.4

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

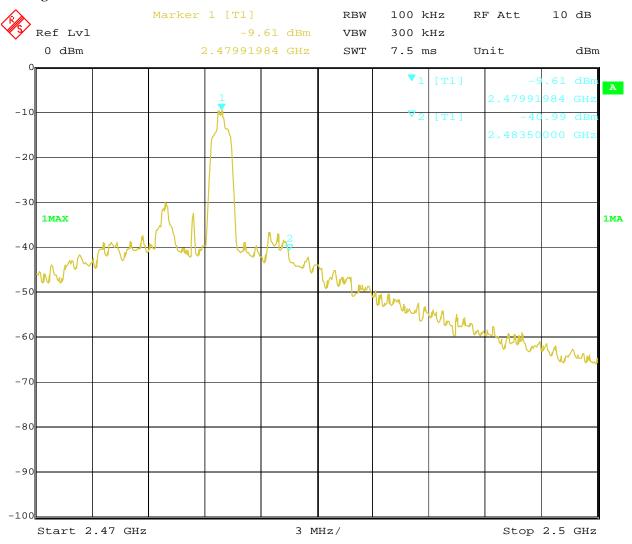

Date: 10.JUN.2020 10:07:39

Page 68 of 89 Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: Л/4DQPSK

Band Edge Test Result

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

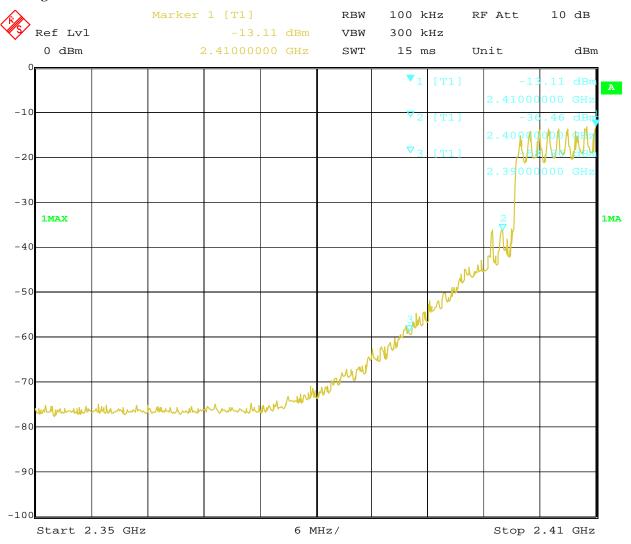

Date: 10.JUN.2020 09:47:39

Page 69 of 89 Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: Л/4DQPSK

Band Edge Test Result

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

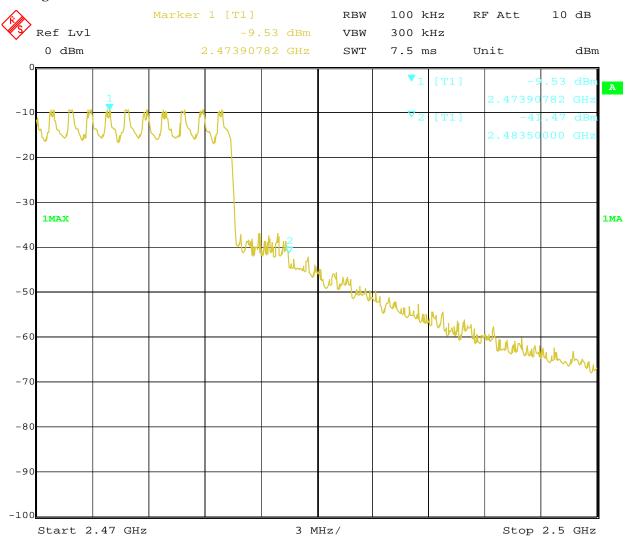

Date: 10.JUN.2020 09:30:19

Page 70 of 89 Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

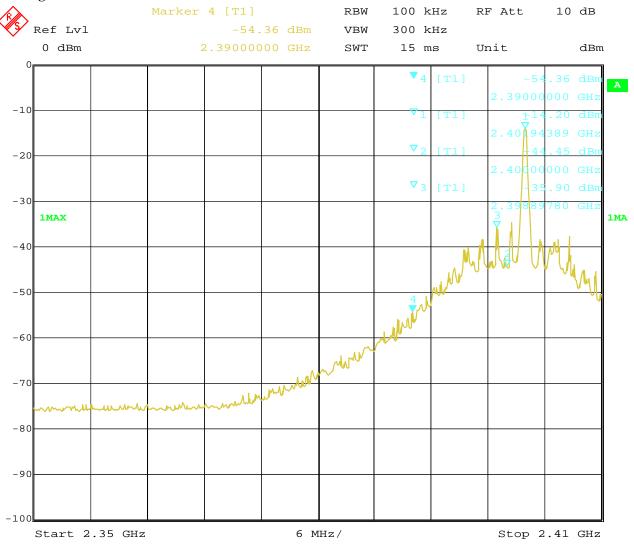

10.JUN.2020 10:01:57 Date:

Page 71 of 89

Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	Harry Potter Deathly Hallows Bluetooth	Test Mode:	High Channel
	Speaker		
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

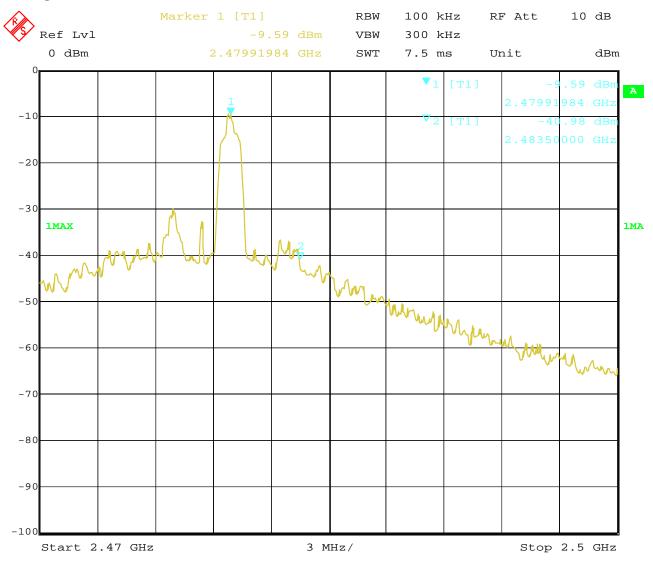

10.JUN.2020 Date: 10:05:19

Page 72 of 89 Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

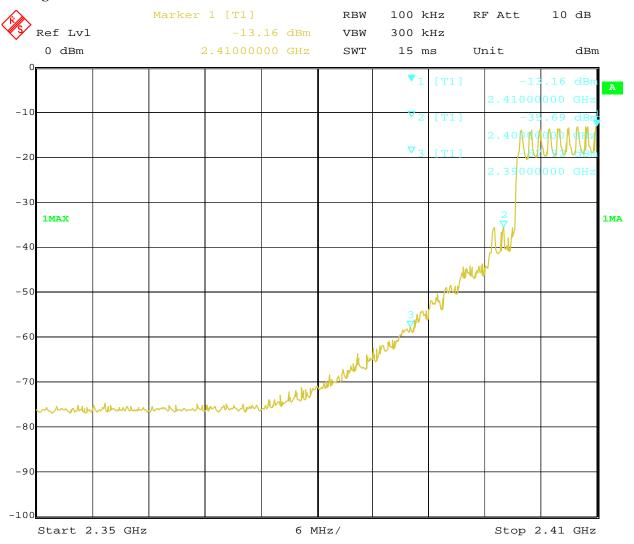

Date: 10.JUN.2020 09:44:38

Page 73 of 89 Report No.: FCC2006002

Date: 2020-06-11




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Harry Potter Deathly Hallows Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

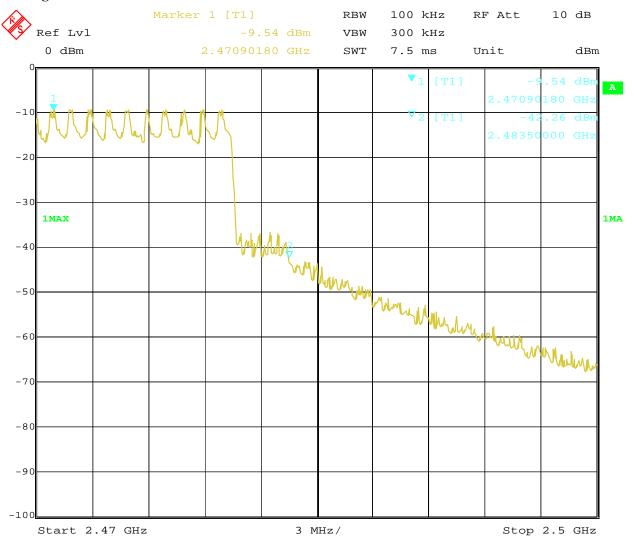


Date: 10.JUN.2020 09:36:01 Report No.: FCC2006002 Page 74 of 89

Date: 2020-06-11



12.4 Restrict Band Measurement

EUT	Harry Potter Deathly Hallows	Model	4334362
	Bluetooth Speaker		
Mode	Keep Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Modulation Type	GFSK

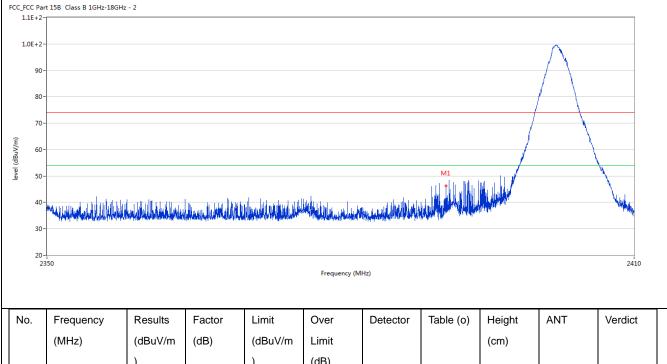


Report No.: FCC2006002 Page 75 of 89

Date: 2020-06-11



12.4 Restrict Band Measurement

EUT	Harry Potter Deathly Hallows	Model	4334362
	Bluetooth Speaker		
Mode	Keep Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Modulation Type	GFSK

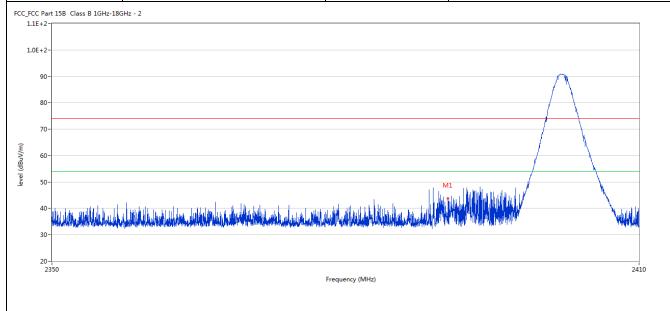

Ī	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict	1
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)			ı
	1	2390.005	43.83	-3.53	54.0	-10.17	Peak	118.00	100	٧	Pass	1


Report No.: FCC2006002 Page 76 of 89

Date: 2020-06-11



12.4 Restrict Band Measurement

EUT	Harry Potter Deathly Hallows	Model	4334362
	Bluetooth Speaker		
Mode	Keep Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Modulation Type	GFSK

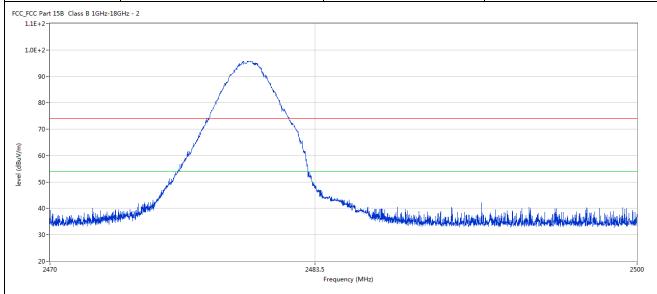

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit	Detector	Table (o)	Height (cm)	ANT	Verdict	
1	2483.5	49.54	-3.57	54.0	-4.46	Peak	64.00	100	Н	Pass	

Report No.: FCC2006002 Page 77 of 89

Date: 2020-06-11



12.4 Restrict Band Measurement

EUT		Potter De Bluetooth	athly Hallov Speaker	VS	Model			433436	52
Mode					Input Volta	ige	DC3.7V 56% RH		
Temperature	•			Humidity	y				
Test Result:		Pas	S	M	odulation '	Туре		GFSK	(
CC_FCC Part 15B Class B 10 1.1E+2 1.0E+2 90 80 70 40 40 40 20 2470	Hz-18GHz - 2			2483.5					2500
				Frequency (M	IHz)				
No. Frequence (MHz)	ey Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
(

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 3. The three modulation modes of GFSK, Pi/4D-QPSK, and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: FCC2006002

Date: 2020-06-11



Page 78 of 89

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

PCB antennas used. The gain of the antennas is -0.58dBi.

Report No.: FCC2006002 Page 79 of 89

Date: 2020-06-11




14.0 FCC ID Label

FCC ID: 2AWNFHPDHBS

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

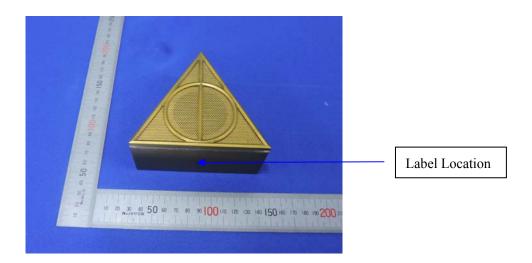

Page 80 of 89 Report No.: FCC2006002

Date: 2020-06-11



15.0 Photo of testing

Conducted Emission Test Setup:




Page 81 of 89

Report No.: FCC2006002

Date: 2020-06-11



Radiated Emission Test Setup:

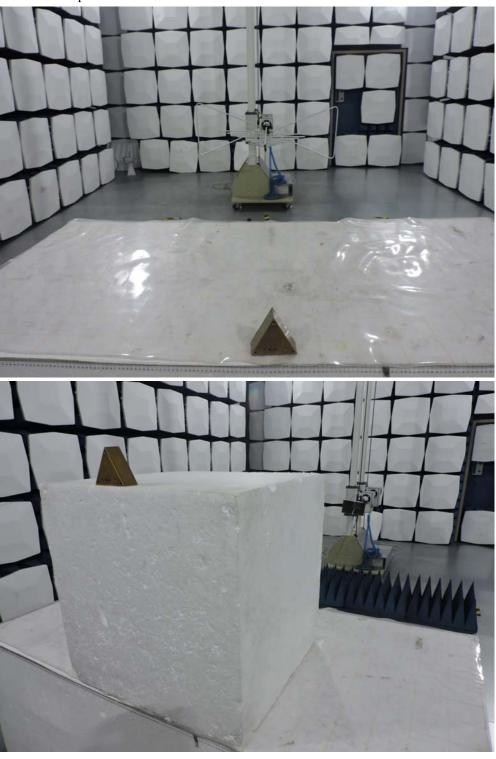



Page 82 of 89

Report No.: FCC2006002

Date: 2020-06-11



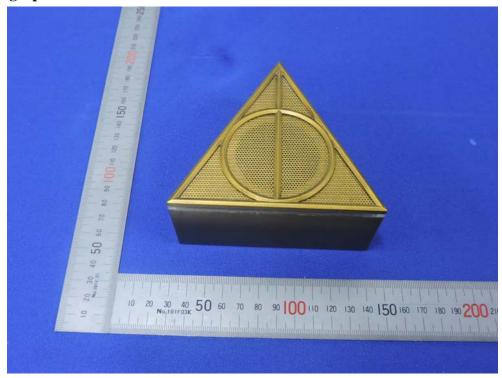

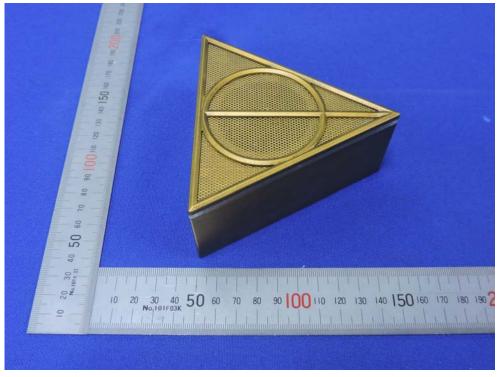



Page 83 of 89

Report No.: FCC2006002

Date: 2020-06-11



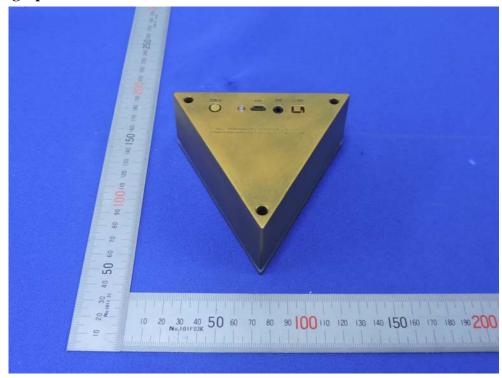

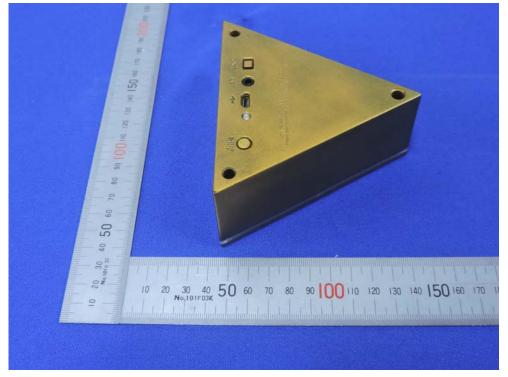

Page 84 of 89

Report No.: FCC2006002

Date: 2020-06-11



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


adopt any other remedies which may be appropriate.

Page 85 of 89

Report No.: FCC2006002

Date: 2020-06-11



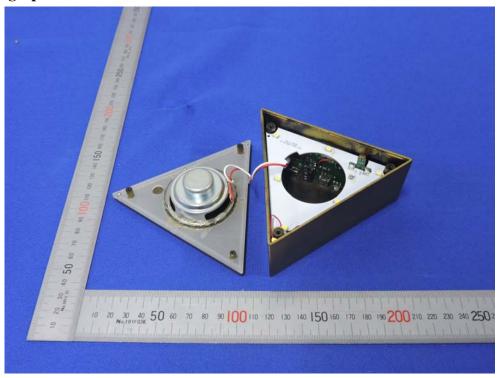




Page 86 of 89

Report No.: FCC2006002

Date: 2020-06-11





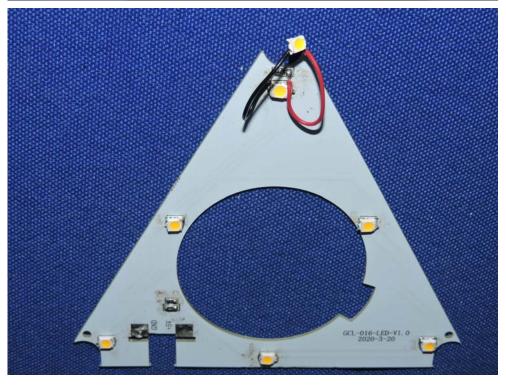


Page 87 of 89


Report No.: FCC2006002

Date: 2020-06-11



Photographs - EUT

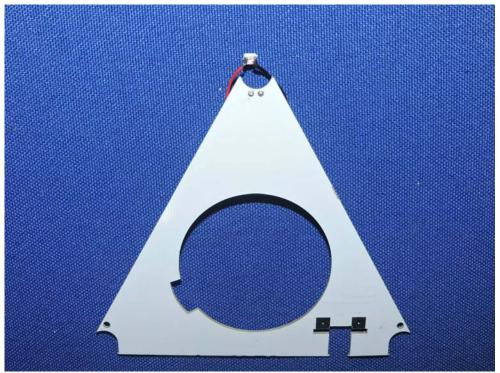

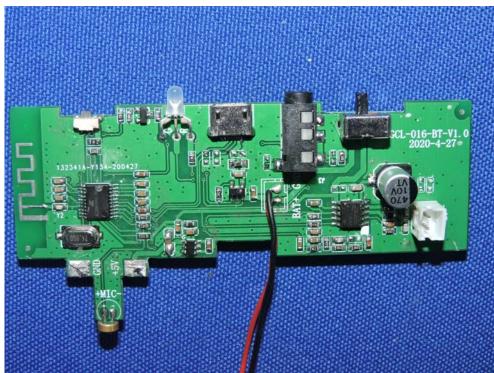

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


adopt any other remedies which may be appropriate.


Page 88 of 89

Report No.: FCC2006002

Date: 2020-06-11



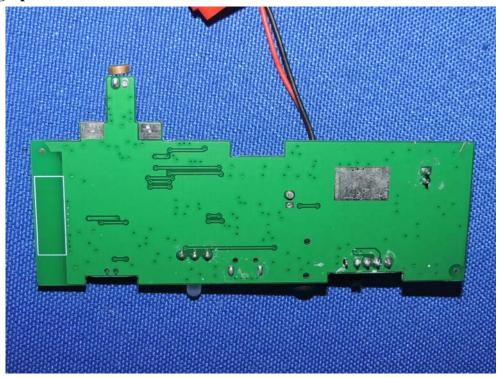

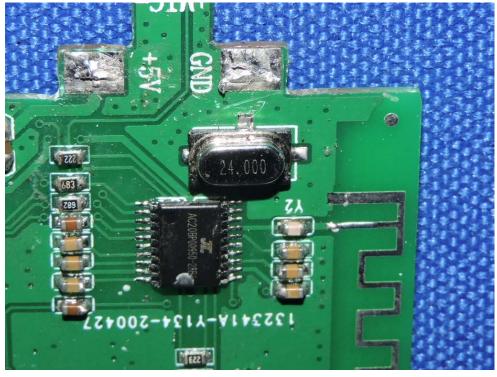

Page 89 of 89

Report No.: FCC2006002

Date: 2020-06-11



Photographs - EUT





End of Report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.