



TEST REPORT

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Tel: 82-31-285-0894 Fax: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR20-SEF0161 Page (1) of (20)</p>	
--	--	---

1. Client

- Name : NODE Co., Ltd.
- Address : #1005, 200, Gieupdosi-ro, Wonju-si, Korea
- Date of Receipt : 2020-08-05

2. Use of Report : -

3. Name of Product / Model : Lip Plumper / NP-P100

4. Manufacturer / Country of Origin : NODE Co., Ltd. / Korea



5. Date of Test : 2020-08-11 to 2020-08-12

6. Location of Test : Permanent Testing Lab On Site Testing (Address: -)

7. Test method used : ANSI C63.4:2014, Class B

8. FCC ID : 2AWNMNP-P100

9. Test Results : Refer to the test result in the test report

Affirmation	Tested by 	Technical Manager 
	Name : Sunbin Hwang (Signature)	Name : Gunsu Park (Signature)

2020-10-20

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

REPORT REVISION HISTORY

Date	Revision	Page No
2020-10-20	Originally issued	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports



Nothing significant to report.

Contents

1. Applicant information	4
2. Laboratory information	5
3. Test system configuration	6
3.1 Operation environment.....	6
3.2 Measurement Uncertainty	7
4. Description of EUT	9
4.1 General information.....	9
4.2 Product description.....	10
4.3 Auxiliary equipments	10
4.4 Test configuration	11
4.5 Operating conditions	12
5. Summary of test results	13
5.1 Summary of EMI emission test results.....	13
6. Test results	14
6.1 Conducted Emissions.....	14
6.2 Radiated Emission	17

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SEF0161
Page (4) of (20)

KCTL**1. Applicant information**

Applicant: NODE Co., Ltd.
Address: #1005, 200, Gieupdosi-ro, Wonju-si, Korea
Telephone: +82-33-766-1018
Fax: +82-504-294-5340
E-mail: nara@node.healthcare
Contact name: Nara Lee

Manufacturer: NODE Co., Ltd.
Address: #1005, 200, Gieupdosi-ro, Wonju-si, Korea
Telephone: +82-33-766-1018
Fax: +82-504-294-5340
E-mail: nara@node.healthcare
Contact name: Nara Lee

KCTL

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SEF0161
Page (5) of (20)

KCTL

2. Laboratory information

Address

KCTL Inc. (Suwon Lab.)

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: 82 31 285 0894

Facsimile Number: 82 505 299 8311


FCC Site Designation No: KR0040

VCCI Registration No.: R-20080, G-20078, C-20059, T-20056

Industry Canada Registration No. : 8035A

KOLAS NO.: KT231

SITE MAP

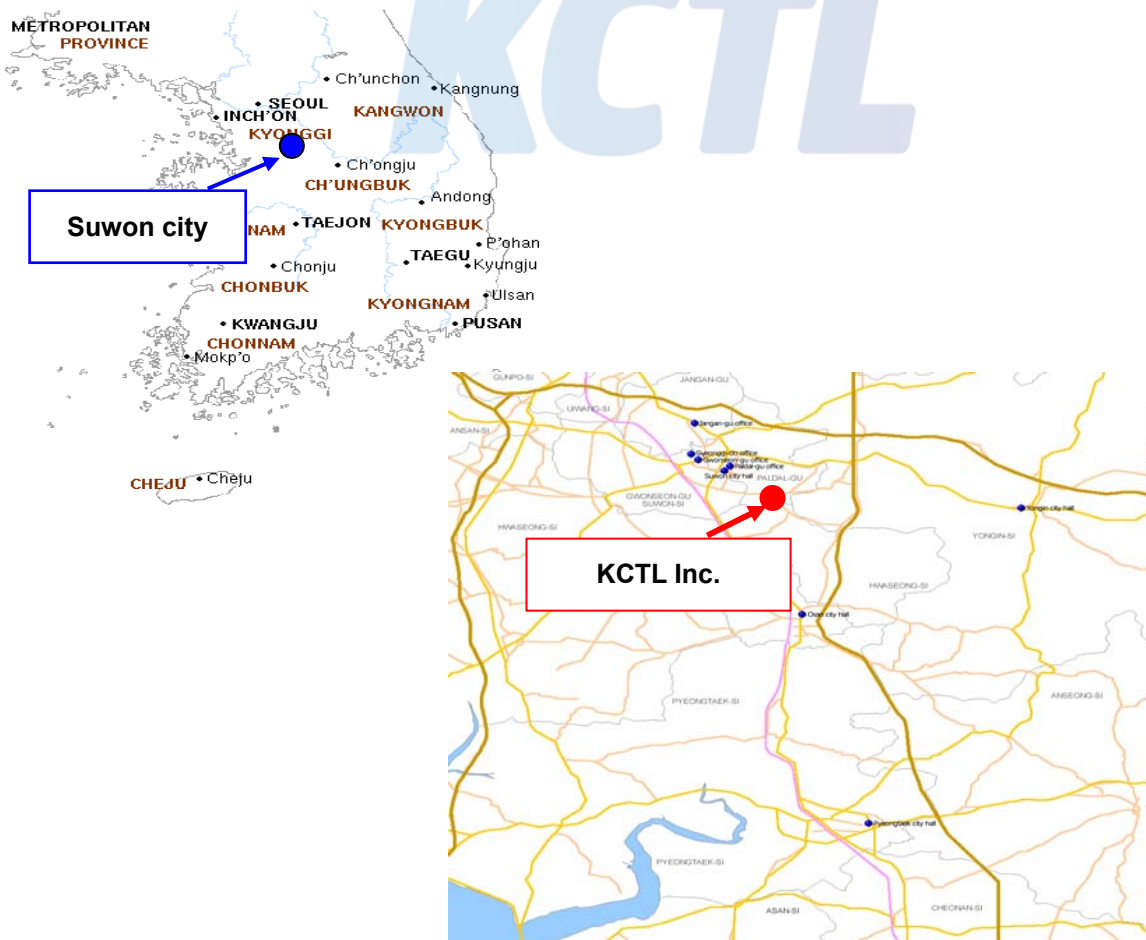

3. Test system configuration

3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber 10 m(RE)	21.4 °C	53.6 % R.H.	-
Shielded room(CE)	21.3 °C	46.3 % R.H.	-

Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SEF0161
Page (7) of (20)



3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted Emission measurement (Confidence level about 95 %, $k = 2$)		
Shielded Room (CE#1)	9 kHz ~ 150 kHz: 3.7 dB	
	150 kHz ~ 30 MHz: 3.3 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz: 3.5 dB	
	150 kHz ~ 30 MHz: 3.1 dB	
Radiated Emission measurement (Confidence level about 95 %, $k = 2$)		
10 m Chamber (4F)	30 MHz ~ 300 MHz	3 m: 5.4 dB
		10 m: 5.3 dB
	300 MHz ~ 1 000 MHz	3 m: 5.5 dB
		10 m: 5.4 dB
	1 GHz ~ 6 GHz	3 m: 6.4 dB
	6 GHz ~ 18 GHz	3 m: 6.6 dB
	18 GHz ~ 30 GHz	3 m: 6.7 dB
30 GHz ~ 40 GHz	3 m: 6.2 dB	
10 m Chamber (2F)	30 MHz ~ 300 MHz	3 m: 5.0 dB
		10 m: 5.0 dB
	300 MHz ~ 1 000 MHz	3 m: 5.2 dB
		10 m: 5.0 dB
	1 GHz ~ 6 GHz	3 m: 6.4 dB
6 GHz ~ 18 GHz	3 m: 6.6 dB	

3.3 Measurement Program

These test items were performed by software programs;

Test item	Measurement Program		Used
Conducted Emission	EP5CE_V 5.4.0(TOYO)		☒
Radiated Emission	2F	EP5RE_V 4.6.0(TOYO)	☒
	4F	EP5RE_V 5.11.10(TOYO)	



KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SEF0161
Page (9) of (20)

KCTL

4. Description of EUT

4.1 General information

■ Main Body

- Product Name: Lip Plumper
- Brand: NARCI
- Model Name: NP-P100
- Manufacturer: NODE Co., Ltd.
- Country of Origin: Republic of Korea
- Size: approx. 62mm x 100mm x 35mm
- Weight: 70g
- Maximum Operating Time: 90min
- Charging Time: about 3 hours

KCTL

4.2 Product description

Type of product	Lip Plumper
Model name (Basic)	NP-P100
Model name (Variant)	-
Difference	-
Serial no	-
Testing voltage	120 V, 60 Hz (Power supplied from Adapter) / DC 3.7 V
Input rating	- DC 5 V - DC 3.7 V (Built in Battery)
Internal clock frequency	Below 15 MHz
FCC ID	2AWNMNP-P100
Note	-The following accessory was not provided by the manufacturer. 1) Adapter -This product is a power AC/DC power converter, and it is a device with a DC power port to which power is supplied, and it is considered as an AC main power device and tested.

4.3 Auxiliary equipments

Type	Model / Part #	S/N	Manufacturer
Adapter	SPE-TC150C	-	Dongguan Yahui Electronic Technology Co.,Ltd.

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SEF0161
Page (11) of (20)

KCTL


4.4 Test configuration

[Test #1]

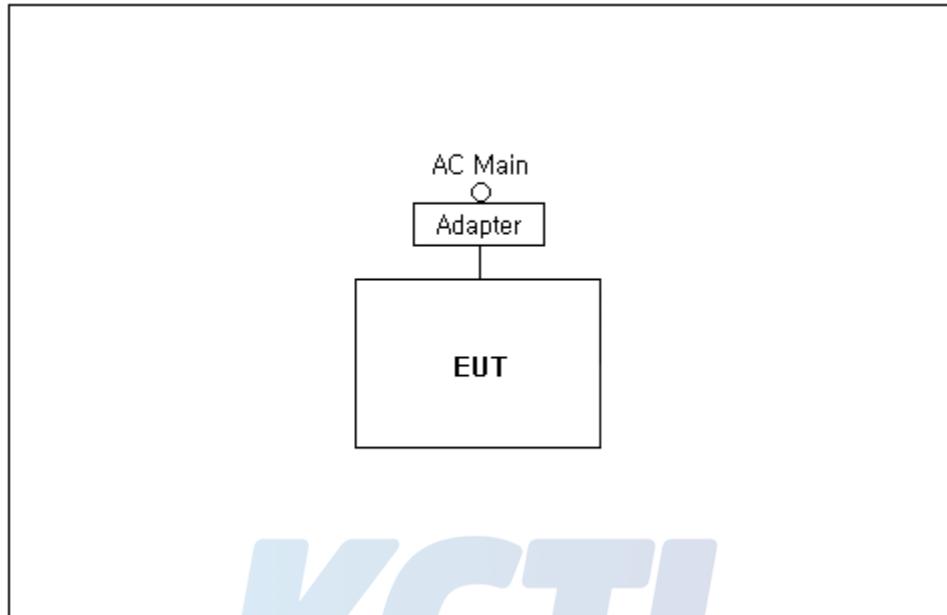

	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT	Power(USB)	Adapter	-	1.5	Unshield

[Test #2]

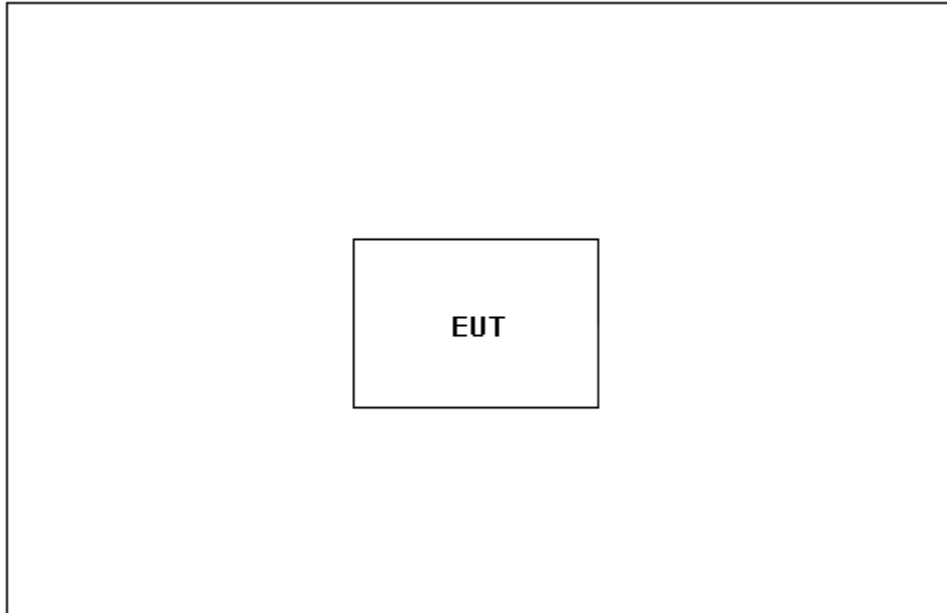

	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
-	EUT	-	-	-	-	-

4.5 Operating conditions

The EUT was configured as normal intended use.

Test mode	Normal operating
Test #1	An EUT continuous operation state is confirmed and a charging state is confirmed, and a test is performed. (Adapter)
Test #2	Check the EUT continuous operation and test. (Battery)

Note 1. It means this device needs to be tested with 3 orientations (x,y and z) and at least the worst case orientation shall be set for final test.

It was determined that Z orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Z orientation.

5. Summary of test results

5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
<input checked="" type="checkbox"/>	Conducted Emission	ANSI C63.4:2014, Class B FCC Part 15 Subpart B	Pass
<input checked="" type="checkbox"/>	Radiated Emission	ANSI C63.4:2014, Class B FCC Part 15 Subpart B	Pass



6. Test results

6.1 Conducted Emissions

Test specification	ANSI C63.4:2014, Class B FCC Part 15 Subpart B		
Testing voltage	120 V, 60 Hz		
Test facility	Shielded room (CE#2)		
Date	2020-08-12		
Temperature (°C)	21.3 °C	Humidity (% R.H.)	46.3 % R.H.
Remarks	Pass		

6.1.1 Limits of conducted emissions measurement

Frequency [MHz]	Class A (dB(μ V))		Class B (dB(μ V))	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79	66	66 ~ 56 ¹⁾	56 ~ 46 ¹⁾
0.5 ~ 5	73	60	56	46
5 ~ 30	73	60	60	50

¹⁾ The limit decreases linearly with the logarithm of frequency

6.1.2 Measurement procedure


The measurements were performed in a shielded room. EUT was setup as shown in photograph and placed on a non-metallic table height of 0.8 m above the reference ground plane. The rear of table was located 0.4 m to the vertical conducted plane. EUT was power through the LISN, which was bonded to the ground plane. The LISN power was filtered. Each EUT power lead, except ground (safety) lead was individually connected through a LISN to input power source. EUT signal cables that hung closer than 0.4 m to the Horizontal metal ground 0.3 m ~ 0.4 m long. The power cord was bundles in the center. All peripheral equipment was powered from a sub LISN. The LISN and ISN were positioned 0.8 m from the EUT. Peak and Average detection were used in preliminary testing and Quasi-peak and Average detections were used at final measurement.

6.1.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
EMI TEST RECEIVER	ESCI	100710	R&S	2020.08.22	<input checked="" type="checkbox"/>
TWO-LINE V-NETWORK	ENV216	101584	R&S	2021.04.06	<input checked="" type="checkbox"/>
TWO-LINE V-NETWORK	NNLK8121	8121-472	SCHWARZBECK	2020.08.23	<input type="checkbox"/>

6.1.4 Conducted emissions measurement result

AC Main

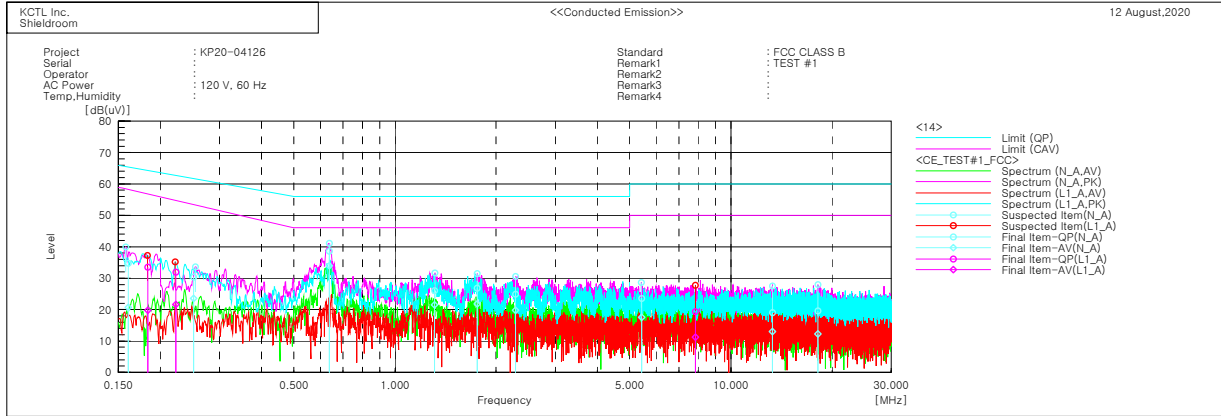

Final Result

--- N_A Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.16058	24.5	10.5	10.2	34.7	20.7	65.4	58.3	30.7	37.6
2	0.25114	20.4	13.6	9.9	30.3	23.5	61.7	53.4	31.4	29.9
3	0.63795	28.5	23.8	10.1	38.6	33.9	56.0	46.0	17.4	12.1
4	1.31091	16.0	11.5	10.0	26.0	21.5	56.0	46.0	30.0	24.5
5	1.75777	16.8	11.7	10.1	26.9	21.8	56.0	46.0	29.1	24.2
6	2.2824	14.8	9.7	10.1	24.9	19.8	56.0	46.0	31.1	26.2
7	5.42253	13.4	7.4	10.1	23.5	17.5	60.0	50.0	36.5	32.5
8	13.28617	8.5	2.5	10.5	19.0	13.0	60.0	50.0	41.0	37.0
9	18.16161	8.9	1.5	10.7	19.6	12.2	60.0	50.0	40.4	37.8

--- L1_A Phase ---										
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.18358	23.5	9.8	10.0	33.5	19.8	64.3	56.8	30.8	37.0
2	0.22259	22.2	11.8	9.8	32.0	21.6	62.7	54.7	30.7	33.1
3	7.83115	9.4	1.2	10.0	19.4	11.2	60.0	50.0	40.6	38.8

6.2 Radiated Emission

Test specification	ANSI C63.4:2014, Class B FCC Part 15 Subpart B		
Testing voltage	120 V, 60 Hz		
Test facility	10 m Chamber (4F)		
Test distance	3 m		
Date	2020-08-11		
Temperature (°C)	21.4 °C	Humidity (% R.H.)	53.6 % R.H.
Remarks	Pass		

6.2.1 Limits of radiated emission measurement

Frequency [MHz]	Class A (dB(μ V/m)) @ 10 m	Class B (dB(μ V/m)) @ 3 m
30-88	39	40
88-216	43.5	43.5
216-960	46.4	46
Above 960	49.5	54

Note- Alternative standard: CISPR, Pub. 22

6.2.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.2.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
EMI TEST RECEIVER	ESR7	101078	R&S	2020.08.22	☒
Bilog Antenna	CBL 6112D	55545	TESEQ	2022.04.24	☒
AMPLIFIER	310N	293004	SONOMA	2020.08.22	☒
ATTENUATOR	8491B-6dB	MY39271060	KEYSIGHT	-	☒
Antenna Mast	MA4640-XP-ET	-	Innco Systems	-	☒
Turn Table	TT 3.0-3t	-	MATURO	-	☒

6.2.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 6 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G = Amplifier Gain

6 dB Att = 6 dB Attenuator

If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 6 dB, A.G 35 dB

The result is $30 + 12 + 5 + 6 - 35 = 18 \text{ dB } (\mu\text{V/m})$

Bilog Antenna and ATTENUATOR (6 dB) were calibrated together.

AV = CAV : Abbreviation of CISPR Average

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SEF0161
Page (19) of (20)



6.2.5 Radiated emission measurement result

30 MHz ~ 1 GHz

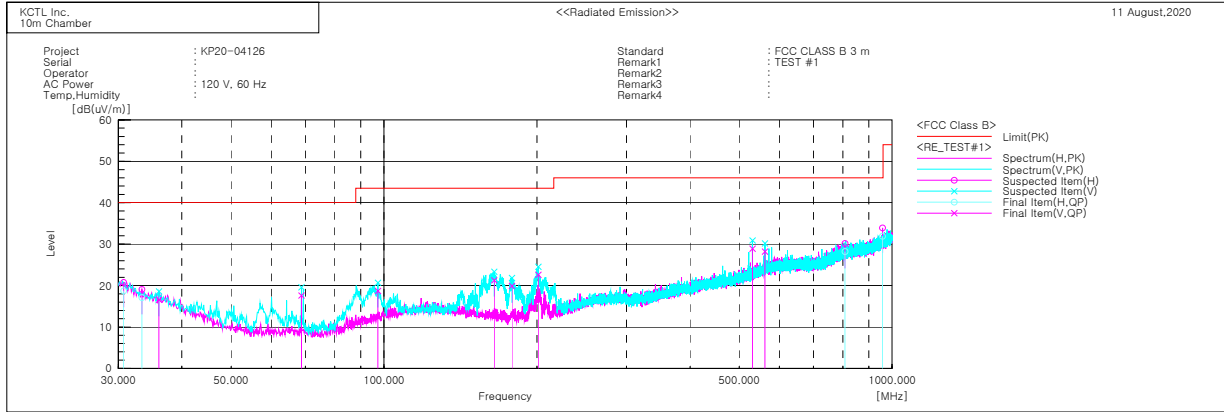

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	30.728	H	24.1	-5.4	18.7	40.0	21.3	328.0	151.0
2	33.395	H	24.3	-7.2	17.1	40.0	22.9	259.0	65.0
3	36.063	V	25.3	-8.7	16.6	40.0	23.4	126.0	204.0
4	68.800	V	34.0	-16.4	17.6	40.0	22.4	253.0	232.0
5	97.294	V	30.8	-12.1	18.7	43.5	24.8	115.0	211.0
6	164.830	V	32.3	-11.0	21.3	43.5	22.2	174.0	135.0
7	178.531	V	31.5	-11.6	19.9	43.5	23.6	159.0	132.0
8	201.326	V	33.6	-11.0	22.6	43.5	20.9	119.0	60.0
9	531.369	V	27.3	1.6	28.9	46.0	17.1	125.0	278.0
10	562.045	V	25.5	2.7	28.2	46.0	17.8	105.0	15.0
11	807.940	H	21.3	6.9	28.2	46.0	17.8	336.0	35.0
12	957.441	H	22.1	9.8	31.9	46.0	14.1	374.0	38.0


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
Tel: 82-31-285-0894 Fax: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SEF0161
Page (20) of (20)



30 MHz ~ 1 GHz

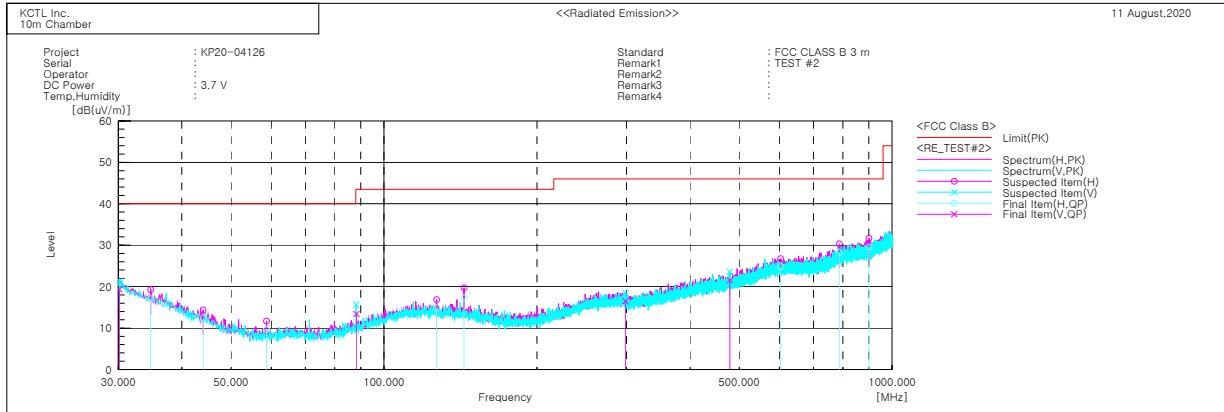

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	30.121	V	24.4	-5.0	19.4	40.0	20.6	128.0	247.0
2	34.729	H	25.1	-8.0	17.1	40.0	22.9	158.0	16.0
3	44.065	H	25.3	-12.9	12.4	40.0	27.6	328.0	152.0
4	58.736	H	26.5	-16.8	9.7	40.0	30.3	320.0	348.0
5	88.200	V	27.3	-13.9	13.4	43.5	30.1	152.0	37.0
6	126.879	H	24.6	-9.7	14.9	43.5	28.6	284.0	155.0
7	143.733	H	27.5	-10.2	17.3	43.5	26.2	316.0	339.0
8	298.690	V	22.0	-5.5	16.5	46.0	29.5	149.0	11.0
9	479.231	V	21.6	0.0	21.6	46.0	24.4	136.0	92.0
10	603.391	H	21.1	3.7	24.8	46.0	21.2	353.0	159.0
11	787.449	H	21.9	6.4	28.3	46.0	17.7	335.0	63.0
12	901.060	H	21.2	8.4	29.6	46.0	16.4	297.0	85.0

