

FCC CFR47 PART 27

CERTIFICATION TEST REPORT

FCC ID: 2AWNW-ONETABT701

Product: onetab T701

Trade Mark: onetab

Model Number: onetab T701

Family Model: N/A

Report No.: STR200610001005E

Prepared for

Onebillion Children LTD

315-317 New Kings Rd, London SW6 4RF,UK

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street

Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 9388 Fax.: +86-755-6115 6599

Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Onebillion Children LTD

Address : 315-317 New Kings Rd, London SW6 4RF, UK

Manufacturer's Name : Shenzhen Alldocube Technology and Science Co., Ltd

Address : 1-3 Floor, A building, 3rd factory, Yujianfeng Industry park, 289#
Huafan Road, Tongsheng community, Dalang, Honghua District, Shenzhen
China

Product name : onetab T701

Model and/or type reference : onetab T701

Family Model: N/A

Standards : FCC CFR 47 Part 27

Test procedure : ANSI C63.26:2015

ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests 10 Jun. 2020 ~ 24 Jun. 2020

Date of Issue 24 Jun, 2020

Test Result **Pass**

Testing Engineer : 
(Mary Hu)

Technical Manager : 
(Jason Chen)

Authorized Signatory : 
(Sam Chen)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION.....	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY.....	6
MEASUREMENT UNCERTAINTY.....	6
1.5 SPECIAL ACCESSORIES.....	6
1.6 WORST-CASE CONFIGURATION AND MODE.....	6
1.7 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT CONFIGURATION.....	8
2.2 EUT EXERCISE	8
2.3 CONFIGURATION OF EUT SYSTEM.....	8
2.4 TEST SETUP	9
3. TEST AND MEASUREMENT EQUIPMENT.....	10
4. OUTPUT POWER.....	12
4.1 OUTPUT POWER MEASUREMENT	12
6. BANDEDGE AND EMISSION MASK.....	15
7. OUT OF BAND EMISSIONS	16
7.1 MEASUREMENT METHOD	17
8. RADIATED MEASUREMENT	18
8.1. RADIATED POWER (ERP & EIRP).....	18
8.2 LTE BAND 7.....	19
9. SPURIOUS RADIATION EMISSION	21
9.1 LTE BAND 7.....	23

10. FREQUENCY STABILITY	27
10.1 LTE BAND 7	28
11. PEAK-TO-AVERAGE RATIO.....	30
11.1 Description of the PAR Measurement.....	30
11.2 Measuring Instruments	30
11.3 Test Procedures.....	30
11.4 Test Setup.....	30

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	onetab T701
Trade Mark	onetab
Model Name	onetab T701
Family Model	N/A
Model Difference	N/A
FCC ID:	2AWNW-ONETABT701
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> LTE FDD Band 7
Frequency Range:	LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz;
Type of Modulation:	QPSK/16QAM
SIM Card	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna:	PIFA Antenna
Antenna gain:	1.4dBi
Power Supply:	DC 3.8V/2800mAh/10.64Wh from Battery or DC 5V from Adapter.
Adapter:	Model: BSY01J3050200UU Input: 100-240V~50/60Hz 0.3A Output: 5.0V---2.0A
Extreme Vol. Limits:	DC 3.4V to DC 4.4V (Nominal DC 3.8V) (Note 1)
HW Version	V1.1
SW Version	1.1.0 test-keys

** Note1: The High Voltage DC 4.4V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID:2AWNW-ONETABT701 filing to comply with the FCC Part 27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 7

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.7 SUMMARY OF TEST RESULTS

FCC FCC Part27 KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
27.50(a) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 27.53(m) KDB 971168 D01 Clause 6	Band Edge	PASS	
27.50(h) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
27.50(h) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 27.53(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 27.53(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	
Remark: <ol style="list-style-type: none"> “N/A” denotes test is not applicable in this Test Report. All test items were verified and recorded according to the standards and without any deviation during the test. No modifications are made to the EUT during all test items. 			

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	onetab T701	onetab T701	FCC ID:2AWNW-ONETABT701	EUT

Note: All the accessories have been used during the test.


the following "EUT" in setup diagram means EUT system.

2.4 TEST SETUP


For Radiated Test Cases




For Conducted Output Power

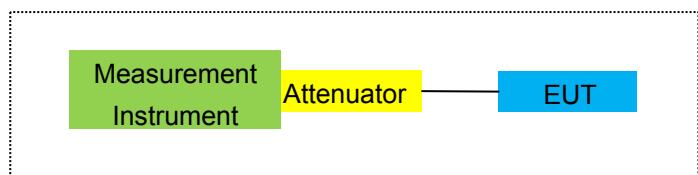

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

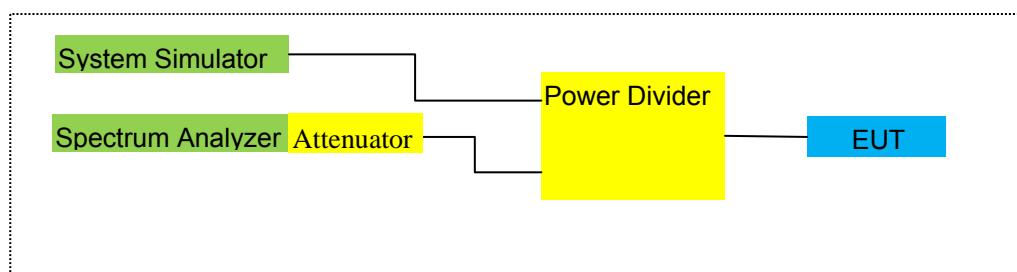

For Frequency Stability

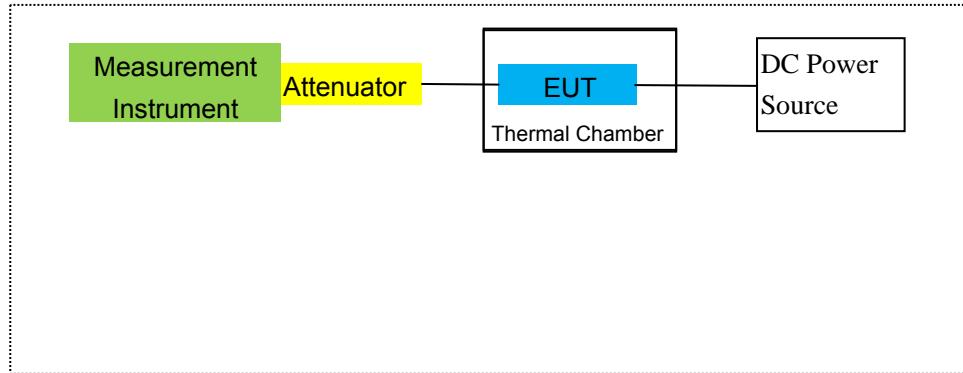

3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2019.08.28	2020.08.27	1 year
2	Test Receiver	R&S	ESPI	101318	2020.05.11	2021.05.10	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2019.12.11	2020.12.10	1 year
7	Amplifier	EM	EM-30180	060538	2019.08.06	2020.08.05	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2020.05.11	2021.05.10	1 year
9	Power Meter	R&S	NRVS	100696	2019.08.06	2020.08.05	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2020.05.11	2021.05.10	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2019.08.06	2020.08.05	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
15	LISN	R&S	ENV216	101313	2020.05.11	2021.05.10	1 year
16	LISN	EMCO	3816/2	00042990	2020.05.11	2021.05.10	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2020.05.11	2021.05.10	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2020.04.11	2021.04.10	1 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2021.05.10	1 year
22	Attenuator	MCE	24-10-34	BN9258	2020.05.11	2021.05.10	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2020.05.11	2021.05.10	1 year
24	test receiver	R&S	ESCI	a0304218	2020.05.11	2021.05.10	1 year
25	Communication Tester	R&S	CMU200	A0304247	2019.08.06	2020.08.05	1 year
27	DC Power Source	N/A	PS-6005D	20170402923	2017.06.06	2020.06.05	3 year

28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2019.08.06	2020.08.05	1 year
29	Communication Tester	R&S	CMW500	148500	2020.05.11	2021.05.10	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..		-	-	-	-
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

LTE Band 7

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §27.53 (m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P) \text{ dB}$ on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P) \text{ dB}$ on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P) \text{ dB}$ on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

LTE Band 7

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §27.53 (m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P) \text{ dB}$ on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P) \text{ dB}$ on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P) \text{ dB}$ on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic.

Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

Set display line

Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

LTE Band 7

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §27.50 (h)

LIMITS:

27.50 (h)(2)Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, “Measurement Guidance for Certification of Licensed Digital Transmitters”

MODES TESTED

LTE Band 7

RESULTS

Pass

8.2 LTE BAND 7

Radiated Power (EIRP) for Band 7								
Mode	RB/RB SIZE	Frequency	Result					
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (dBm)	Polarization
5.0MHz Band QPSK	1/#Max	2502.5	0.49	4.54	27.75	23.70	234.423	Horizontal
		2535	0.55	4.69	27.72	23.58	228.034	Horizontal
		2567.5	0.67	4.71	27.71	23.67	232.809	Horizontal
10.0MHz Band QPSK	1/#Mid	2505	0.27	4.55	27.76	23.48	222.844	Horizontal
		2535	0.82	4.69	27.72	23.85	242.661	Horizontal
		2565	0.92	4.72	27.70	23.90	245.471	Horizontal
15.0MHz Band QPSK	1/#Mid	2507.5	0.27	4.55	27.77	23.49	223.357	Horizontal
		2535	0.70	4.69	27.72	23.73	236.048	Horizontal
		2562.5	0.61	4.72	27.69	23.58	228.034	Horizontal
20.0MHz Band QPSK	1/#Mid	2510	0.71	4.57	27.78	23.92	246.604	Horizontal
		2535	0.75	4.73	27.72	23.74	236.592	Horizontal
		2560	0.83	4.75	27.68	23.76	237.684	Horizontal
5.0MHz Band QPSK	1/#Mid	2502.5	-0.17	4.54	27.75	23.04	201.372	Vertical
		2535	0.20	4.69	27.72	23.23	210.378	Vertical
		2567.5	-0.11	4.71	27.71	22.89	194.536	Vertical
10.0MHz Band QPSK	1/#Mid	2505	-0.49	4.55	27.76	22.72	187.068	Vertical
		2535	0.32	4.69	27.72	23.35	216.272	Vertical
		2565	0.05	4.72	27.70	23.03	200.909	Vertical
15.0MHz Band QPSK	1/#Mid	2507.5	-0.79	4.55	27.77	22.43	174.985	Vertical
		2535	-0.23	4.69	27.72	22.80	190.546	Vertical
		2562.5	-0.33	4.72	27.69	22.64	183.654	Vertical
20.0MHz Band QPSK	1/#Mid	2510	0.11	4.57	27.78	23.32	214.783	Vertical
		2535	-0.20	4.73	27.72	22.79	190.108	Vertical
		2560	-0.38	4.75	27.68	22.55	179.887	Vertical

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization	
5.0MHz Band 16 QAM	1/#Max	2502.5	-0.37	4.54	27.75	22.84	192.309	Horizontal	Pass
		2535	-0.13	4.69	27.72	22.90	194.984	Horizontal	Pass
		2567.5	-0.29	4.71	27.71	22.71	186.638	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	0.52	4.55	27.76	23.73	236.048	Horizontal	Pass
		2535	-0.23	4.69	27.72	22.80	190.546	Horizontal	Pass
		2565	-0.21	4.72	27.70	22.77	189.234	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	0.55	4.55	27.77	23.77	238.232	Horizontal	Pass
		2535	-0.28	4.69	27.72	22.75	188.365	Horizontal	Pass
		2562.5	0.44	4.72	27.69	23.41	219.280	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	-0.80	4.57	27.78	22.41	174.181	Horizontal	Pass
		2535	0.81	4.73	27.72	23.80	239.883	Horizontal	Pass
		2560	-0.26	4.75	27.68	22.67	184.927	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	2502.5	-0.62	4.54	27.75	22.59	181.552	Vertical	Pass
		2535	-0.36	4.69	27.72	22.67	184.927	Vertical	Pass
		2567.5	-0.42	4.71	27.71	22.58	181.134	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	0.02	4.55	27.76	23.23	210.378	Vertical	Pass
		2535	0.07	4.69	27.72	23.10	204.174	Vertical	Pass
		2565	-0.20	4.72	27.70	22.78	189.671	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	-0.41	4.55	27.77	22.81	190.985	Vertical	Pass
		2535	0.34	4.69	27.72	23.37	217.270	Vertical	Pass
		2562.5	-0.47	4.72	27.69	22.50	177.828	Vertical	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	-0.39	4.57	27.78	22.82	191.426	Vertical	Pass
		2535	0.37	4.73	27.72	23.36	216.770	Vertical	Pass
		2560	-0.49	4.75	27.68	22.44	175.388	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §27.53 (m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts].

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10} (p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10} (p)$, dB at the channel edges and $55 + 10 \log_{10} (p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

LTE Band 7

RESULTS

PASS

9.1 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-63.15	5.23	35.81	-32.57	-25	-7.57	Horizontal
5005.0	-60.16	5.23	35.81	-29.58	-25	-4.58	Vertical
7507.5	-60.96	5.67	36.85	-29.78	-25	-4.78	Vertical
7507.5	-59.82	5.67	36.85	-28.64	-25	-3.64	Horizontal
213.6	-48.85	1.73	17.97	-32.61	-25	-7.61	Vertical
319.6	-49.86	1.38	15.11	-36.13	-25	-11.13	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-59.71	5.23	35.82	-29.12	-25	-4.12	Horizontal
5070.0	-64.36	5.23	35.82	-33.77	-25	-8.77	Vertical
7605.0	-62.60	5.67	36.85	-31.42	-25	-6.42	Vertical
7605.0	-59.51	5.67	36.85	-28.33	-25	-3.33	Horizontal
269.3	-44.80	1.77	16.17	-30.39	-25	-5.39	Vertical
544.9	-47.69	1.63	15.21	-34.11	-25	-9.11	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-61.10	5.24	35.83	-30.51	-25	-5.51	Horizontal
5135.0	-62.38	5.24	35.83	-31.79	-25	-6.79	Vertical
7702.5	-62.80	5.68	36.87	-31.61	-25	-6.61	Vertical
7702.5	-59.25	5.68	36.87	-28.06	-25	-3.06	Horizontal
409.3	-49.63	1.58	17.56	-33.65	-25	-8.65	Vertical
563.5	-46.23	1.45	16.58	-31.10	-25	-6.10	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-63.62	5.23	35.82	-33.03	-25	-8.03	Horizontal
5020.0	-62.02	5.23	35.82	-31.43	-25	-6.43	Vertical
7530.0	-61.42	5.67	36.86	-30.23	-25	-5.23	Vertical
7530.0	-60.60	5.67	36.86	-29.41	-25	-4.41	Horizontal
469.9	-50.65	1.63	15.76	-36.52	-25	-11.52	Vertical
271.7	-44.71	1.71	15.44	-30.98	-25	-5.98	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-60.51	5.23	35.82	-29.92	-25	-4.92	Horizontal
5070.0	-59.54	5.23	35.82	-28.95	-25	-3.95	Vertical
7605.0	-64.22	5.67	36.85	-33.04	-25	-8.04	Vertical
7605.0	-60.68	5.67	36.85	-29.50	-25	-4.50	Horizontal
357.3	-49.97	1.79	16.84	-34.91	-25	-9.91	Vertical
442.2	-53.35	1.71	17.64	-37.42	-25	-12.42	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-63.95	5.24	35.83	-33.36	-25	-8.36	Horizontal
5120.0	-62.05	5.24	35.83	-31.46	-25	-6.46	Vertical
7680.0	-61.44	5.70	36.88	-30.26	-25	-5.26	Vertical
7680.0	-63.12	5.70	36.88	-31.94	-25	-6.94	Horizontal
345.9	-48.83	1.79	16.84	-33.77	-25	-8.77	Vertical
486.2	-44.01	1.71	17.64	-28.08	-25	-3.08	Horizontal

Note: PMea(dBm)= Power(dBm)+ ARpl (dBm)

Over Limit= : PMea(dBm)-Limit(dBm)

16QAM EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-71.57	5.23	35.81	-40.99	-25	-15.99	Horizontal
5005.0	-73.66	5.23	35.81	-43.08	-25	-18.08	Vertical
7507.5	-68.96	5.67	36.85	-37.78	-25	-12.78	Vertical
7507.5	-75.14	5.67	36.85	-43.96	-25	-18.96	Horizontal
519.6	-83.70	1.36	16.72	-68.34	-25	-43.34	Vertical
358.6	-76.17	1.58	16.65	-61.10	-25	-36.10	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-73.90	5.23	35.82	-43.31	-25	-18.31	Horizontal
5070.0	-71.30	5.23	35.82	-40.71	-25	-15.71	Vertical
7605.0	-69.56	5.67	36.85	-38.38	-25	-13.38	Vertical
7605.0	-70.65	5.67	36.85	-39.47	-25	-14.47	Horizontal
344.5	-76.67	1.32	17.33	-60.66	-25	-35.66	Vertical
129.1	-70.42	1.50	17.46	-54.46	-25	-29.46	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-73.00	5.24	35.83	-42.41	-25	-17.41	Horizontal
5135.0	-74.58	5.24	35.83	-43.99	-25	-18.99	Vertical
7702.5	-69.28	5.68	36.87	-38.09	-25	-13.09	Vertical
7702.5	-70.85	5.68	36.87	-39.66	-25	-14.66	Horizontal
565.4	-63.02	1.78	15.82	-48.98	-25	-23.98	Vertical
537.0	-67.93	1.55	16.68	-52.80	-25	-27.80	Horizontal

16QAM EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-74.66	5.23	35.82	-44.07	-25	-19.07	Horizontal
5020.0	-71.02	5.23	35.82	-40.43	-25	-15.43	Vertical
7530.0	-70.92	5.67	36.86	-39.73	-25	-14.73	Vertical
7530.0	-69.37	5.67	36.86	-38.18	-25	-13.18	Horizontal
263.0	-62.55	1.38	17.72	-46.21	-25	-21.21	Vertical
86.8	-61.77	1.42	16.10	-47.09	-25	-22.09	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-75.72	5.23	35.82	-45.13	-25	-20.13	Horizontal
5070.0	-76.70	5.23	35.82	-46.11	-25	-21.11	Vertical
7605.0	-74.56	5.67	36.85	-43.38	-25	-18.38	Vertical
7605.0	-71.65	5.67	36.85	-40.47	-25	-15.47	Horizontal
158.0	-68.54	1.31	17.19	-52.66	-25	-27.66	Vertical
530.0	-60.31	1.53	15.38	-46.46	-25	-21.46	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-75.83	5.24	35.83	-45.24	-25	-20.24	Horizontal
5120.0	-75.44	5.24	35.83	-44.85	-25	-19.85	Vertical
7680.0	-68.94	5.70	36.88	-37.76	-25	-12.76	Vertical
7680.0	-69.84	5.70	36.88	-38.66	-25	-13.66	Horizontal
486.5	-65.56	1.79	16.45	-50.90	-25	-25.90	Vertical
376.5	-73.44	1.64	16.06	-59.02	-25	-34.02	Horizontal

Note: PMea(dBm)= Power(dBm)+ ARpl (dBm)

Over Limit= : PMea(dBm)-Limit(dBm)

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §27.54

LIMITS

§27.54 Frequency stability.

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

Temp. = -30° to +50°C

Voltage =low voltage, DC 3.4V, Normal, DC 3.8V and High voltage, DC 4.4V.

Frequency Stability vs Temperature:

The EUT is place inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

LTE Band 7

RESULTS

See the following pages.

10.1 LTE BAND 7

QPSK, (20MHz BANDWIDTH)
Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	2535	10.0	0.003944	2.5
3.8	2535	8.5	0.003342	2.5
4.4	2535	8.5	0.003369	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	9.6	0.003805	2.5
Extreme (50C)	2535	9.1	0.003596	2.5
Extreme (40C)	2535	8.9	0.003510	2.5
Extreme (30C)	2535	9.0	0.003560	2.5
Extreme (10C)	2535	8.0	0.003148	2.5
Extreme (0C)	2535	8.1	0.003213	2.5
Extreme (-10C)	2535	9.0	0.003554	2.5
Extreme (-20C)	2535	8.9	0.003523	2.5
Extreme (-30C)	2535	7.9	0.003130	2.5

16QAM, (20MHz BANDWIDTH)**Frequency error vs. Voltage**

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	2535	7.1	0.002820	2.5
3.8	2535	6.2	0.002437	2.5
4.4	2535	5.9	0.002331	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	6.8	0.002669	2.5
Extreme (50C)	2535	5.8	0.002278	2.5
Extreme (40C)	2535	5.6	0.002205	2.5
Extreme (30C)	2535	6.7	0.002637	2.5
Extreme (10C)	2535	5.8	0.002290	2.5
Extreme (0C)	2535	5.4	0.002137	2.5
Extreme (-10C)	2535	5.1	0.002013	2.5
Extreme (-20C)	2535	6.1	0.002417	2.5
Extreme (-30C)	2535	6.2	0.002428	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

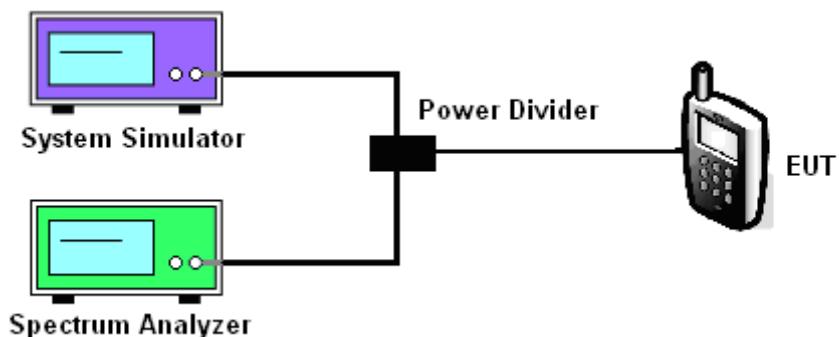

MODES TESTED

LTE Band 7

Test data reference attachment.

----END OF REPORT----