



FCC RF Test Report

APPLICANT : Gnome Tarn LLC
EQUIPMENT : Gemini
BRAND NAME : Gnome Tarn
MODEL NAME : SMALL FLEXIBLE, GEMINI
FCC ID : 2AWS6-5646
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Sep. 08, 2020 and testing was completed on Sep. 27, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 26dB & 99% Occupied Bandwidth Measurement	13
3.2 Maximum Conducted Output Power Measurement	15
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement.....	19
3.5 AC Conducted Emission Measurement.....	24
3.6 Automatically Discontinue Transmission	26
3.7 Antenna Requirements.....	27
4 LIST OF MEASURING EQUIPMENT	28
5 UNCERTAINTY OF EVALUATION	29
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR090813D	Rev. 01	Initial issue of report	Nov. 11, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.45 dB at 5458.96 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.10 dB at 0.461 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Gnome Tarn LLC
103 Foulk Road, Wilmington Delaware 19803

1.2 Manufacturer

Gnome Tarn LLC
103 Foulk Road, Wilmington Delaware 19803

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Gemini
Brand Name	Gnome Tarn
Model Name	SMALL FLEXIBLE, GEMINI
FCC ID	2AWS6-5646
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS
HW Version	EVT1
SW Version	msm8998-userdebug 7.1.1 NGI77B eng.cep.20200824.233949 test-keys
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ HT40 by referring to their maximum conducted power.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 15.83 dBm / 0.0383 W 802.11n HT20 : 14.84 dBm / 0.0305 W 802.11n HT40 : 13.94 dBm / 0.0248 W 802.11ac VHT20 : 13.98 dBm / 0.0250 W 802.11ac VHT40 : 13.07 dBm / 0.0203 W 802.11ac VHT80 : 12.82 dBm / 0.0191 W <5260 MHz ~ 5320 MHz> 802.11a : 15.83 dBm / 0.0383 W 802.11n HT20 : 15.10 dBm / 0.0324 W 802.11n HT40 : 13.89 dBm / 0.0245 W 802.11ac VHT20 : 14.04 dBm / 0.0254 W 802.11ac VHT40 : 13.08 dBm / 0.0203 W 802.11ac VHT80 : 8.95 dBm / 0.0079 W <5500 MHz ~ 5720 MHz > 802.11a : 16.27 dBm / 0.0424 W 802.11n HT20 : 15.40 dBm / 0.0347 W 802.11n HT40 : 14.55 dBm / 0.0285 W 802.11ac VHT20 : 14.44 dBm / 0.0278 W 802.11ac VHT40 : 13.55 dBm / 0.0226 W 802.11ac VHT80 : 13.40 dBm / 0.0219 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 18.23 MHz 802.11n HT20 : 19.23 MHz 802.11n HT40 : 37.16 MHz 802.11ac VHT80 : 76.00 MHz <5260 MHz ~ 5320 MHz> 802.11a : 18.23 MHz 802.11n HT20 : 19.38 MHz 802.11n HT40 : 37.16 MHz 802.11ac VHT80 : 76.00 MHz <5500 MHz ~ 5720 MHz > 802.11a : 18.37 MHz 802.11n HT20 : 19.73 MHz 802.11n HT40 : 37.16 MHz 802.11ac VHT80 : 76.12 MHz
Antenna Type / Gain	<5150 MHz ~ 5250 MHz> IFA Antenna with gain 0.10 dBi <5250 MHz ~ 5350 MHz> IFA Antenna with gain -1.20 dBi <5470 MHz ~ 5725 MHz> IFA Antenna with gain 0.10 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link(5G) + Adaptor
Remark: For Radiated Test Cases, The tests were performance with Adapter and USB cable.	


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138

2.3 Connection Diagram of Test System

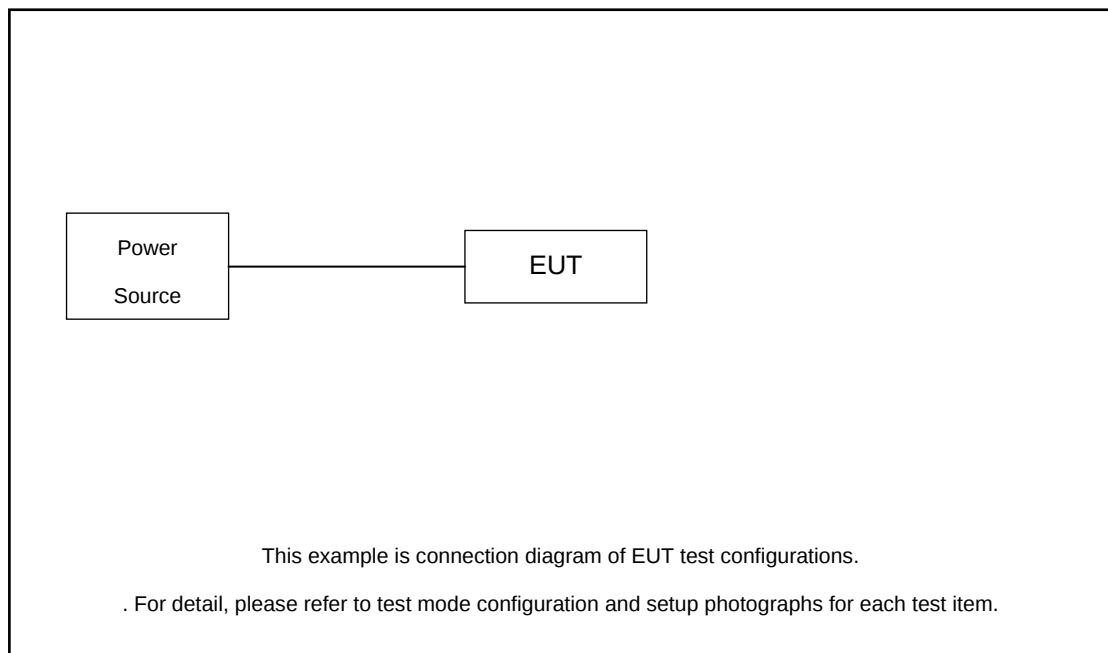

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.9dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.9 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

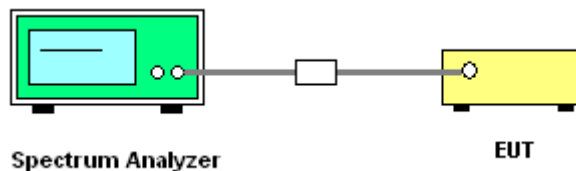

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

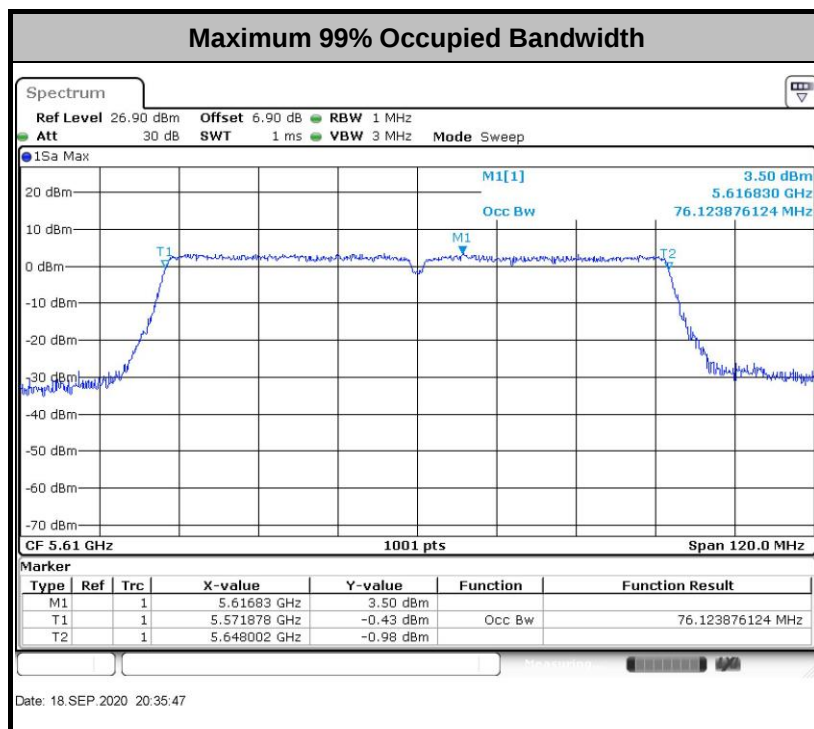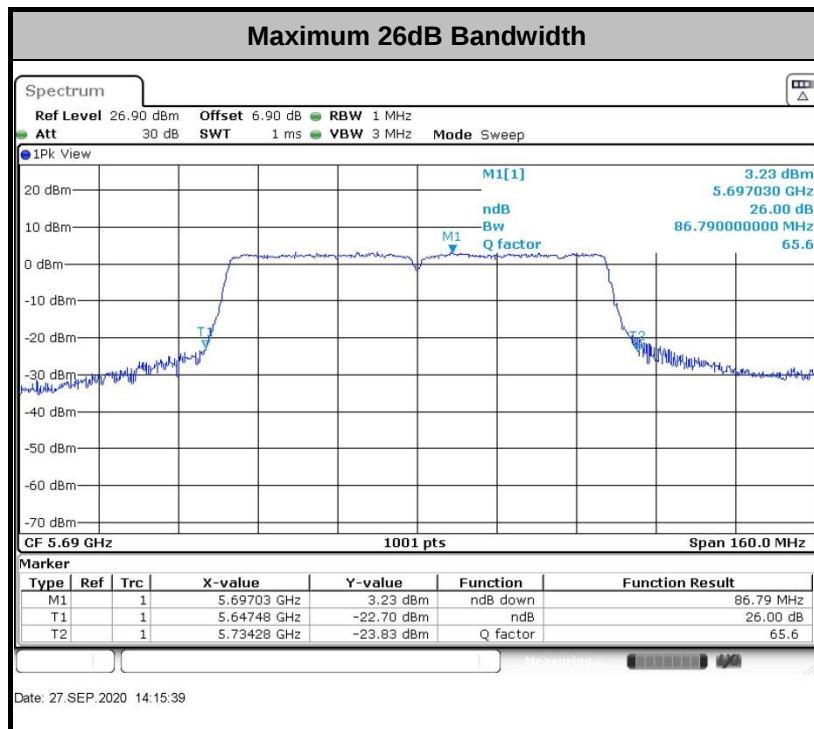

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

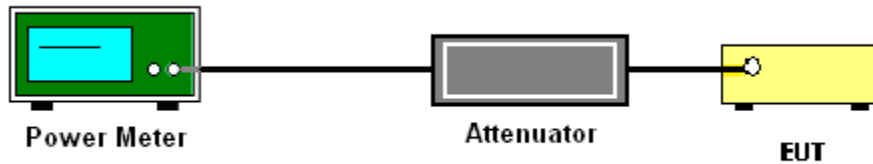

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
- 3.

3.3.4 Test Setup

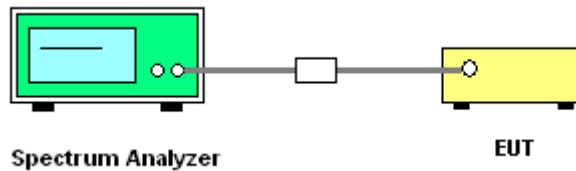

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

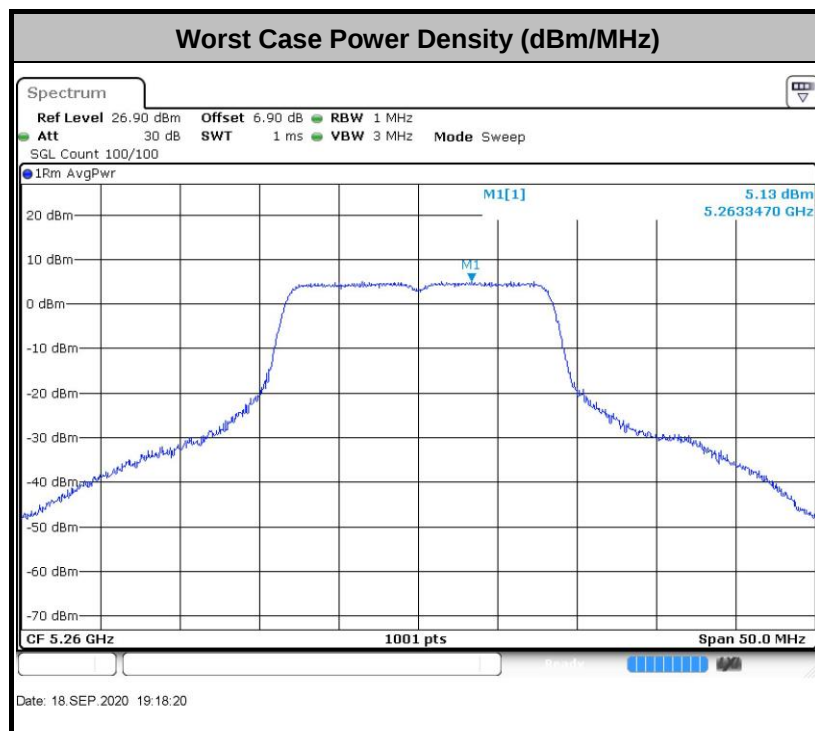

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.8$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $\text{VBW} \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.


4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

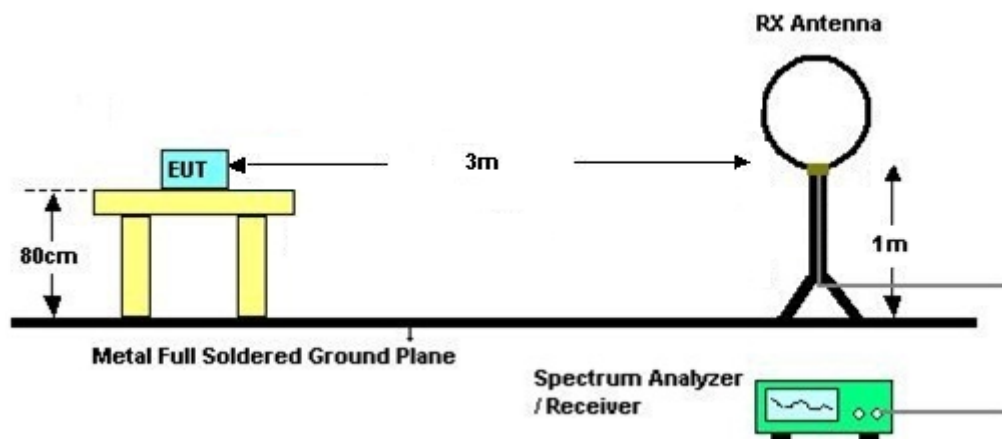

For radiated emissions from 30MHz to 1GHz

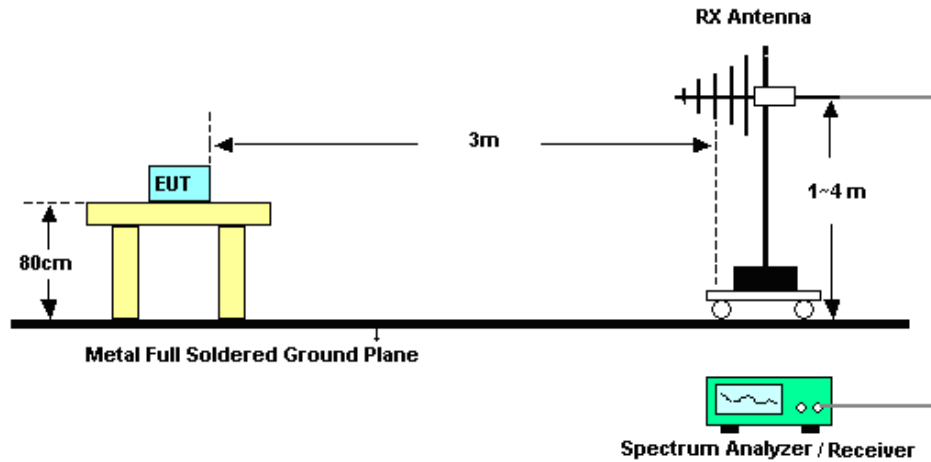

For radiated emissions above 1GHz

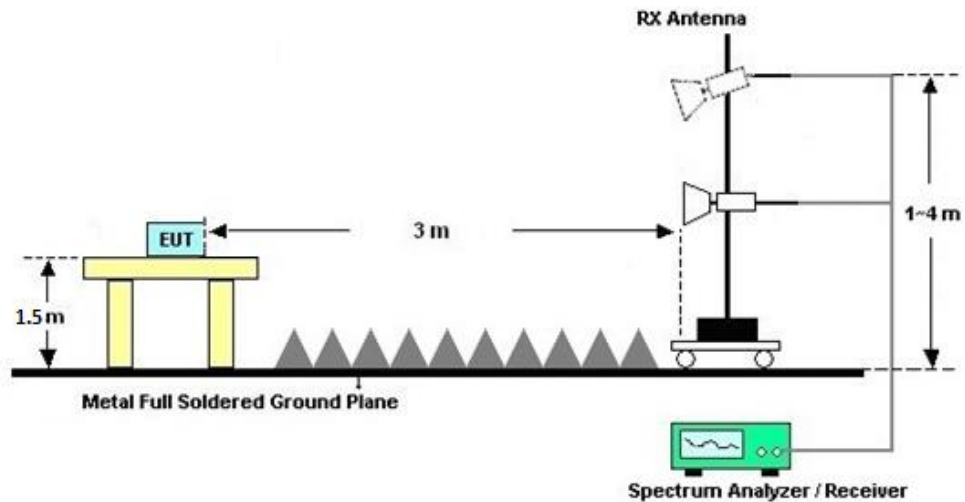

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.



3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

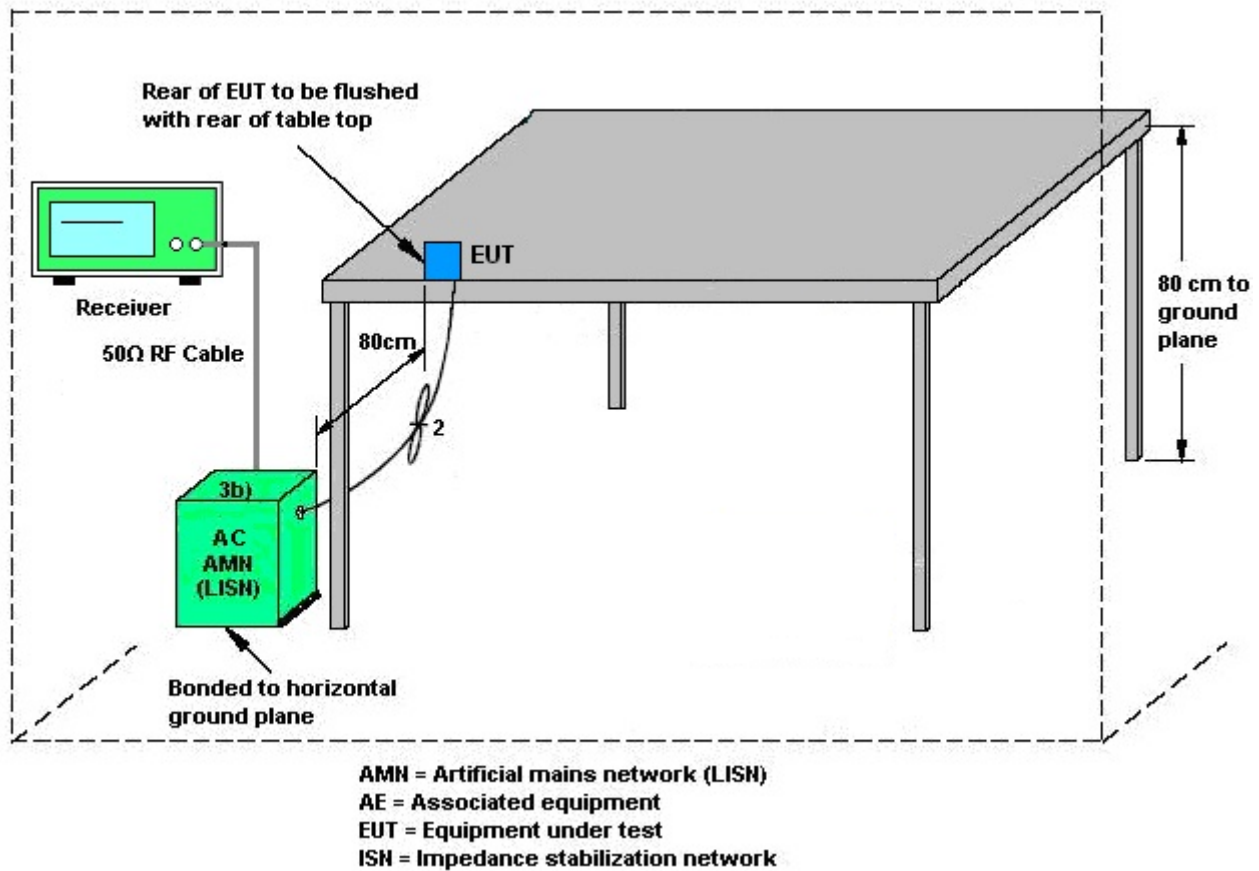

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Sep. 18, 2020~ Sep. 27, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	Sep. 18, 2020~ Sep. 27, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Sep. 18, 2020~ Sep. 27, 2020	Jan. 07, 2021	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 03, 2020	Sep. 18, 2020~ Sep. 27, 2020	Jul. 02, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 18, 2019	Sep. 23, 2020	Oct. 17, 2020	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 14, 2020	Sep. 23, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	Sep. 23, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 29, 2020	Sep. 23, 2020	May 28, 2021	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2020	Sep. 23, 2020	Apr. 26, 2021	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Sep. 23, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 14, 2020	Sep. 23, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Sep. 23, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Jan. 02, 2020	Sep. 23, 2020	Jan. 01, 2021	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2020	Sep. 23, 2020	Apr. 14, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 23, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 23, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 23, 2020	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Sep. 17, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Sep. 17, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Sep. 17, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Sep. 17, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Report Number : FR090813D

Test Engineer:	Rise liu	Temperature:	21~25	°C
Test Date:	2020/9/18~2020/9/27	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	18.18	25.52	-	22.60		
11a	6Mbps	1	44	5220	18.23	25.48	-	22.61		
11a	6Mbps	1	48	5240	18.18	25.62	-	22.60		
HT20	MCS0	1	36	5180	19.12	24.68	-	22.82		
HT20	MCS0	1	44	5220	19.23	24.93	-	22.84		
HT20	MCS0	1	48	5240	19.13	24.63	-	22.82		
HT40	MCS0	1	38	5190	37.16	43.52	-	23.01		
HT40	MCS0	1	46	5230	37.06	43.07	-	23.01		
VHT80	MCS0	1	42	5210	76.00	84.72	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.35	15.83	24.00	0.10		Pass
11a	6Mbps	1	44	5220	0.35	15.79	24.00	0.10		Pass
11a	6Mbps	1	48	5240	0.35	15.82	24.00	0.10		Pass
HT20	MCS0	1	36	5180	0.38	14.84	24.00	0.10		Pass
HT20	MCS0	1	44	5220	0.38	14.82	24.00	0.10		Pass
HT20	MCS0	1	48	5240	0.38	14.83	24.00	0.10		Pass
HT40	MCS0	1	38	5190	0.62	12.79	24.00	0.10		Pass
HT40	MCS0	1	46	5230	0.62	13.94	24.00	0.10		Pass
VHT20	MCS0	1	36	5180	0.38	13.83	24.00	0.10		Pass
VHT20	MCS0	1	44	5220	0.38	13.98	24.00	0.10		Pass
VHT20	MCS0	1	48	5240	0.38	13.91	24.00	0.10		Pass
VHT40	MCS0	1	38	5190	0.70	13.03	24.00	0.10		Pass
VHT40	MCS0	1	46	5230	0.70	13.07	24.00	0.10		Pass
VHT80	MCS0	1	42	5210	1.16	12.82	24.00	0.10		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.35	5.06	11.00	0.10		Pass
11a	6Mbps	1	44	5220	0.35	5.11	11.00	0.10		Pass
11a	6Mbps	1	48	5240	0.35	5.35	11.00	0.10		Pass
HT20	MCS0	1	36	5180	0.38	3.73	11.00	0.10		Pass
HT20	MCS0	1	44	5220	0.38	3.98	11.00	0.10		Pass
HT20	MCS0	1	48	5240	0.38	3.95	11.00	0.10		Pass
HT40	MCS0	1	38	5190	0.62	-1.50	11.00	0.10		Pass
HT40	MCS0	1	46	5230	0.62	0.21	11.00	0.10		Pass
VHT80	MCS0	1	42	5210	1.16	-2.96	11.00	0.10		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	18.23	25.57	23.61	29.61	23.98	
11a	6M bps	1	60	5300	18.23	25.62	23.61	29.61	23.98	
11a	6M bps	1	64	5320	18.18	25.38	23.60	29.60	23.98	
HT20	MCS 0	1	52	5260	19.18	25.23	23.83	29.83	23.98	
HT20	MCS 0	1	60	5300	19.38	25.92	23.87	29.87	23.98	
HT20	MCS 0	1	64	5320	19.18	25.97	23.83	29.83	23.98	
HT40	MCS 0	1	54	5270	37.16	43.43	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.96	43.43	23.98	30.00	23.98	
VHT80	MCS 0	1	58	5290	76.00	85.51	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.35	15.83	23.98	-1.20	26.99	Pass
11a	6M bps	1	60	5300	0.35	15.72	23.98	-1.20	26.99	Pass
11a	6M bps	1	64	5320	0.35	15.82	23.98	-1.20	26.99	Pass
HT20	MCS 0	1	52	5260	0.38	14.85	23.98	-1.20	26.99	Pass
HT20	MCS 0	1	60	5300	0.38	14.88	23.98	-1.20	26.99	Pass
HT20	MCS 0	1	64	5320	0.38	15.10	23.98	-1.20	26.99	Pass
HT40	MCS 0	1	54	5270	0.62	13.89	23.98	-1.20	26.99	Pass
HT40	MCS 0	1	62	5310	0.62	10.97	23.98	-1.20	26.99	Pass
VHT20	MCS 0	1	52	5260	0.38	13.73	23.98	-1.20	26.99	Pass
VHT20	MCS 0	1	60	5300	0.38	13.94	23.98	-1.20	26.99	Pass
VHT20	MCS 0	1	64	5320	0.38	14.04	23.98	-1.20	26.99	Pass
VHT40	MCS 0	1	54	5270	0.70	12.98	23.98	-1.20	26.99	Pass
VHT40	MCS 0	1	62	5310	0.70	13.08	23.98	-1.20	26.99	Pass
VHT80	MCS 0	1	58	5290	1.16	8.95	23.98	-1.20	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.35	5.48	11.00	-1.20		Pass
11a	6M bps	1	60	5300	0.35	5.04	11.00	-1.20		Pass
11a	6M bps	1	64	5320	0.35	5.29	11.00	-1.20		Pass
HT20	MCS 0	1	52	5260	0.38	4.65	11.00	-1.20		Pass
HT20	MCS 0	1	60	5300	0.38	4.34	11.00	-1.20		Pass
HT20	MCS 0	1	64	5320	0.38	4.18	11.00	-1.20		Pass
HT40	MCS 0	1	54	5270	0.62	-0.03	11.00	-1.20		Pass
HT40	MCS 0	1	62	5310	0.62	-3.37	11.00	-1.20		Pass
VHT80	MCS 0	1	58	5290	1.16	-8.14	11.00	-1.20		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	18.13	24.93	23.58	29.58	23.98	
11a	6M bps	1	116	5580	18.23	25.13	23.61	29.61	23.98	
11a	6M bps	1	140	5700	18.08	25.62	23.57	29.57	23.98	
11a	6Mbps	1	144	5720	18.37	26.87	23.64	29.64	23.98	
HT20	MCS 0	1	100	5500	19.13	25.72	23.82	29.82	23.98	
HT20	MCS 0	1	116	5580	19.28	26.07	23.85	29.85	23.98	
HT20	MCS 0	1	140	5700	19.23	25.62	23.84	29.84	23.98	
HT20	MCS0	1	144	5720	19.73	26.02	23.95	29.95	23.98	
HT40	MCS 0	1	102	5510	37.16	43.52	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	37.16	43.52	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	37.16	43.43	23.98	30.00	23.98	
HT40	MCS0	1	142	5710	37.16	43.70	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	76.12	85.35	23.98	30.00	23.98	
VHT80	MCS 0	1	122	5610	76.12	86.15	23.98	30.00	23.98	
VHT80	MCS0	1	138	5690	76.00	86.79	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table


FCC Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.35	16.05	23.98	0.10	26.99	Pass
11a	6M bps	1	116	5580	0.35	16.25	23.98	0.10	26.99	Pass
11a	6M bps	1	140	5700	0.35	14.57	23.98	0.10	26.99	Pass
11a	6Mbps	1	144	5720	0.35	16.27	23.98	0.10	26.99	Pass
HT20	MCS 0	1	100	5500	0.38	15.16	23.98	0.10	26.99	Pass
HT20	MCS 0	1	116	5580	0.38	15.21	23.98	0.10	26.99	Pass
HT20	MCS 0	1	140	5700	0.38	12.61	23.98	0.10	26.99	Pass
HT20	MCS0	1	144	5720	0.38	15.40	23.98	0.10	26.99	Pass
HT40	MCS 0	1	102	5510	0.62	12.64	23.98	0.10	26.99	Pass
HT40	MCS 0	1	110	5550	0.62	14.28	23.98	0.10	26.99	Pass
HT40	MCS 0	1	134	5670	0.62	14.55	23.98	0.10	26.99	Pass
HT40	MCS0	1	134	5670	0.62	14.50	23.98	0.10	26.99	Pass
VHT20	MCS 0	1	100	5500	0.38	14.16	23.98	0.10	26.99	Pass
VHT20	MCS 0	1	116	5580	0.38	14.28	23.98	0.10	26.99	Pass
VHT20	MCS0	1	140	5700	0.38	14.39	23.98	0.10	26.99	Pass
VHT20	MCS0	1	144	5720	0.38	14.44	23.98	0.10	26.99	Pass
VHT40	MCS 0	1	102	5510	0.70	13.22	23.98	0.10	26.99	Pass
VHT40	MCS 0	1	110	5550	0.70	13.36	23.98	0.10	26.99	Pass
VHT40	MCS 0	1	134	5670	0.70	13.53	23.98	0.10	26.99	Pass
VHT40	MCS0	1	142	5710	0.70	13.55	23.98	0.10	26.99	Pass
VHT80	MCS 0	1	106	5530	1.16	10.68	23.98	0.10	26.99	Pass
VHT80	MCS 0	1	122	5610	1.16	13.20	23.98	0.10	26.99	Pass
VHT80	MCS 0	1	138	5690	1.16	13.40	23.98	0.10	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.35	5.03	11.00	0.10		Pass
11a	6M bps	1	116	5580	0.35	5.08	11.00	0.10		Pass
11a	6M bps	1	140	5700	0.35	3.04	11.00	0.10		Pass
11a	6Mbps	1	144	5720	0.35	4.62	11.00	0.10		Pass
HT20	MCS 0	1	100	5500	0.38	3.66	11.00	0.10		Pass
HT20	MCS 0	1	116	5580	0.38	3.51	11.00	0.10		Pass
HT20	MCS 0	1	140	5700	0.38	1.15	11.00	0.10		Pass
HT20	MCS0	1	144	5720	0.38	3.90	11.00	0.10		Pass
HT40	MCS 0	1	102	5510	0.62	-1.85	11.00	0.10		Pass
HT40	MCS 0	1	110	5550	0.62	0.60	11.00	0.10		Pass
HT40	MCS 0	1	134	5670	0.62	0.36	11.00	0.10		Pass
HT40	MCS0	1	142	5710	0.62	-7.33	11.00	0.10		Pass
VHT80	MCS 0	1	106	5530	1.16	-4.30	11.00	0.10		Pass
VHT80	MCS 0	1	122	5610	1.16	-4.68	11.00	0.10		Pass
VHT80	MCS0	1	138	5690	1.16	1.16	11.00	0.10		Pass




Appendix B. AC Conducted Emission Test Results

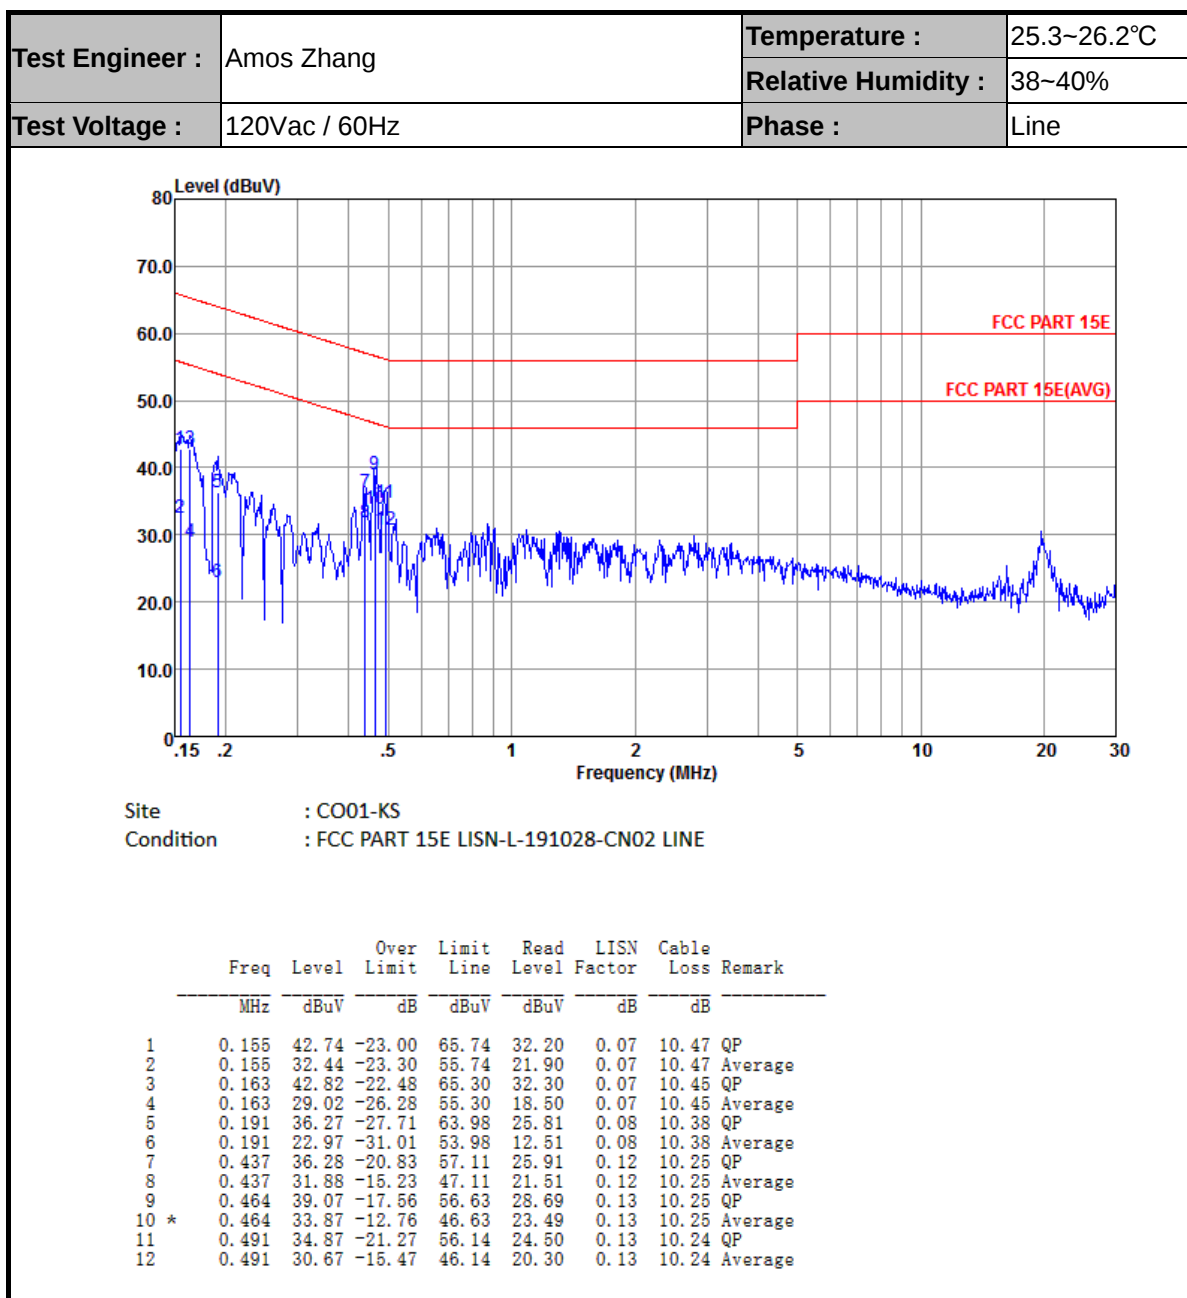



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

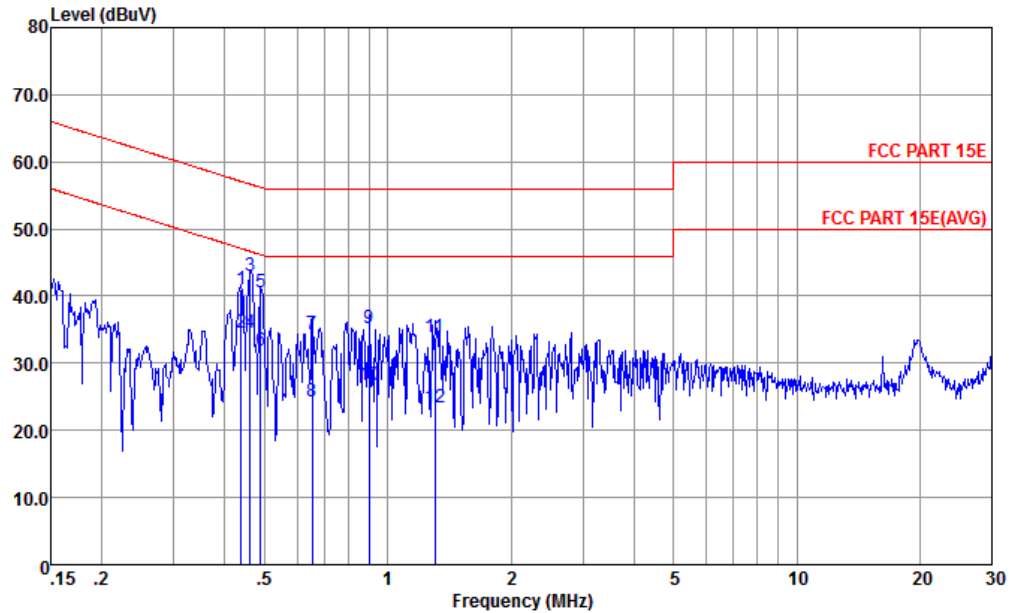

Site : CO01-KS
Condition : FCC PART 15E LISN-N-191028-CN02 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.437	41.07	-16.04	57.11	30.60	0.22	10.25	QP
2	0.437	34.57	-12.54	47.11	24.10	0.22	10.25	Average
3	0.461	42.97	-13.70	56.67	32.50	0.22	10.25	QP
4 *	0.461	34.57	-12.10	46.67	24.10	0.22	10.25	Average
5	0.489	40.57	-15.62	56.19	30.10	0.23	10.24	QP
6	0.489	31.97	-14.22	46.19	21.50	0.23	10.24	Average
7	0.654	34.39	-21.61	56.00	23.90	0.25	10.24	QP
8	0.654	24.29	-21.71	46.00	13.80	0.25	10.24	Average
9	0.899	35.12	-20.88	56.00	24.60	0.28	10.24	QP
10	0.899	26.82	-19.18	46.00	16.30	0.28	10.24	Average
11	1.303	33.81	-22.19	56.00	23.20	0.38	10.23	QP
12	1.303	23.51	-22.49	46.00	12.90	0.38	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.92	56.75	-17.25	74	43.65	35.33	11.09	33.32	101	325	P	H
		5149.92	45.46	-8.54	54	32.36	35.33	11.09	33.32	101	325	A	H
	*	5188	102.27	-	-	89.11	35.36	11.12	33.32	101	325	P	H
		5188	95.39	-	-	82.23	35.36	11.12	33.32	101	325	A	H
		5145.76	57.76	-16.24	74	44.66	35.33	11.09	33.32	301	2	P	V
		5150	46.31	-7.69	54	33.21	35.33	11.09	33.32	301	2	A	V
	*	5182	106.35	-	-	93.19	35.36	11.12	33.32	301	2	P	V
		5182	97.92	-	-	84.76	35.36	11.12	33.32	301	2	A	V

Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		10360	45.25	-23.05	68.3	51.85	39.6	15.88	62.08	100	360	P	H
		10360	45.48	-22.82	68.3	52.08	39.6	15.88	62.08	100	360	P	V
802.11a CH 44 5220MHz		10440	45.54	-22.76	68.3	52.02	39.63	15.94	62.05	100	360	P	H
		10440	45.58	-22.72	68.3	52.06	39.63	15.94	62.05	100	360	P	V
802.11a CH 48 5240MHz		10480	45.4	-22.9	68.3	51.78	39.66	15.98	62.02	100	360	P	H
		10480	46.54	-21.76	68.3	52.92	39.66	15.98	62.02	100	360	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5139.04	55.62	-18.38	74	42.56	35.31	11.07	33.32	107	326	P	H
		5148.64	45.37	-8.63	54	32.27	35.33	11.09	33.32	107	326	A	H
	*	5176	101.59	-	-	88.43	35.36	11.12	33.32	107	326	P	H
		5176	94.12	-	-	80.96	35.36	11.12	33.32	107	326	A	H
		5149.12	59.43	-14.57	74	46.33	35.33	11.09	33.32	290	5	P	V
		5150	46.11	-7.89	54	33.01	35.33	11.09	33.32	290	5	A	V
	*	5188	105.09	-	-	91.93	35.36	11.12	33.32	290	5	P	V
		5188	96.81	-	-	83.65	35.36	11.12	33.32	290	5	A	V

Band 1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	45.79	-22.51	68.3	52.39	39.6	15.88	62.08	100	360	P	H
		10360	45.81	-22.49	68.3	52.41	39.6	15.88	62.08	100	360	P	V
802.11n HT20 CH 44 5220MHz		10440	45.36	-22.94	68.3	51.84	39.63	15.94	62.05	100	360	P	H
		10440	45.78	-22.52	68.3	52.26	39.63	15.94	62.05	100	360	P	V
802.11n HT20 CH 48 5240MHz		10480	45.13	-23.17	68.3	51.51	39.66	15.98	62.02	100	360	P	H
		10480	45.38	-22.92	68.3	51.76	39.66	15.98	62.02	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5149.76	57.59	-16.41	74	44.49	35.33	11.09	33.32	114	326	P	H
		5149.92	47.62	-6.38	54	34.52	35.33	11.09	33.32	114	326	A	H
	*	5206	96.73	-	-	83.53	35.38	11.14	33.32	114	326	P	H
		5206	89.48	-	-	76.28	35.38	11.14	33.32	114	326	A	H
		5400	53.3	-20.7	74	39.71	35.57	11.33	33.31	114	326	P	H
		5390.1	44.39	-9.61	54	30.83	35.56	11.31	33.31	114	326	A	H
		5145.76	59.11	-14.89	74	46.01	35.33	11.09	33.32	291	4	P	V
		5150	50.22	-3.78	54	37.12	35.33	11.09	33.32	291	4	A	V
	*	5194	100.49	-	-	87.29	35.38	11.14	33.32	291	4	P	V
		5194	92.9	-	-	79.7	35.38	11.14	33.32	291	4	A	V
		5376.6	54.46	-19.54	74	40.93	35.54	11.3	33.31	291	4	P	V
		5397.48	44.42	-9.58	54	30.83	35.57	11.33	33.31	291	4	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10380	45.53	-22.77	68.3	52.1	39.61	15.89	62.07	100	360	P	H
		10380	44.63	-23.67	68.3	51.2	39.61	15.89	62.07	100	360	P	V
802.11n HT40 CH 46 5230MHz		10460	45.44	-22.86	68.3	51.89	39.64	15.95	62.04	100	360	P	H
		10460	44.26	-24.04	68.3	50.71	39.64	15.95	62.04	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5150	62.25	-11.75	74	49.15	35.33	11.09	33.32	106	326	P	H
		5146.72	48.26	-5.74	54	35.16	35.33	11.09	33.32	106	326	A	H
	*	5248	96.51	-	-	83.21	35.43	11.19	33.32	106	326	P	H
		5248	89.14	-	-	75.84	35.43	11.19	33.32	106	326	A	H
		5379.12	54.49	-19.51	74	40.93	35.56	11.31	33.31	106	326	P	H
		5396.4	45.58	-8.42	54	31.99	35.57	11.33	33.31	106	326	A	H
		5149.12	66.82	-7.18	74	53.72	35.33	11.09	33.32	322	5	P	V
		5150	49.93	-4.07	54	36.83	35.33	11.09	33.32	322	5	A	V
	*	5242	99.43	-	-	86.13	35.43	11.19	33.32	322	5	P	V
		5242	92.18	-	-	78.88	35.43	11.19	33.32	322	5	A	V
		5367.78	54.99	-19.01	74	41.47	35.54	11.3	33.32	322	5	P	V
		5375.88	45.79	-8.21	54	32.26	35.54	11.3	33.31	322	5	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		10420	45.39	-22.91	68.3	51.91	39.62	15.92	62.06	300	0	P	H
		10420	45.36	-22.94	68.3	51.88	39.62	15.92	62.06	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 64 5320MHz		5350.3	56.21	-17.79	74	42.73	35.52	11.28	33.32	112	326	P	H
		5350	45.7	-8.3	54	32.22	35.52	11.28	33.32	112	326	A	H
	*	5314	102.11	-	-	88.69	35.49	11.25	33.32	112	326	P	H
		5314	94.71	-	-	81.29	35.49	11.25	33.32	112	326	A	H
		5352.2	62.68	-11.32	74	49.2	35.52	11.28	33.32	277	0	P	V
		5350.1	47.94	-6.06	54	34.46	35.52	11.28	33.32	277	0	A	V
	*	5320	107.28	-	-	93.86	35.49	11.25	33.32	277	0	P	V
		5320	99.85	-	-	86.43	35.49	11.25	33.32	277	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10520	46.15	-22.15	68.3	52.47	39.68	16.01	62.01	100	360	P	H
		10520	46.26	-22.04	68.3	52.58	39.68	16.01	62.01	100	360	P	V
802.11a CH 60 5300MHz		10600	45.91	-28.09	74	52.08	39.72	16.08	61.97	100	360	P	H
		10600	45.61	-28.39	74	51.78	39.72	16.08	61.97	100	360	P	V
802.11a CH 64 5320MHz		10640	45.86	-28.14	74	51.96	39.74	16.11	61.95	100	360	P	H
		10640	45.98	-28.02	74	52.08	39.74	16.11	61.95	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 64 5320MHz		5350	55.67	-18.33	74	42.19	35.52	11.28	33.32	115	325	P	H
		5351.1	45.26	-8.74	54	31.78	35.52	11.28	33.32	115	325	A	H
	*	5320	101.76	-	-	88.34	35.49	11.25	33.32	115	325	P	H
		5320	94.2	-	-	80.78	35.49	11.25	33.32	115	325	A	H
		5351.2	59.55	-14.45	74	46.07	35.52	11.28	33.32	212	22	P	V
		5350	46.48	-7.52	54	33	35.52	11.28	33.32	212	22	A	V
	*	5314	105.63	-	-	92.21	35.49	11.25	33.32	212	22	P	V
		5314	98.1	-	-	84.68	35.49	11.25	33.32	212	22	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10520	45.28	-23.02	68.3	51.6	39.68	16.01	62.01	100	360	P	H
CH 52 5260MHz		10520	45.91	-22.39	68.3	52.23	39.68	16.01	62.01	100	360	P	V
802.11n HT20		10600	46.72	-27.28	74	52.89	39.72	16.08	61.97	100	360	P	H
CH 60 5300MHz		10600	45.71	-28.29	74	51.88	39.72	16.08	61.97	100	360	P	V
802.11n HT20		10640	46.34	-27.66	74	52.44	39.74	16.11	61.95	100	360	P	H
CH 64 5320MHz		10640	46.09	-27.91	74	52.19	39.74	16.11	61.95	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5111.52	54.55	-19.45	74	41.53	35.3	11.05	33.33	113	326	P	H
		5111.2	45.31	-8.69	54	32.29	35.3	11.05	33.33	113	326	A	H
	*	5320	95.14	-	-	81.72	35.49	11.25	33.32	113	326	P	H
		5320	87.78	-	-	74.36	35.49	11.25	33.32	113	326	A	H
		5350.9	57.91	-16.09	74	44.43	35.52	11.28	33.32	113	326	P	H
		5350.2	48.16	-5.84	54	34.68	35.52	11.28	33.32	113	326	A	H
		5103.84	55.18	-18.82	74	42.2	35.28	11.03	33.33	296	18	P	V
		5111.2	45.15	-8.85	54	32.13	35.3	11.05	33.33	296	18	A	V
	*	5326	98.44	-	-	85.02	35.49	11.25	33.32	296	18	P	V
		5326	91.04	-	-	77.62	35.49	11.25	33.32	296	18	A	V
		5353.7	62.11	-11.89	74	48.63	35.52	11.28	33.32	296	18	P	V
		5350.4	50.21	-3.79	54	36.73	35.52	11.28	33.32	296	18	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		10540	46.69	-21.61	68.3	52.98	39.69	16.02	62	100	360	P	H
CH 54 5270MHz		10540	46.27	-22.03	68.3	52.56	39.69	16.02	62	100	360	P	V
802.11n HT40		10620	45.43	-28.57	74	51.56	39.73	16.1	61.96	100	360	P	H
CH 62 5310MHz		10620	45.15	-28.85	74	51.28	39.73	16.1	61.96	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5109.6	54.97	-19.03	74	41.95	35.3	11.05	33.33	101	325	P	H
		5109.92	45.99	-8.01	54	32.97	35.3	11.05	33.33	101	325	A	H
	*	5308	92.11	-	-	78.71	35.48	11.24	33.32	101	325	P	H
		5308	84.89	-	-	71.49	35.48	11.24	33.32	101	325	A	H
		5351.2	57.88	-16.12	74	44.4	35.52	11.28	33.32	101	325	P	H
		5350.2	48.34	-5.66	54	34.86	35.52	11.28	33.32	101	325	A	H
		5134.24	55.55	-18.45	74	42.49	35.31	11.07	33.32	303	22	P	V
		5123.2	45.84	-8.16	54	32.79	35.31	11.07	33.33	303	22	A	V
	*	5326	96.08	-	-	82.66	35.49	11.25	33.32	303	22	P	V
		5326	88.92	-	-	75.5	35.49	11.25	33.32	303	22	A	V
		5354.5	61.28	-12.72	74	47.8	35.52	11.28	33.32	303	22	P	V
		5352	50.46	-3.54	54	36.98	35.52	11.28	33.32	303	22	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		10580	45.5	-22.8	68.3	51.7	39.71	16.07	61.98	300	0	P	H
		10580	45.96	-22.34	68.3	52.16	39.71	16.07	61.98	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		5355.12	54.75	-19.25	74	41.27	35.52	11.28	33.32	100	271	P	H
		5469.52	55.47	-12.83	68.3	41.73	35.64	11.41	33.31	100	271	P	H
		5458.16	45.48	-8.52	54	31.78	35.62	11.39	33.31	100	271	A	H
	*	5500	103.09	-	-	89.28	35.67	11.45	33.31	100	271	P	H
		5500	95.67	-	-	81.86	35.67	11.45	33.31	100	271	A	H
		5442.48	54.98	-19.02	74	41.31	35.61	11.37	33.31	234	49	P	V
		5468.88	58.93	-9.37	68.3	45.19	35.64	11.41	33.31	234	49	P	V
		5458.32	45.87	-8.13	54	32.17	35.62	11.39	33.31	234	49	A	V
	*	5500	107.06	-	-	93.25	35.67	11.45	33.31	234	49	P	V
		5500	99.65	-	-	85.84	35.67	11.45	33.31	234	49	A	V
802.11a CH 140 5700MHz		5725.96	57.31	-10.99	68.3	43.17	35.84	11.68	33.38	106	43	P	H
	*	5704	103.07	-	-	88.95	35.83	11.66	33.37	106	43	P	H
		5704	96.05	-	-	81.93	35.83	11.66	33.37	106	43	A	H
		5725.08	64.32	-3.98	68.3	50.18	35.84	11.68	33.38	293	48	P	V
	*	5698	108.25	-	-	94.15	35.82	11.65	33.37	293	48	P	V
		5698	100.93	-	-	86.83	35.82	11.65	33.37	293	48	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	46.79	-27.21	74	52.23	39.93	16.42	61.79	100	360	P	H
		11000	45.89	-28.11	74	51.33	39.93	16.42	61.79	100	360	P	V
802.11a CH 116 5580MHz		11160	47.61	-26.39	74	52.86	40.02	16.57	61.84	100	360	P	H
		11160	47.4	-26.6	74	52.65	40.02	16.57	61.84	100	360	P	V
802.11a CH 140 5700MHz		11400	45.97	-28.03	74	50.94	40.15	16.79	61.91	300	0	P	H
		11400	46.64	-27.36	74	51.61	40.15	16.79	61.91	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5391.76	55.03	-18.97	74	41.47	35.56	11.31	33.31	109	326	P	H
		5465.2	54.64	-13.66	68.3	40.9	35.64	11.41	33.31	109	326	P	H
		5459.44	44.94	-9.06	54	31.24	35.62	11.39	33.31	109	326	A	H
	*	5494	100.03	-	-	86.26	35.65	11.43	33.31	109	326	P	H
		5494	92.33	-	-	78.56	35.65	11.43	33.31	109	326	A	H
		5421.84	54.62	-19.38	74	40.99	35.59	11.35	33.31	273	47	P	V
		5468.72	59.02	-9.28	68.3	45.28	35.64	11.41	33.31	273	47	P	V
		5452.56	45.65	-8.35	54	31.95	35.62	11.39	33.31	273	47	A	V
	*	5494	105.45	-	-	91.68	35.65	11.43	33.31	273	47	P	V
		5494	98.2	-	-	84.43	35.65	11.43	33.31	273	47	A	V
802.11n HT20 CH 140 5700MHz		5725.4	56.12	-12.18	68.3	41.98	35.84	11.68	33.38	116	342	P	H
	*	5710	97.62	-	-	83.51	35.83	11.66	33.38	116	342	P	H
		5710	89.46	-	-	75.35	35.83	11.66	33.38	116	342	A	H
		5725	64.76	-3.54	68.3	50.62	35.84	11.68	33.38	295	45	P	V
	*	5704	106.56	-	-	92.44	35.83	11.66	33.37	295	45	P	V
		5704	99.24	-	-	85.12	35.83	11.66	33.37	295	45	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11000	45.83	-28.17	74	51.27	39.93	16.42	61.79	100	360	P	H
CH 100 5500MHz		11000	45.04	-28.96	74	50.48	39.93	16.42	61.79	100	360	P	V
802.11n HT20		11160	45.67	-28.33	74	50.92	40.02	16.57	61.84	100	360	P	H
CH 116 5580MHz		11160	45.7	-28.3	74	50.95	40.02	16.57	61.84	100	360	P	V
802.11n HT20		11400	46.29	-27.71	74	51.26	40.15	16.79	61.91	300	0	P	H
CH 140 5700MHz		11400	46.44	-27.56	74	51.41	40.15	16.79	61.91	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5459.76	56.9	-17.1	74	43.2	35.62	11.39	33.31	101	328	P	H
		5469.68	58.77	-9.53	68.3	45.03	35.64	11.41	33.31	101	328	P	H
		5459.92	46.07	-7.93	54	32.37	35.62	11.39	33.31	101	328	A	H
	*	5506	95.16	-	-	81.35	35.67	11.45	33.31	101	328	P	H
		5506	87.95	-	-	74.14	35.67	11.45	33.31	101	328	A	H
		5759.56	55.31	-12.99	68.3	41.15	35.85	11.71	33.4	101	328	P	H
		5459.6	57.25	-16.75	74	43.55	35.62	11.39	33.31	302	46	P	V
		5470	62.73	-5.57	68.3	48.99	35.64	11.41	33.31	302	46	P	V
		5459.76	47.89	-6.11	54	34.19	35.62	11.39	33.31	302	46	A	V
	*	5518	101.49	-	-	87.65	35.69	11.47	33.32	302	46	P	V
		5518	94.31	-	-	80.47	35.69	11.47	33.32	302	46	A	V
		5732.44	57.23	-11.07	68.3	43.09	35.84	11.68	33.38	302	46	P	V
802.11n HT40 CH 134 5670MHz		5444.72	54.84	-19.16	74	41.17	35.61	11.37	33.31	111	329	P	H
		5468.24	54.49	-13.81	68.3	40.75	35.64	11.41	33.31	111	329	P	H
		5446.96	46.24	-7.76	54	32.54	35.62	11.39	33.31	111	329	A	H
	*	5686	97.8	-	-	83.7	35.82	11.65	33.37	111	329	P	H
		5686	90.14	-	-	76.04	35.82	11.65	33.37	111	329	A	H
		5744.12	55.49	-12.81	68.3	41.34	35.85	11.69	33.39	111	329	P	H
		5446.16	55.25	-18.75	74	41.55	35.62	11.39	33.31	296	46	P	V
		5462.8	54.04	-14.26	68.3	40.3	35.64	11.41	33.31	296	46	P	V
		5447.28	48	-6	54	34.3	35.62	11.39	33.31	296	46	A	V
	*	5686	105.95	-	-	91.85	35.82	11.65	33.37	296	46	P	V
		5686	98.42	-	-	84.32	35.82	11.65	33.37	296	46	A	V
		5728.28	56.8	-11.5	68.3	42.66	35.84	11.68	33.38	296	46	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11020	46.3	-27.7	74	51.72	39.94	16.44	61.8	100	360	P	H
		11020	44.87	-29.13	74	50.29	39.94	16.44	61.8	100	360	P	V
802.11n HT40 CH 110 5550MHz		11100	46.31	-27.69	74	51.64	39.98	16.51	61.82	100	360	P	H
		11100	45.65	-28.35	74	50.98	39.98	16.51	61.82	100	360	P	V
802.11n HT40 CH 134 5670MHz		11340	44.61	-29.39	74	49.66	40.11	16.73	61.89	100	360	P	H
		11340	43.88	-30.12	74	48.93	40.11	16.73	61.89	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5458	59.78	-14.22	74	44.56	34.46	11.48	30.72	245	172	P	H
		5465.68	59	-9.3	68.3	43.74	34.48	11.5	30.72	245	172	P	H
		5458.96	50.55	-3.45	54	35.33	34.46	11.48	30.72	245	172	A	H
	*	5524	100.6	-	-	85.24	34.55	11.55	30.74	245	172	P	H
		5524	92.99	-	-	77.63	34.55	11.55	30.74	245	172	A	H
		5741.08	55.67	-12.63	68.3	39.95	34.79	11.76	30.83	245	172	P	H
		5438.32	55.82	-18.18	74	40.63	34.44	11.46	30.71	178	198	P	V
		5460.4	55.63	-12.67	68.3	40.41	34.46	11.48	30.72	178	198	P	V
		5454.64	47.11	-6.89	54	31.88	34.46	11.48	30.71	178	198	A	V
	*	5536	92.73	-	-	77.34	34.57	11.56	30.74	178	198	P	V
		5536	85.51	-	-	70.12	34.57	11.56	30.74	178	198	A	V
		5730.28	56.3	-12	68.3	40.59	34.78	11.75	30.82	178	198	P	V
802.11ac VHT80 CH 122 5610MHz		5455.44	56.08	-17.92	74	40.85	34.46	11.48	30.71	100	179	P	H
		5461.36	56.23	-12.07	68.3	41.01	34.46	11.48	30.72	100	179	P	H
		5449.84	47.14	-6.86	54	31.91	34.46	11.48	30.71	100	179	A	H
	*	5602	104.13	-	-	88.6	34.66	11.63	30.76	100	179	P	H
		5602	96.5	-	-	80.97	34.66	11.63	30.76	100	179	A	H
		5725.56	58.29	-10.01	68.3	42.58	34.78	11.75	30.82	100	179	P	H
		5373.68	55.33	-18.67	74	40.27	34.35	11.4	30.69	104	176	P	V
		5462	55.86	-12.44	68.3	40.64	34.46	11.48	30.72	104	176	P	V
		5455.28	46.52	-7.48	54	31.29	34.46	11.48	30.71	104	176	A	V
	*	5614	96.29	-	-	80.77	34.66	11.63	30.77	104	176	P	V
		5614	89.31	-	-	73.79	34.66	11.63	30.77	104	176	A	V
		5753.64	56.43	-11.87	68.3	40.67	34.81	11.78	30.83	104	176	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11059.05	42.33	-31.67	74	48.65	37.44	16.77	60.53	100	360	P	H
CH 106 5530MHz		11059.05	43.09	-30.91	74	49.41	37.44	16.77	60.53	100	360	P	V
802.11ac VHT80		11219.21	42.02	-31.98	74	48.1	37.53	16.88	60.49	100	360	P	H
CH 122 5610MHz		11219.21	41.93	-32.07	74	48.01	37.53	16.88	60.49	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 3 - Straddle Channel

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		5716	111.89	-	-	97.78	35.83	11.66	33.38	105	325	P	H
CH 144		5716	103.49	-	-	89.38	35.83	11.66	33.38	105	325	A	H
5720MHz		5716	114.67	-	-	100.56	35.83	11.66	33.38	258	9	P	V
		5716	107.36	-	-	93.25	35.83	11.66	33.38	258	9	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 144 5720MHz		11440	46.25	-27.75	74	51.19	40.16	16.82	61.92	300	0	P	H
		11440	46.67	-27.33	74	51.61	40.16	16.82	61.92	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 3 - Straddle Channel
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 144 5720MHz		5716	111	-	-	96.89	35.83	11.66	33.38	110	328	P	H
		5716	103.24	-	-	89.13	35.83	11.66	33.38	110	328	A	H
		5722	113.7	-	-	99.56	35.84	11.68	33.38	280	10	P	V
		5722	106.16	-	-	92.02	35.84	11.68	33.38	280	10	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11440	46.23	-27.77	74	51.17	40.16	16.82	61.92	300	0	P	H
CH 144 5720MHz		11440	46.44	-27.56	74	51.38	40.16	16.82	61.92	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 3 - Straddle Channel
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		5710	106.96	-	-	92.85	35.83	11.66	33.38	110	326	P	H
		5710	99.14	-	-	85.03	35.83	11.66	33.38	110	326	A	H
CH 142		5692	110.29	-	-	96.19	35.82	11.65	33.37	282	5	P	V
5710MHz		5692	102.37	-	-	88.27	35.82	11.65	33.37	282	5	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		11420	46.35	-27.65	74	51.3	40.16	16.81	61.92	300	0	P	H
CH 142 5710MHz		11420	46.94	-27.06	74	51.89	40.16	16.81	61.92	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 3 - Straddle Channel
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		5680	104.11	-	-	90.03	35.82	11.63	33.37	115	316	P	H
VHT80		5680	96.94	-	-	82.86	35.82	11.63	33.37	115	316	A	H
CH 138		5722	105.96	-	-	91.82	35.84	11.68	33.38	256	36	P	V
5690MHz		5722	97.35	-	-	83.21	35.84	11.68	33.38	256	36	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11380	46.18	-27.82	74	51.18	40.14	16.77	61.91	300	0	P	H
CH 138 5690MHz		11380	46.9	-27.1	74	51.9	40.14	16.77	61.91	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 3 - 5470~5725MHz

Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
5GHz 802.11ac VHT80 LF		30	20.32	-19.68	40	26.18	25.1	1.24	32.2	-	-	P	H
		128.94	17.29	-26.21	43.5	29.27	17.6	2.56	32.14	-	-	P	H
		157.07	17.31	-26.19	43.5	29.9	16.68	2.83	32.1	-	-	P	H
		234.67	20.3	-25.7	46	32.06	16.95	3.46	32.17	-	-	P	H
		318.09	21.43	-24.57	46	29.97	19.58	4.02	32.14	-	-	P	H
		955.38	28.15	-17.85	46	22.45	30.95	6.94	32.19	100	0	P	H
		31.94	29.48	-10.52	40	36.36	24.04	1.28	32.2	100	360	P	V
		133.79	17.87	-25.63	43.5	29.83	17.56	2.61	32.13	-	-	P	V
		309.36	18.78	-27.22	46	27.43	19.5	3.97	32.12	-	-	P	V
		558.65	22.4	-23.6	46	23.91	25.47	5.32	32.3	-	-	P	V
		746.83	26.26	-19.74	46	24.3	28.11	6.14	32.29	-	-	P	V
		937.92	27.14	-18.86	46	21.91	30.55	6.88	32.2	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:


1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	92.26	2.0725	0.4825	0.51kHz
802.11n HT20	91.72	1.9275	0.5188	0.56kHz
802.11n HT40	86.76	0.9493	1.0534	1.1kHz
802.11ac VHT80	76.63	0.4609	2.1698	2.2kHz

802.11a

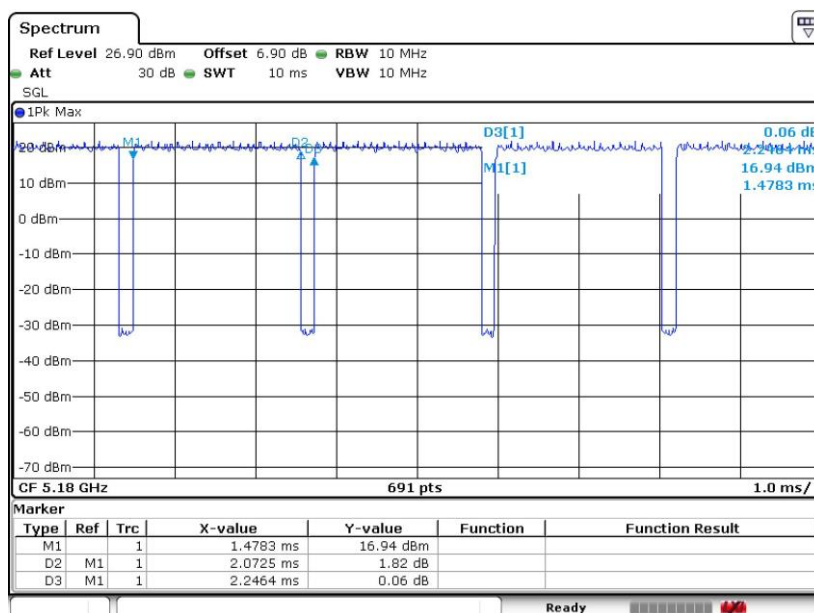




802.11n HT20

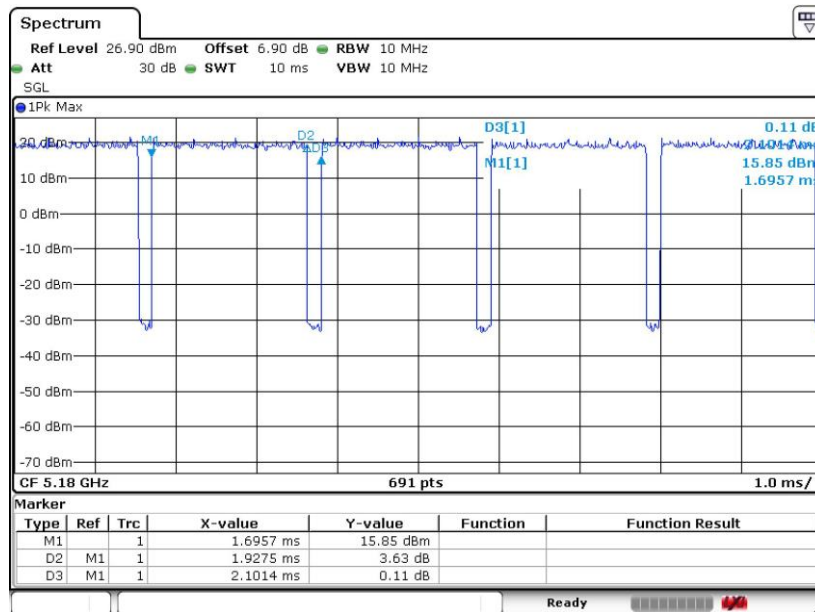

802.11n HT40

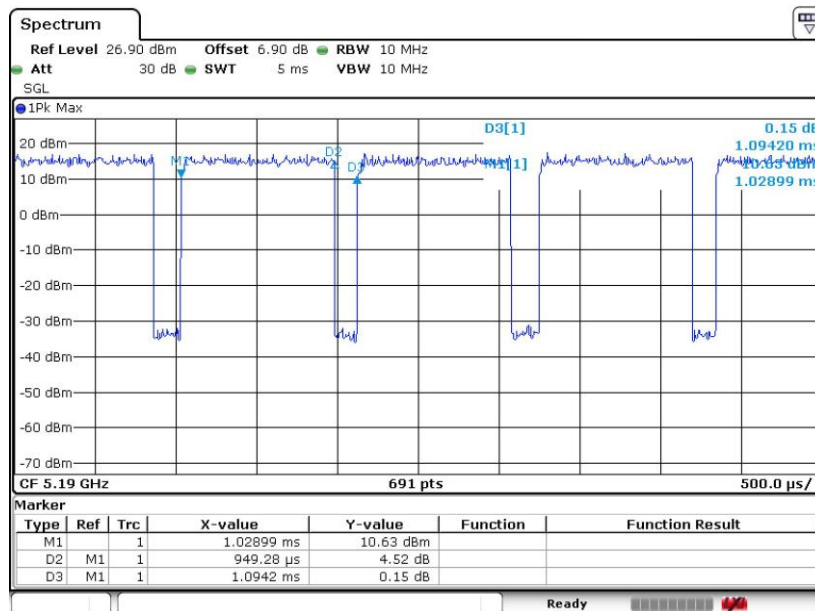



802.11ac VHT80

