

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART CTEST REPORT**FCC PART 15.236****Report Reference No.....: GTS20200615007-1-8****FCC ID.....: 2AWSI-KWP022**

Compiled by
(position+printedname+signature)....: File administrators Jimmy Wang

Supervised by
(position+printedname+signature).....: Test Engineer Aaron Tan



Approved by
(position+printedname+signature).....: Manager Jason Hu

Date of issue.....: June 29, 2020**Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.**

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Applicant's name: Fujian Yiyun Vegue Electronic Technology Co., Ltd.

Address: Room 3-D, Building D, No.24 Houyu Road, Jinan District, Fuzhou City, Fujian Province, China

Test specification**Standard: FCC Part 15.236****TRF Originator: Shenzhen Global Test Service Co.,Ltd.****Master TRF.....: Dated 2014-12****Shenzhen Global Test Service Co.,Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Wireless microphone**Trade Mark: vegue****Manufacturer: Fujian Yiyun Vegue Electronic Technology Co., Ltd.****Model/Type reference.....: KWP022****Listed Models: KWP012, KWP032, KWP052, KWP062, KWP072, KWP082, KWP092****Modulation Type: FM****Operation Frequency.....: 556.5MHz-566.5MHz, 585.5MHz-592.5MHz****Rating: 3.0V---120mA****Result.....: PASS**

TEST REPORT

Test Report No. : GTS20200615007-1-8	June 29, 2020 Date of issue
--	--------------------------------

Equipment under Test : Wireless microphone

Model /Type : KWP022

Listed Models : KWP012, KWP032, KWP052, KWP062, KWP072,
KWP082, KWP092

Applicant : **Fujian Yiyun Vegue Electronic Technology Co., Ltd.**

Address : Room 3-D, Building D, No.24 Houyu Road, Jinan District
Fuzhou City, Fujian Province, China

Manufacturer : **Fujian Yiyun Vegue Electronic Technology Co., Ltd.**

Address : Room 3-D, Building D, No.24 Houyu Road, Jinan District
Fuzhou City, Fujian Province, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2</u>	<u>SUMMARY</u>	<u>5</u>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Test Sample	6
2.4	Equipment Under Test	6
2.5	Short description of the Equipment under Test (EUT)	6
2.6	EUT operation mode	6
2.7	Block Diagram of Test Setup	6
2.8	Related Submittal(s) / Grant (s)	6
2.9	Modifications	6
<u>3</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1	Address of the test laboratory	7
3.2	Test Facility	7
3.3	Environmental conditions	7
3.4	Summary of measurement results	8
3.5	Statement of the measurement uncertainty	8
3.6	Equipments Used during the Test	8
<u>4</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>10</u>
4.1	AC Power Conducted Emission	10
4.2	Maximum Output Power	11
4.3	Occupied Bandwidth	13
4.4	Necessary Bandwidth	15
4.5	Transmitter spurious emissions	18
4.6	Frequency Stability	21
<u>5</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>24</u>
<u>6</u>	<u>PHOTOS OF THE EUT</u>	<u>25</u>

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.236](#): Operation of wireless microphones in the bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-698 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	June 09, 2020
Testing commenced on	:	June 10, 2020
Testing concluded on	:	June 28, 2020

2.2 Product Description

Product Name:	Wireless microphone
Model/Type reference:	KWP022
Power supply:	DC 3V from battery
Hardware version:	BP-TX02FS V3.0
Software version:	V1.0
Sample ID:	GTS20200615007-1-8-1#/ GTS20200615007-1-8-2#
Wireless microphone	
Frequency:	Band A:556.5MHz-566.5MHz Band B:585.5MHz-592.5MHz
Channel number:	Band A:51 Band B:36
Nominal channel bandwidth	200KHz
Modulation Type:	FM
Antenna type:	PCB Antenna
Antenna gain:	1.0dBi

Note: For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.3 Test Sample

The application provides 2 samples to meet requirement.

Sample Number	Description
GTS20200615007-1-8-1#	Engineer sample – continuous transmit
GTS20200615007-1-8-2#	Normal sample – Intermittent transmit

2.4 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V/ 50 Hz	☐ 120V/60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.0V from battery

2.5 Short description of the Equipment under Test (EUT)

This is a wireless microphone.

For more details, refer to the user's manual of the EUT.

2.6 EUT operation mode


The EUT has been tested under typical operating condition. The EUT will staying in continuous transmitting when switch to the specific test frequency.

Operation Frequency:

Band A		Band B	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	556.5	01	585.5
02	556.7	02	585.7
03	556.9	03	585.9
⋮	⋮	⋮	⋮
26	561.5	18	588.9
⋮	⋮	⋮	⋮
49	566.1	34	592.3
50	566.3	35	592.4
51	566.5	36	592.5

Note: The line displays in grey were the channel selected for testing.

2.7 Block Diagram of Test Setup



2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.236 of the FCC Part 15, Subpart C Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:165725

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 4758.01

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2024.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4 Summary of measurement results

Test Specification clause	Test case	Test Sample	Test result
§15.236(d)	RF Power Output	GTS20200615007-1-8-1#	Compliant
§15.236(f)(2)	Occupied Bandwidth	GTS20200615007-1-8-1#	Compliant
§15.236(g)	Necessary Bandwidth	GTS20200615007-1-8-1#	Compliant
§15.236(g)	Spurious emissions	GTS20200615007-1-8-1#	Compliant
§15.236(f)(3)	Frequency Stability	GTS20200615007-1-8-1#	Compliant
§15.207	Conducted Emissions	GTS20200615007-1-8-2#	N/A

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2019/09/20	2020/09/19
LISN	R&S	ESH2-Z5	893606/008	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESPI3	101841-cd	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESCI7	101102	2019/09/20	2020/09/19
Spectrum Analyzer	Agilent	N9020A	MY48010425	2019/09/20	2020/09/19
Spectrum Analyzer	R&S	FSV40	100019	2019/09/20	2020/09/19
Vector Signal generator	Agilent	N5181A	MY49060502	2019/09/20	2020/09/19
Signal generator	Agilent	E4421B	3610AO1069	2019/09/20	2020/09/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2019/09/20	2020/09/19
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2019/09/23	2020/09/22
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2019/10/12	2020/10/11


Bilog Antenna	Schwarzbeck	VULB9163	000976	2020/05/25	2021/05/24
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV9743	#202	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV9179	9719-025	2019/09/20	2020/09/19
Amplifier	EMCI	EMC051845B	980355	2019/09/20	2020/09/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/09/20	2020/09/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2019/09/20	2020/09/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2019/09/20	2020/09/19
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2019/09/20	2020/09/19
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2019/09/20	2020/09/19
RF COMMUNICATION TEST SET	HP	8920B	US361412279	2019/09/20	2020/09/19
Data acquisition card	Agilent	U2531A	TW53323507	2019/09/20	2020/09/19
Power Sensor	Agilent	U2021XA	MY5365004	2019/09/20	2020/09/19
Test Control Unit	Tonscend	JS0806-1	178060067	2020/06/19	2021/07/18
Automated filter bank	Tonscend	JS0806-F	19F8060177	2020/06/19	2021/07/18
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

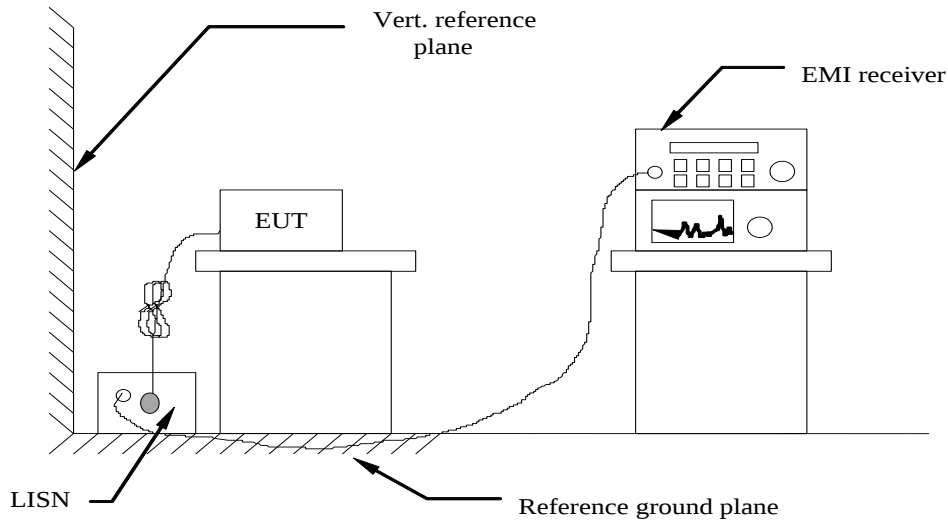

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Not applicable.

4.2 Maximum Output Power


Limit

The maximum radiated power shall not exceed the following values:

- (1) In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP
- (2) In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.

Test Procedure

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all test transmit frequencies were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier may be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

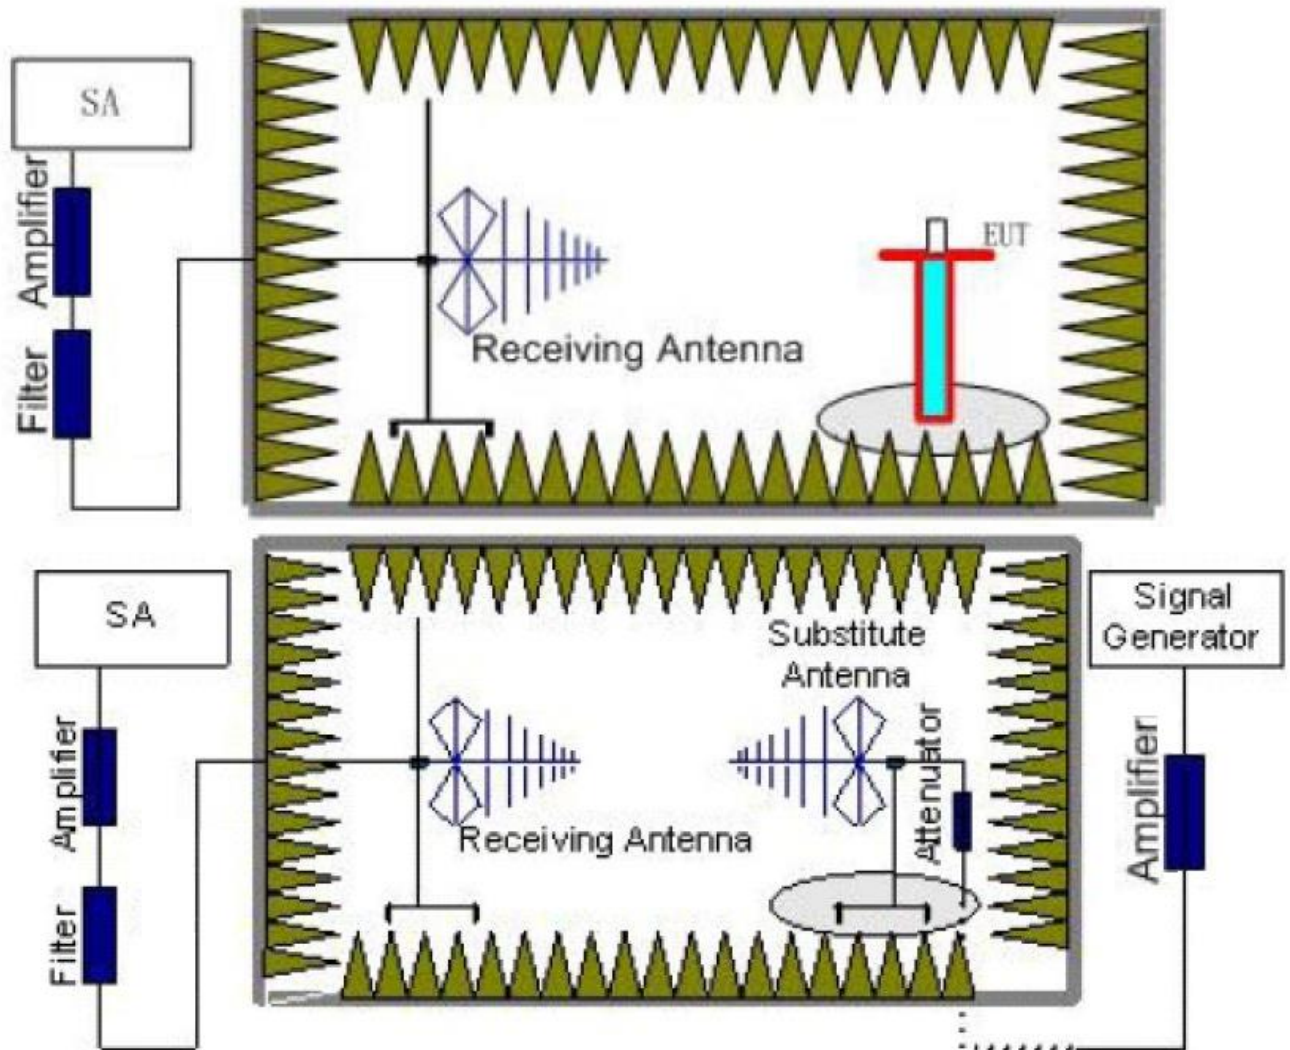Test Configuration**Test Results**

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	TX

Remark;

The field strength of radiation emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The data show in this report only with the worst case setup. After exploratory measurement the worst case of Z axis and receiver antenna at vertical polarization was reported.

Test Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dBi)	P _{Ag} (dB)	EIRP (dBm)	EIRP (mW)	FCC Limit (mW)	Polarization
556.5	-24.80	2.11	8.66	28.82	10.57	11.402	50	V
561.5	-25.41	2.18	8.75	28.82	9.98	9.954	50	V
566.5	-25.24	2.22	8.89	28.82	10.25	10.593	50	V
585.5	-25.76	2.31	9.05	28.88	9.86	9.683	50	V
588.9	-24.63	2.34	9.14	28.88	11.05	12.735	50	V
592.5	-25.02	2.41	9.18	28.88	10.63	11.561	50	V

Remark: $EIRP = P_{Mea}(dBm) + P_{Ag}(dB) - P_{cl}(dB) + G_a(dBi)$

4.3 Occupied Bandwidth


Limit

One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 3 KHz RBW and 10 KHz VBW.

Test Configuration




Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	TX


Modulation	Frequency (MHz)	99% OBW (KHz)	Limit (KHz)	Result
FM	556.5	63.305	200	Pass
	561.5	63.146	200	
	566.5	61.780	200	
FM	585.5	63.789	200	Pass
	588.9	61.853	200	
	592.5	63.739	200	

Test plot as follows:


Band A

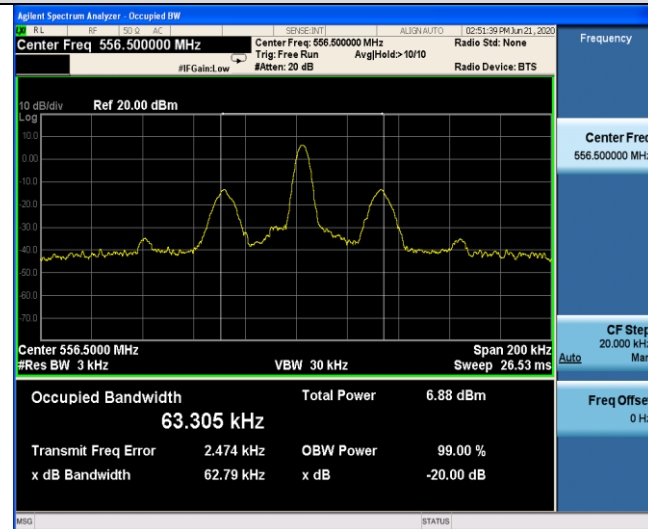


Band B

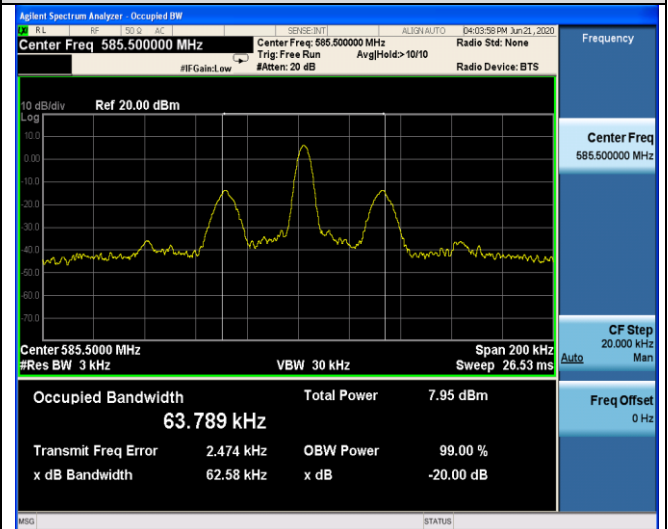


556.5MHz

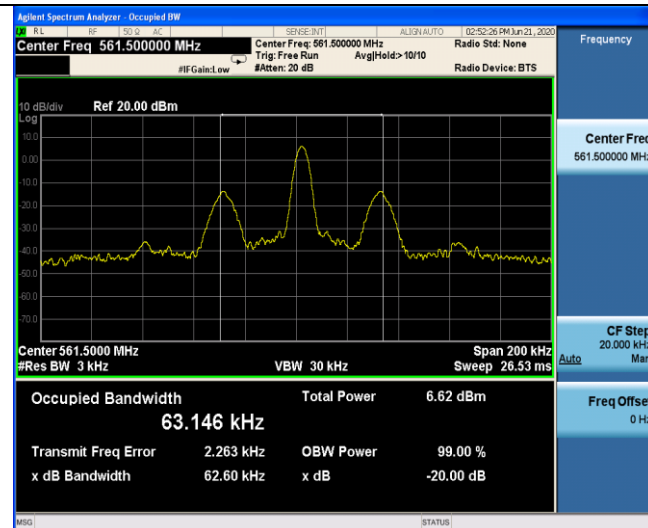


585.5MHz

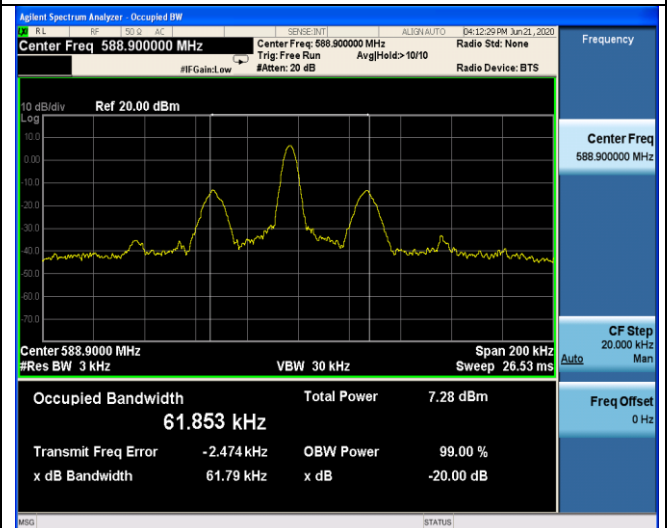

561.5MHz

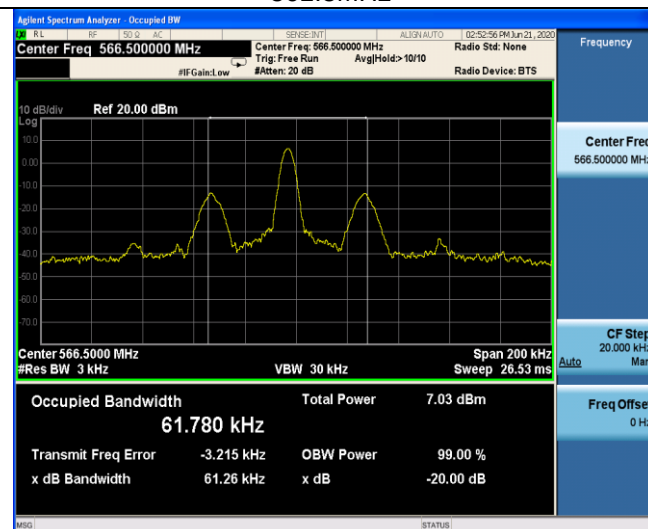

588.9MHz

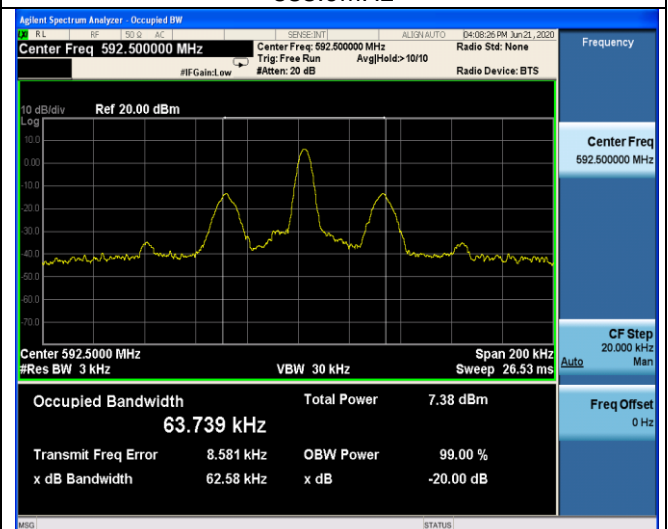

566.5MHz


592.5MHz

4.4 Necessary Bandwidth

LIMIT

Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08) as below:


The transmitter output spectrum shall be within the mask defined in figure below where B is the declared channel bandwidth

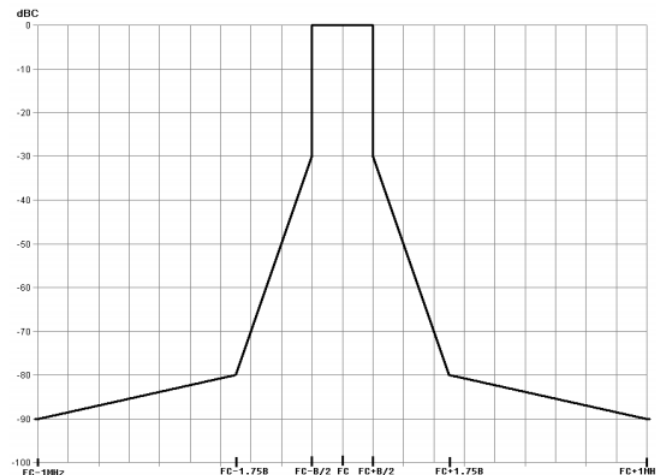

TEST PROCEDURE

1. With the Low Frequency (LF) audio signal generator set to 500 Hz, the audio input level to the EUT shall be Adjusted to 8 dB below the limiting threshold (-8dB limit) as declared by the manufacturer.
2. The corresponding audio output level from the demodulator shall be measured and recorded.
3. The input impedance of the noise meter shall be sufficiently high to avoid more than 0.1 dB changes in input level when the meter is switched between input and output.
4. The audio input level shall be increased by 20 dB, i.e. to 12 dB (lim), and the corresponding change in output level shall be measured.
5. It shall be checked that the audio output level has increased by ≤ 10 dB.
6. If the step 5 is not met, the initial audio input level shall be increased from -8 dB (lim) in 1 dB steps until the above condition is fulfilled, and the input level recorded in the test report. This level replaces the value derived from the manufacturer's declaration and is defined as -8dB (lim).
7. Measure the input level at the transmitter required to give +12 dB (lim) and record the EUT output level test plots by the spectrum analyzer.
8. The transmitter RF output spectrum shall be measured, using a spectrum analyser with the following settings:
 - centre frequency: fc: Transmitter (Tx) nominal frequency;
 - dispersion (Span): fc - 1 MHz to fc + 1 MHz;
 - Resolution BandWidth (RBW): 1 kHz;
 - Video BandWidth (VBW): 1 kHz;
 - detector: Peak hold.

TEST CONFIGURATION

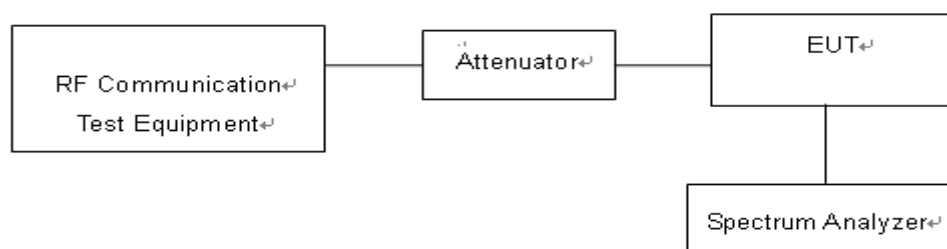



TEST RESULTS

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	TX


Note:

	Bandwidth(B)	B/2	0.35B
Manufacturer declare	200 KHz	100KHz	70KHz

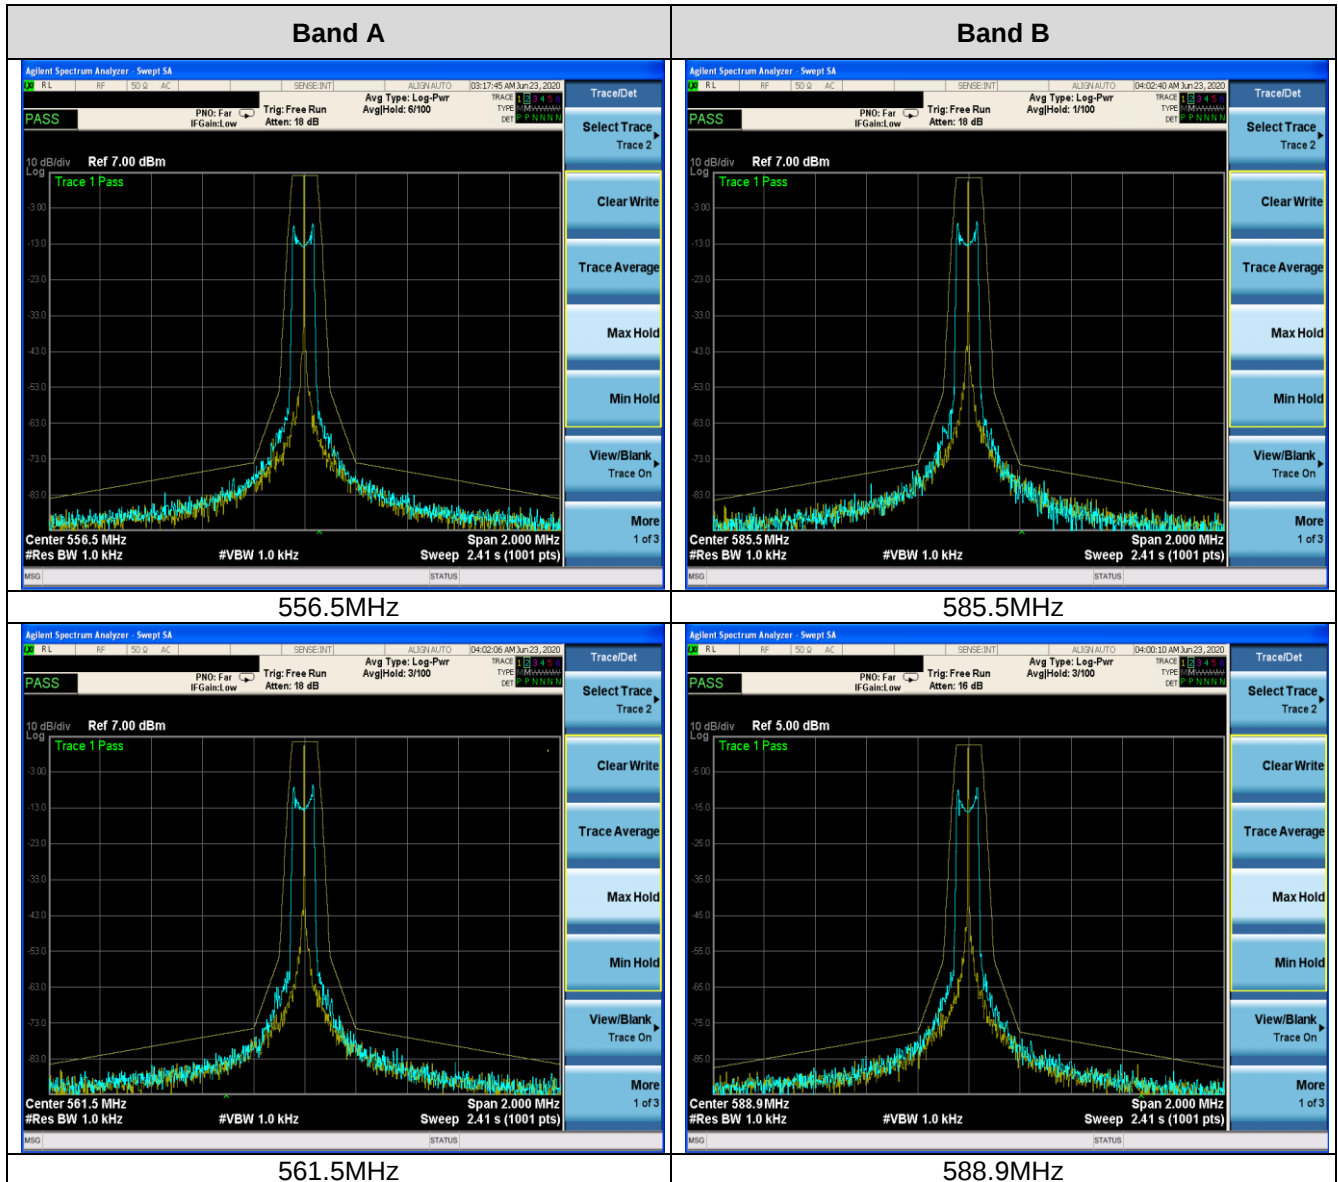

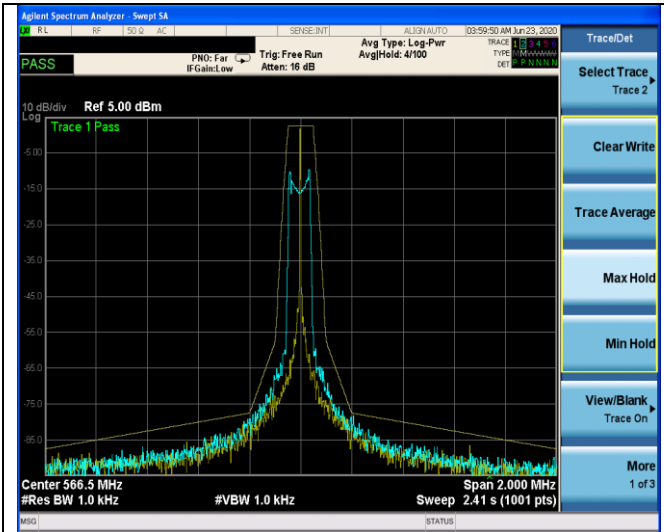

566.5MHz

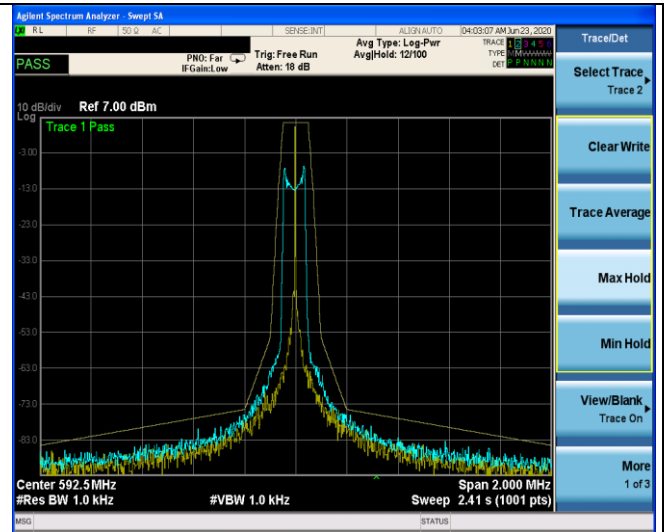

592.5MHz

4.5 Transmitter spurious emissions

Limit

Spurious emissions are emissions outside the frequency range(s) of the equipment. The power of the spurious emissions shall not exceed the limits of table as below:


State	Frequency		
	47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 μ W
Standby	2 nW	2 nW	20 nW

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

Test Configuration

Effective Radiated Power measurement (30 MHz to 12.75 GHz)

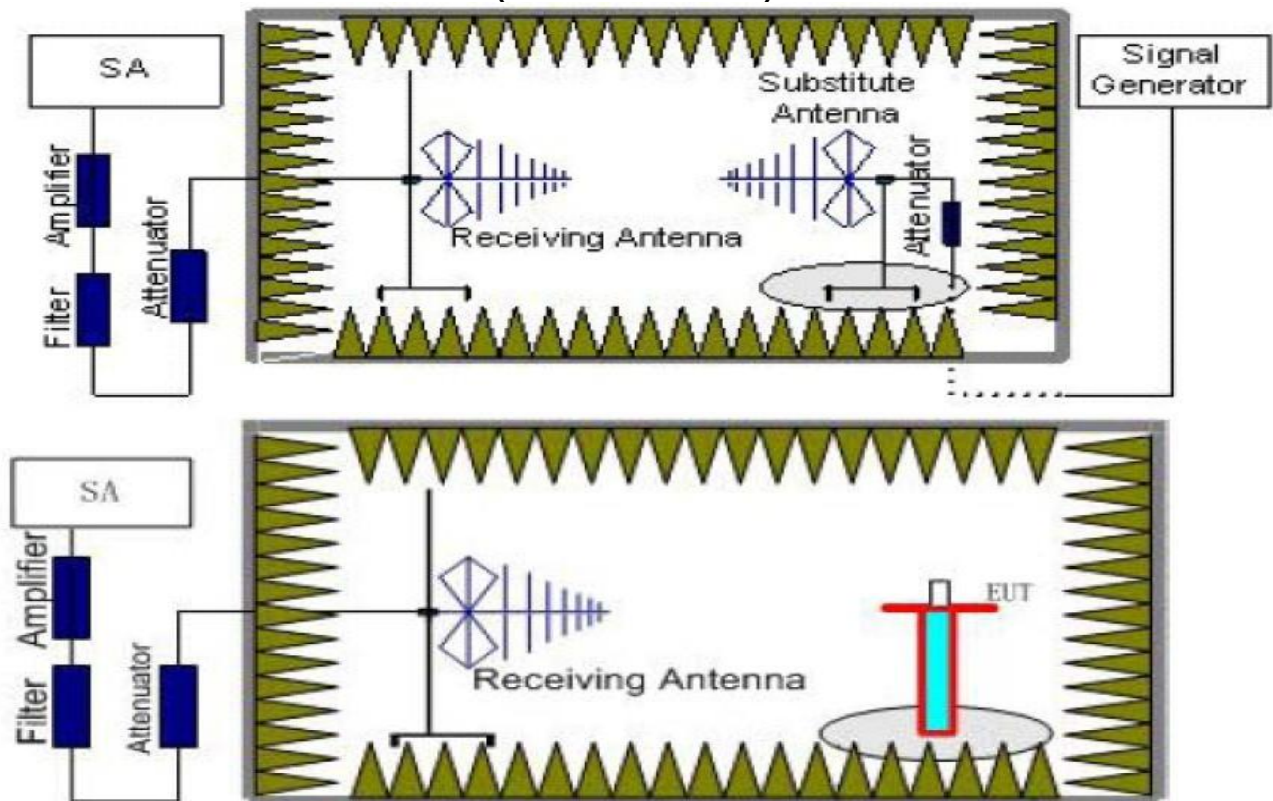

TEST PROCEDURE

1. Please refer to ETSI EN 300 422-1 V1.4.2 (2011-08) clause 6.1 for the test conditions.
2. Please refer to ETSI EN 300 422-1 V1.4.2 (2011-08) clause 8.4.2 for the measurement method.

Test Results

TEST RESULTS

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	TX

The test frequency range from 25MHz to 4GHz and recorded worst at below:

Test mode: Tx (556.5MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
1113.00	V	-40.26	-30	10.26	PASS
1669.50	V	-33.25	-30	3.25	
2226.00	V	-38.75	-30	8.75	
2782.50	V	-37.89	-30	7.89	
--	V	--	--	--	
1113.00	H	-41.26	-30	11.26	
1669.50	H	-34.58	-30	4.58	
2226.00	H	-39.11	-30	9.11	
2782.50	H	-40.36	-30	10.36	
--	H	--	--	--	

Test mode: Tx (561.5MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
1123.00	V	-36.25	-30	6.25	PASS
1684.50	V	-38.47	-30	8.47	
2246.00	V	-39.66	-30	9.66	
2807.50	V	-41.85	-30	11.85	
--	V	--	--	--	
1123.00	H	-36.98	-30	6.98	
1684.50	H	-39.56	-30	9.56	
2246.00	H	-40.87	-30	10.87	
2807.50	H	-42.74	-30	12.74	
--	H	--	--	--	

Test mode: Tx (566.5MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
1132.00	V	-34.25	-30	4.25	PASS
1698.00	V	-36.98	-30	6.98	
2264.00	V	-41.45	-30	11.45	
--	V	--	--	--	
1132.00	H	-35.89	-30	5.89	
1698.00	H	-38.66	-30	8.66	
2264.00	H	-42.73	-30	12.73	
--	H	--	--	--	

Test mode: Tx (585.5MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
1171.00	V	-33.68	-30	3.68	PASS
1756.50	V	-34.52	-30	4.52	
2342.00	V	-39.87	-30	9.87	
--	V	--	--	--	
1171.00	H	-35.69	-30	5.69	
1756.50	H	-36.12	-30	6.12	
2342.00	H	-40.73	-30	10.73	
--	H	--	--	--	

Test mode: Tx (588.9MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
1177.80	V	-33.89	-30	3.89	PASS
1766.70	V	-34.54	-30	4.54	
2355.60	V	-39.74	-30	9.74	
--	V	--	--	--	
1177.80	H	-34.55	-30	4.55	
1766.70	H	-35.86	-30	5.86	
2355.60	H	-40.12	-30	10.12	
--	H	--	--	--	

Test mode: Tx (592.5MHz)					
Frequency (MHz)	Pol./Ant	Measurement EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
1184.00	V	-33.51	-30	3.51	PASS
1776.00	V	-34.63	-30	4.63	
2368.00	V	-39.69	-30	9.69	
--	V	--	--	--	
1184.00	H	-34.45	-30	4.45	
1776.00	H	-35.41	-30	5.41	
2368.00	H	-41.62	-30	11.62	
--	H	--	--	--	

Remark:

1. The test frequency range from 25MHz to 4GHz, RBW/VBW: 100 KHz/300KHz below 1GHz, RBW/VBW: 1000 KHz/3000KHz above 1GHz.
2. "--"Other emission levels were very low against the limit and not reported.

4.6 Frequency Stability

Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

Test Procedure


a) Frequency stability versus environmental temperature

1. Setup as Test Configuration for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used.
2. Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3 kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -20°C is measured, record all measurement frequencies.

b) Frequency stability versus input voltage

1. Setup as Test Configuration for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used. Install new batteries in the EUT.
2. Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. For non hand carried, battery operated device, supply the EUT primary voltage with 85 and 115 percent of the nominal value and record the frequency.

Test Configuration

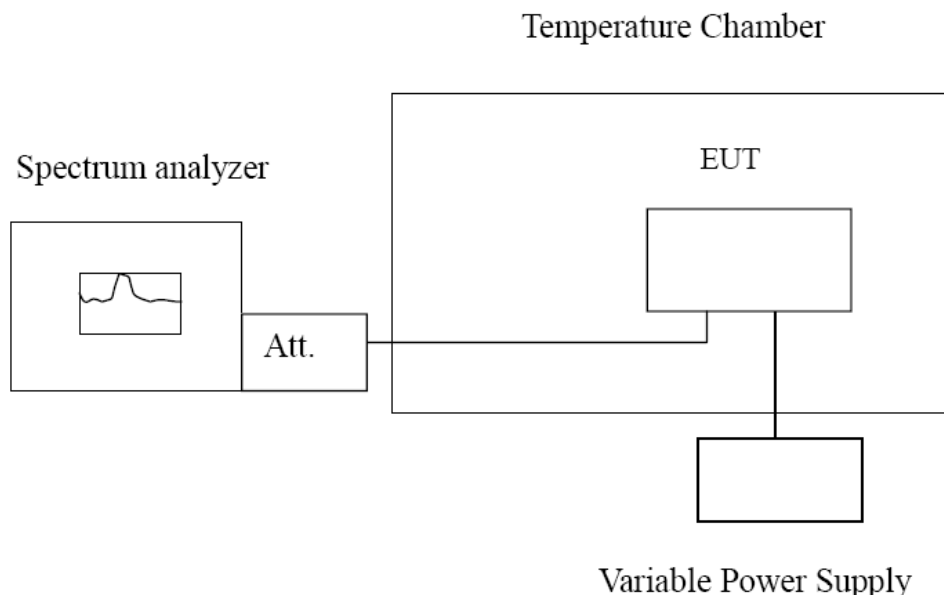

Test Results

Temperature	22.8°C	Humidity	56%
Test Engineer	Moon Tan	Configurations	TX

Reference Frequency: 556.5MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00744	0.001336%	±0.005	PASS
	-10	0.00850	0.001527%		
	0	0.00946	0.001700%		
	10	0.00812	0.001460%		
	20	0.00830	0.001491%		
	30	0.00906	0.001628%		
	40	0.00660	0.001187%		
	50	0.00651	0.001169%		
3.45	20	0.00841	0.001512%	±0.005	PASS
2.55	20	0.00924	0.001660%		

Reference Frequency: 561.5MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00809	0.001441%	±0.005	PASS
	-10	0.00748	0.001331%		
	0	0.00860	0.001532%		
	10	0.00767	0.001367%		
	20	0.00792	0.001410%		
	30	0.00648	0.001154%		
	40	0.00765	0.001362%		
	50	0.00639	0.001137%		
3.45	20	0.00731	0.001301%	±0.005	PASS
2.55	20	0.00835	0.001486%		

Reference Frequency: 566.5MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00702	0.001239%	±0.005	PASS
	-10	0.00760	0.001342%		
	0	0.00590	0.001041%		
	10	0.00782	0.001381%		
	20	0.00743	0.001311%		
	30	0.00787	0.001389%		
	40	0.00726	0.001282%		
	50	0.00748	0.001321%		
3.45	20	0.00587	0.001036%	±0.005	PASS
2.55	20	0.00842	0.001486%		

Reference Frequency: 585.5MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00619	0.001058%	±0.005	PASS
	-10	0.00863	0.001473%		
	0	0.00822	0.001403%		
	10	0.00551	0.000941%		
	20	0.00867	0.001480%		
	30	0.00889	0.001518%		
	40	0.00620	0.001059%		
	50	0.00641	0.001095%		
3.45	20	0.00636	0.001087%	±0.005	PASS
2.55	20	0.00641	0.001095%		

Reference Frequency: 588.9MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00718	0.001220%	±0.005	PASS
	-10	0.00716	0.001216%		
	0	0.00697	0.001184%		
	10	0.00829	0.001407%		
	20	0.00931	0.001581%		
	30	0.00561	0.000952%		
	40	0.00893	0.001517%		
	50	0.00696	0.001182%		
3.45	20	0.00874	0.001485%	±0.005	PASS
2.55	20	0.00702	0.001193%		

Reference Frequency: 592.5MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.00945	0.001595%	±0.005	PASS
	-10	0.00910	0.001536%		
	0	0.00940	0.001586%		
	10	0.00584	0.000985%		
	20	0.00551	0.000930%		
	30	0.00692	0.001168%		
	40	0.00658	0.001110%		
	50	0.00759	0.001280%		
3.45	20	0.00610	0.001030%	±0.005	PASS
2.55	20	0.00923	0.001557%		


5 Test Setup Photos of the EUT



6 Photos of the EUT


External Photos of EUT



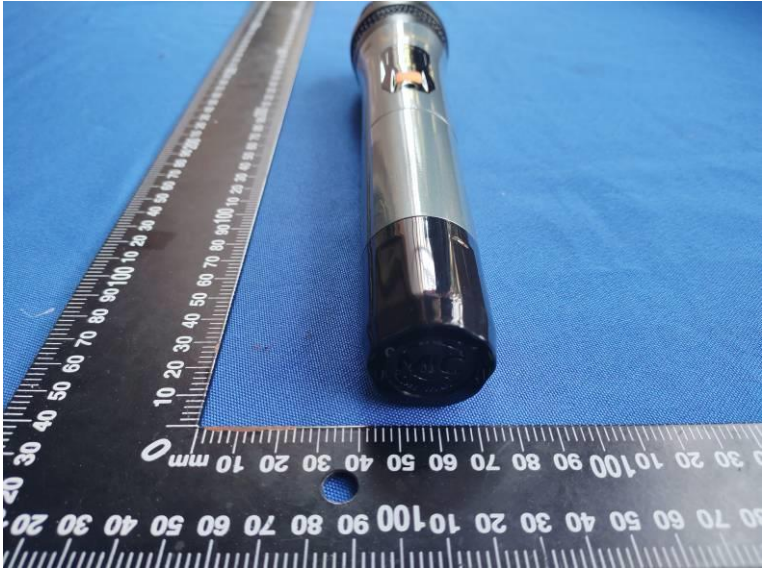



Internal Photos of EUT

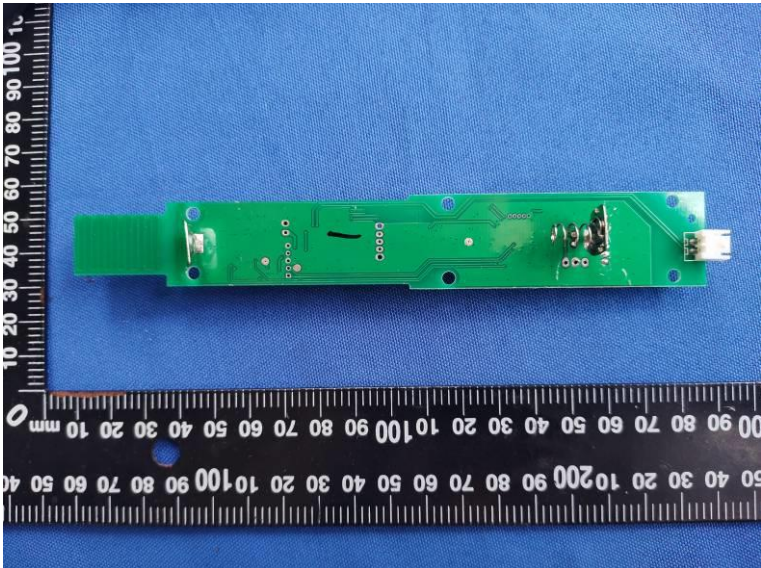

Wireless Microphone
TX antenna

