



Report No.: TW2011042-02E File reference No.: 2020-11-16

Applicant: Audax Global Solutions Ltd

Product: Body Worn Camera

Model No.: BioAX

Trademark: Audax®

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Manager

Dated: November 16, 2020

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2020-11-16



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

Page 2 of 76

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — **Registration No.:5205A**

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 76

Report No.: TW2011042-02E

Date: 2020-11-16



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure	12
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	26
8.0	Maximum Output Power	38
9.0	Carrier Frequency Separation.	41
10.0	Number of Hopping Channel.	45
11.0	Time of Occupancy (Dwell Time)	49
12.0	Out of Band Measurement.	56
13.0	Antenna Requirement.	73
14.0	FCC ID Label.	74
15.0	Photo of Test Setup and EUT View.	75

Date: 2020-11-16



Page 4 of 76

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Audax Global Solutions Ltd

Address: c/o Francis Clark LLP, North Quay House, Sutton Harbour, Plymouth, PL4 ORA

Telephone: 44(0)1752264950

Fax: --

1.3 Description of EUT

Product: Body Worn Camera

Manufacturer: Audax Global Solutions Ltd

Address: c/o Francis Clark LLP, North Quay House, Sutton Harbour, Plymouth, PL4 ORA

Brand Name: Audax® Model Number: BioAX Additional Model Number: N/A

Type of Modulation GFSK, JI/4-DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channels for Bluetooth

Antenna: FPC antenna used. The gain of the antenna is 1.79dBi. (get from the antenna

specification provided the applicant)

Input Voltage: DC5V, 2A

Battery: DC3.8V, 3200mAh,12.16Wh Li-ion battery

Power Supply: Model: BS-16W0502000WB;

Input: 100-240V~50/60Hz 0.5A Max; Output: 5V, 2000mA

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2011042-02E Page 5 of 76

Date: 2020-11-16



1.4 Submitted Sample: 3 Samples

1.5 Test Duration 2020-11-03 to 2020-11-16

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 76

Report No.: TW2011042-02E

Date: 2020-11-16



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2020-06-23	2021-06-22
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2020-06-23	2021-06-22
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22
Loop Antenna	EMCO	6507	00078608	2020-06-23	2021-06-22
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2020-06-23	2021-06-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22
Spectrum	RS	FSP	1164.4391.38	2020-01-18	2021-01-17
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2020-06-23	2021-06-22
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

2.2 Automation Test Software

For Conducted Emission Test

Name	Version		
EZ-EMC	Ver.EMC-CON 3A1.1		

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 7 of 76

Report No.: TW2011042-02E

Date: 2020-11-16



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii) PASS		Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 76


Report No.: TW2011042-02E

Date: 2020-11-16



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

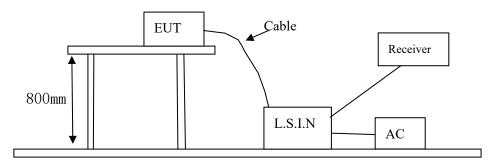

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Page 9 of 76

Report No.: TW2011042-02E

Date: 2020-11-16



A. EUT

Device	Manufacturer	Model	FCC ID
Body Worn Camera	Audax Global Solutions Ltd	BioAX	2AWT2-BIO-AX

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating

EUT Operating Condition 5.4

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- В Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class B Limits (dB μ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
0.50 ~ 5.00	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2020-11-16



Conducted Emission on Live Terminal (150kHz to 30MHz) A:

EUT Operating Environment


Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

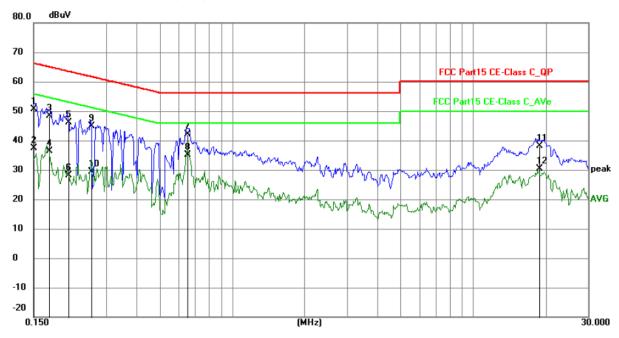

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1507	40.97	9.78	50.75	65.96	-15.21	QP	Р
2	0.1507	27.69	9.78	37.47	55.96	-18.49	AVG	Р
3	0.1733	38.70	9.77	48.47	64.80	-16.33	QP	Р
4	0.1733	26.54	9.77	36.31	54.80	-18.49	AVG	Р
5	0.2084	36.42	9.75	46.17	63.27	-17.10	QP	Р
6	0.2084	18.38	9.75	28.13	53.27	-25.14	AVG	Р
7	0.6542	32.46	9.78	42.24	56.00	-13.76	QP	Р
8	0.6542	25.33	9.78	35.11	46.00	-10.89	AVG	Р
9	0.2590	35.08	9.75	44.83	61.46	-16.63	QP	Р
10	0.2590	19.65	9.75	29.40	51.46	-22.06	AVG	Р
11	18.9204	27.48	10.62	38.10	60.00	-21.90	QP	Р
12	18.9204	19.66	10.62	30.28	50.00	-19.72	AVG	Р

Date: 2020-11-16



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

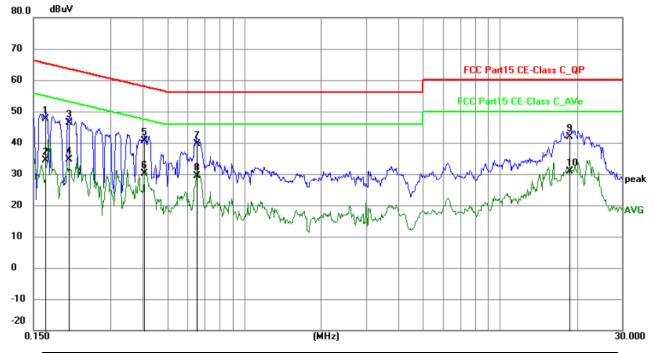

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1675	37.91	9.77	47.68	65.08	-17.40	QP	Р
2	0.1675	24.58	9.77	34.35	55.08	-20.73	AVG	Р
3	0.2061	36.74	9.75	46.49	63.36	-16.87	QP	Р
4	0.2061	24.89	9.75	34.64	53.36	-18.72	AVG	Р
5	0.4082	30.90	9.76	40.66	57.68	-17.02	QP	Р
6	0.4082	20.33	9.76	30.09	47.68	-17.59	AVG	Р
7	0.6542	29.78	9.78	39.56	56.00	-16.44	QP	Р
8	0.6542	19.66	9.78	29.44	46.00	-16.56	AVG	Р
9	18.7210	31.35	10.60	41.95	60.00	-18.05	QP	Р
10	18.7210	20.34	10.60	30.94	50.00	-19.06	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2011042-02E Page 12 of 76

Date: 2020-11-16




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

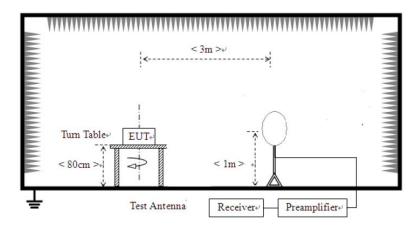


Date: 2020-11-16



For radiated emissions from 30MHz to1GHz

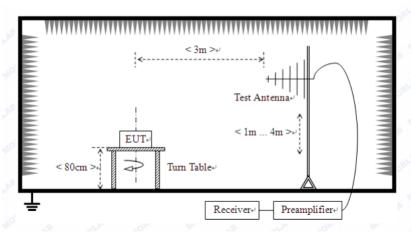

For radiated emissions above 1GHz

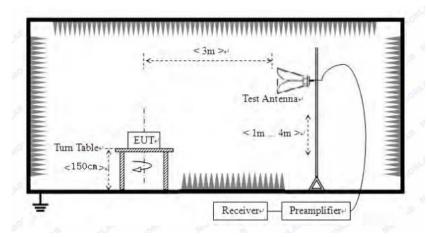

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2011042-02E Page 14 of 76

Date: 2020-11-16



Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. $\Pi/4$ -DQPSK was the worst case because it has highest output power
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 6. Battery full charged during tests.

Date: 2020-11-16



Page 15 of 76

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass


Page 16 of 76 Report No.: TW2011042-02E

Date: 2020-11-16



Test Figure:

H

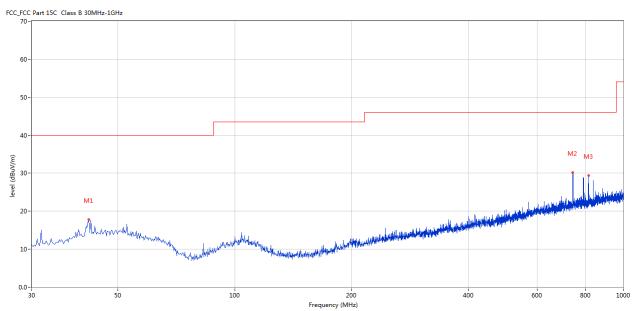


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	42.122	17.78	-11.64	40.0	-22.22	Peak	360.00	200	Horizontal	Pass
2	742.044	30.18	-3.43	46.0	-15.82	Peak	360.00	100	Horizontal	Pass
3	813.807	29.41	-2.98	46.0	-16.59	Peak	15.00	100	Horizontal	Pass

Page 17 of 76 Report No.: TW2011042-02E

Date: 2020-11-16



Test Figure:

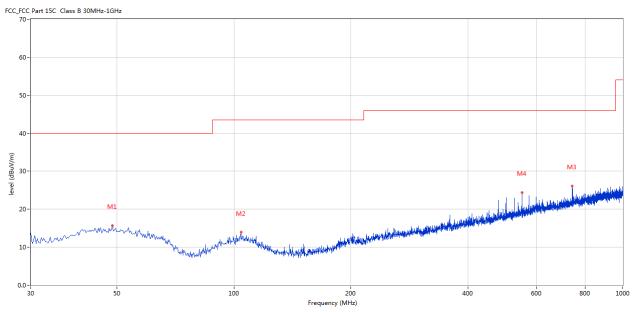

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	48.668	15.75	-11.22	40.0	-24.25	Peak	207.00	100	Vertical	Pass
2	104.186	13.92	-13.30	43.5	-29.58	Peak	360.00	200	Vertical	Pass
3	742.044	26.12	-3.43	46.0	-19.88	Peak	22.00	200	Vertical	Pass
4	550.517	24.36	-6.33	46.0	-21.64	Peak	360.00	200	Vertical	Pass

Report No.: TW2011042-02E Page 18 of 76

Date: 2020-11-16



Operation Mode: Transmitting under Low Channel (2402MHz)

	0	,	
Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4882		Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Page 19 of 76 Report No.: TW2011042-02E

Date: 2020-11-16



Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \text{V/m} \)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured


Page 20 of 76 Report No.: TW2011042-02E

Date: 2020-11-16



Please refer to the following test plots for details:

Low Channel: Vertical

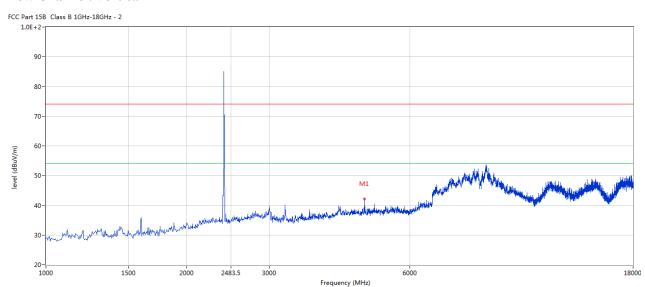

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4802.799	42.22	3.12	74.0	-31.78	Peak	168.00	100	٧	Pass


Report No.: TW2011042-02E Page 21 of 76

Date: 2020-11-16



Low Channel: Horizontal

FCC Part 15B Class B 1GHz-18GHz - 2

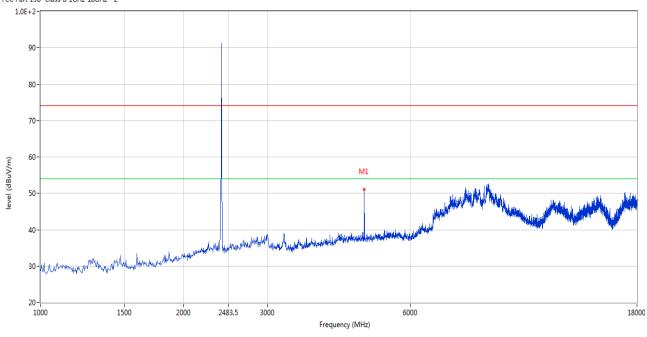


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	4802.799	50.99	3.12	74.0	-23.01	Peak	242.00	100	Н	Pass

Report No.: TW2011042-02E Page 22 of 76

Date: 2020-11-16



Middle Channel: Horizontal

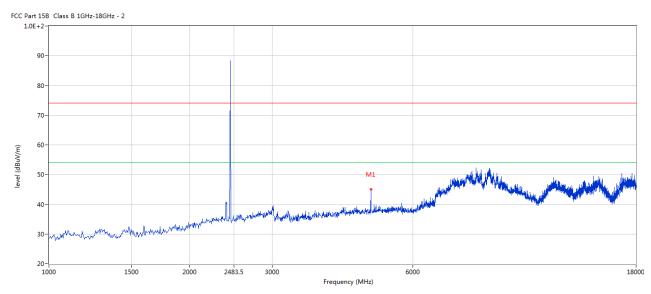


No).	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1		4883.529	45.01	3.20	74.0	-28.99	Peak	241.00	100	Н	Pass

Report No.: TW2011042-02E Page 23 of 76

Date: 2020-11-16



Middle Channel: Vertical

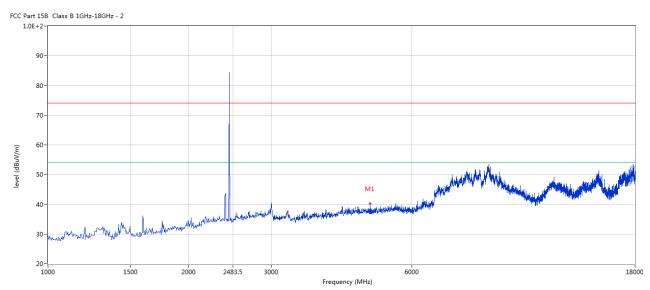


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4883.529	40.32	3.20	74.0	-33.68	Peak	0.00	100	٧	Pass

Report No.: TW2011042-02E Page 24 of 76

Date: 2020-11-16



High Channel: Horizontal

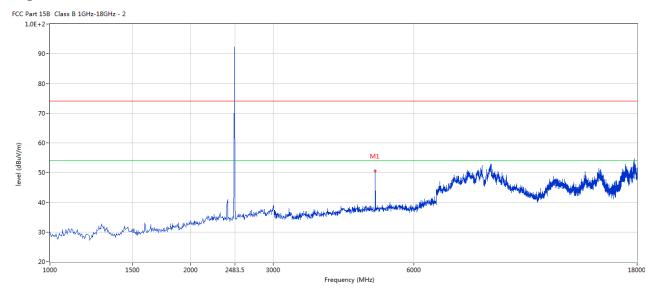


١	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	1	4960.010	50.61	3.36	74.0	-23.39	Peak	197.00	100	Н	Pass

Report No.: TW2011042-02E Page 25 of 76

Date: 2020-11-16



High Channel: Vertical

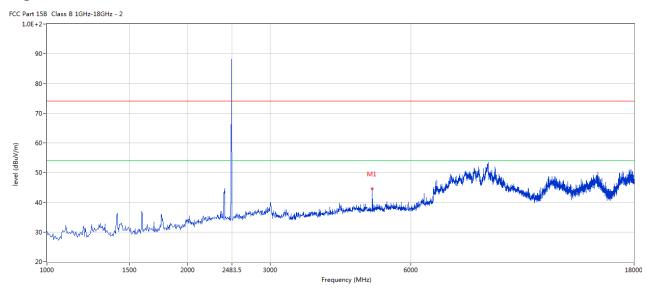

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	44.58	3.36	74.0	-29.42	Peak	356.00	100	V	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz, it is only the floor noise.
- 5. The peak value less than the AV limit, no necessary to take down the AV measurement result.

Date: 2020-11-16



Page 26 of 76

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

EUT	Bod	y Worn Cameras	Model	BioAX
Mode	Ke	ep Transmitting	Test Voltage	DC3.8V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail
Low	2402	782		Pass
Middle	2441	782		Pass
High	2480	782		Pass

Page 27 of 76


Report No.: TW2011042-02E

Date: 2020-11-16



Test Figure:

1. Condition: Low Channel

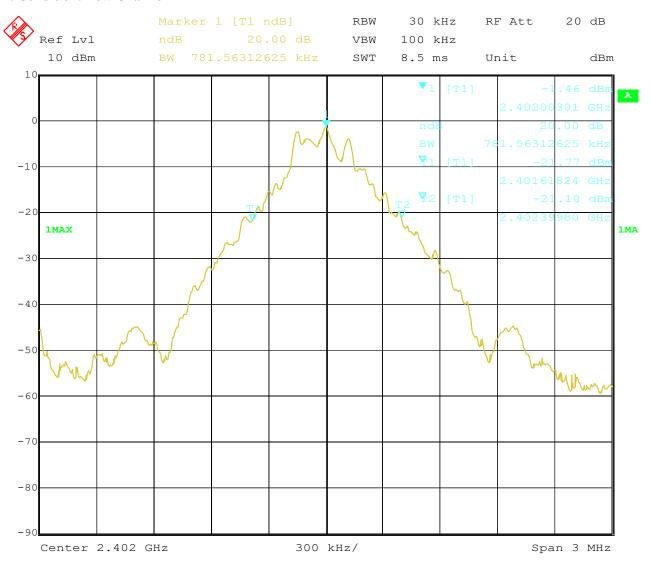


Page 28 of 76

Date: 2020-11-16



2. Condition: Middle Channel

Report No.: TW2011042-02E

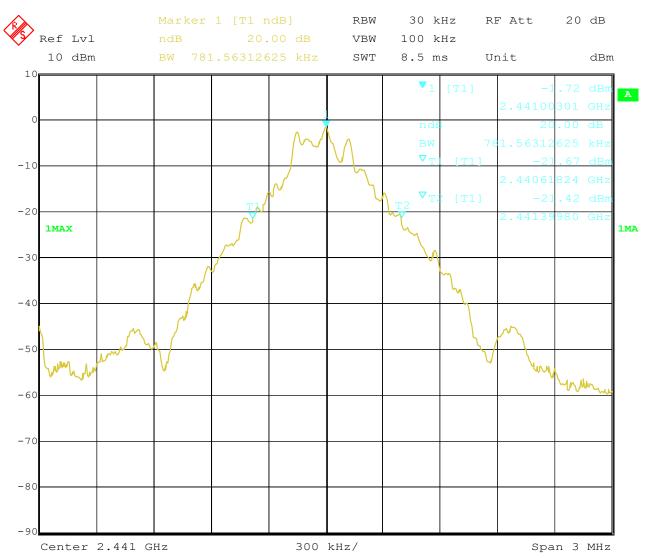


Report No.: TW2011042-02E Page 29 of 76

Date: 2020-11-16



3. High Channel

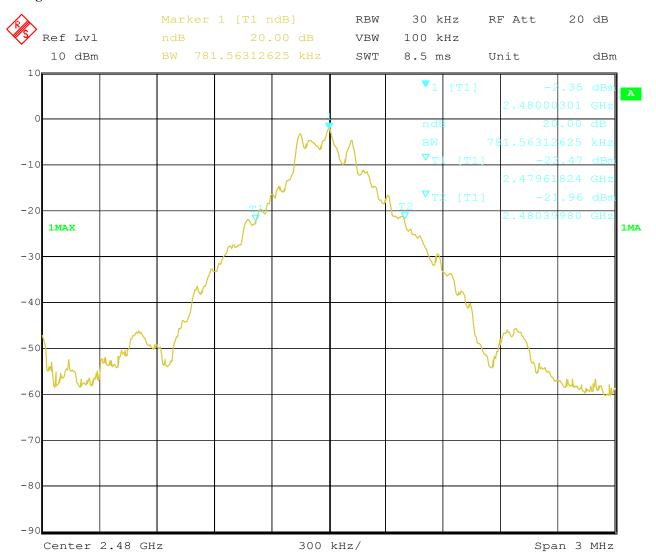

Date: 2020-11-16



Page 30 of 76

Test Result

Type of Modulation: JI/4-DQPSK

EUT	Во	Body Worn Cameras		BioAX
Mode	K	Keep Transmitting		DC3.8V
Temperat	ure	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1208		Pass
Middle	2441	1202		Pass
High	2480	1208		Pass


Report No.: TW2011042-02E Page 31 of 76

Date: 2020-11-16



Test Figure:

1. Condition: Low Channel

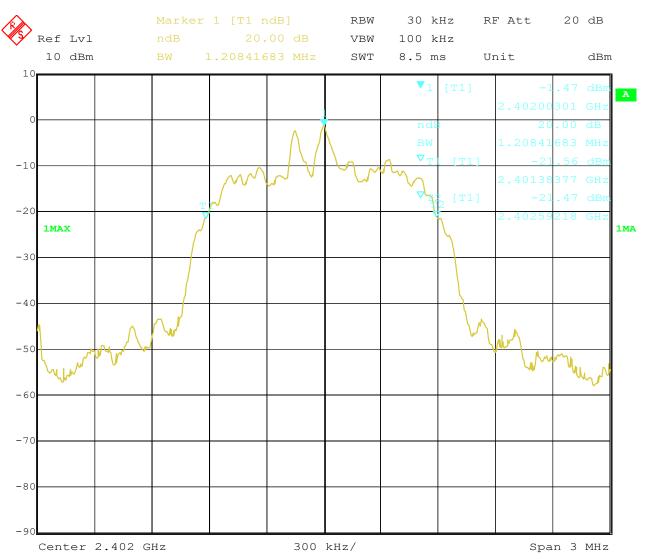


Report No.: TW2011042-02E Page 32 of 76

Date: 2020-11-16



2. Condition: Middle Channel

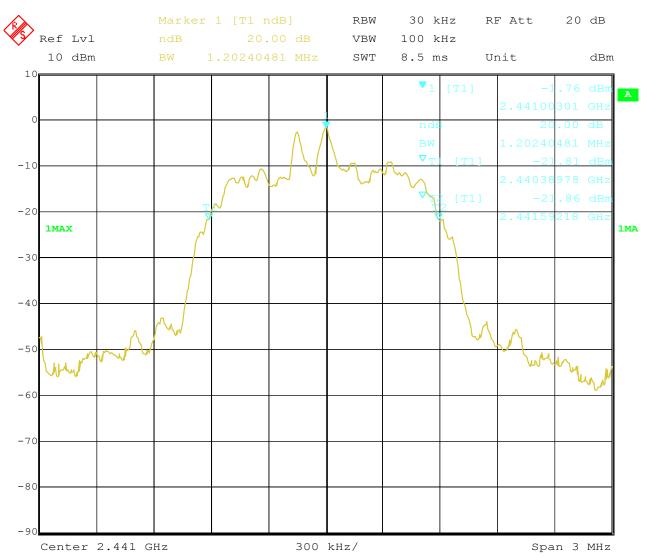


Report No.: TW2011042-02E Page 33 of 76

Date: 2020-11-16



3. High Channel

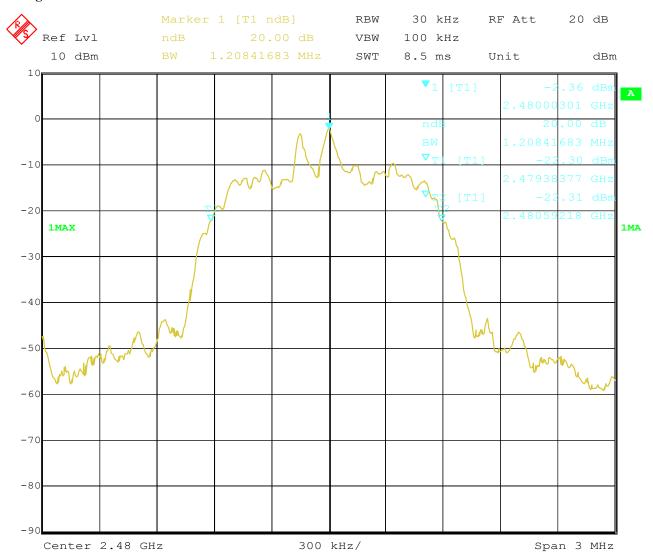

Date: 2020-11-16



Page 34 of 76

Test Result

Type of Modulation: 8DPSK

EUT	Вос	Body Worn Cameras		BioAX
Mode	Ko	Keep Transmitting		DC3.8V
Temperat	ure	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1214		Pass
Middle	2441	1208		Pass
High	2480	1208		Pass

Page 35 of 76


Report No.: TW2011042-02E

Date: 2020-11-16



Test Figure:

1. Condition: Low Channel

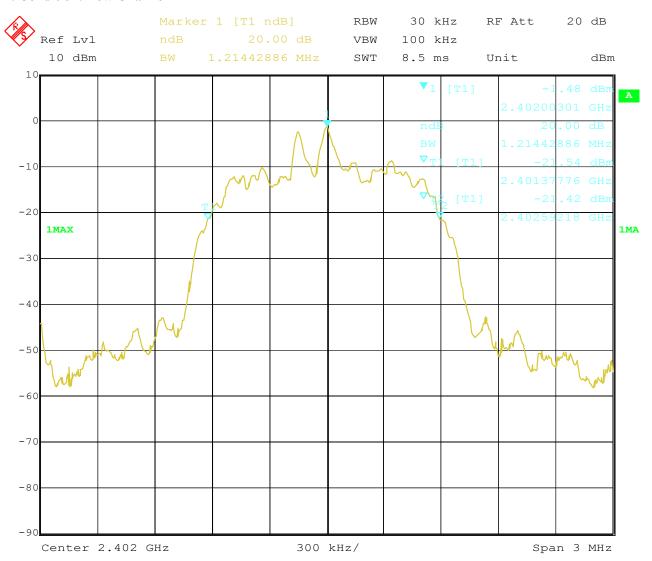


Report No.: TW2011042-02E Page 36 of 76

Date: 2020-11-16



2. Condition: Middle Channel

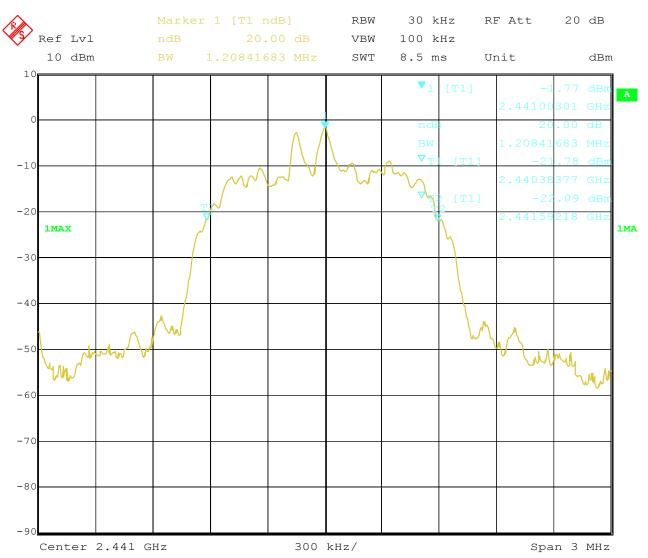


Report No.: TW2011042-02E Page 37 of 76

Date: 2020-11-16



3. High Channel

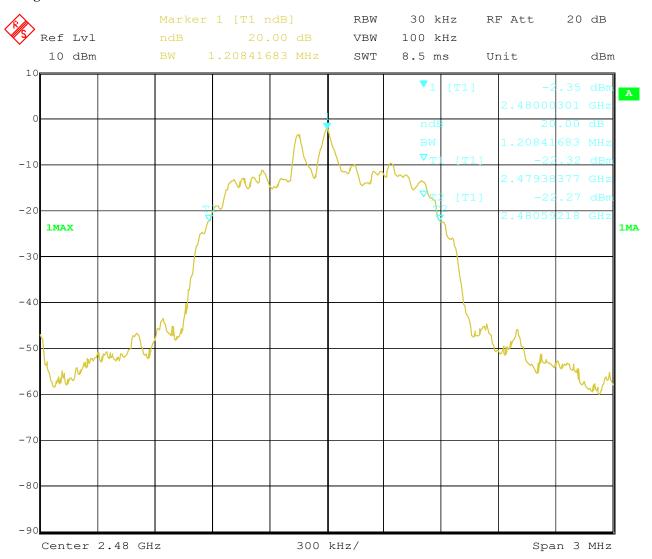

Date: 2020-11-16



Page 38 of 76

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = 60s; Detector function = RMS; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 39 of 76

Report No.: TW2011042-02E

Date: 2020-11-16



8.4Test Results

Type of Modulation: GFSK

EUT	Во	Body Worn Cameras M		Model	BioAX
Mode	K	eep Transmitting	Test Voltage		DC3.8V
Temperature	e	24 deg. C,	Humi	dity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)		Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-1.24		30	Pass
Middle	2441	-1.51		30	Pass
High	2480	-2.05		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The AV power was measured

Type of Modulation: $\sqrt{1/4}$ -DQPSK

EUT	Boo	Body Worn Cameras		Model	BioAX
Mode	Ke	ep Transmitting	Test Voltage		DC3.8V
Temperature	е	24 deg. C,	Humi	idity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	0.12		30	Pass
Middle	2441	-0.38		30	Pass
High	2480	-0.51		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The AV power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2020-11-16



Page 40 of 76

Type of Modulation: 8DPSK

EUT	Bod	Body Worn Cameras		Model	BioAX
Mode	Ke	Keep Transmitting		t Voltage	DC3.8V
Temperature	e	24 deg. C, H		umidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm) AV		Peak Power Limit (dBm)	Pass/ Fail
-0.80	2402	-1.11		30	Pass
-0.03	2441	-0.51		30	Pass
High	2480	-1.11		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The AV power was measured

Date: 2020-11-16



Page 41 of 76

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 42 of 76

Report No.: TW2011042-02E

Date: 2020-11-16




9.4Test Result

Type of Modulation: GFSK

EUT	Body Worn Car	Model		BioAX	
Mode	Hopping O	Test Voltage		DC3.8V	
Temperature	24 deg. C,	Humidity			56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass

Test Plots

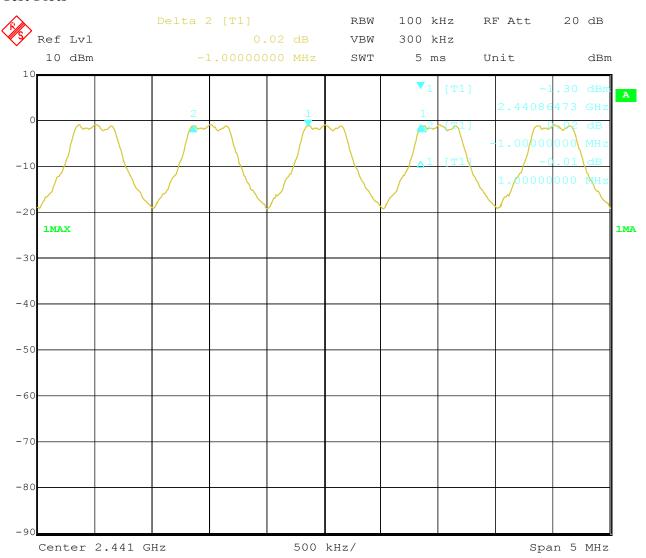

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 43 of 76

Report No.: TW2011042-02E


Date: 2020-11-16



Type of Modulation: $\pi/4$ -DQPSK

EUT	Body Worn Car	Model		BioAX	
Mode	Hopping O	Test Voltage		DC3.8V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

Test Plots

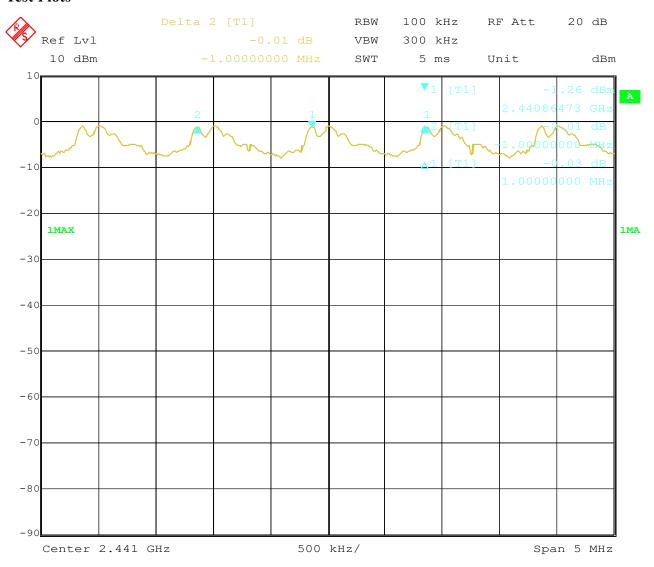

Page 44 of 76

Report No.: TW2011042-02E


Date: 2020-11-16



Type of Modulation: 8DPSK

EUT	Body Worn Car	Model		BioAX	
Mode	Hopping O	Test Voltage		DC3.8V	
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation			Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

Test Plots

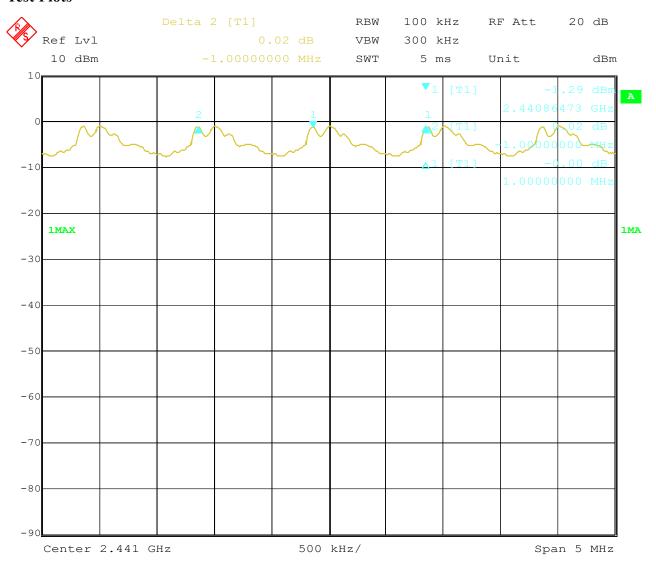

Date: 2020-11-16



Page 45 of 76

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 46 of 76

Report No.: TW2011042-02E

Date: 2020-11-16




10.4Test Result

Type of Modulation: GFSK

EUT	Body Worn Cameras		Model		BioAX	
Mode	Н	opping On	Test Voltage	DC3.8V		
Temperature	2	24 deg. C,	Humidity	56% RH		
Operating Frequency		Number of hopp	ping channels	Limit	Pass/ Fail	
2402-2480MHz		79		≥ 15	Pass	

Test Plot

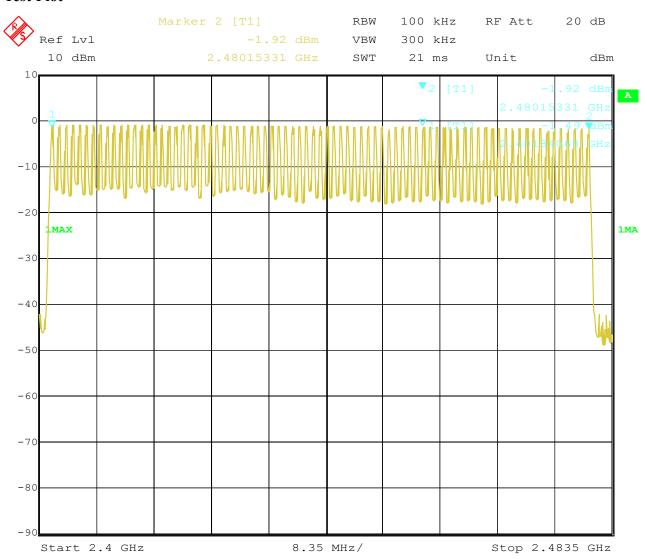

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 47 of 76

Report No.: TW2011042-02E


Date: 2020-11-16



Type of Modulation: $\pi/4$ -DQPSK

EUT	Body Worn Cameras		M	Iodel		BioAX
Mode	Hopping On		Test '	Voltage	DC3.8V	
Temperature	24 deg. C,		Hum	umidity		56% RH
Operating Frequency		Number of hopping channels		Lir	nit	Pass/ Fail
2402-2480MHz		79		>	15	Pass

Test Plot

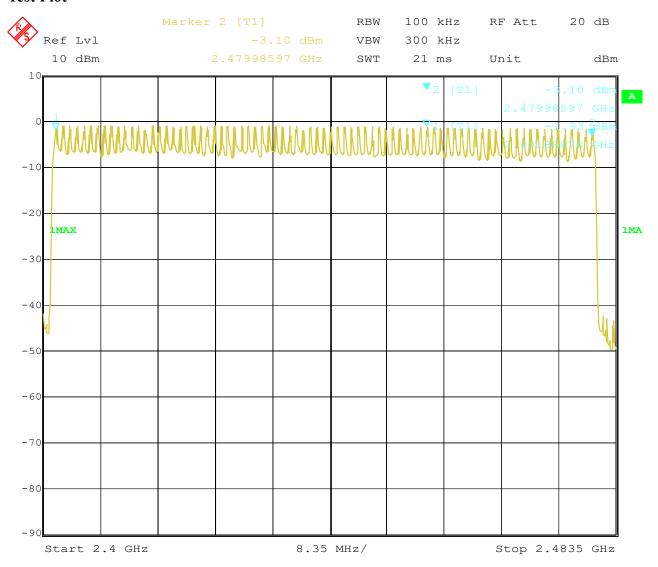

Page 48 of 76

Report No.: TW2011042-02E


Date: 2020-11-16



Type of Modulation: 8DPSK

EUT	Body Worn Cameras		Мо	odel		BioAX	
Mode	Hopping On		Test Vo	ltage		DC3.8V	
Temperature	2	4 deg. C,	Humidi	ty		56% RH	
Operating Frequency		Number of hopp channels	oing	Liı	mit	Pass/ Fail	
2402-2480MHz		79		>	15	Pass	

Test Plot

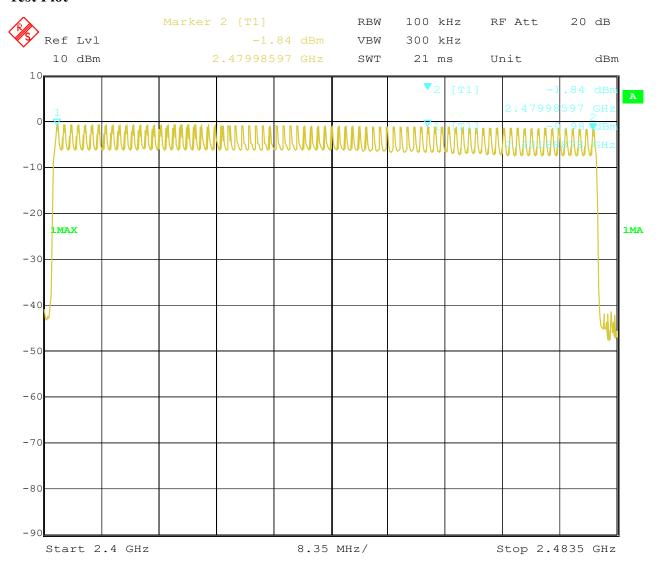

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2020-11-16



Page 49 of 76

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Date: 2020-11-16



Page 50 of 76

11.4 Test Result

Type of Modulation: GFSK

EUT	Body Wo	Body Worn Cameras N			BioAX		
Mode	Keep Tr	ansmitting	Test Voltage	DC3.8V			
Temperatur	e 24 c	leg. C,	Humidity	5	6% RH		
Channel	Reading	Hoping	g Rate	Actual	Limit		
	DH5						
Middle	2.986ms	266.667 hop/s		0.319s	0.4s		

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.

Page 51 of 76


Report No.: TW2011042-02E

Date: 2020-11-16



Test Plots:

DH5

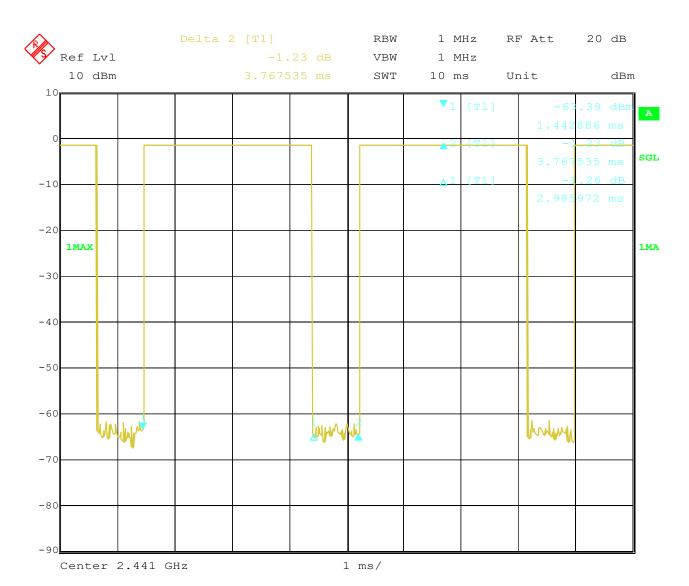

Date: 2020-11-16



Page 52 of 76

Test Result

Type of Modulation: $\sqrt{1/4}$ -DQPSK

EUT	Body Wo	Body Worn Cameras			BioAX		
Mode	Keep Tr	ransmitting Test Voltage		DC3.8V			
Temperatur	e 24 c	leg. C,	Humidity	5	66% RH		
Channel	Reading	Hoping	g Rate	Actual	Limit		
	DH5						
Middle	3.026ms	266.667	7 hop/s	0.323s	0.4s		

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of $625\mu s$ with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.

Page 53 of 76


Report No.: TW2011042-02E

Date: 2020-11-16



Test Plots:

2DH5

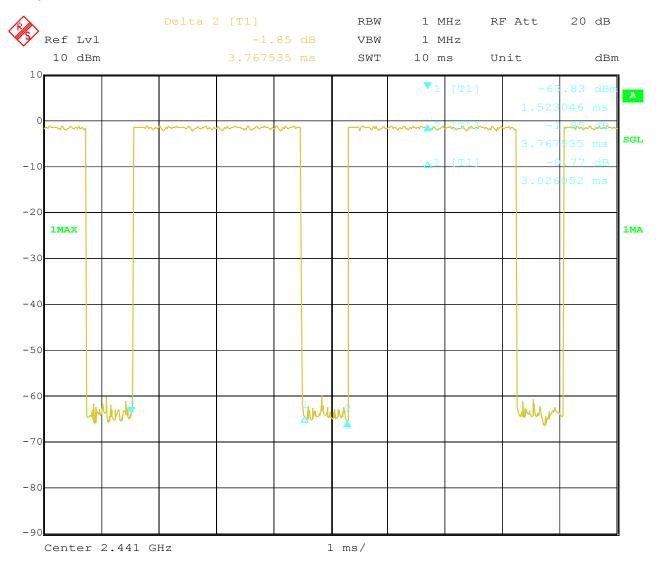

Report No.: TW2011042-02E Page 54 of 76

Date: 2020-11-16



Type of Modulation: 8DPSK

EUT	Body Worn Cameras		Model		BioAX		
Mode	Keep Tr	ransmitting	Test Voltage	I	DC3.8V		
Temperatur	re 24 c	leg. C,	Humidity	5	56% RH		
Channel	Reading	Hoping	g Rate	Actual	Limit		
	DH5						
Middle	2.986ms	266.667	7 hop/s	0.319s	0.4s		

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.

Page 55 of 76


Report No.: TW2011042-02E

Date: 2020-11-16



Test Plots:

3DH5

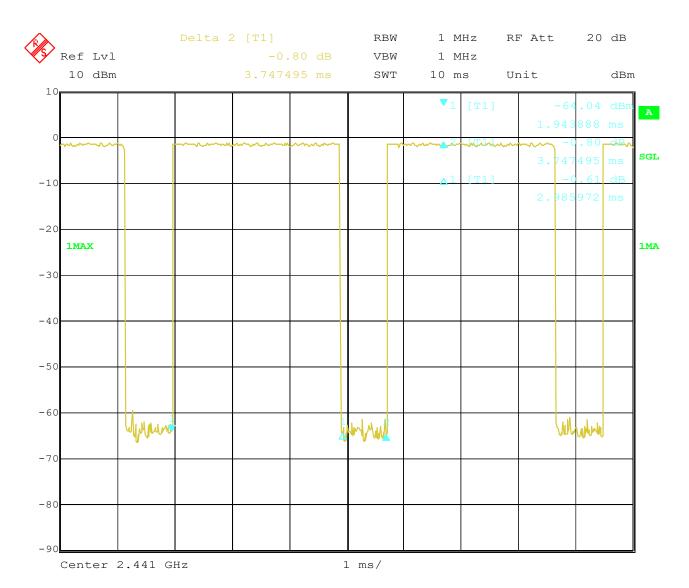


Date: 2020-11-16



Page 56 of 76

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule. 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: TW2011042-02E Page 57 of 76


Date: 2020-11-16



Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Body Worn Camera	Test Mode:	Low Channel
Mode	Keeping Transmitting	Test Voltage	DC3.8V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

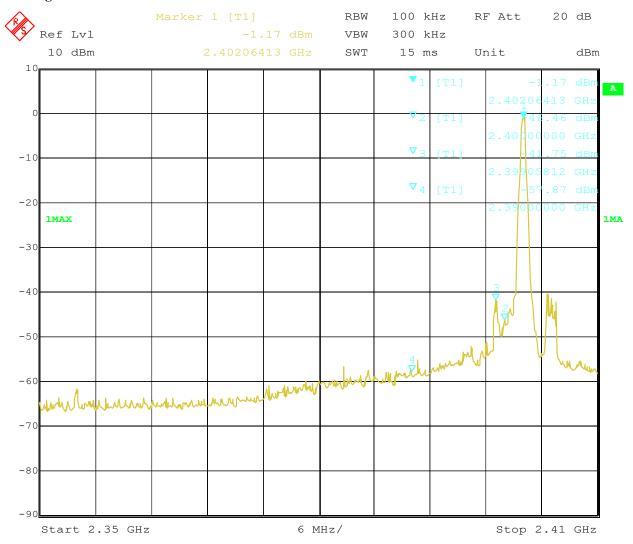

Page 58 of 76

Report No.: TW2011042-02E


Date: 2020-11-16



Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Body Worn Camera	Test Mode:	High Channel
Mode	Keeping Transmitting	Test Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

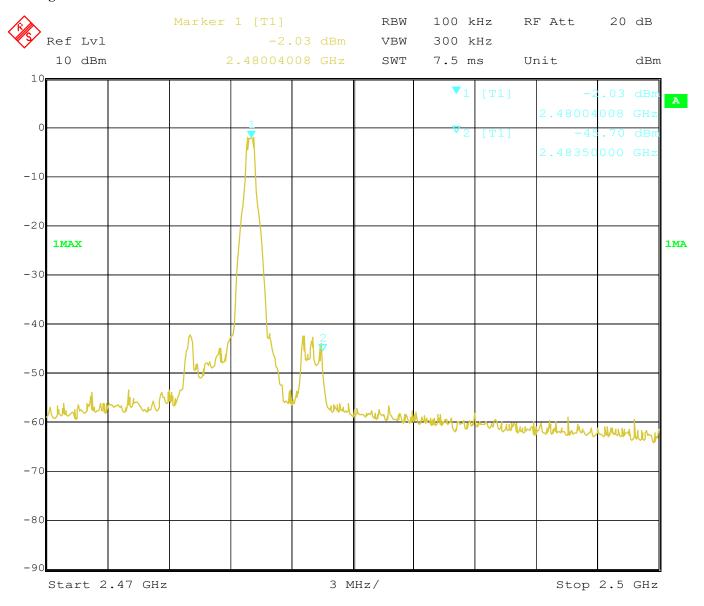

Report No.: TW2011042-02E Page 59 of 76


Date: 2020-11-16



Type of Modulation: GFSK

Band Edge Test Result

Product:	Body Worn Camera	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

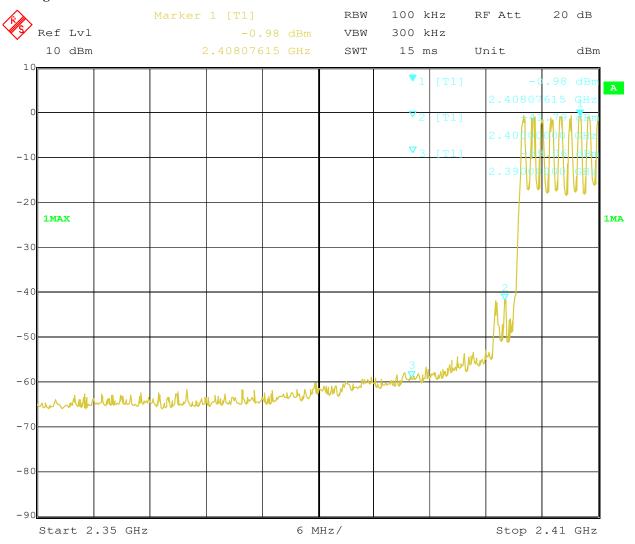

Report No.: TW2011042-02E Page 60 of 76


Date: 2020-11-16



Type of Modulation: GFSK

Band Edge Test Result

Product:	Body Worn Camera	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

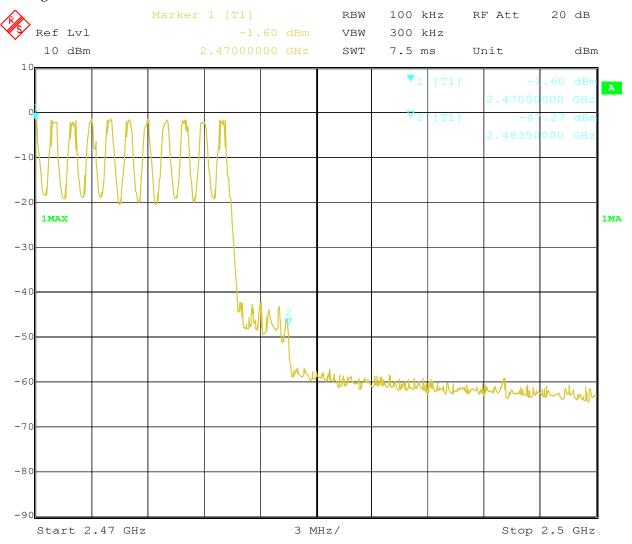

Report No.: TW2011042-02E Page 61 of 76


Date: 2020-11-16



Type of Modulation: Л/4-DQPSK

12.4 Out of Band Test Result

Product:	Body Worn Camera	Test Mode:	Low Channel
Mode	Keeping Transmitting	Test Voltage	DC3.8V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

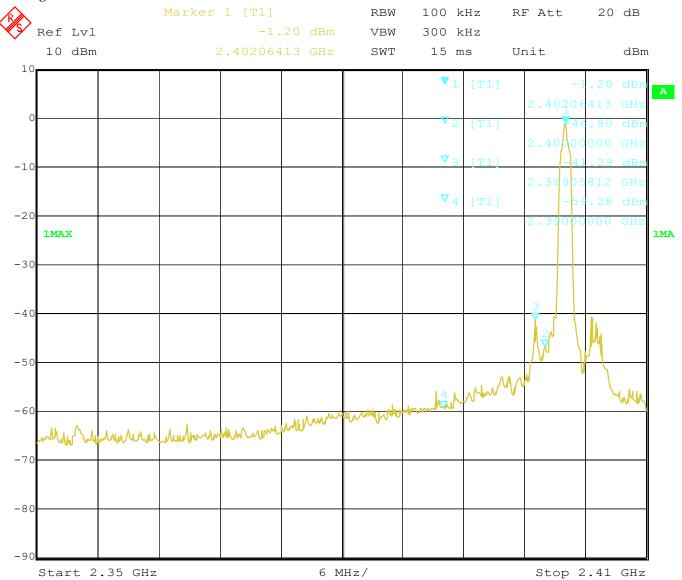

Report No.: TW2011042-02E Page 62 of 76


Date: 2020-11-16



Type of Modulation: Л/4-DQPSK

Band Edge Test Result 12.4

Product:	Body Worn Camera	Test Mode:	High Channel
Mode	Keeping Transmitting	Test Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

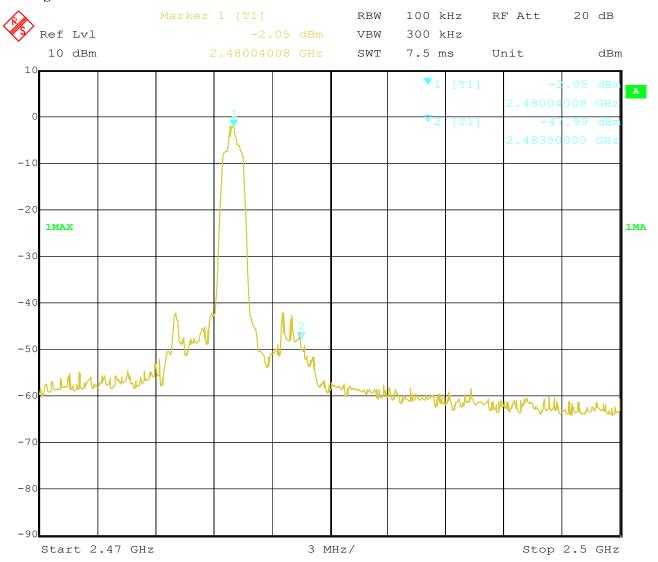

Report No.: TW2011042-02E Page 63 of 76


Date: 2020-11-16



Type of Modulation: Л/4-DQPSK

Out of Band Test Result

Product:	Body Worn Camera	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

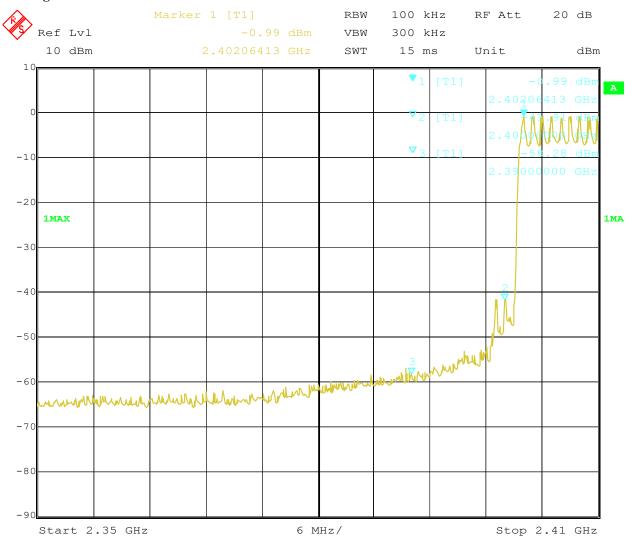

Page 64 of 76

Report No.: TW2011042-02E


Date: 2020-11-16



Type of Modulation: $\pi/4$ -DQPSK

Out of Band Test Result

Product:	Body Worn Camera	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

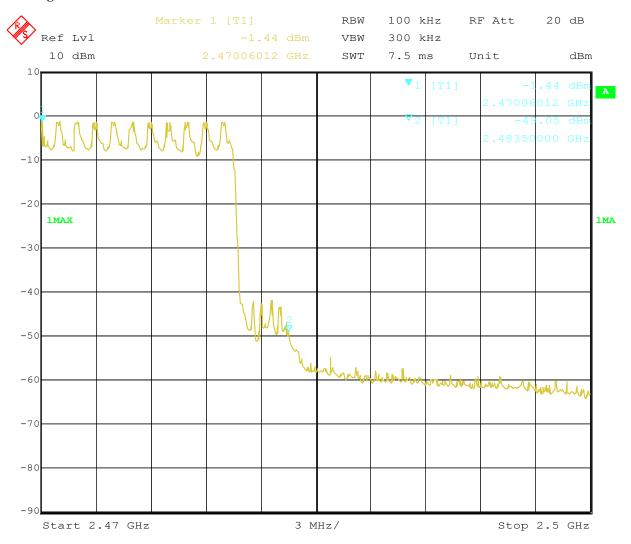

Page 65 of 76

Report No.: TW2011042-02E


Date: 2020-11-16



Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	Body Worn Camera	Test Mode:	Low Channel
Mode	Keeping Transmitting	Test Voltage	DC3.8V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

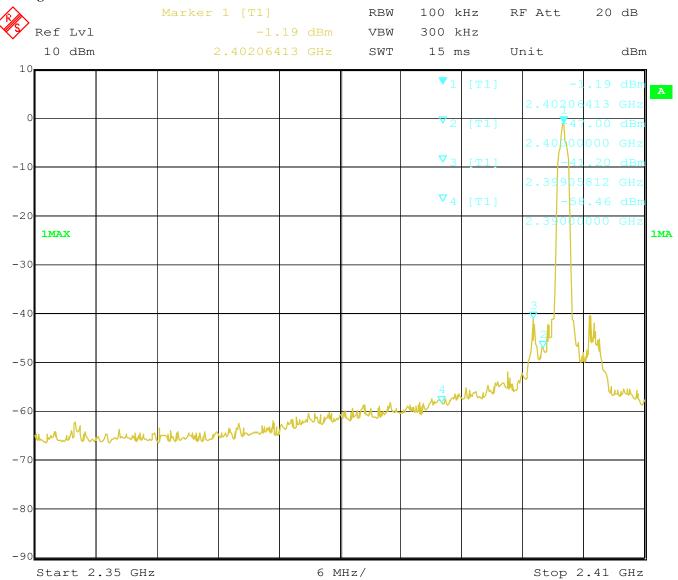

Report No.: TW2011042-02E Page 66 of 76


Date: 2020-11-16



Type of Modulation: 8DPSK

Band Edge Test Result 12.4

Product:	Body Worn Camera	Test Mode:	High Channel
Mode	Keeping Transmitting	Test Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

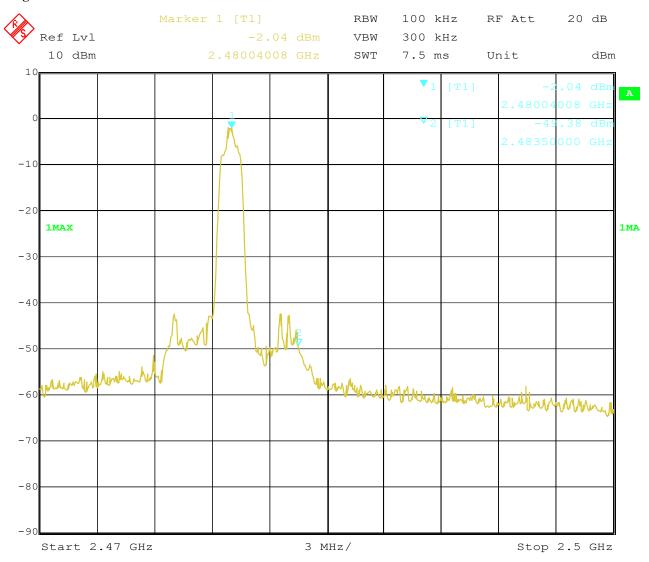

Report No.: TW2011042-02E Page 67 of 76


Date: 2020-11-16



Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Body Worn Camera	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

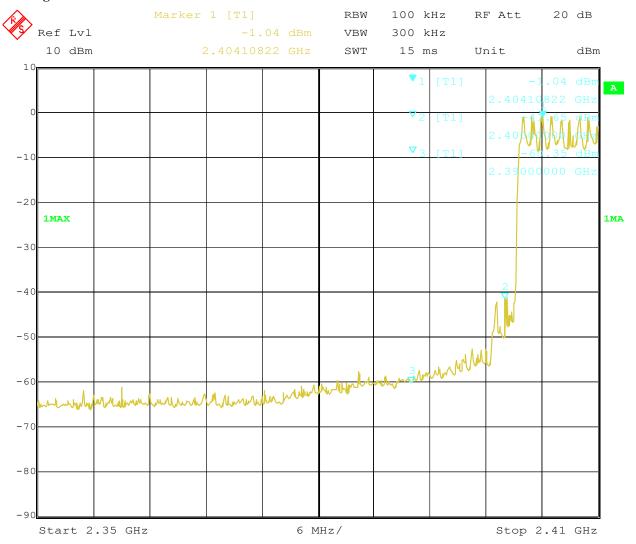

Page 68 of 76

Report No.: TW2011042-02E


Date: 2020-11-16



Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Body Worn Camera	Test Mode:	Hopping mode
Mode	Hopping On	Test Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

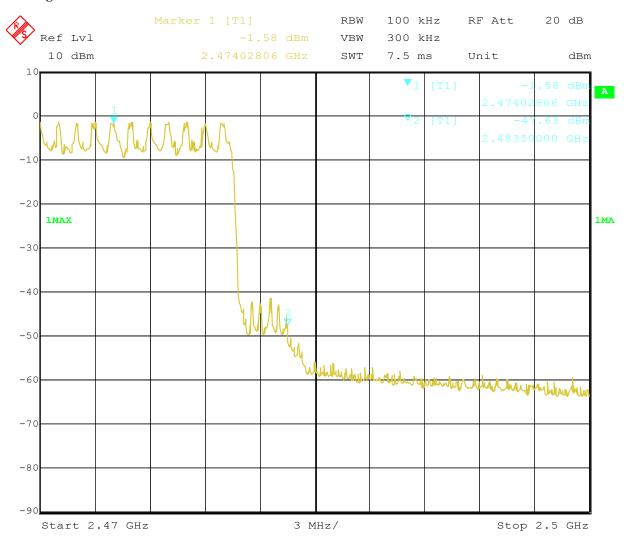

Report No.: TW2011042-02E Page 69 of 76

Date: 2020-11-16



12.4 Restrict Band Measurement

	EUT Mode		Body Worn Camera Keep Transmitting				Model Test Voltage			BioAX DC3.8V			
-	Гет	nperature		24 deg	g. C,		Humidity			56% RH			
	Test	t Result:	Pass			M	Modulation Type			Л/4-DQPSK			
		Class B 1GHz-18GH:	z - 2			<u>'</u>							
1.	0E+2-												
	90-									$\overline{}$			
										/ \			
	80-									+			
	70-									/ \			
Œ,										/ \			
level (dBuV/m)	60-								/	\	\		
eve	50-												
								M1					
	40-	40-											
		hadron derivatives and profit and the state in the state of the state											
	30 - 23!	50				Frequency (N	MHz)				2410		
NI.	_		Danulta	Factor	1::4	Over Limit	1	Table (a)	Haimbt	ANIT	Mandiat		
No	ο.	Frequency	Results		Limit		Detector	Table (o)	Height	ANT	Verdict		
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)				
1		2390.340	41.09	-3.53	74.0	-32.91	Peak	227.00	100	Н	Pass		

Page 70 of 76 Report No.: TW2011042-02E

Date: 2020-11-16



12.4 Restrict Band Measurement

]	EUT	Body Worn Camera			Model			BioAX			
	Mode Temperature		Keep Transmitting			Test Voltage			DC3.8V			
-				24 deg	g. C,	F	Humidity			56% RH		
	Test	t Result:	Pass			Mod	Modulation Type			Л/4-DQPSK		
	art 15B	Class B 1GHz-18GH:	2 - 2			·		·				
-	.0212											
	90-											
	80-									\wedge		
	80-											
	70-									/ \		
										/ \		
(m/apap) lasa	60-								1			
<u> </u>	50-							M1				
	40-											
	- 1	Administrative and the state of										
	23	50				Frequency (N	IHz)				2410	
No	D.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict	
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)			
1		2390.325	44.27	-3.53	74.0	-29.73	Peak	166.00	100	V	Pass	

Report No.: TW2011042-02E Page 71 of 76

Date: 2020-11-16



12.4 Restrict Band Measurement

4,5	•	Kestifet Da	and Mcasure	HICH									
]	EUT	Body Worn Camera			Model			BioAX				
Mode		Mode	Keep Transmitting			Test Voltage			DC3.8V				
]	Гет	perature		24 deg. C,			Humidity			56% RH			
-	Test	t Result:		Pass		Modu	lation Typ	e	J	I/4-DQP	SK		
C_FC	CC Part	t 15B Class B 1GHz-1	BGHz - 2										
1.0	0E+2-												
	90-												
	30												
	80-			/									
	70-												
E/A	60-				1								
level (dBuV/m)	50-												
eve	/					Y							
	40-		- Marin										
	History Annabel of History Balling and Bright and Brigh					The same of the sa		All Mark State Burns No.		والمتابع والمسابعة والم	andred alegadi		
	30-												
	20-¦ 24:	70			248								
						Frequency (MHz)							
).	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict		
No			I	1	(dBuV/m)	(dB)		(o)	(cm)				
No		(MHz)	(dBuV/m)		(dbdv/iii)	(GD)		(0)	(CIII)				

Page 72 of 76 Report No.: TW2011042-02E

Date: 2020-11-16



12.4 Restrict Band Measurement

	EUT	Body Worn Camera			Model Test Voltage			BioAX DC3.8V				
	Mode	K	Keep Transmitting									
T	emperature	perature 24 deg. C,				Humidity	y		56% RI	Ŧ		
Т	est Result:		Pas	s	M	odulation '	Гуре		Л/4-DQPSK			
FCC Par	t 15B Class B 1GHz-18GH	z - 2										
1.0	.+2-											
	90-											
			,									
	80-											
	70-			$\overline{}$								
(m//vr	60											
level (dBuV/m)	60-											
<u>u</u>	50-				$\overline{}$							
		a hay in the first of the state			No. of Control of Cont		odnovný vytorná stány kon doube		hole in a little mile for the contract of the	rate water the state of the		
	30- 2470				2483.5							
	Frequency (MHz)											
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict		
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)				
1	2483.480	50.61	-3.57	74.0	-23.39	Peak	168.00	100	V	Pass		

Note: For Restricted band test, only the worst case was reported. And $\pi/4$ -DQPSK modulation was the worst case.

Date: 2020-11-16



Page 73 of 76

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

FPC antenna used. The gain of the antennas is 1.79dBi. (get from the antenna specification provided the applicant)

Report No.: TW2011042-02E Page 74 of 76

Date: 2020-11-16




14.0 FCC ID Label

FCC ID: 2AWT2-BIO-AX

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

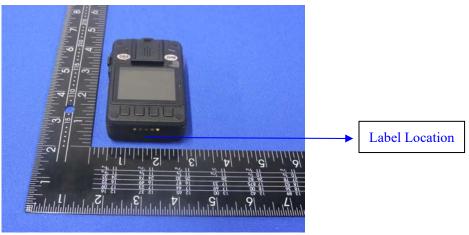

Page 75 of 76 Report No.: TW2011042-02E

Date: 2020-11-16



15.0 **Photo of testing**

Conducted Emission Test Setup:



Date: 2020-11-16



Radiated Emission Test Setup:



Photographs – EUT

Please see test report TW2011042-01E

-End of Report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.