



# TEST REPORT

**APPLICANT** : mMax Communications, Inc.  
**PRODUCT NAME** : Mobile Hotspot  
**MODEL NAME** : HPP-M14  
**BRAND NAME** : Hot Pepper  
**FCC ID** : 2AWVS-M14  
**STANDARD(S)** : 47 CFR Part 15 Subpart B  
**RECEIPT DATE** : 2020-07-15  
**TEST DATE** : 2020-07-15 to 2020-08-06  
**ISSUE DATE** : 2020-08-17

Edited by : Qingzhou Zhuo  
Qingzhou Zhuo (Test engineer)  
Review by: Bowers Zeng  
Bowers Zeng (Auditor)  
Approved by: Anne Liu  
Anne Liu ( Supervisor )

**NOTE:**1.The report is invalid when there is no the approver signature and the special stamp for test report. 2.The test report shall not be reproduced except in full without prior written permission of the company. 3.The report copy is invalid when there is no the special stamp for test report. 4.The altered report is invalid. 5.The entrust test is responsibility for the received sample only.



# DIRECTORY

- 1. Technical Information..... 3
- 1.1. Applicant and Manufacturer Information..... 3
- 1.2. Equipment Under Test (EUT) Description.....3
- 2. Test Results.....4
- 2.1. Applied Reference Documents..... 4
- 2.2. EUT Setup and Operating Conditions..... 5
- 3. 47 CFR Part 15B Requirements..... 6
- 3.1. Conducted Emission..... 6
- 3.2. Radiated Disturbance.....10
- Annex A Test Uncertainty.....18
- Annex B Testing Laboratory Information..... 19

Change History		
Version	Date	Reason for change
1.0	2020-08-17	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	mMax Communications, Inc.
<b>ApplicantAddress:</b>	5151 California Ave., Suite 100, Irvine 92617, USA
<b>Manufacturer:</b>	mMax Communications, Inc.
<b>ManufacturerAddress:</b>	5151 California Ave., Suite 100, Irvine 92617, USA

## 1.2. Equipment Under Test (EUT) Description

<b>EUT Type:</b>	Mobile Hotspot	
<b>Serial No:</b>	(N/A, marked #1 by test site)	
<b>Hardware Version:</b>	SD305T_V1.0	
<b>Software Version:</b>	Fresno_V1.0.2_RLK	
<b>Accessory Information:</b>	Battery	
	Manufacturer:	Shenzhen Chaonengtong Technology Co.,LTD.
	Brand Name:	Hot Pepper
	Model No.:	C2020M14
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	3000mAh
	Rated Voltage:	3.70V
	Charge Limit:	4.20V
	AC Adapter	
	Manufacturer:	Shenzhen King Fu Lin Technology Co.,Ltd
	Brand Name:	Hot Pepper
	Model No.:	KFL-C060500100
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	100-240V ~ 50/60Hz 0.2A
	Rated Output:	5V=1.0A

**Note:**

1. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer



## 2. Test Results

### 2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.107	Conducted Emission	2020.08.06	Yaming Luo	PASS
2	15.109	Radiated Emission	2020.07.15	Bowers Zeng	PASS

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.



## 2.2. EUT Setup and Operating Conditions

Frequency range was investigated: Conducted emission test: from 150 KHz to 30 MHz; Radiated emission test: from 30MHz to 6000MHz.

<b>Test Item</b>	
<b>Mode 1</b>	<b>: EUT ON + Charge</b>

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

### 3. 47 CFR Part 15B Requirements

#### 3.1. Conducted Emission

##### 3.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

##### 3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

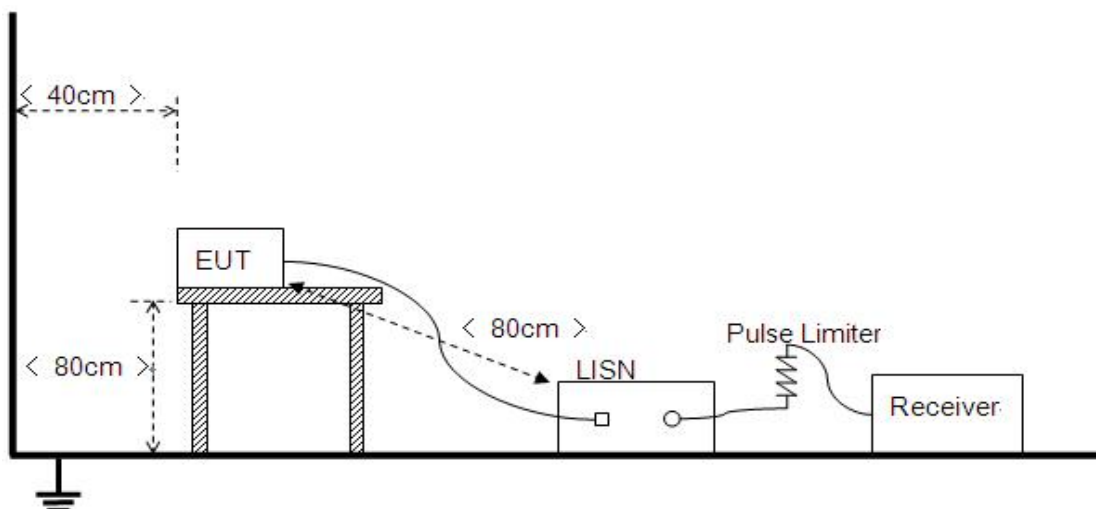




The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50Ω/50μH of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.

### **3.1.3. Test Result**


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

**A. Test Plot and Suspicious Points:**

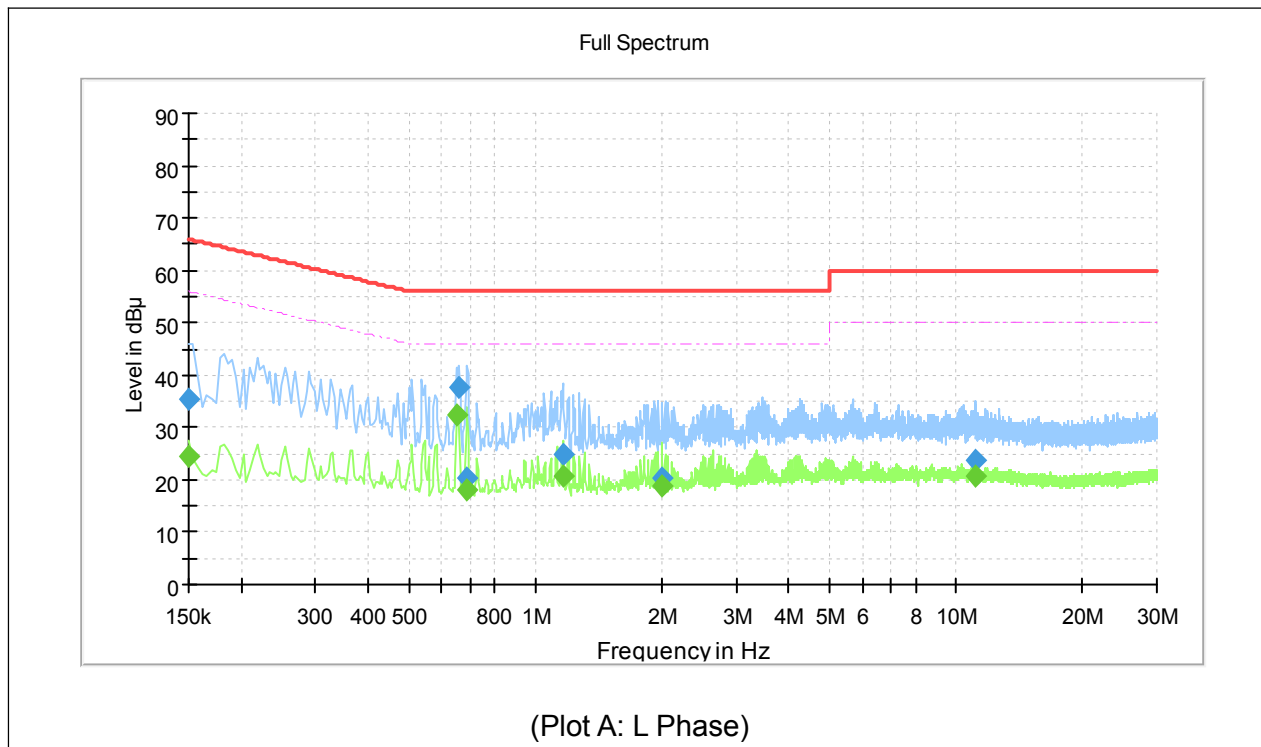

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	Verdict
0.150000	---	24.57	56.00	31.43	L1	10.2	PASS
0.150000	35.40	---	66.00	30.60	L1	10.2	PASS
0.654000	---	32.25	46.00	13.76	L1	10.2	PASS
0.658000	37.55	---	56.00	18.45	L1	10.2	PASS
0.690000	---	18.05	46.00	27.95	L1	10.2	PASS
0.690000	20.24	---	56.00	35.76	L1	10.2	PASS
1.162000	24.76	---	56.00	31.24	L1	10.3	PASS
1.162000	---	20.70	46.00	25.30	L1	10.3	PASS
1.998000	20.20	---	56.00	35.80	L1	10.3	PASS
1.998000	---	18.65	46.00	27.35	L1	10.3	PASS
11.074000	---	20.88	50.00	29.12	L1	10.6	PASS
11.074000	23.68	---	60.00	36.32	L1	10.6	PASS



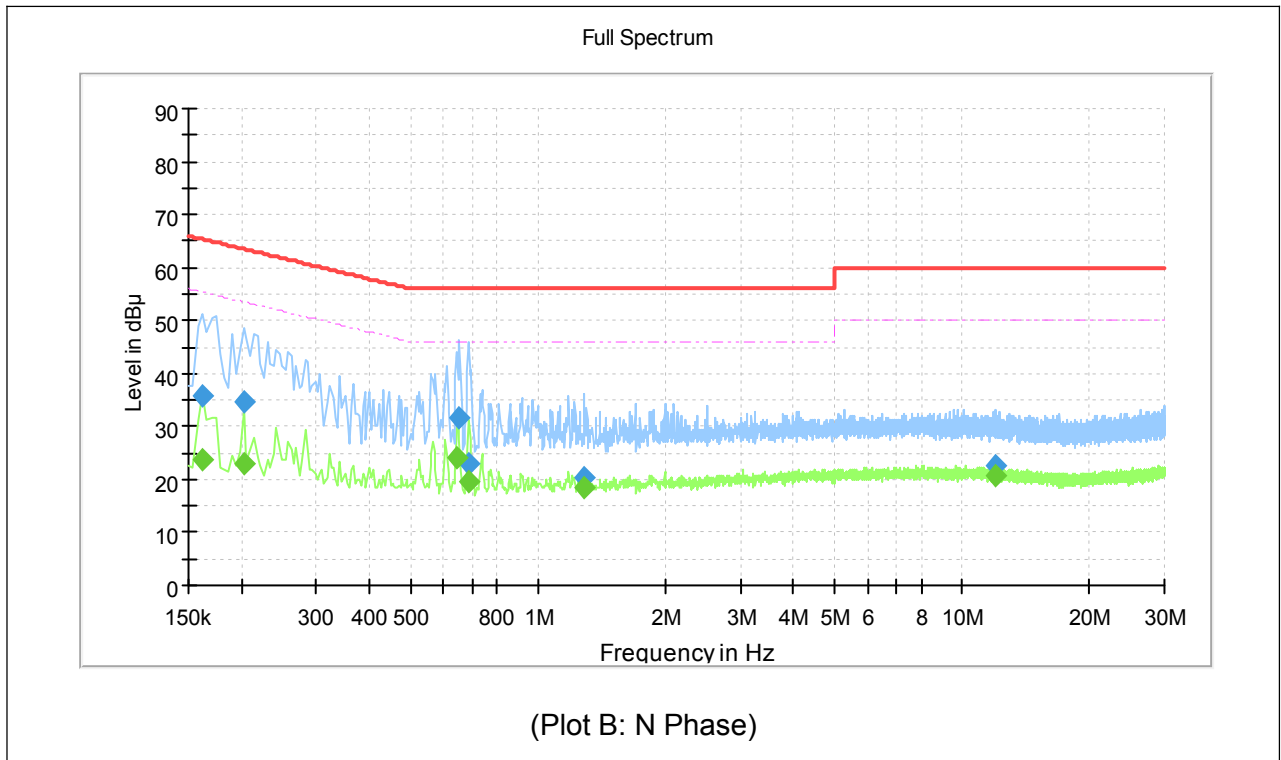

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	Verdict
0.162000	---	23.88	55.36	31.48	N	10.5	PASS
0.162000	35.80	---	65.36	29.56	N	10.5	PASS
0.202000	---	22.88	53.53	30.65	N	10.4	PASS
0.202000	34.53	---	63.53	28.99	N	10.4	PASS
0.646000	---	24.19	46.00	21.81	N	10.4	PASS
0.654000	31.45	---	56.00	24.55	N	10.4	PASS
0.686000	22.90	---	56.00	33.10	N	10.4	PASS
0.686000	---	19.55	46.00	26.45	N	10.4	PASS
1.286000	20.41	---	56.00	35.59	N	10.5	PASS
1.286000	---	18.58	46.00	27.42	N	10.5	PASS
11.986000	---	20.78	50.00	29.22	N	10.9	PASS
11.986000	22.45	---	60.00	37.55	N	10.9	PASS



### 3.2. Radiated Disturbance

#### 3.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Distance	
	( $\mu\text{V/m}$ )	(dB $\mu\text{V/m}$ )
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dB $\mu\text{V/m}$  is calculated by  $20\log$  Emission Level( $\mu\text{V/m}$ ).


#### 3.2.2. Frequency range of measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705 .....	30.
1.705–108 .....	1000.
108–500 .....	2000.
500–1000 .....	5000.
Above 1000 .....	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

### 3.2.3. Test Setup

- 1) For radiated emissions from 30MHz to1GHz

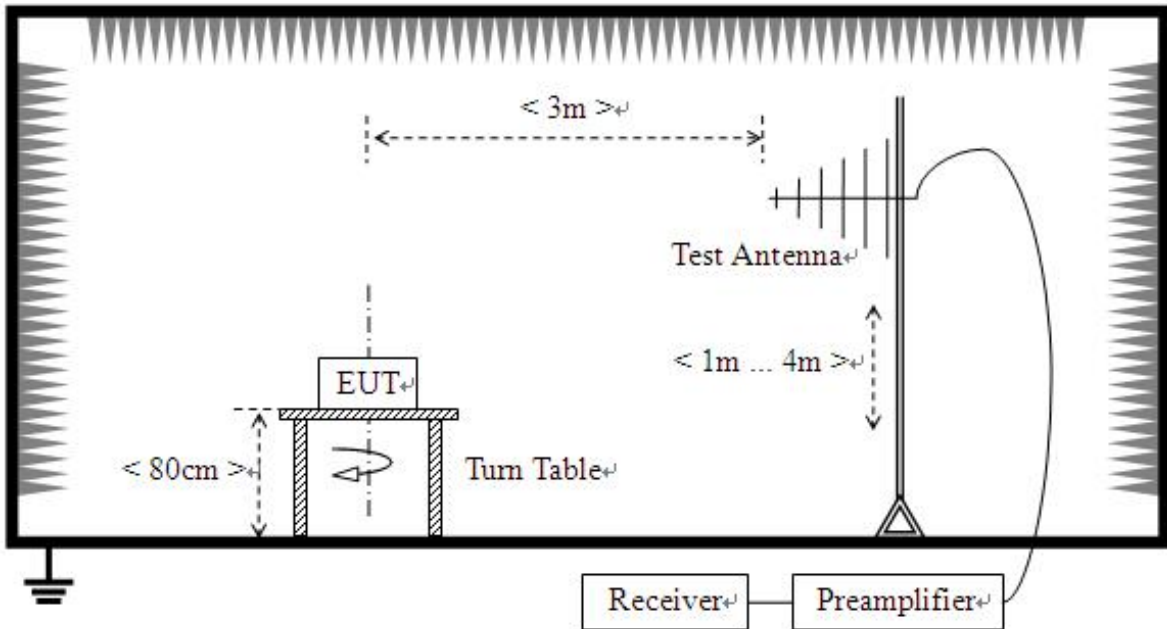

- 2) For radiated emissions above 1GHz

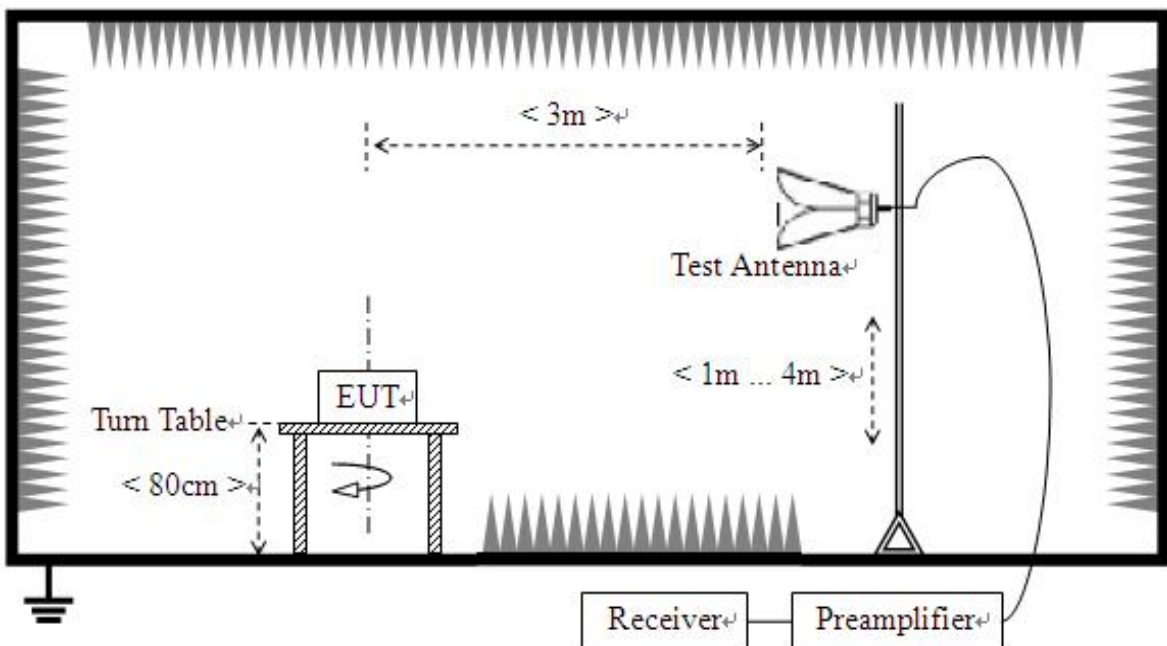



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.



c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.


e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasipeak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

3.2.4. Test Result

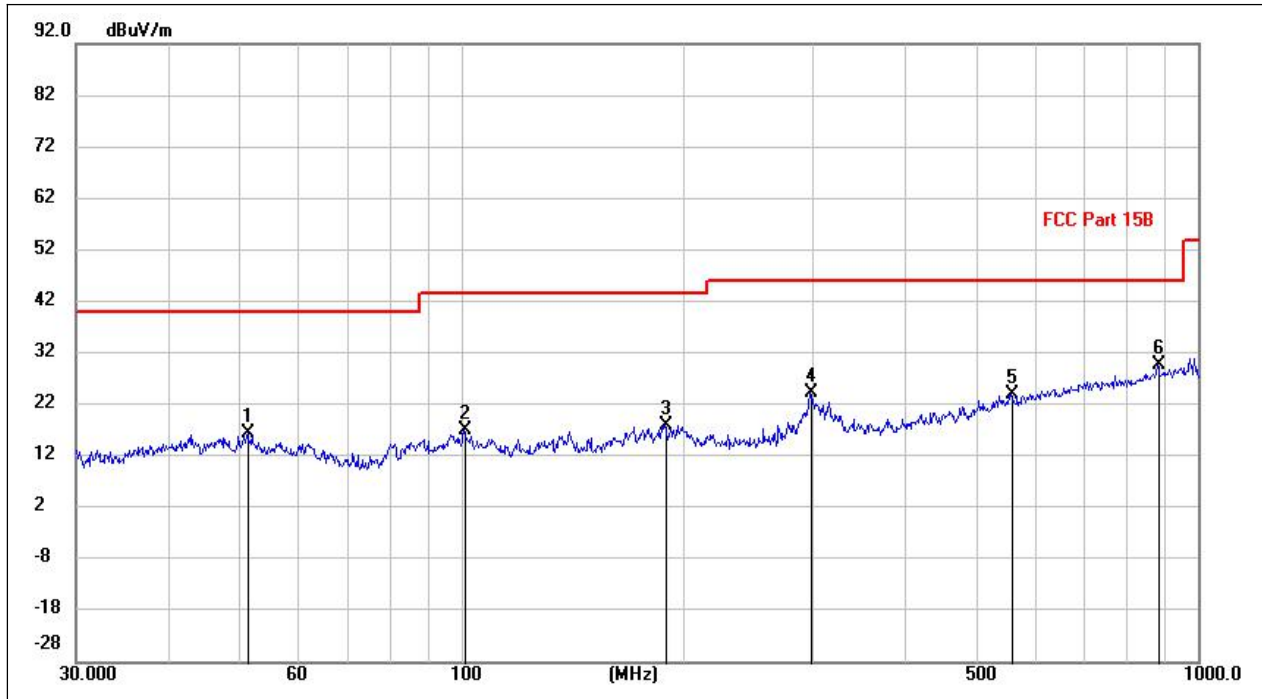


(Plot A: ANT- Horizontal, 30MHz - 1GHz)

Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Det.	Verdict
51.4536	0.71	15.74	16.45	40.00	-23.55	peak	PASS
101.1111	2.01	14.96	16.97	43.50	-26.53	peak	PASS
189.6387	4.55	13.41	17.96	43.50	-25.54	peak	PASS
298.0068	7.33	16.84	24.17	46.00	-21.83	peak	PASS
558.6322	1.25	22.69	23.94	46.00	-22.06	peak	PASS
882.1798	2.13	27.72	29.85	46.00	-16.15	peak	PASS

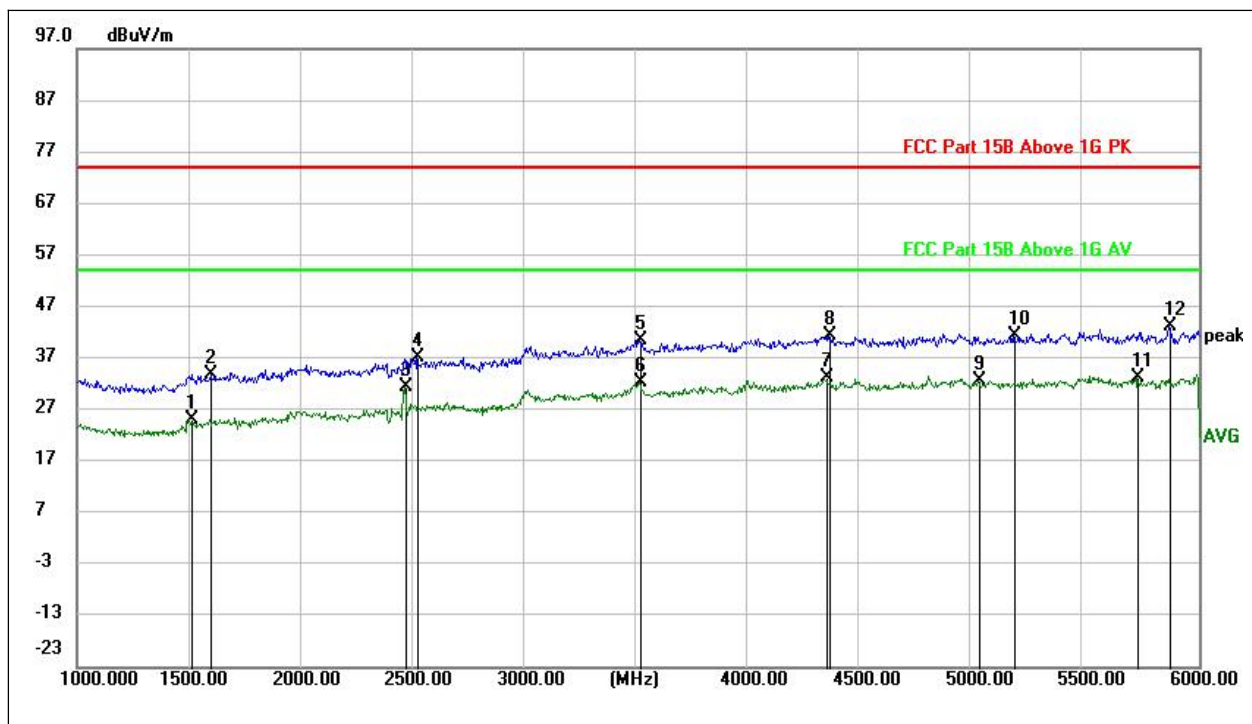

(Plot B: ANT- Horizontal, 1GHz - 6GHz)


Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
1505.250	40.74	-15.59	25.15	54.00	-28.85	AVG	PASS
1599.000	48.69	-14.96	33.73	74.00	-40.27	peak	PASS
2463.000	43.09	-11.54	31.55	54.00	-22.45	AVG	PASS
2515.500	48.46	-11.21	37.25	74.00	-36.75	peak	PASS
3510.500	48.97	-8.42	40.55	74.00	-33.45	peak	PASS
3510.500	40.76	-8.42	32.34	54.00	-21.66	AVG	PASS
4335.500	37.44	-4.21	33.23	54.00	-20.77	AVG	PASS
4353.500	45.43	-4.19	41.24	74.00	-32.76	peak	PASS
5017.750	37.32	-4.69	32.63	54.00	-21.37	AVG	PASS
5177.500	45.37	-4.12	41.25	74.00	-32.75	peak	PASS
5727.000	36.42	-3.31	33.11	54.00	-20.89	AVG	PASS
5872.500	46.45	-3.29	43.16	74.00	-30.84	peak	PASS

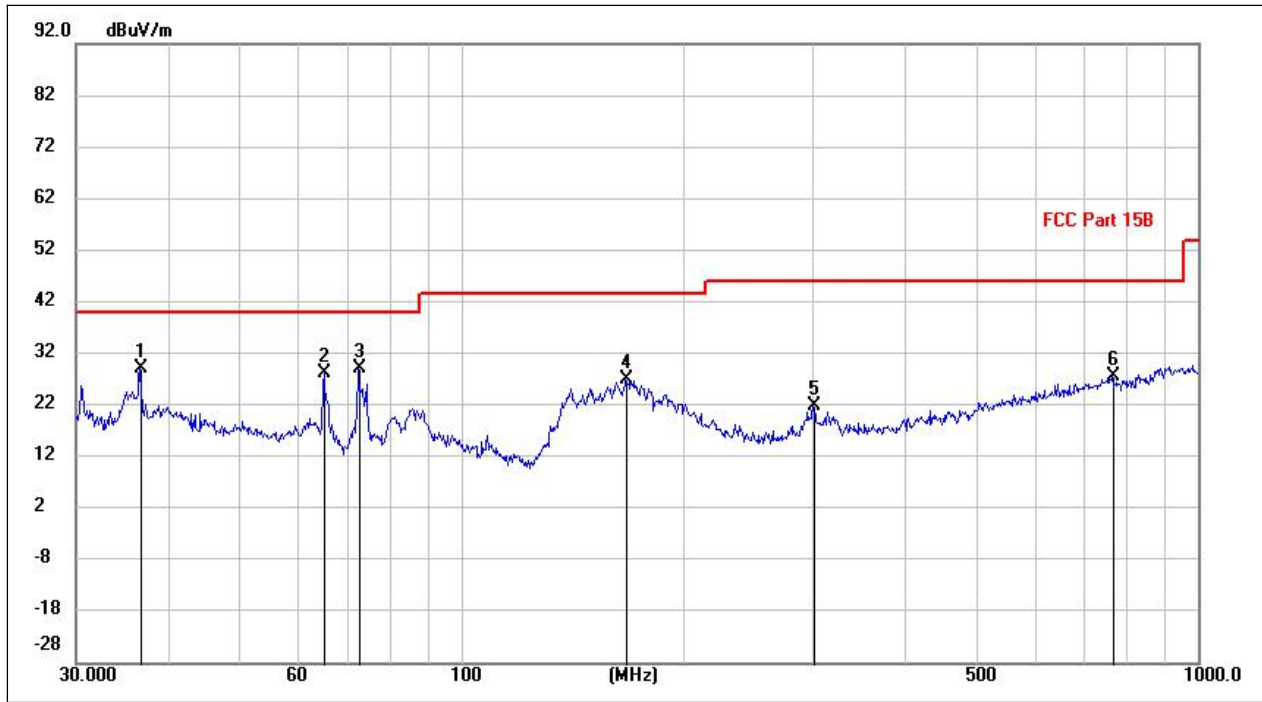

(Plot C: ANT- Vertical, 30MHz - 1GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
36.6439	15.83	13.41	29.24	40.00	-10.76	peak	PASS
65.2516	14.81	13.31	28.12	40.00	-11.88	peak	PASS
72.7573	18.76	10.37	29.13	40.00	-10.87	peak	PASS
167.4422	15.33	11.75	27.08	43.50	-16.42	peak	PASS
300.4199	4.60	17.44	22.04	46.00	-23.96	peak	PASS
768.6134	1.48	26.17	27.65	46.00	-18.35	peak	PASS



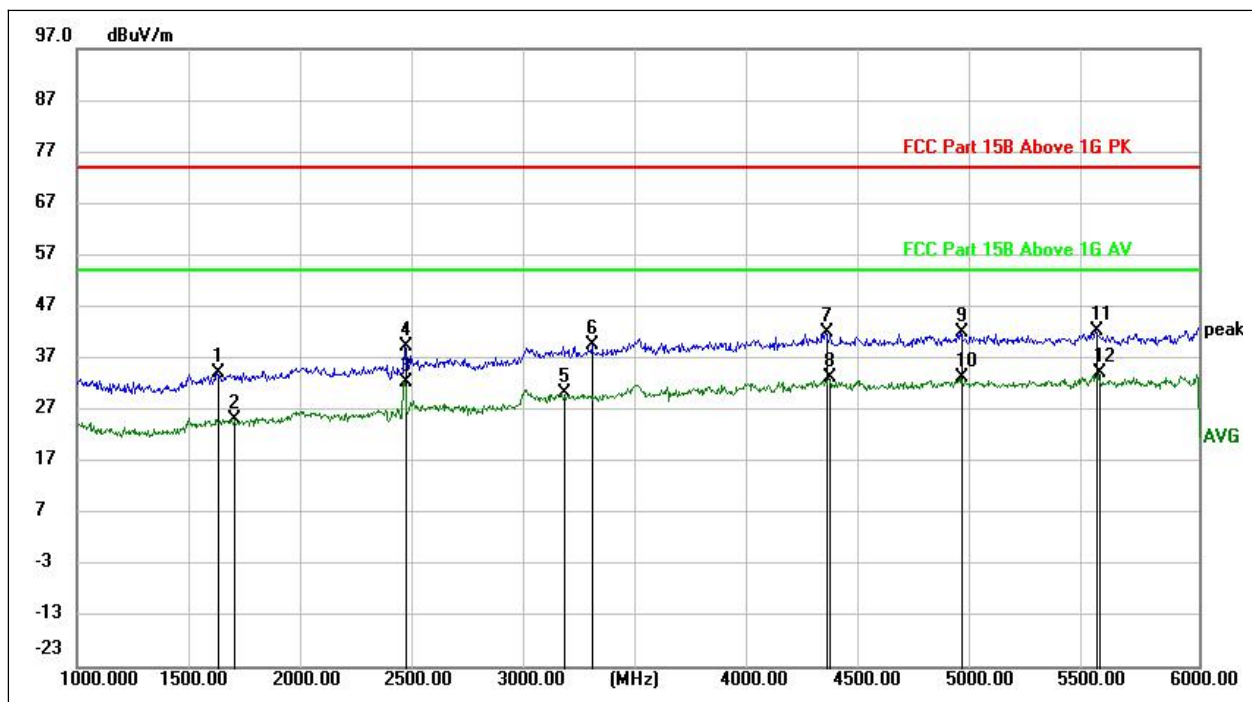

(Plot D: ANT- Vertical, 1GHz - 6GHz)

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Verdict
1627.750	49.26	-14.98	34.28	74.00	-39.72	peak	PASS
1695.500	40.08	-14.92	25.16	54.00	-28.84	AVG	PASS
2463.000	43.78	-11.54	32.24	54.00	-21.76	AVG	PASS
2463.500	50.92	-11.53	39.39	74.00	-34.61	peak	PASS
3169.250	38.14	-7.96	30.18	54.00	-23.82	AVG	PASS
3299.500	47.27	-7.71	39.56	74.00	-34.44	peak	PASS
4336.000	46.10	-4.21	41.89	74.00	-32.11	peak	PASS
4352.000	37.31	-4.19	33.12	54.00	-20.88	AVG	PASS
4941.250	45.30	-3.44	41.86	74.00	-32.14	peak	PASS
4941.250	36.82	-3.44	33.38	54.00	-20.62	AVG	PASS
5543.000	45.44	-3.05	42.39	74.00	-31.61	peak	PASS
5555.250	37.07	-3.05	34.02	54.00	-19.98	AVG	PASS



## Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

### Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	150kHz-30MHz	2.61dB
--	--------------	--------

### Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	30MHz-200MHz	±3.66dB
	200MHz-1000MHz	±3.87dB
	1GHz-6GHz	±4.50dB



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Kehu-Morlab Test Laboratory
<b>Laboratory Address:</b>	Unit 101, No.1732 Gangzhong Road, Xiamen Area, Pilot Free Trade Zone (Fujian) P.R. China
<b>Telephone:</b>	+86-0592-5612050
<b>Facsimile:</b>	+86-0592-5612095

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Kehu-Morlab Test Laboratory
<b>Address:</b>	Unit 101, No.1732 Gangzhong Road, Xiamen Area, Pilot Free Trade Zone (Fujian) P.R. China

### 3. Accreditation Certificate

<b>Accredited Testing Laboratory:</b>	The FCC designation number is CN1249. ( Kehu-Morlab Test Laboratory )
---------------------------------------	--

### 4. Test Software Utilized

No	Model	Version Number	Producer	Test Item
1	EZ_EMG	V1.1.4.2	FARAD	RE
2	EMC32	V10.20.01	Rode&Schwarz	CE

### 5. Conducted Emission Test Equipments

No.	Equipment Name	Serial No.	Model No.	Manufacturer	Cal.Due Date
1	EMI Receiver	102174	ESR3	ESR3	2021.03.15
2	LISN	101338	ENV432	ENV432	2021.03.09
3	Pulse Limiter (10dB)	317	VTSD 9561 F	VTSD 9561 F	2021.03.13
4	Coaxial cable(BNC) (30MHz-3GHz)	EMC01	N/A	Morlab	2021.03.13

**6. Radiated Test Equipments**

No.	Equipment Name	Serial No.	Model No.	Manufacturer	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	ETS-Lindgren	2022.07.20
2	Signal Analyzer	101294	FSV40	R&S	2021.06.04
3	Active Ring Antenna	FMZB 1513 #269	FMZB 1513	Schwarzbeck	2022.01.11
4	Linear Log Periodic Broad Band Antenna	949	VULB 9163	Schwarzbeck	2021.09.24
5	Ultra-Wideband Horn Antenna	102615	HF907	R&S	2022.01.18
6	Coaxial cable (N male) (9kHz -3GHz)	EMC02	N/A	Morlab	2021.03.23
7	Coaxial cable (N male) (9kHz -3GHz)	EMC03	N/A	Morlab	2021.03.23
8	Coaxial cable (N male) (1GHz-26.5GHz)	EMC04	N/A	Morlab	2021.03.23
9	Coaxial cable (N male) (1GHz-26.5GHz)	EMC05	N/A	Morlab	2021.03.23
10	Pre-amplifier (1GHz-18GHz)	8810011	PAP-1G18	CDSI	2021.03.23

— END OF REPORT —