



Shenzhen DEWEIMA Communication Equipment Co.,Ltd

# SPECIFICATION SHEET FOR APPROVAL

<b>CUSTOMER NAME</b>	Vodofu
<b>CUSTOMER P/N</b>	NT08E
<b>PART NAME</b>	BT Antenna
<b>DWM NO.</b>	
<b>APPROVAL REV.</b>	DWM-V1.0

<b>CONTRACTOR</b>			<b>DATE : 2023-10-26</b>
<b>QA CHECKED</b>	<b>ME CHECKED</b>	<b>RF CHECKED</b>	<b>MANAGER CHECKED</b>

<b>CUSTOMER</b>		<b>DATE :</b>
<b>Approved By</b>	<b>Checked By</b>	<b>Prepared By</b>



# Product Specification

P/N:

**BT Antenna**

Rev.:

A

Page:

2/11

## Content

Content.....	2
1. Product Application.....	3
2. The test environment, equipment.....	3
3. Technology Parameters.....	6
4. Antenna picture.....	9
5. Environmental Performance.....	9
6. Usage Precaution.....	10



# Product Specification

P/N:

**BT Antenna**

Rev.:

A


Page:

3/11

## 1. Product Application

Terminal of the antenna products can only be used for BT antenna.

## 2. The test environment, equipment

Item	Description	Test Condition	Requirement
2.1	Passive testing	The VSWR measurement devices are connected in sequence: Agilent5071B Network Analyzer → measurement Cable → Customer-providing Devices.	VSWR: 2400-2500MHz ≤ 4.0
		Test equipment	
			
Item	Description	Test Condition	
2.2	Active test	The antenna is tested within the cell mainboard provided by clients. Follow picture shows the measurement condition of the antenna been put on the measurement device, which is used for all measurement of electric performances.	



# Product Specification

P/N:

BT Antenna

Rev.:

A



Page:

4/11

Test equipment

2.3

Microwave  
Anechoic  
chamber  
(Satimo&ETS  
)

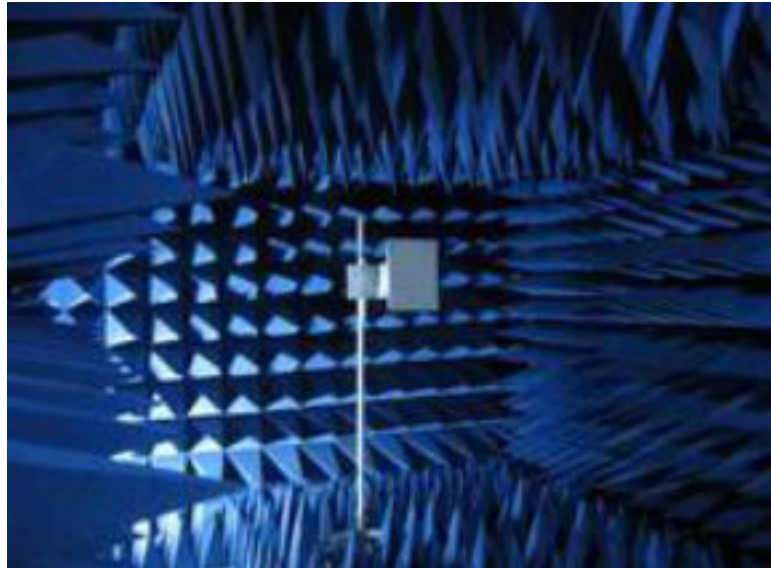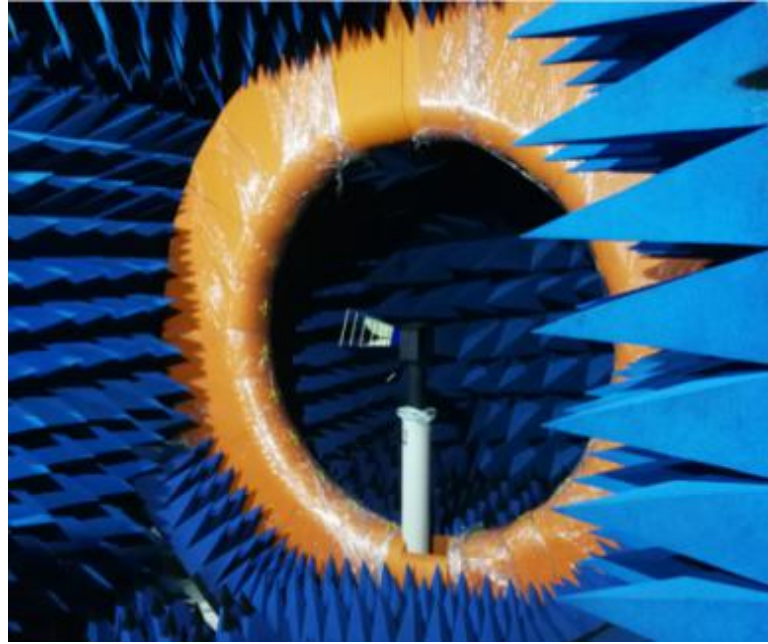



# Product Specification

P/N:

BT Antenna



Rev.:

A

Page:

5/11

2.4  
CMW500  
Agilent5071B  
AgilentE4405B  
Agilent8960

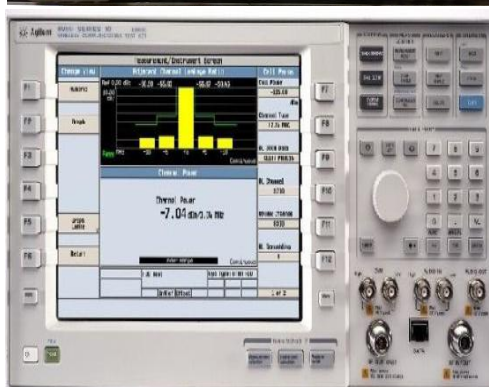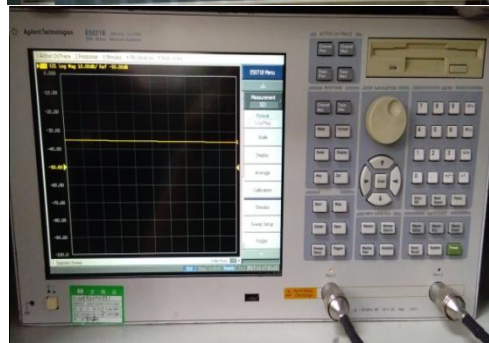



# Product Specification

P/N:

BT Antenna

Rev.:

A

Page:


6/11

## 3. Technology Parameters


Frequency Range: 2400MHz~2500MHz  
 Operating Humidity: 85% R.H.MAX  
 Temperature Rating: -40°C ~ +85°C

### 3.1 The matching test value

Element	Value
E1(0402)	
E2(0402)	
E3(0402)	
E4(0402)	

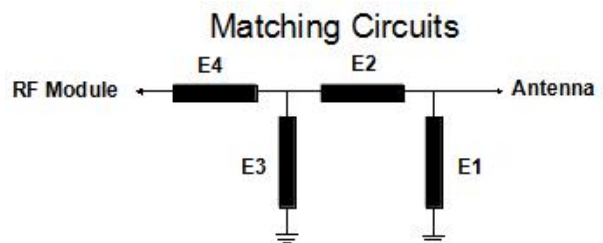

### 3.2 VSWR&Smith&Return Loss:

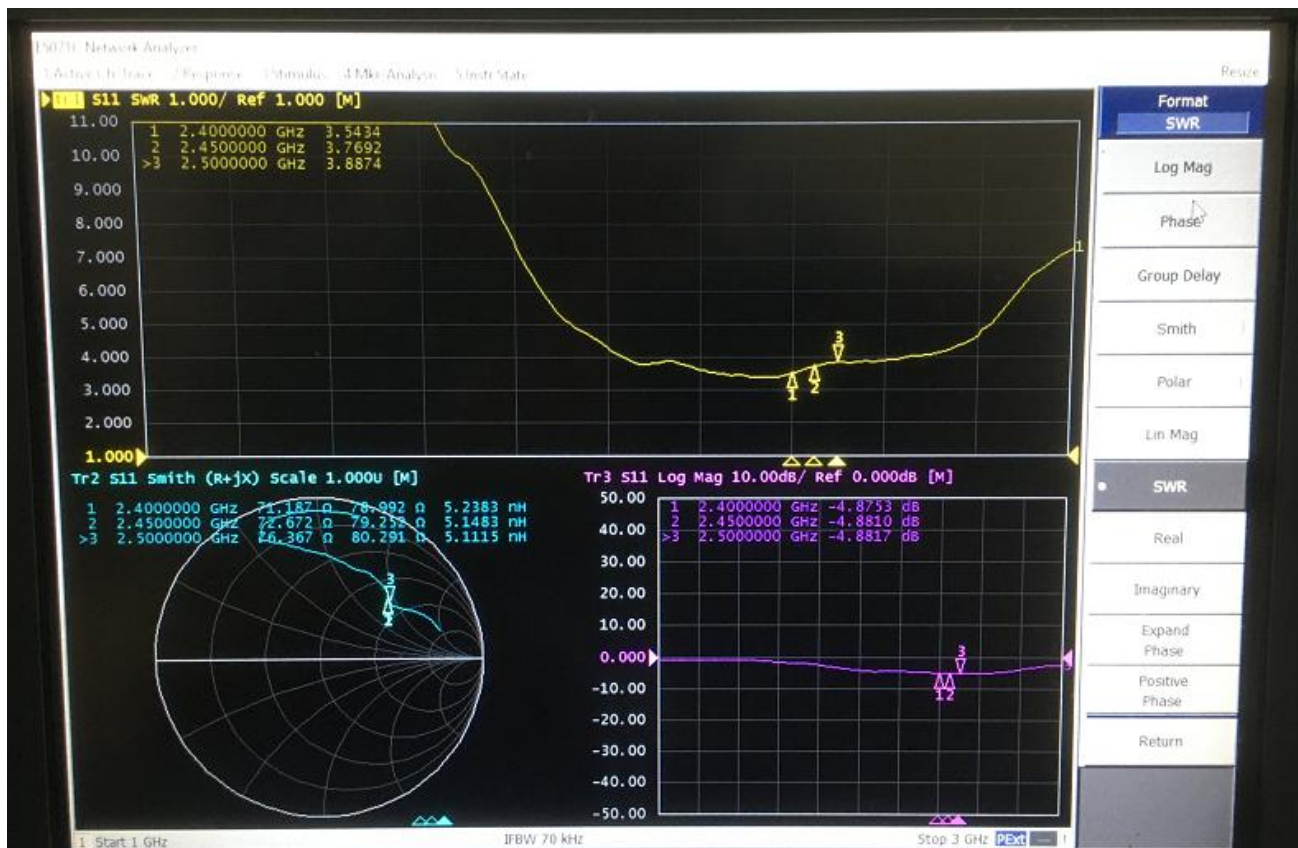



# Product Specification

P/N:

**BT Antenna**

Rev.:

A

Page:


7/11

### 3.3 Efficiency And Gain:

Frequency / MHz	Gain/ dBi
2400	-0.35
2410	-0.48
2420	-0.52
2430	-0.74
2440	-0.92
2450	-0.83
2460	-0.77
2470	-0.71
2480	-0.85
2490	-0.93
2500	-1.01

Frequency / MHz	Efficiency / dB	Efficiency / %
2400	-6.49	22.44
2410	-6.35	23.17
2420	-6.58	21.98
2430	-7.4	18.2
2440	-7.58	17.46
2450	-7.15	19.28
2460	-6.73	21.23
2470	-6.54	22.18
2480	-6.31	23.39
2490	-6.09	24.6
2500	-6.27	23.6

### 3.4. 3D Pattern 2400MHz

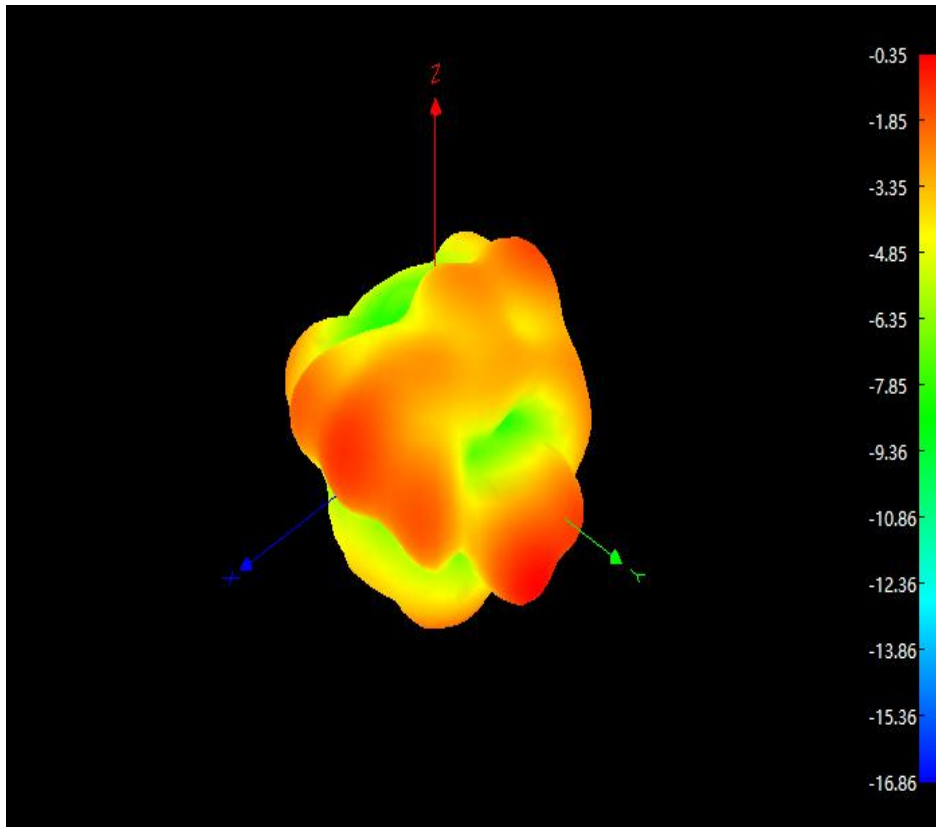



# Product Specification

P/N:

BT Antenna


Rev.:

A


Page:

8/11

2450MHz:

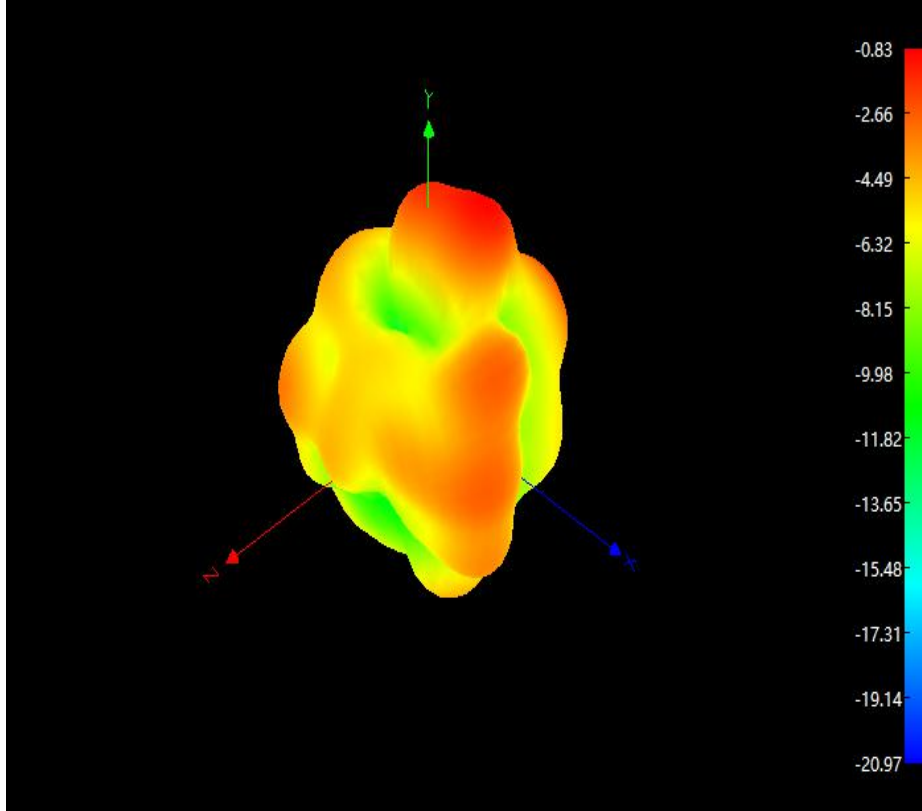

2500MHz:

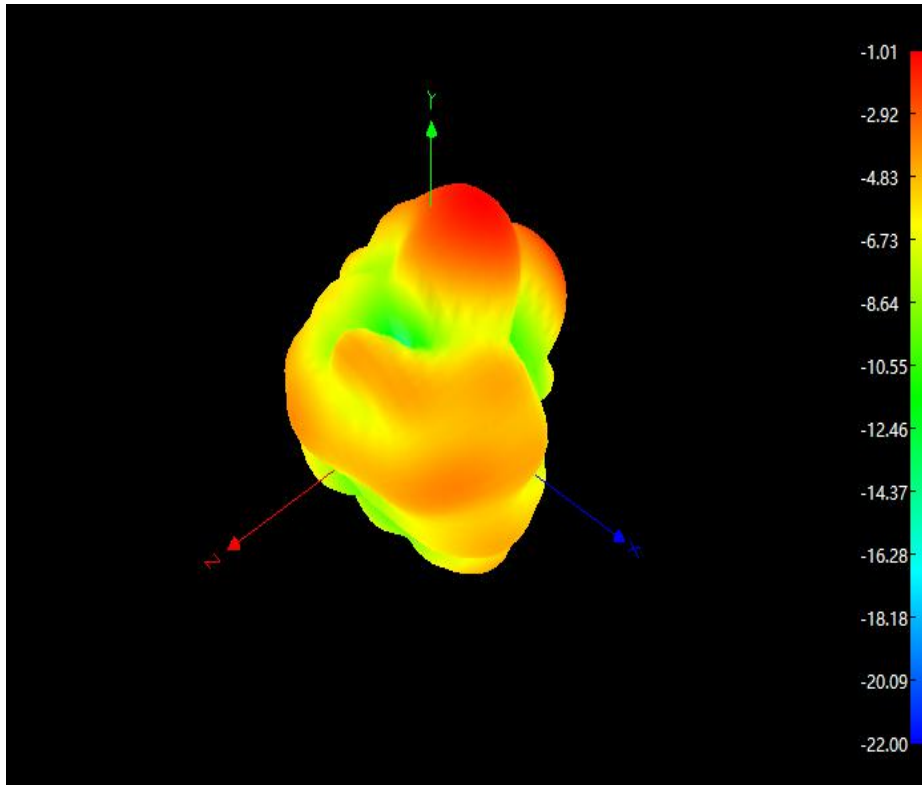





## Product Specification

P/N:

BT Antenna


Rev.:

A

Page:

9/11

### 4. Antenna Picture :

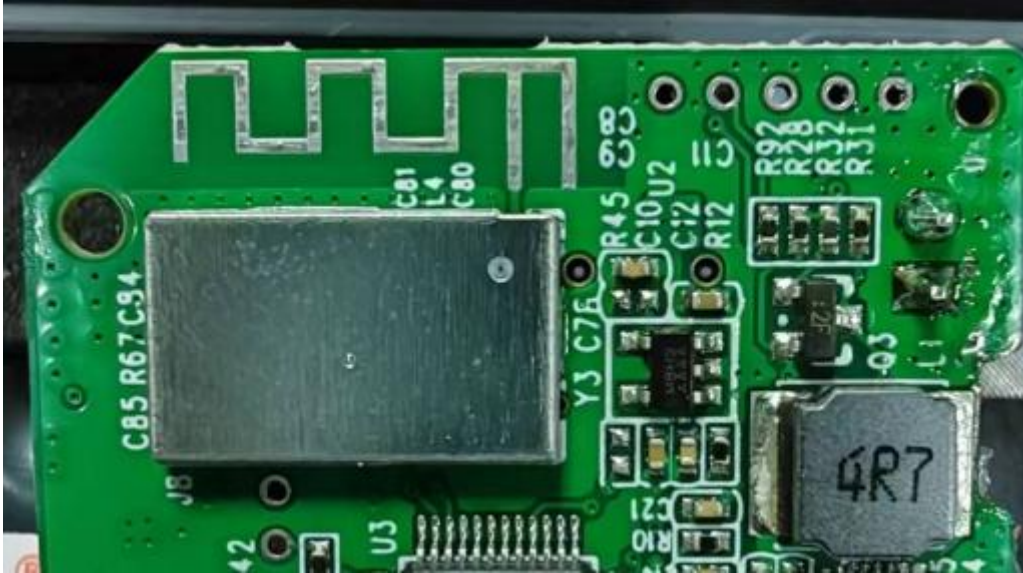

### 5.Environmental Performance

Item	Description	Test Condition	Requirement
5.1	High and low temperature test	Temp.: -40 °C Time: 48 hours  Temp.: 85°C Time: 48 hours	1. No visible damage.  2. The electric performances reach the standard.
5.2	Salt Spray	5±0.1% Nad salt fog PH Value: 6.5-7.2 Temp: 35±1 °C Time:24 hours	1. No color change.  2. the appearance of the antenna does not flake off.



# Product Specification

P/N:

**BT Antenna**

Rev.:

A


Page:

10/11

## 6.Usage Precaution

No	Items	Matter
6.1	Precautions	a)Please avoid the cleaning of this product
No	Items	Matter
6.2	Stockpile condition	Use this product within 6 months after receipt Condition : Temp: 5~30℃ Humidity:≤70%

专业的**RF**研发机构

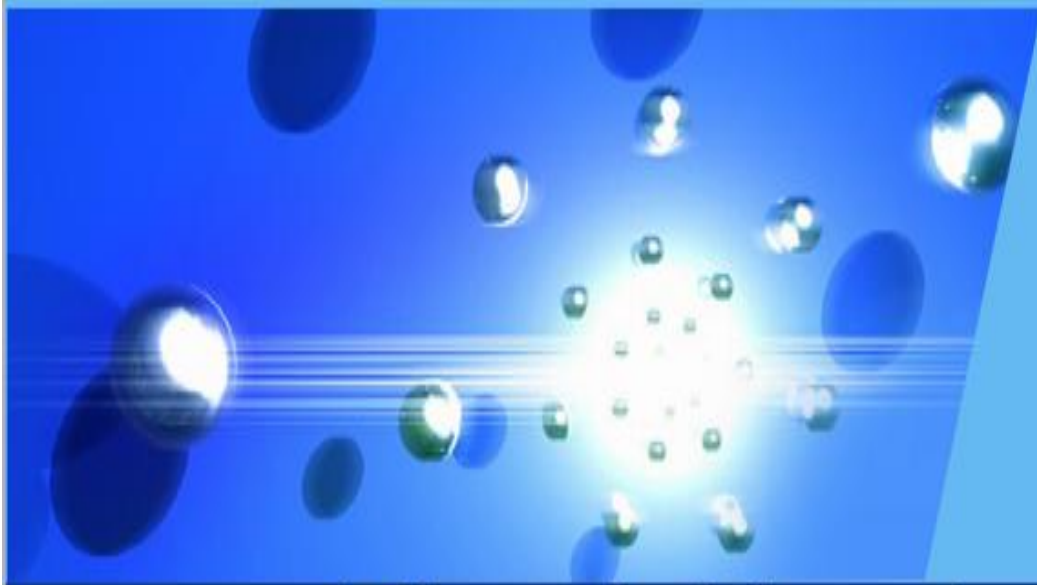

**Thank You !**

公司地址：深圳市宝安23区创业二路友谊大厦1栋3楼 邮编：518101  
3rd Floor,first unit,Friendships Building,Chuangye 2rd Road,Baoan  
23 district,Shenzhen,China Post NO:518101  
TEL: 0755-27885759 FAX: 0755-27885739  
E-mail: 2880181958@qq.com