

FCC Test Report

Report No.: AGC10706210401FE03

FCC ID : 2AWXK-TOS250

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Multi-Device Wireless Keyboard

BRAND NAME : ABKO

MODEL NAME : TOS250

APPLICANT: ABKO Co., Ltd.


DATE OF ISSUE : May 14, 2021

STANDARD(S) : FCC Part 15.247

REPORT VERSION : V1.0

Attestation of Global Continue (Shenzhen) Co., Ltd







REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	® /	May 14, 2021	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	
2.9. EQUIPMENT MODIFICATIONS	
2.10. ANTENNA REQUIREMENT	8
3. MEASUREMENT UNCERTAINTY	<u> </u>
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	11
5.1. CONFIGURATION OF EUT SYSTEM	11
5.2. EQUIPMENT USED IN TESTED SYSTEM	11
5.3. SUMMARY OF TEST RESULTS	11
6. TEST FACILITY	12
7. PEAK OUTPUT POWER	13
7.1. MEASUREMENT PROCEDURE	13
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	14
8. 20DB BANDWIDTH	16
8.1. MEASUREMENT PROCEDURE	16
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
0.2 I IMITO AND MEASI IDEMENT DESI ILTS	17
9. CONDUCTED SPURIOUS EMISSION	19
9.1. MEASUREMENT PROCEDURE	19



9.3. MEASUREMENT EQUIPMENT USED	9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
10. RADIATED EMISSION 28 10.1. MEASUREMENT PROCEDURE 26 10.2. TEST SETUP 30 10.3. LIMITS AND MEASUREMENT RESULT 31 10.4. TEST RESULT 31 11. NUMBER OF HOPPING FREQUENCY 41 11.1. MEASUREMENT PROCEDURE 41 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 41 11.3. MEASUREMENT EQUIPMENT USED 41 11.4. LIMITS AND MEASUREMENT RESULT 41 12. TIME OF OCCUPANCY (DWELL TIME) 42 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 42 12.3. MEASUREMENT PROCEDURE 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13.5. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT PROCEDURE 46 13.4. LIMITS AND MEASUREMENT RESULT 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14.5. CLINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF L		
10.1. MEASUREMENT PROCEDURE	9.4. LIMITS AND MEASUREMENT RESULT	19
10.2. TEST SETUP 30 10.3. LIMITS AND MEASUREMENT RESULT 31 10.4. TEST RESULT 31 11. NUMBER OF HOPPING FREQUENCY 41 11.1. MEASUREMENT PROCEDURE 41 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 41 11.3. MEASUREMENT EQUIPMENT USED 41 11.4. LIMITS AND MEASUREMENT RESULT 41 12. TIME OF OCCUPANCY (DWELL TIME) 42 12.1. MEASUREMENT PROCEDURE 42 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 42 12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT PROCEDURE 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FOC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48	10. RADIATED EMISSION	28
10.3. LIMITS AND MEASUREMENT RESULT 31 10.4. TEST RESULT 31 11. NUMBER OF HOPPING FREQUENCY 41 11.1. MEASUREMENT PROCEDURE 41 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 41 11.3. MEASUREMENT EQUIPMENT USED 41 11.4. LIMITS AND MEASUREMENT RESULT 41 12. TIME OF OCCUPANCY (DWELL TIME) 42 12.1. MEASUREMENT PROCEDURE 42 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 42 12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FOC LINE CONDUCTED EMISSION TEST 46 14. FOC LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 46 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 46 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST <td>10.1. MEASUREMENT PROCEDURE</td> <td>28</td>	10.1. MEASUREMENT PROCEDURE	28
10.4. TEST RESULT	10.2. TEST SETUP	30
11. NUMBER OF HOPPING FREQUENCY 41 11.1. MEASUREMENT PROCEDURE 41 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 41 11.3. MEASUREMENT EQUIPMENT USED 41 11.4. LIMITS AND MEASUREMENT RESULT 41 12. TIME OF OCCUPANCY (DWELL TIME) 42 12.1. MEASUREMENT PROCEDURE 42 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 42 12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT RESULT 46 13.4. LIMITS AND MEASUREMENT RESULT 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48		
11.1. MEASUREMENT PROCEDURE 41 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 41 11.3. MEASUREMENT EQUIPMENT USED 41 11.4. LIMITS AND MEASUREMENT RESULT 41 12. TIME OF OCCUPANCY (DWELL TIME) 42 12.1. MEASUREMENT PROCEDURE 42 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 42 12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48		
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 41 11.3. MEASUREMENT EQUIPMENT USED 41 11.4. LIMITS AND MEASUREMENT RESULT 41 12. TIME OF OCCUPANCY (DWELL TIME) 42 12.1. MEASUREMENT PROCEDURE 42 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 42 12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 46 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48		
11.3. MEASUREMENT EQUIPMENT USED 41 11.4. LIMITS AND MEASUREMENT RESULT 41 12. TIME OF OCCUPANCY (DWELL TIME) 42 12.1. MEASUREMENT PROCEDURE 42 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 42 12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 46 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 46 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 46 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 46	11.1. MEASUREMENT PROCEDURE	41
11.4. LIMITS AND MEASUREMENT RESULT 41 12. TIME OF OCCUPANCY (DWELL TIME) 42 12.1. MEASUREMENT PROCEDURE 42 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 42 12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48	11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	41
12. TIME OF OCCUPANCY (DWELL TIME). 42 12.1. MEASUREMENT PROCEDURE 42 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION). 42 12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48	11.3. MEASUREMENT EQUIPMENT USED	41
12.1. MEASUREMENT PROCEDURE 42 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 42 12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48	11.4. LIMITS AND MEASUREMENT RESULT	41
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 42 12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48	12. TIME OF OCCUPANCY (DWELL TIME)	42
12.3. MEASUREMENT EQUIPMENT USED 42 12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48	12.1. MEASUREMENT PROCEDURE	42
12.4. LIMITS AND MEASUREMENT RESULT 42 13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 48	12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	42
13. FREQUENCY SEPARATION 46 13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 49		
13.1. MEASUREMENT PROCEDURE 46 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 46 13.3. MEASUREMENT EQUIPMENT USED 46 13.4. LIMITS AND MEASUREMENT RESULT 46 14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 49		
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)		
13.3. MEASUREMENT EQUIPMENT USED	13.1. MEASUREMENT PROCEDURE	46
13.4. LIMITS AND MEASUREMENT RESULT	13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	46
14. FCC LINE CONDUCTED EMISSION TEST 47 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 49	13.3. MEASUREMENT EQUIPMENT USED	46
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 49	13.4. LIMITS AND MEASUREMENT RESULT	46
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 47 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 47 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 49	14. FCC LINE CONDUCTED EMISSION TEST	47
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 48 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 49	14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	47
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	47
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	48
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF EUT53	APPENDIX B. PHOTOGRAPHS OF FUT	53



1. VERIFICATION OF CONFORMITY

Applicant	ABKO Co., Ltd.	
Address	M Signature 7th floor, 20, Magokjungang 1-ro, Gangseo-gu, Seoul, Republic of Korea	
Manufacturer ABKO Co., Ltd.		
Address	M Signature 7th floor, 20, Magokjungang 1-ro, Gangseo-gu, Seoul, Republic of Korea	
Factory	Shenzhen Youcai Jia Technology Co., Ltd	
Address	Building A, Dingfeng High-tech Park, Building 41, Second Industrial Zone, Shapuwei Community, Songgang Street, Baoan District, Shenzhen	
Product Designation	Multi-Device Wireless Keyboard	
Brand Name	ABKO	
Test Model	TOS250	
Date of test	Apr. 19, 2021 to May 13, 2021	
Deviation	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Prepared By	Then Huony	
CC -	Thea Huang Project Engineer	May 14, 2021
Reviewed By	Max Zhang	
	Max Zhang Reviewer	May 14, 2021
Approved By	Formastics	
	Forrest Lei Authorized Officer	May 14, 2021



Report No.: AGC10706210401FE03

Page 6 of 60

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Multi-Device Wireless Keyboard". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

· ······g				
Operation Frequency	2.402 GHz to 2.480 GHz			
RF Output Power	-3.633dBm (Max)			
Bluetooth Version	V3.0			
BR ⊠GFSK, EDR □π /4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps				
Number of channels 79				
Hardware Version V02				
Software Version v2.2_CRC_E161A8AF				
Antenna Designation PCB Antenna (Comply with requirements of the FCC part 15.203)				
Antenna Gain 1.87dBi				
Power Supply DC 3.7V by battery or DC 5V by adapter				
Note: The EUT doesn't support	π /4-DQPSK, 8DPSKand BLE.			

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
100	0	2402 MHz	
0	64 -6	2403 MHz	
GC CC	· : 10		
	38	2440 MHz	
2402~2480MHz	39	2441 MHz	
- GC - C	40	2442 MHz	
	c.C	200 -0	
0	77	2479 MHz	
	78	2480 MHz	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written permitted without the writte



2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode:

40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55,

36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63,

42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14,

51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49,

20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37,

65, 32, 70, 52, 27, 59, 22, 62, 39

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:


- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.





The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **2AWXK-TOS250** filling to comply with the FCC PART 15.247 requirements.

2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.


2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.





3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.1 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±4.0 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted, Uc = ±0.8dB
- Uncertainty of spurious emissions, conducted, Uc = ±2.7dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %
- Uncertainty of Dwell Time: Uc = ±2 %
- Uncertainty of Frequency: Uc = ±2 %

a/Inspection

The test results

the test report.




4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION		
1	Low channel GFSK		
2	Middle channel GFSK		
3	High channel GFSK		
4	Hopping mode GFSK		

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting

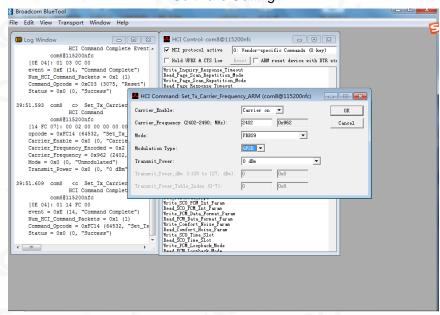




Report No.: AGC10706210401FE03

Page 11 of 60


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No. ID or Specification		Remark
1	Multi-Device Wireless Keyboard	TOS250	2AWXK-TOS250	EUT
2	Control Box	USB-TTL	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES DESCRIPTION OF TEST		RESULT	
15.247 (b)(1)	Peak Output Power	Compliant	
15.247 (a)(1)	20 dB Bandwidth	Compliant	
15.247 (d)	Conducted Spurious Emission	Compliant	
15.209	Radiated Emission	Compliant	
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant	
15.247 (a)(1)(iii)	Time of Occupancy	Compliant	
15.247 (a)(1)	Frequency Separation	Compliant	
15.207 Conducted Emission		Compliant	

Note: The EUT is powered by battery.



Report No.: AGC10706210401FE03

Page 12 of 60

6. TEST FACILITY


Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA		

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2020	May 14, 2021
LISN	R&S	ESH2-Z5	100086	Jul. 03, 2020	Jul. 02, 2021
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec.06, 2021
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2019	Sep. 20, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 17, 2019	May 16, 2021
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08,2021	Jan. 07,2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A





7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

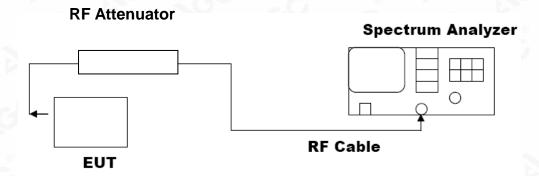



7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT						
	FOR GFSK MOUL	DULATION				
Frequency (GHz) Peak Power (dBm) Applicable Limits (dBm) Pass or Fail						
2.402	-4.129	21	Pass			
2.441	-3.864	21	Pass			
2.480	-3.633	21	Pass			

CH₀






CH39



CH78



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

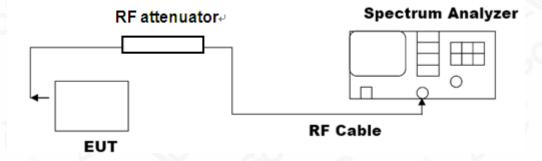



8.3. LIMITS AND MEASUREMENT RESULTS

MEASUREMENT RESULT FOR GFSK MOUDULATION					
Measurement Result					
Applicable Limits	Test Data	(MHz)	Criteria		
N/A	Low Channel	1.033	PASS		
	Middle Channel	1.031	PASS		
-,C	High Channel	1.021	PASS		

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written permitted without the writte



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC10706210401FE03

Page 19 of 60

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
 RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT						
Applicable Limite	Measurement Resu	ult				
Applicable Limits	Test Data	Criteria				
In any 100 kHz Bandwidth Outside the	At least -20dBc than the limit	2100				
requency band in which the spread spectrum ntentional radiator is operating, the radio frequency	Specified on the BOTTOM Channel	PASS				
bower that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS				




TEST RESULT FOR ENTIRE FREQUENCY RANGE

TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL





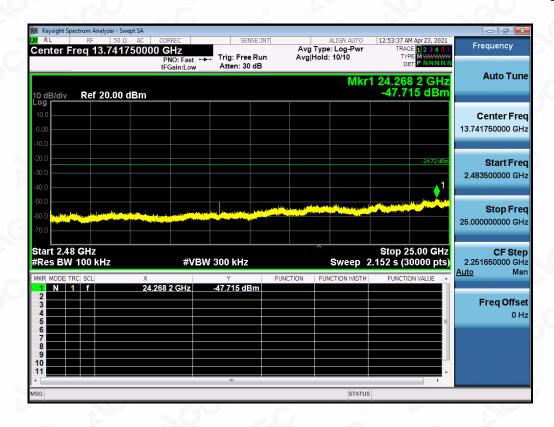




TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL





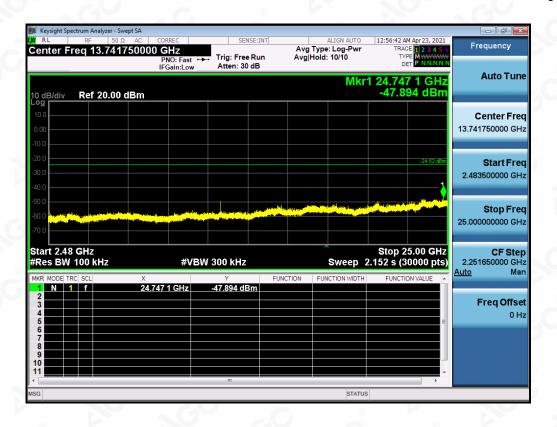

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portion of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






Note: The GFSK modulation is the worst case and only those data recorded in the report.




TEST RESULT FOR BAND EDGE

GFSK MODULATION IN LOW CHANNEL

Hopping off

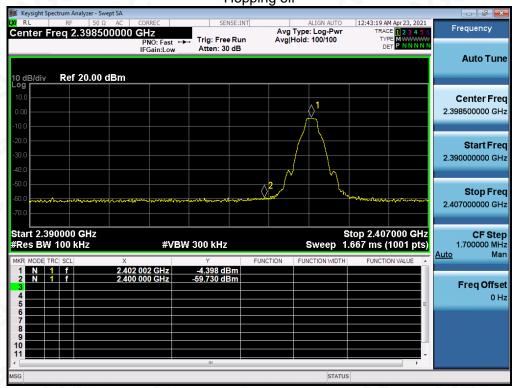




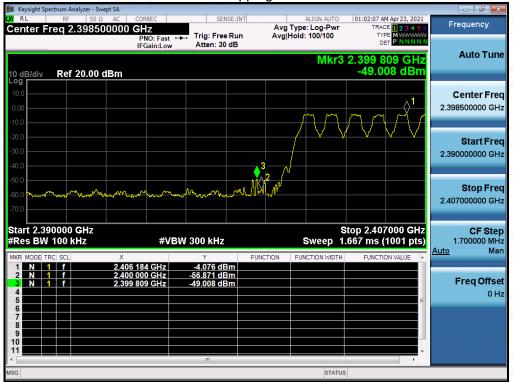





GFSK MODULATION IN HIGH CHANNEL

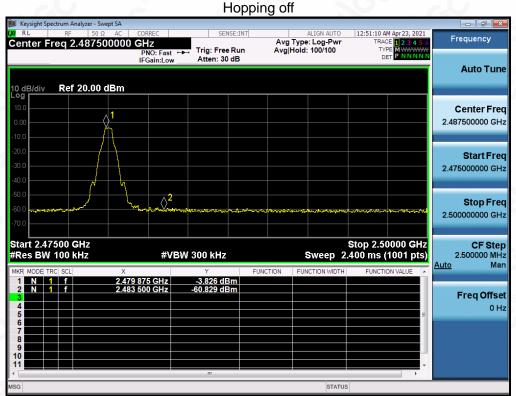

Hopping on

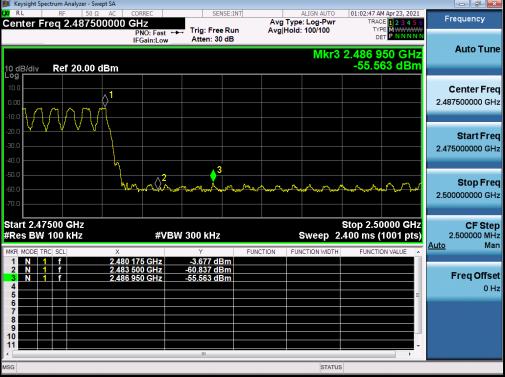

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter portionization of AGC where the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Report No.: AGC10706210401FE03

Page 29 of 60

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

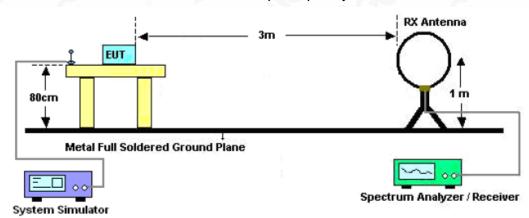

RADIATED EMISSION TEST SETUP 30MHz-1000MHz



RADIATED EMISSION TEST SETUP ABOVE 1000MHz

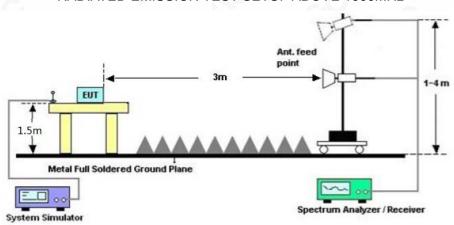

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC10706210401FE03

Page 31 of 60

10.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(kHz)	300		
0.490~1.705	24000/F(kHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

10.4. TEST RESULT


RADIATED EMISSION BELOW 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



RADIATED EMISSION BELOW 1GHz

EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

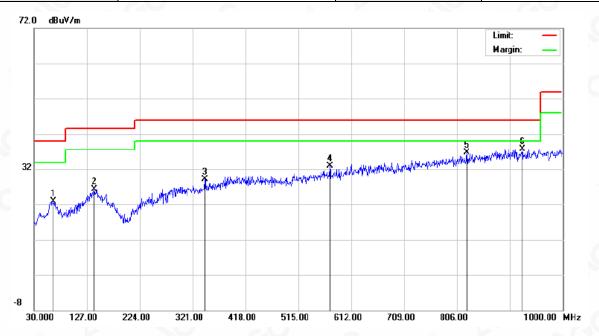


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		65.8900	5.55	17.42	22.97	40.00	-17.03	peak
2		140.5800	5.10	21.17	26.27	43.50	-17.23	peak
3		343.3100	6.12	22.99	29.11	46.00	-16.89	peak
4		572.2300	6.43	26.41	32.84	46.00	-13.16	peak
5		823.4600	6.02	30.71	36.73	46.00	-9.27	peak
6	*	925.3100	5.85	31.92	37.77	46.00	-8.23	peak

RESULT: PASS



EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

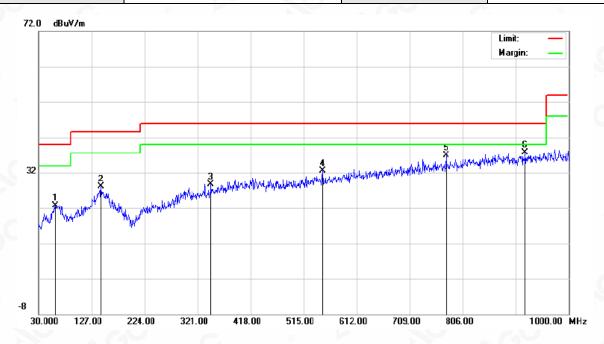


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		60.0700	4.94	17.86	22.80	40.00	-17.20	peak
2		144.4600	7.38	20.78	28.16	43.50	-15.34	peak
3		345.2500	5.65	23.06	28.71	46.00	-17.29	peak
4		548.9500	6.65	25.95	32.60	46.00	-13.40	peak
5		774.9600	7.12	29.84	36.96	46.00	-9.04	peak
6	*	919.4900	5.75	31.87	37.62	46.00	-8.38	peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Over= Measurement –Limit.

2. All test modes had been pre-tested. The mode 3 is the worst case and recorded in the report.



/Inspection The test results the test report.




RADIATED EMISSION ABOVE 1GHz

EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.65	0.08	45.73	74	-28.27	peak
4804.000	37.36	0.08	37.44	54	-16.56	AVG
7206.000	40.54	2.21	42.75	74	-31.25	peak
7206.000	32.21	2.21	34.42	54	-19.58	AVG
6	-0				20	
Remark:			<u> </u>			
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.	8		

EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	44.48	0.08	44.56	74	-29.44	peak
4804.000	36.35	0.08	36.43	54	-17.57	AVG
7206.000	39.59	2.21	41.8	74	-32.2	peak
7206.000	30.52	2.21	32.73	54	-21.27	AVG
.66				50	.0	8
emark:						
actor = Anter	nna Factor + Cable	Loss - Pre-	-amplifier.	(8)		



he test report.




EUT	Multi-Device Wireless Keyboard	Model Name	TOS250		
Temperature	25°C	Relative Humidity	55.4%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 2	Antenna	Horizontal		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	45.82	0.14	45.96	74	-28.04	peak
4882.000	38.36	0.14	38.5	54	-15.5	AVG
7323.000	41.24	2.36	43.6	74	-30.4	peak
7323.000	34.41	2.36	36.77	54	-17.23	AVG
0				<u></u>		
	8				(8)	
temark:	- G	0			- 6	8
actor = Anter	na Factor + Cable	Loss – Pre-	amplifier.		10	a.C

EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	45.79	0.14	45.93	74	-28.07	peak
4882.000	37.36	0.14	37.5	54	-16.5	AVG
7323.000	40.32	2.36	42.68	74	-31.32	peak
7323.000	31.45	2.36	33.81	54	-20.19	AVG
8			60			
	8					(8)
emark:	a.C	· (6)				
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			





EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.79	0.22	47.01	74	-26.99	peak
4960.000	38.68	0.22	38.9	54	-15.1	AVG
7440.000	41.35	2.64	43.99	74	-30.01	peak
7440.000	32.42	2.64	35.06	54	-18.94	AVG
				©		
	(8)				®	
Remark:		©		~GC		
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			

EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	45.82	0.22	46.04	74	-27.96	peak
4960.000	38.46	0.22	38.68	54	-15.32	AVG
7440.000	41.35	2.64	43.99	74	-30.01	peak
7440.000	33.34	2.64	35.98	54	-18.02	AVG
	100	60	© O			
mark:				8	<u> </u>	

RESULT: PASS

Note

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


All test modes had been tested. The GFSK modulation is the worst case and recorded in the report.




TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

PΚ

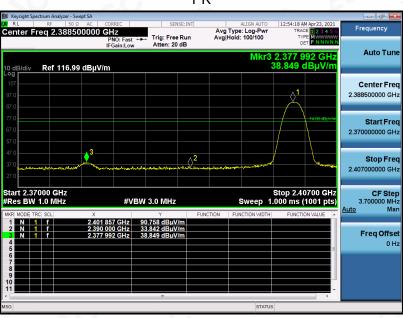

AV

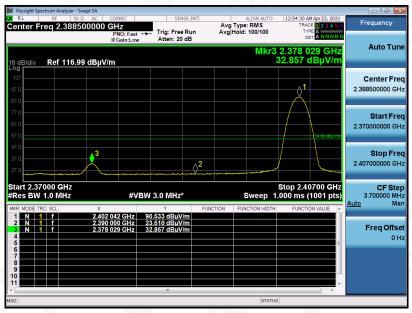


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the content of the report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

PK

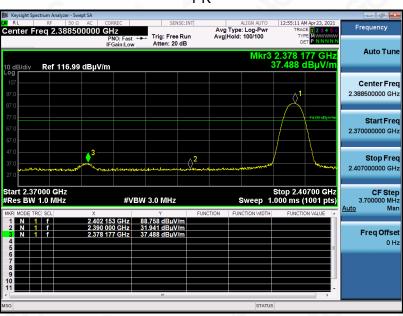

ΑV

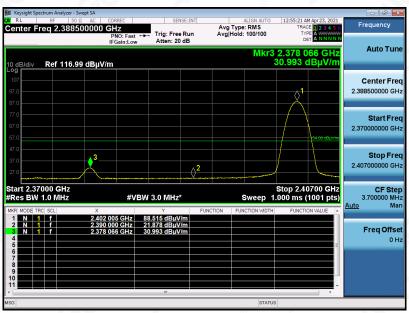


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter perhorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

PK

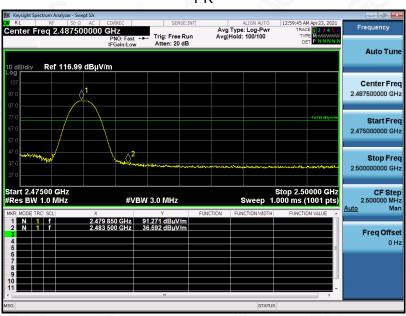

ΑV

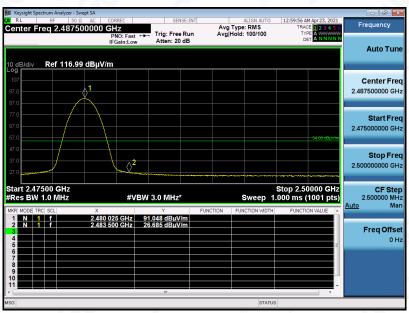

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


g/Inspection The test results

he test report.




EUT	Multi-Device Wireless Keyboard	Model Name	TOS250
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical



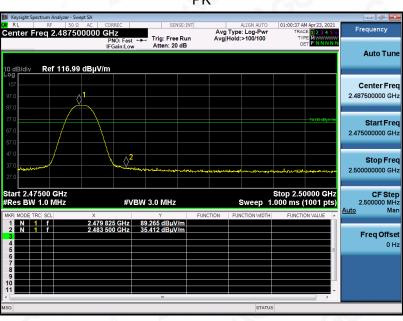

ΑV

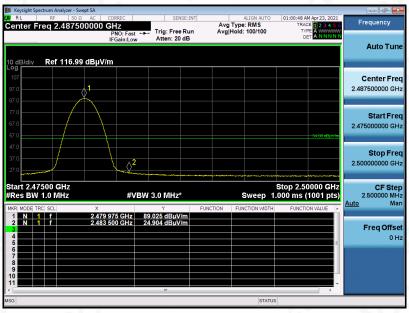

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer. The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated feet Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



11. NUMBER OF HOPPING FREQUENCY

11.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3. VBW RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.
- 4. Allow the trace to stabilize.

11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2


11.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

11.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS

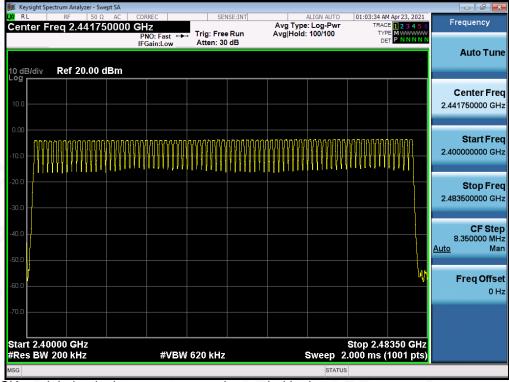

Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restroc/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Report No.: AGC10706210401FE03

Page 42 of 60

12. TIME OF OCCUPANCY (DWELL TIME)

12.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Zero span, centered on a hopping channel.
- 2. RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- 4. Detector function: Peak. Trace: Max hold.
- 5. Use the marker-delta function to determine the transmit time per hop.
- 6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) \times (period specified in the requirements / analyzer sweep time)

7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

12.4. LIMITS AND MEASUREMENT RESULT


Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Sweep Time (ms)	Limit (ms)
Low	2.932	30*4	351.840	400
Middle	2.932	31*4	363.568	400
High	2.932	27*4	316.656	400

Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




TEST PLOT OF LOW CHANNEL

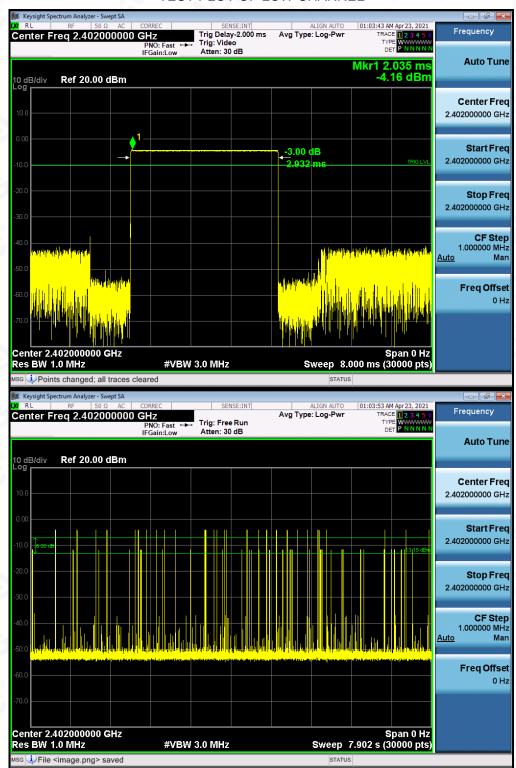

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




TEST PLOT OF MIDDLE CHANNEL

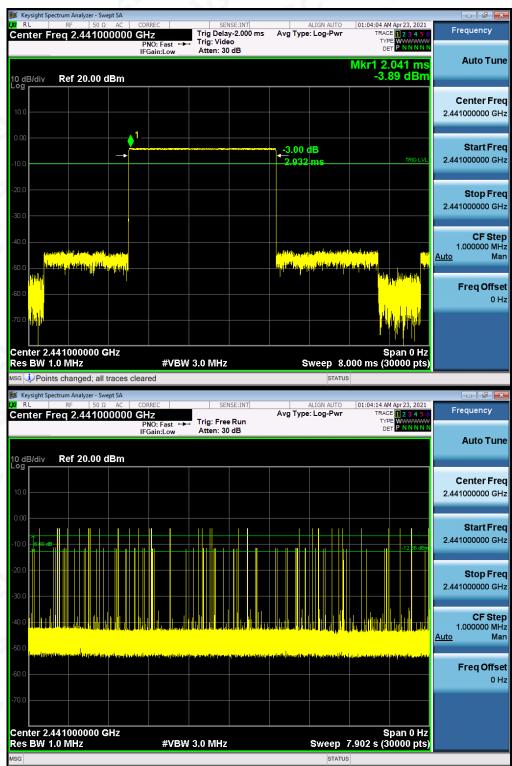

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST PLOT OF HIGH CHANNEL

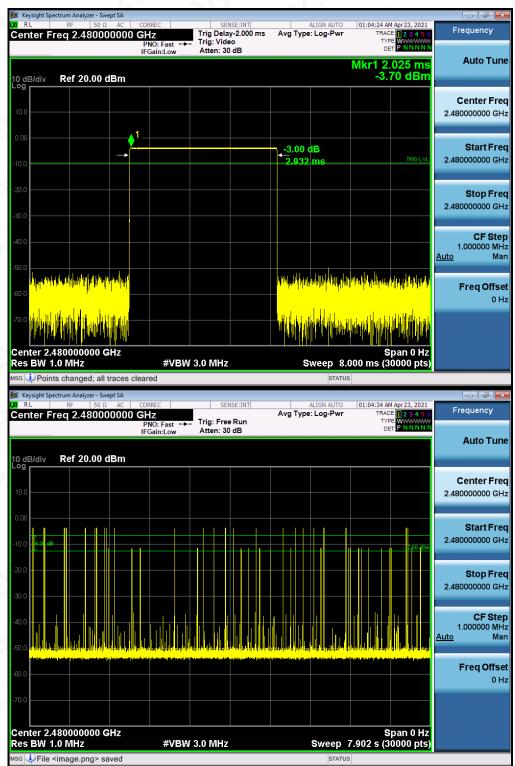

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



13. FREQUENCY SEPARATION

13.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) ≥ RBW.
- 4. Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2


13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

13.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT	
	MHz		Dana	
Hopping mode	1.001	2/3 *20 dB BW	Pass	

TEST PLOT FOR FREQUENCY SEPARATION

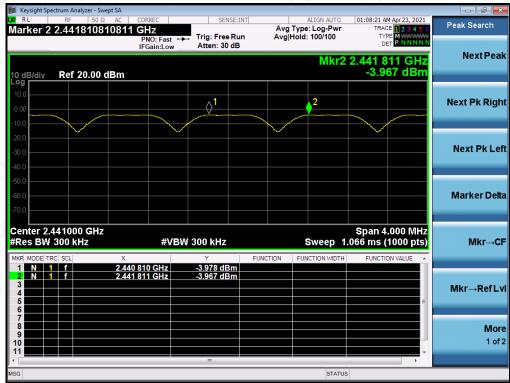

Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Posting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



14. FCC LINE CONDUCTED EMISSION TEST


14.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage			
Frequency	Q.P. (dBµV)	Average (dBµV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		


Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

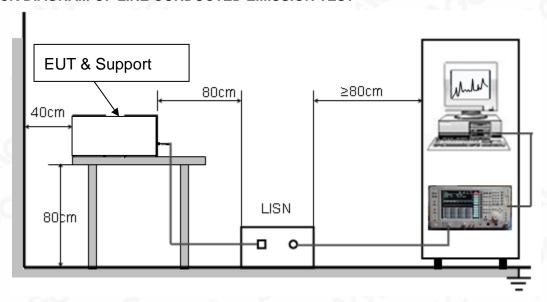

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test represented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report and in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report and in the report apply only to the test report should be addressed to AGC by agc@agc-cert.com.





14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

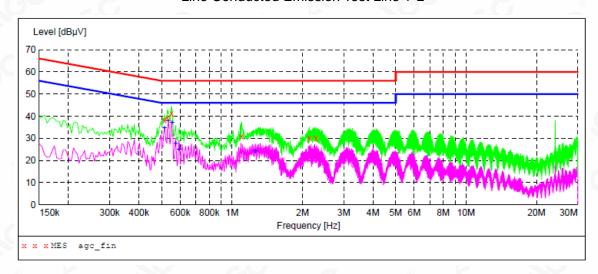

MEASUREMENT RESULT: "agc_fin"

2	021/4/26 9:54 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.514000	38.30	12.4	56	17.7	QP	L1	GND
	0.530000	39.30	12.4	56	16.7	QP	L1	GND
	0.550000	41.30	12.4	56	14.7	QP	L1	GND
	1.098000	30.80	12.4	56	25.2	QP	L1	GND
	2.138000	30.00	12.5	56	26.0	QP	L1	GND
	2.282000	30.00	12.5	56	26.0	OP	L1	GND


MEASUREMENT RESULT: "agc fin2"

2021/4/26 9:5	4						
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.514000	34.70	12.4	46	11.3	AV	L1	GND
0.534000	37.60	12.4	46	8.4	AV	L1	GND
0.554000	37.10	12.4	46	8.9	AV	L1	GND
0.574000	27.80	12.4	46	18.2	AV	L1	GND
0.594000	25.00	12.4	46	21.0	AV	L1	GND
1.258000	24.20	12.4	4.6	21.8	ΑV	T-1	GND

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Line Conducted Emission Test Line 2-N

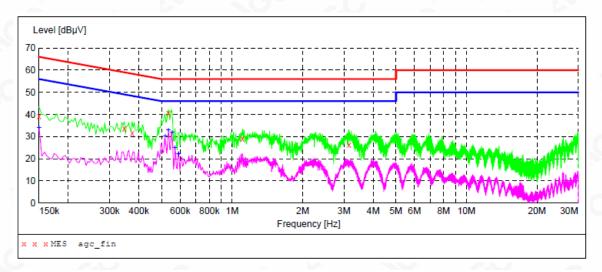

MEASUREMENT RESULT: "agc fin"

2021/4/26	9:58						
Freque	-	el Transd µV dB		Margin dB	Detector	Line	PE
0.150	000 39.	20 12.4	66	26.8	QP	N	GND
0.346	000 33.	60 12.4	59	25.5	QP	N	GND
0.374	000 31.	60 12.4	58	26.8	QP	N	GND
0.534	000 40.	50 12.4	56	15.5	QP	N	GND
1.106	000 29.	20 12.4	56	26.8	QP	N	GND
3.150	000 26.	40 12.5	56	29.6	QP	N	GND

MEASUREMENT RESULT: "agc fin2"

2021/4/26 Frequence MF	cy Level	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.15000	00 34.10	12.4	56	21.9	AV	N	GND
0.51800	00 30.10	12.4	46	15.9	AV	N	GND
0.53400	00 32.80	12.4	46	13.2	AV	N	GND
0.55400	31.80	12.4	46	14.2	AV	N	GND
0.57000	00 25.00	12.4	46	21.0	AV	N	GND
0.59000	00 22.10	12.4	46	23.9	AV	N	GND

RESULT: PASS

Note: All the test modes had been tested, the mode 3 was the worst case. Only the data of the worst case would be record in this test report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purportization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.