



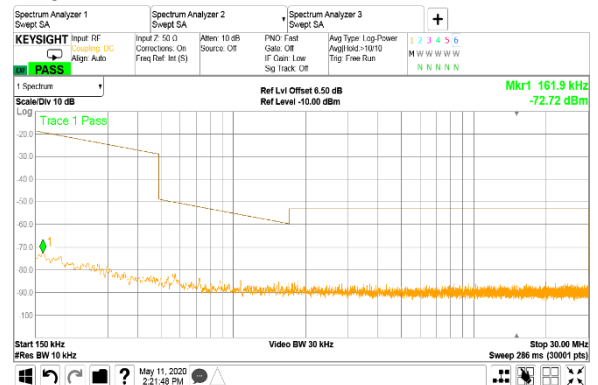



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.15 Spurious emission measurements in 9 kHz - 30 MHz range at high carrier frequency
CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #5

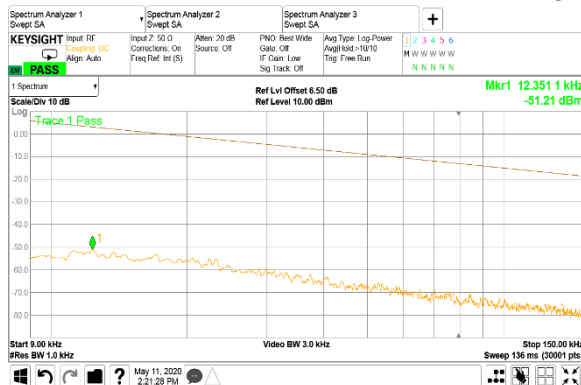

Plot 7.5.16 Spurious emission measurements in 9 kHz - 30 MHz range at low carrier frequency
CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #6

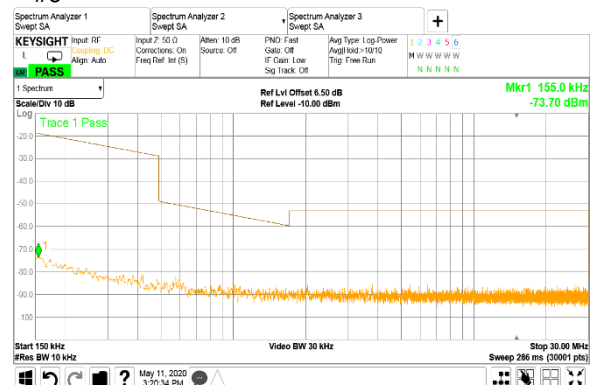
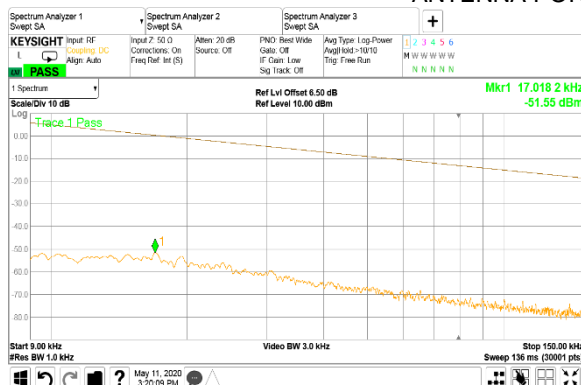






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.17 Spurious emission measurements in 9 kHz - 30 MHz range at mid carrier frequency
CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #6

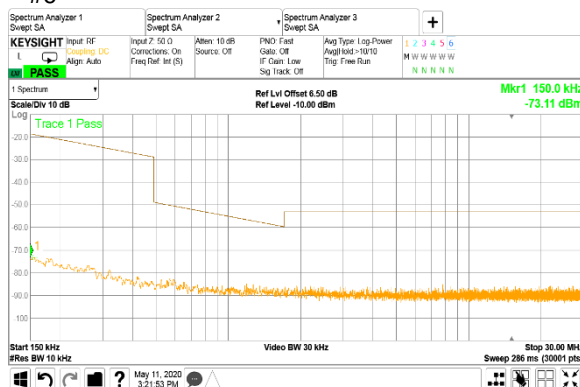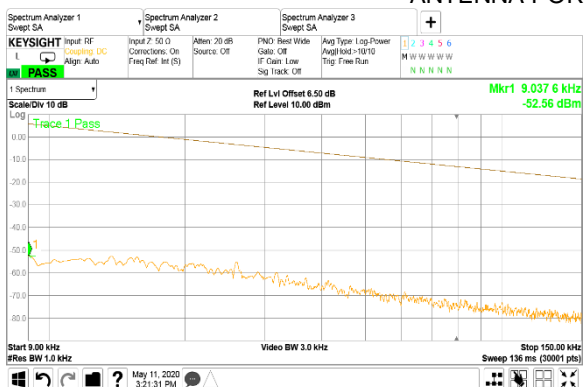

Plot 7.5.18 Spurious emission measurements in 9 kHz - 30 MHz range at high carrier frequency
CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #6

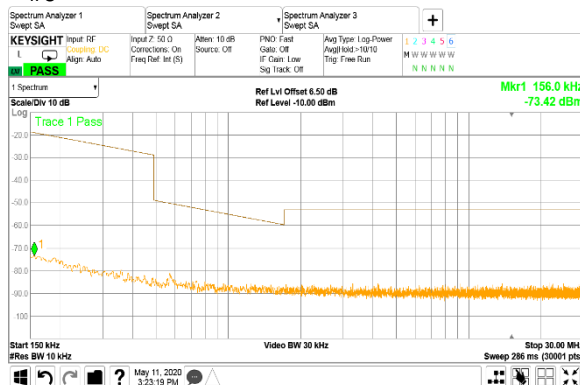
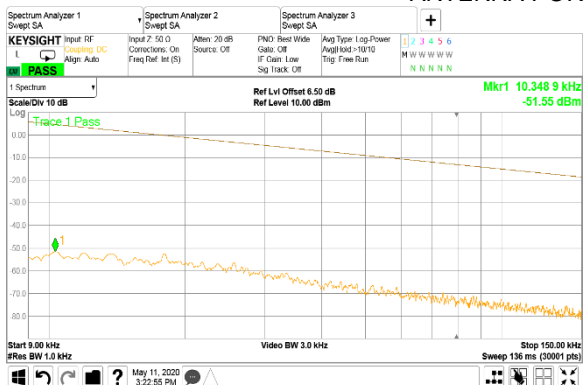






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.19 Spurious emission measurements in 9 kHz - 30 MHz range at low carrier frequency
CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #7

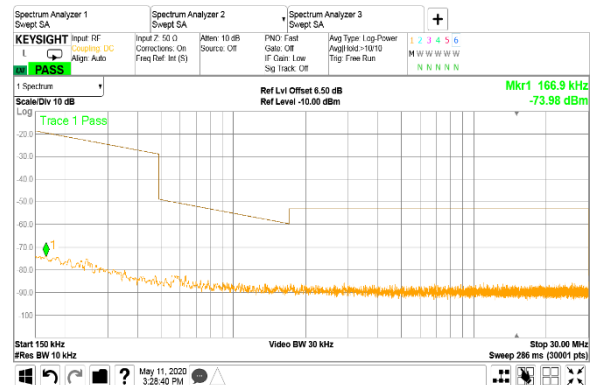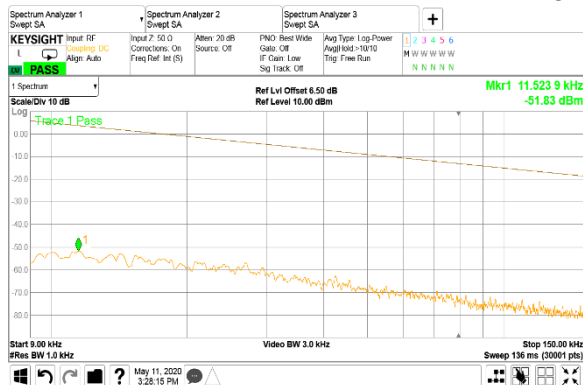

Plot 7.5.20 Spurious emission measurements in 9 kHz - 30 MHz range at mid carrier frequency
CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #7

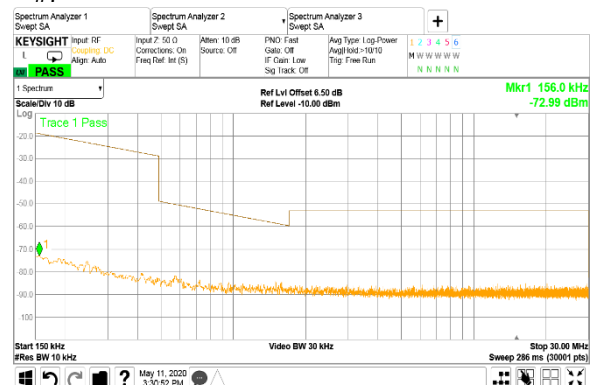
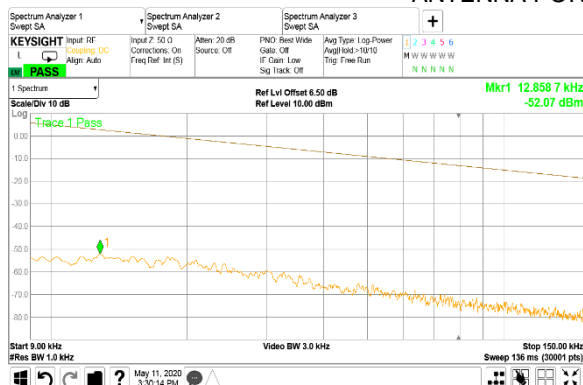






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.21 Spurious emission measurements in 9 kHz - 30 MHz range at high carrier frequency
CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #7

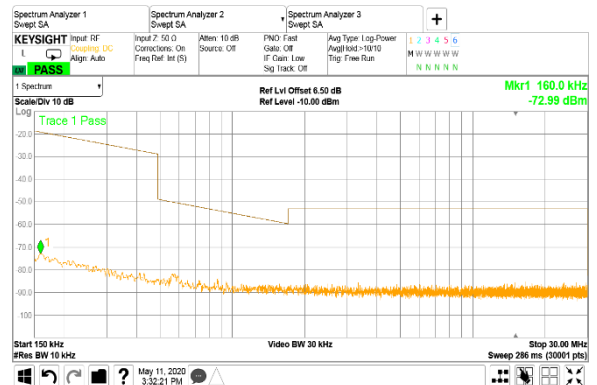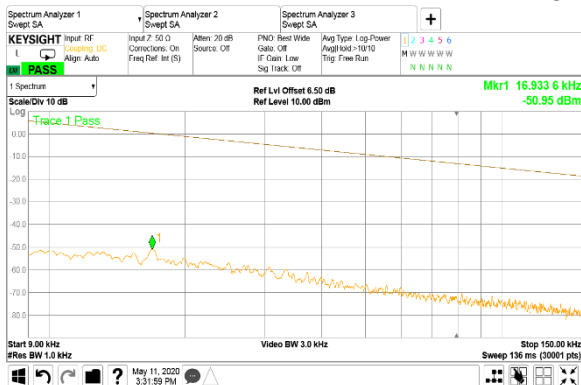

Plot 7.5.22 Spurious emission measurements in 9 kHz - 30 MHz range at low carrier frequency
CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #8

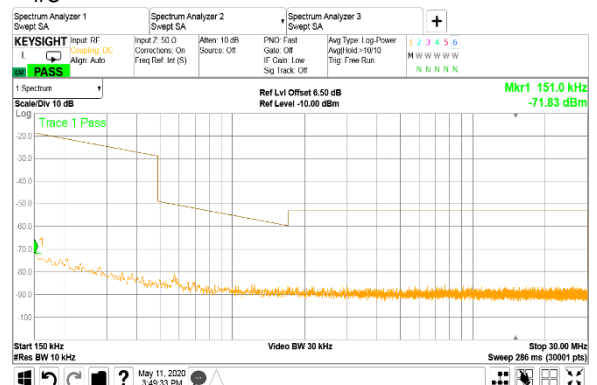
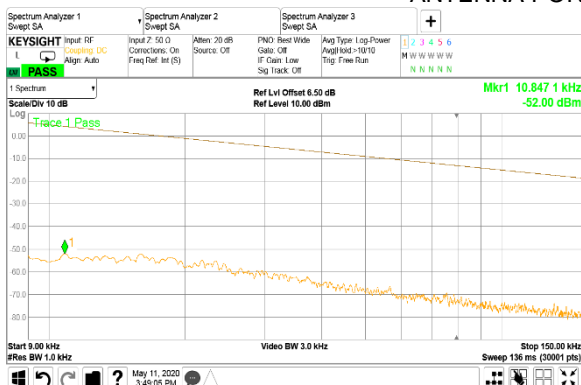






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.23 Spurious emission measurements in 9 kHz - 30 MHz range at mid carrier frequency
CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #8

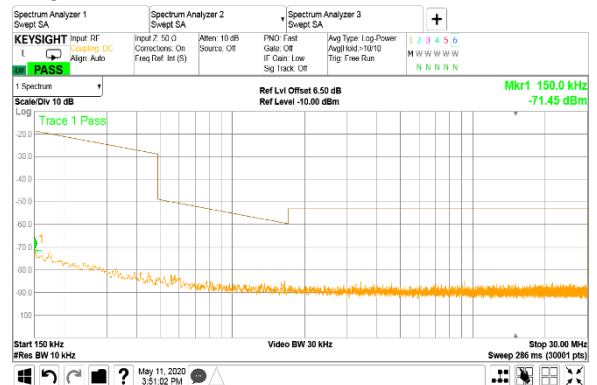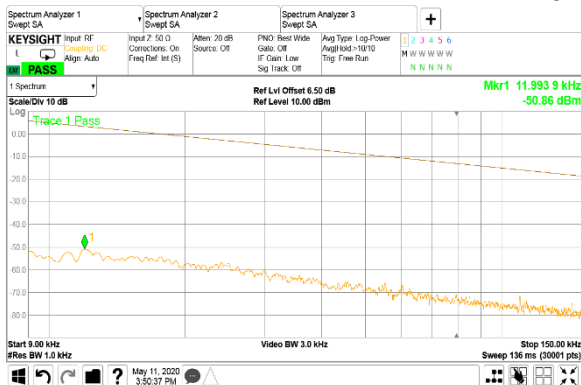

Plot 7.5.24 Spurious emission measurements in 9 kHz - 30 MHz range at high carrier frequency
CHANNEL BANDWIDTH: 5 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #8

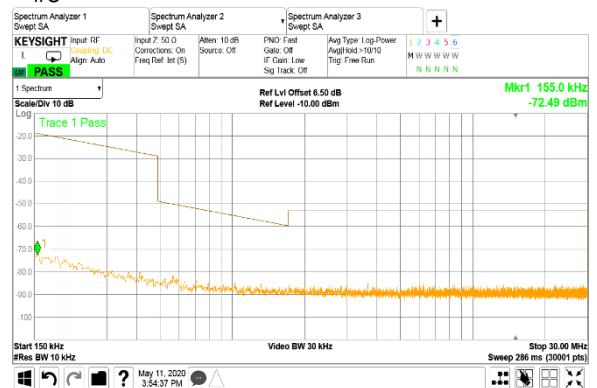
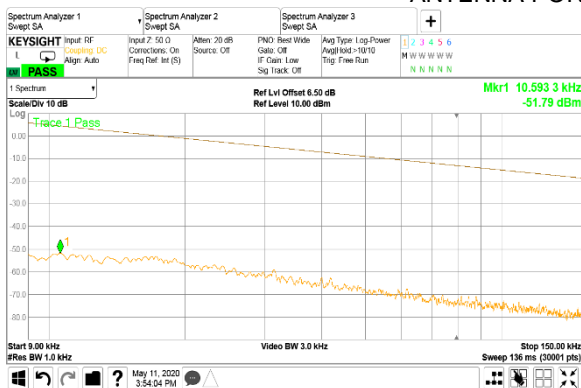






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.25 Spurious emission measurements in 9 kHz - 30 MHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #1

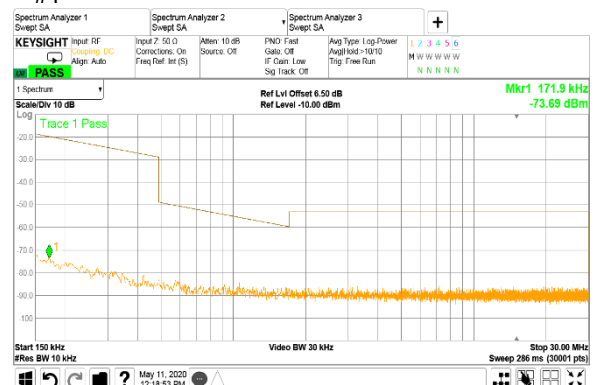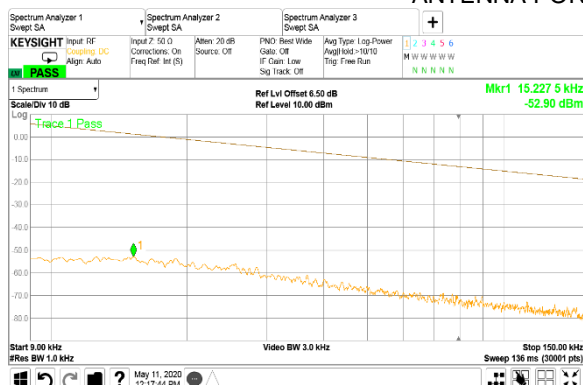

Plot 7.5.26 Spurious emission measurements in 9 kHz - 30 MHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #1

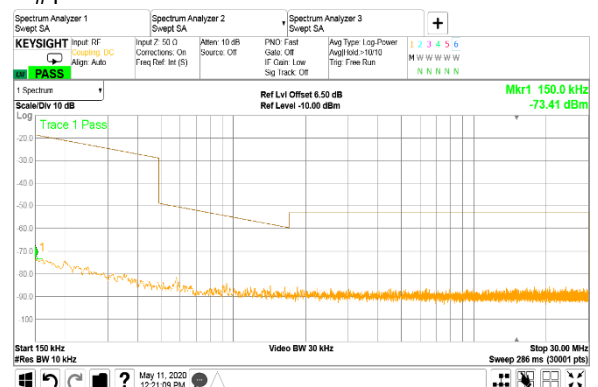
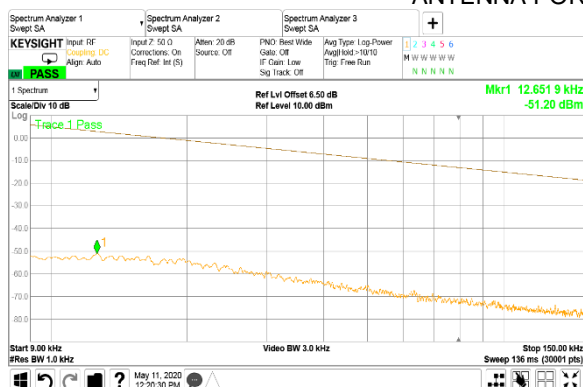






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.27 Spurious emission measurements in 9 kHz - 30 MHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #1

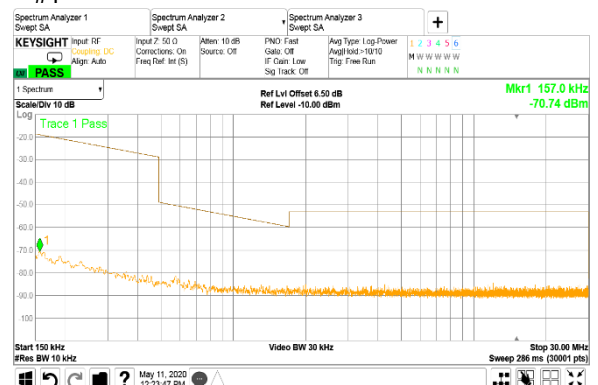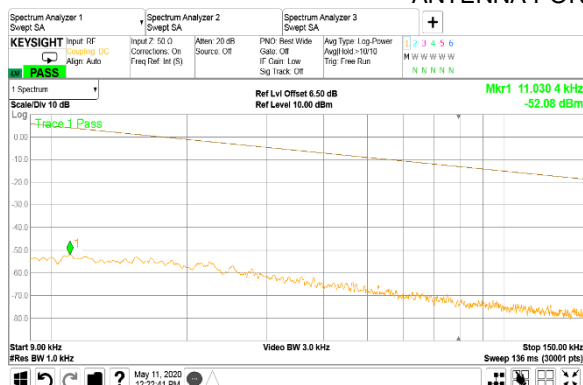

Plot 7.5.28 Spurious emission measurements in 9 kHz - 30 MHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #2

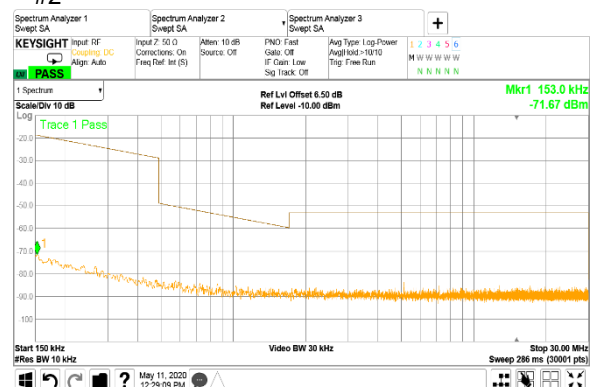
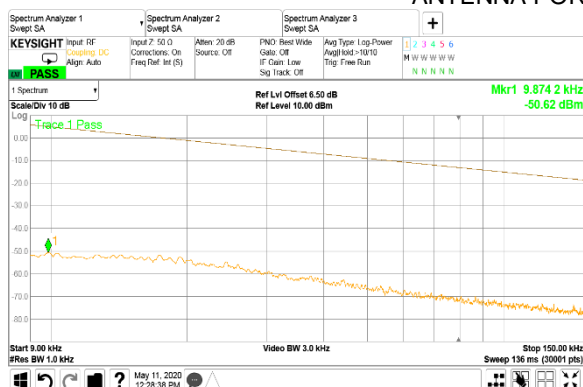






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.29 Spurious emission measurements in 9 kHz - 30 MHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #2

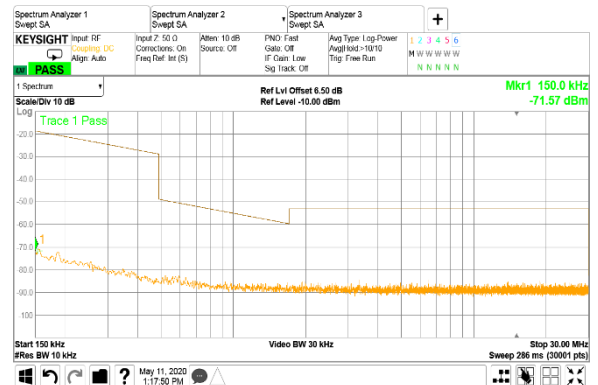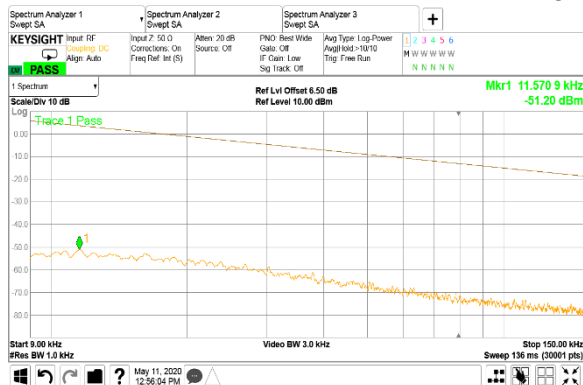

Plot 7.5.30 Spurious emission measurements in 9 kHz - 30 MHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #2

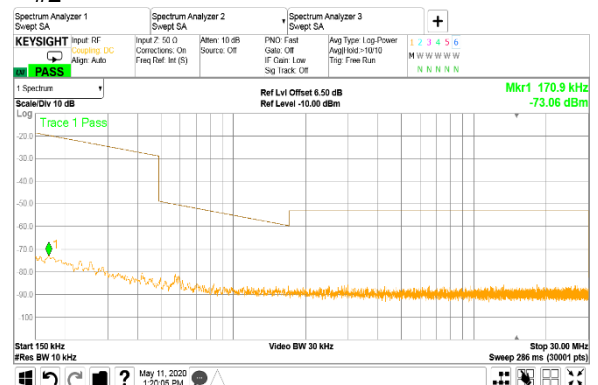
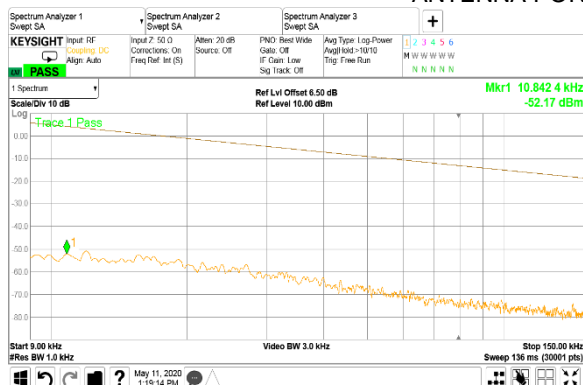






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.31 Spurious emission measurements in 9 kHz - 30 MHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #3

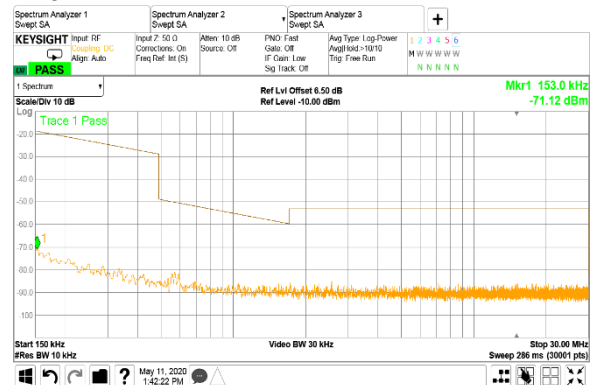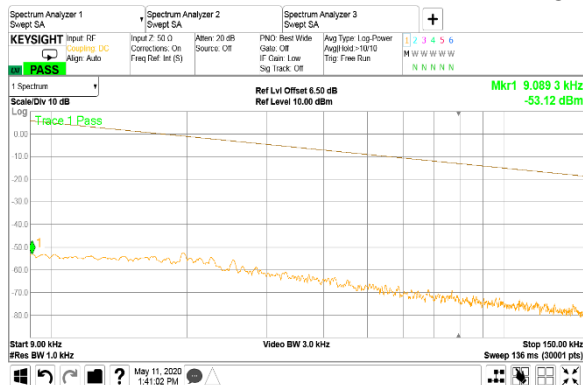

Plot 7.5.32 Spurious emission measurements in 9 kHz - 30 MHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #3

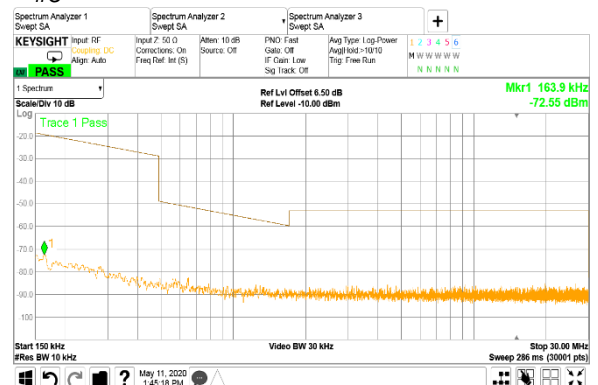
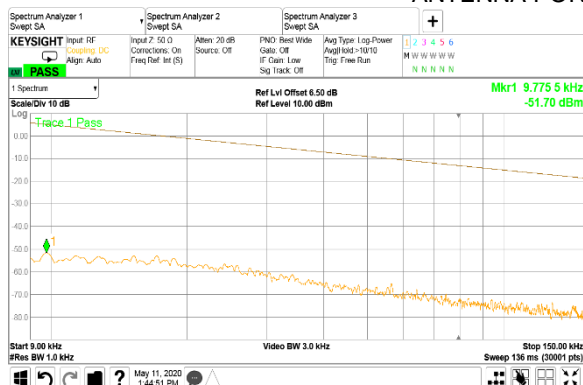






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.33 Spurious emission measurements in 9 kHz - 30 MHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #3

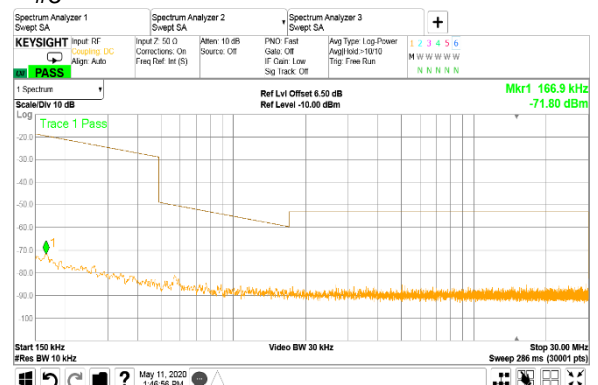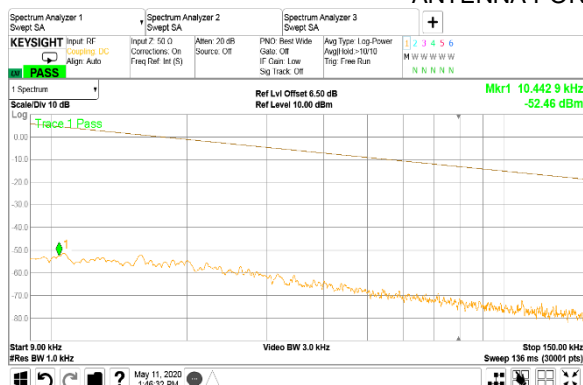

Plot 7.5.34 Spurious emission measurements in 9 kHz - 30 MHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #4

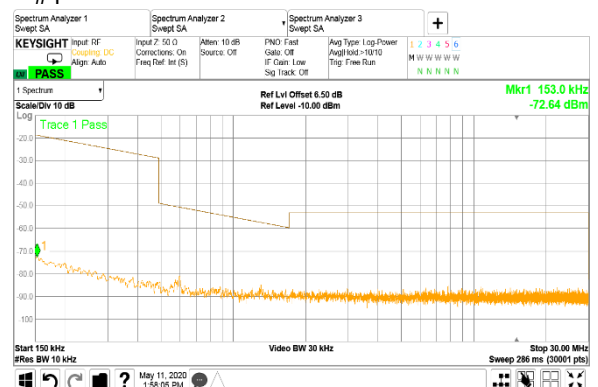
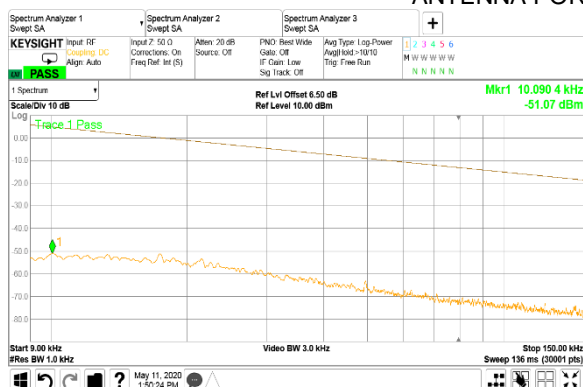






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.35 Spurious emission measurements in 9 kHz - 30 MHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #4

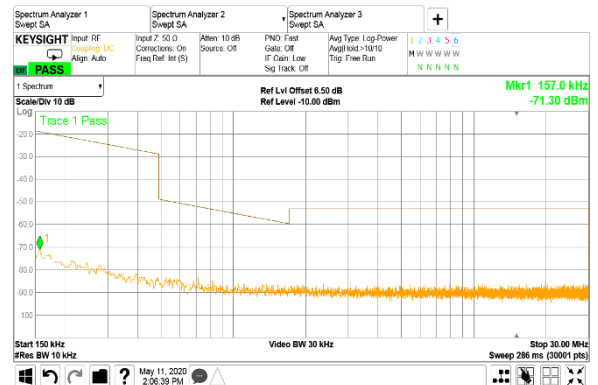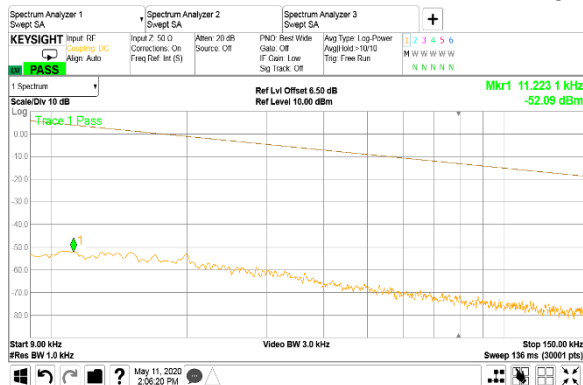

Plot 7.5.36 Spurious emission measurements in 9 kHz - 30 MHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #4

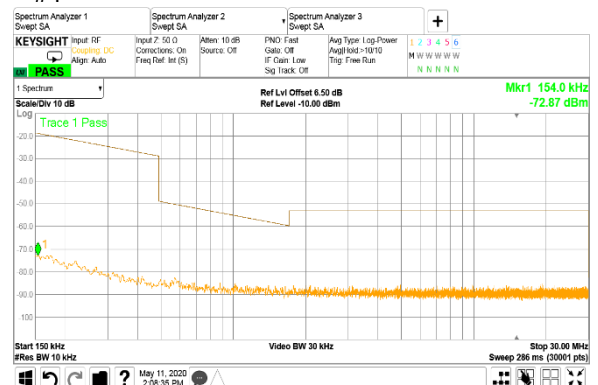
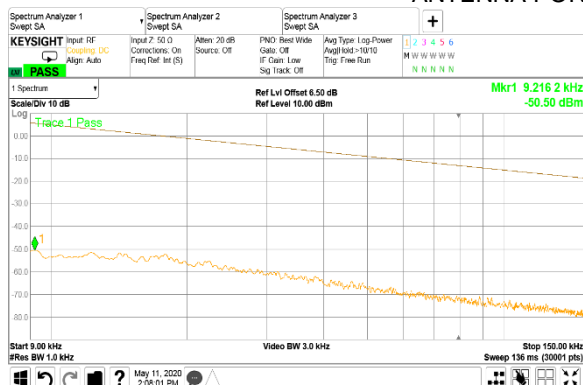






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.37 Spurious emission measurements in 9 kHz - 30 MHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #5

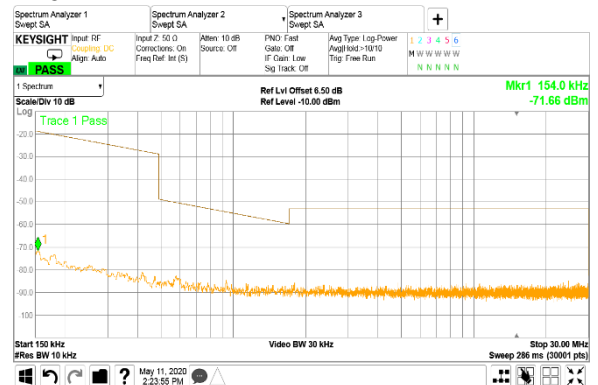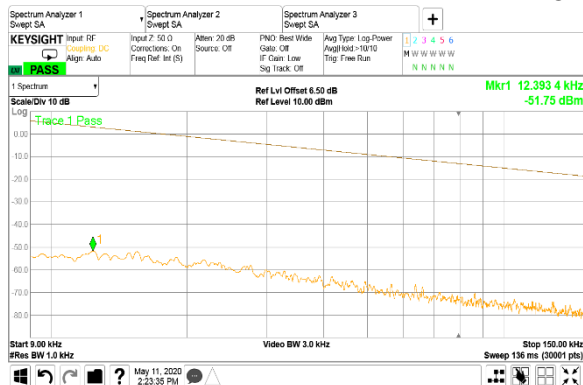

Plot 7.5.38 Spurious emission measurements in 9 kHz - 30 MHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #5

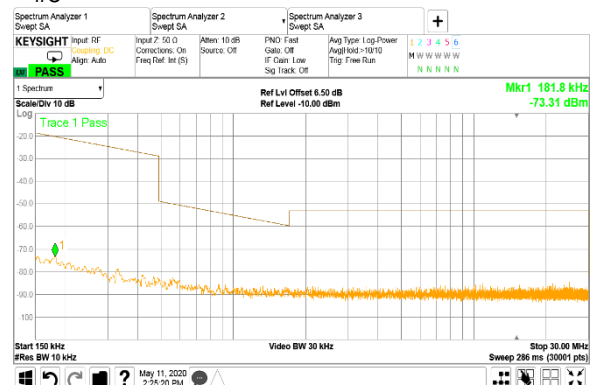
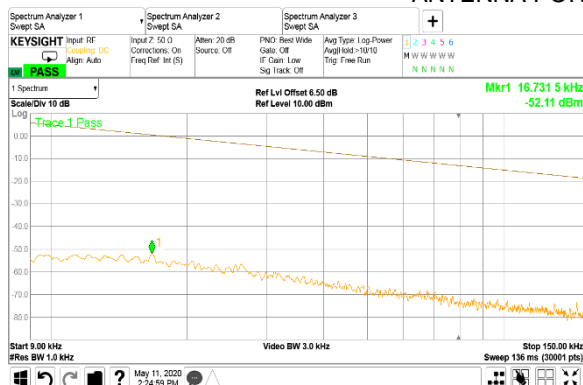






HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.39 Spurious emission measurements in 9 kHz - 30 MHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #5

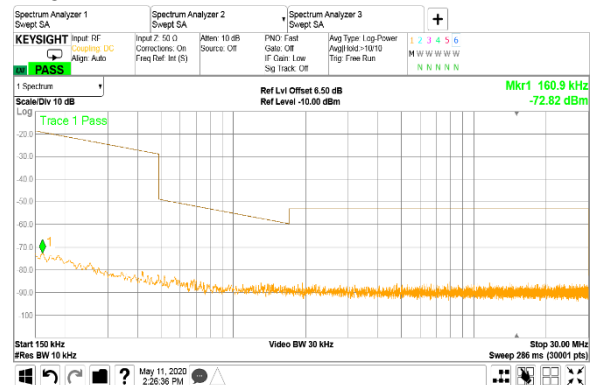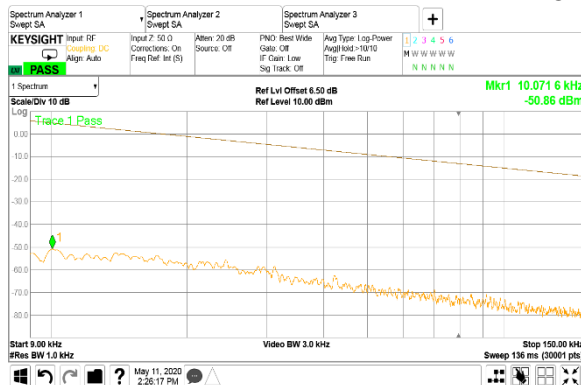

Plot 7.5.40 Spurious emission measurements in 9 kHz - 30 MHz range at low carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #6

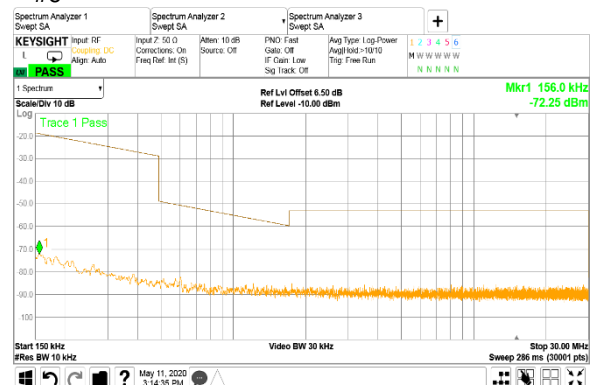
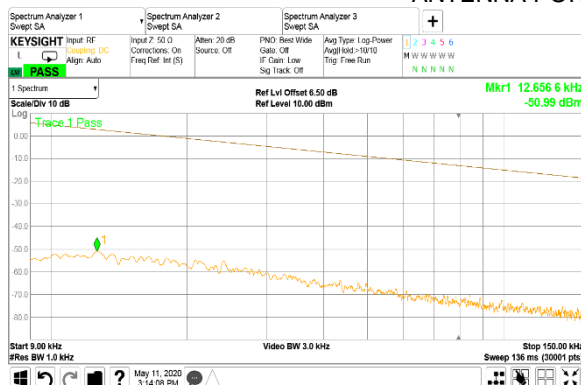




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Conducted spurious emissions			
Test procedure: ANSI C63.10 section 11.12.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 28-Jul-19			
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1004 hPa	Power: 48 VDC
Remarks:			

Plot 7.5.41 Spurious emission measurements in 9 kHz - 30 MHz range at mid carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #6

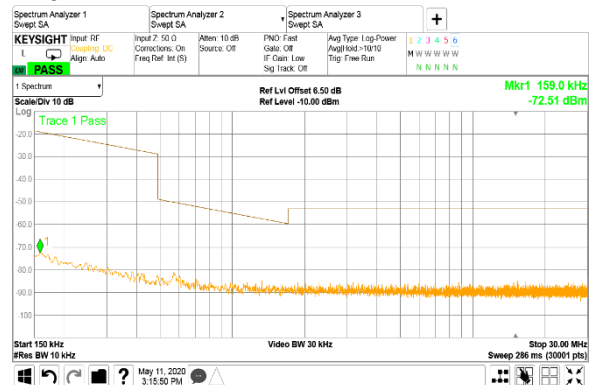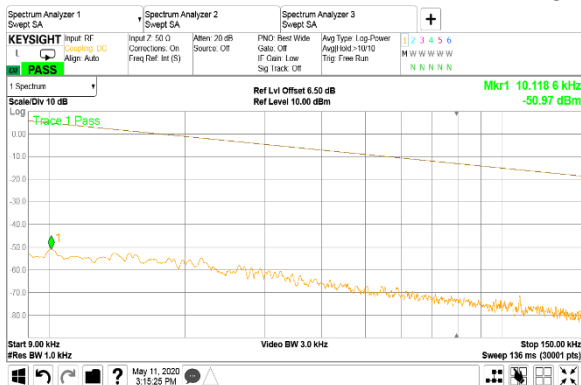

Plot 7.5.42 Spurious emission measurements in 9 kHz - 30 MHz range at high carrier frequency
CHANNEL BANDWIDTH: 10 MHz
CONFIGURATION: 3 Non-Overlapping Beams
ANTENNA PORT: #6

