



U-NII-3 Band


IEEE 802.11ac(VHT20) Low Channel

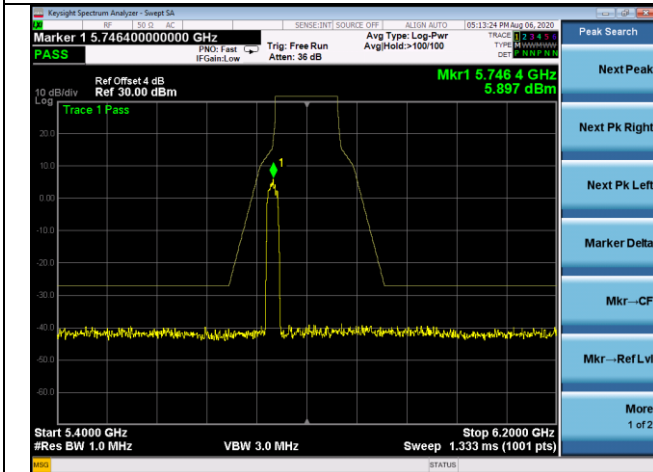


IEEE 802.11ac(VHT20) Middle Channel

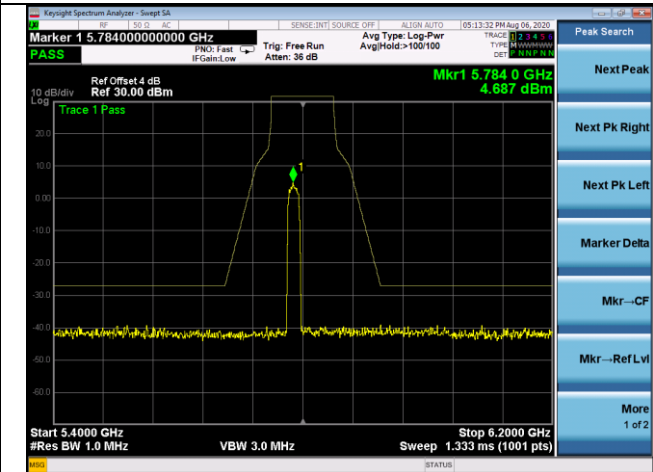


IEEE 802.11ac(VHT20) High Channel

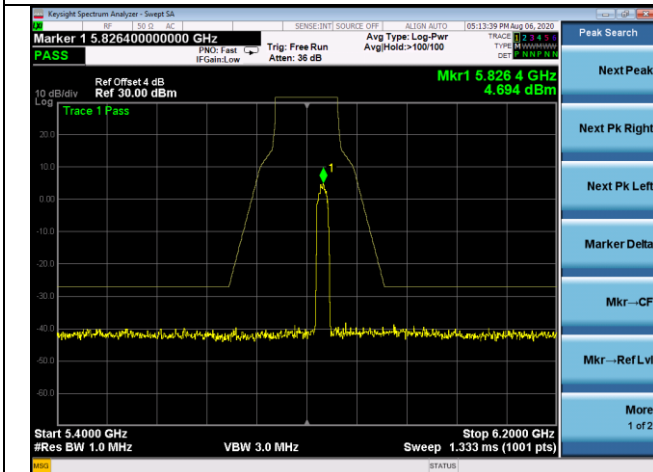


IEEE 802.11n(HT40) Low Channel

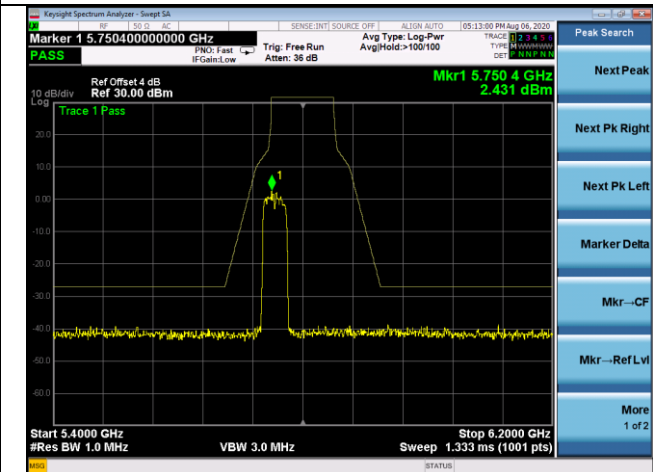

IEEE 802.11n(HT40) High Channel

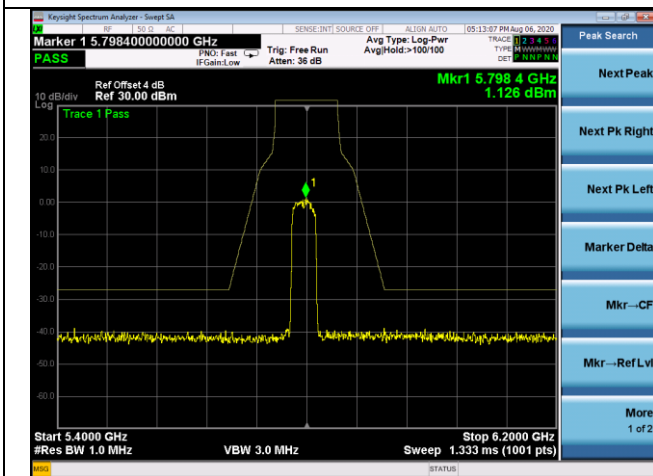


IEEE 802.11ac(VHT40) Low Channel

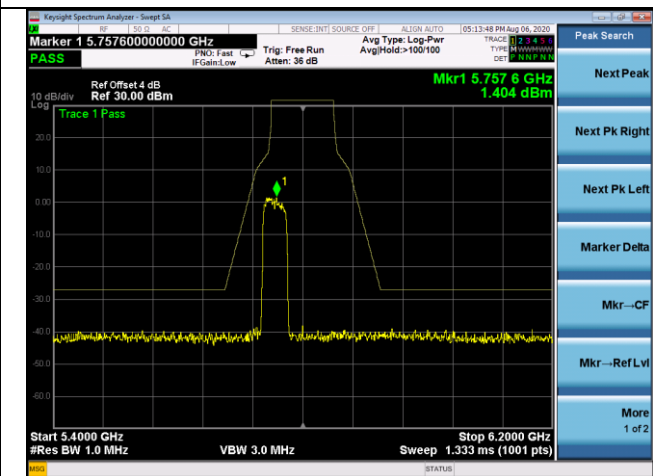


U-NII-3 Band

IEEE 802.11ac(VHT40) High Channel

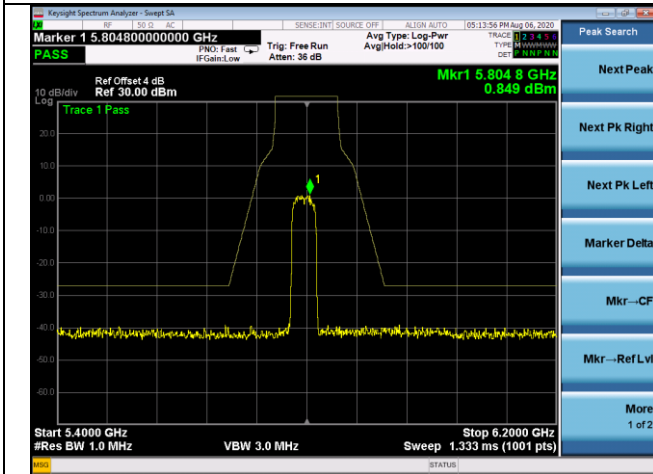

IEEE 802.11ac(VHT80)

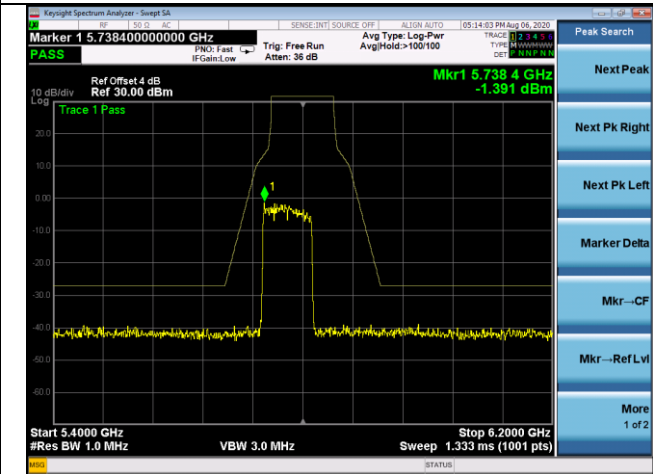

9. Dynamic Frequency Selection

9.1 List of Measurement and Examinations

EUT Operational mode:

DFS Operational mode	Operating Frequency Range	
	U-NII-2A	U-NII-2C
Slave without radar Interference detection function	√	√

Devices with radar detection

Maximum Transmit Power	Value (See Note 1 and 2)
≥200 mw	-64 dBm
EIRP < 200 mw and power spectral density < 10 dBm/MHz	-62 dBm
E IRP < 200 mw that do not meet the power spectral density requirement	-64 dBm

Note: 1. This is the level at the input of the receiver assuming a 0 dBi receive antenna.
 2. Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.
 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Applicability of DFS requirements prior to use of a channel

Requirement Radar	Operational Mode		
	Master	Client without Radar Detection	Client with Radar Detection
Non-Occupancy Period	√	Not required	Yes
DFS Detection Threshold	√	Not required	Yes
Channel Availability Check Time	√	Not required	Not Required
U-NII Detection Bandwidth	√	Not required	Yes

Note: Regarding KDB 905462 D03 Client Without DFS New Rules section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.

Applicability of DFS requirements during normal operation

Requirement Radar	Operational Mode		
	Master	Client without Radar Detection	Client with Radar Detection
DFS Detection Threshold	√	Not required	Yes
Channel Closing Transmission Time	√	Yes	Yes
Channel Move Time	√	Yes	Yes
U-NII Detection Bandwidth	√	Not required	Yes
<p>Note: Regarding KDB 905462 D03 Client Without DFS New Rules section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non- occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.</p>			
Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection	
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required	
Channel Move Time and Channel Closing Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest Test using the widest BW mode available for the link	
All other	Any single BW mode	Not required	
<p>Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.</p>			

DFS Radar Signal Parameter Values:

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (See Note 1)
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60ms over remaining 10 second period (See Notes 1 and 2)
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth (See Note 3.)

- Note:
1. Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
 2. The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
 3. During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

DFS Radar Signal Parameter:

Radar Type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time

Table 1: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A, Test B	Roundup $\left\{ \left(\frac{1}{\frac{360}{\text{PRI}_{\mu\text{sec}}}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					
Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a					
Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A.					
Remark1: A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.					
Remark2: If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.					
Remark3: The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.					

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30


In-Service Monitoring: Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

9.2 Limit of In-Service Monitoring


Reference to DFS Radar Signal Parameter Values.

9.3 Test Procedures

1. One frequency will be chosen from the Operating Channels of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.
2. In case the EUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will associate with the EUT (Master). For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
3. The TCP protocol unicast data stream was generated by the iperf software command line with at least 17% activity ratio over any 100ms period.
4. Timing plots are reported with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time).
5. At time T_0 the Radar Waveform generator sends a Burst of pulses for one of the Short Pulse Radar Types 1-4 at DFS Detection Threshold levels on the Operating Channel. An additional 1dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Measure and record the Channel Move Time and Channel Closing Transmission Time if radar detection occurs.
7. When operating as a Master Device, monitor the EUT for more than 30 minutes following instant T_2 to verify that the EUT does not resume any transmissions on this Channel. Perform this test once and record the measurement result.

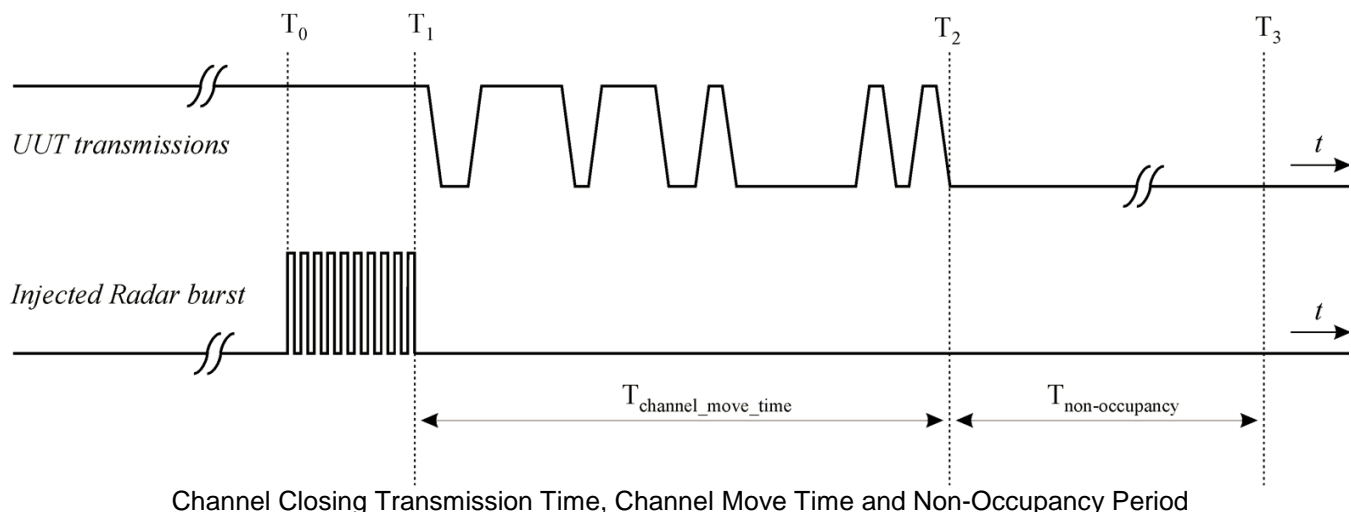

9.4 Test Set-Up

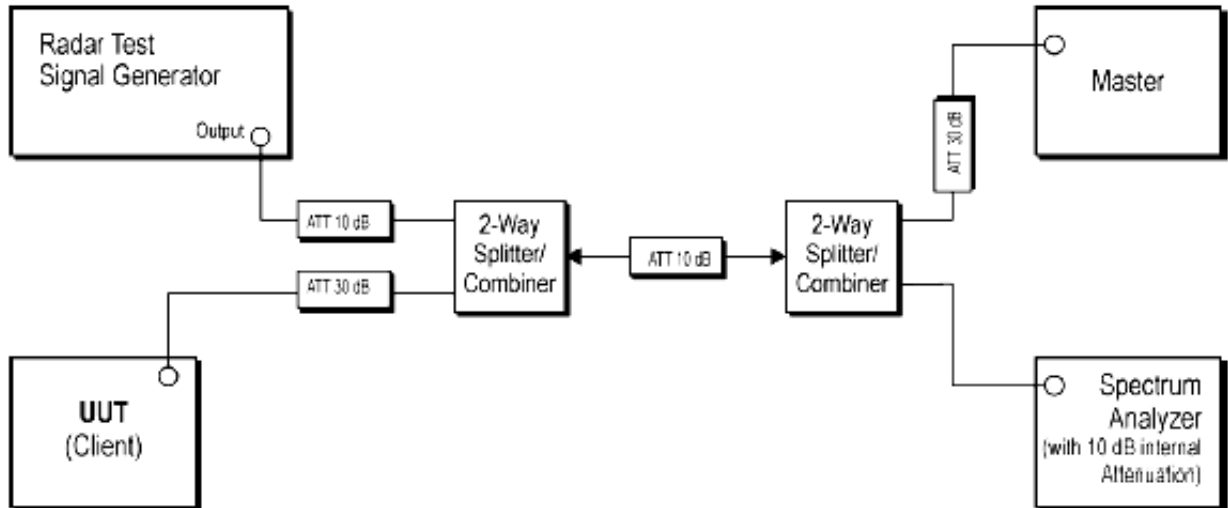

Setup for Client with injection at the Master


9.5 Measurement Results

Pass


Please refer to following plots of the worst case.

Channel	Test Item	Test Result	Limit	Pass/Fail
5260MHz	Channel Move Time	0.2 s	<10s	Pass
	Channel Closing Transmission Time	43.8 ms	<200+60ms	Pass
	Non-Occupancy Period	No transmission	30 minutes	Pass


Radars Waveform Calibration Plot - 5260MHz

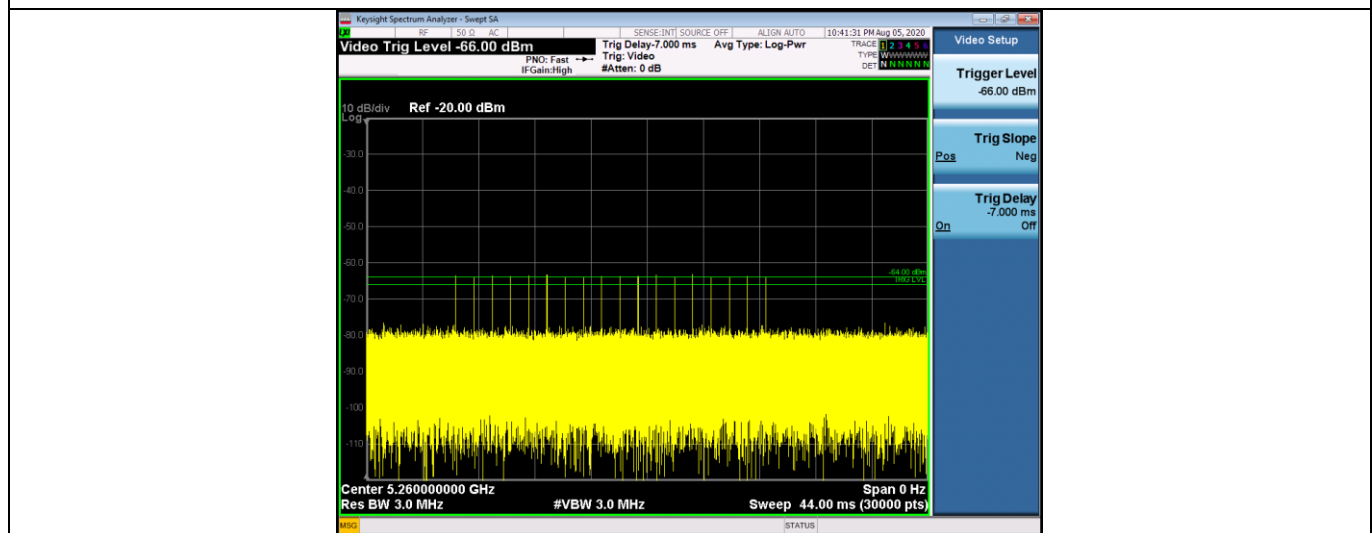

The Worst Case - 5260MHz Data Traffic Plot

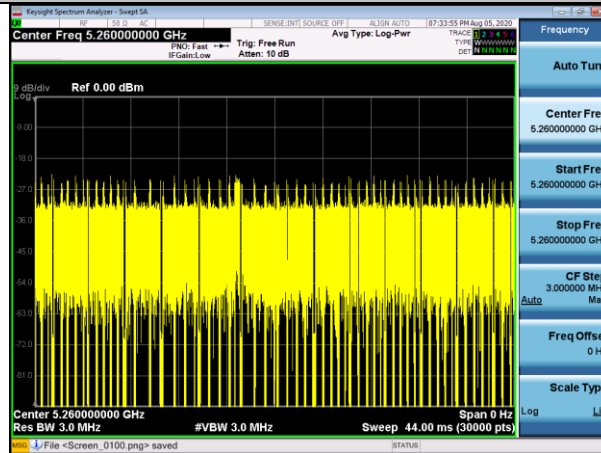

Channel Move Time & Channel Closing Transmission Time Plot

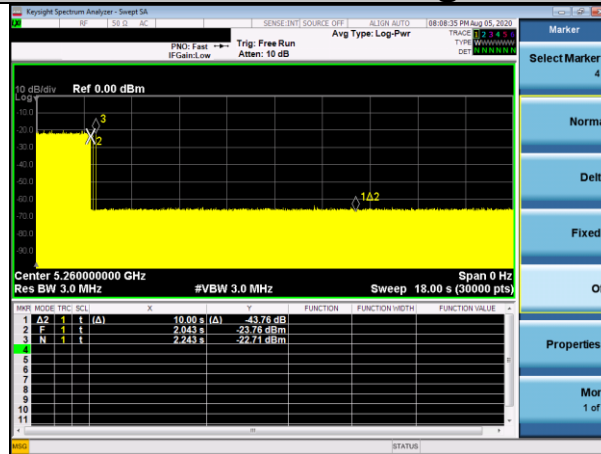

Note: 1) Mark1 Time: 2.043s, Mark2 Time: 12.043s, Overtime Points: 73
 2) Dwell = S/B = 18000ms/30000 = 0.6ms, C = N x Dwell = 73x 0.6 = 43.8ms
 3) CMT=2.243 s- 2.043s = 0.2s

Non-Occupancy Period Plot




10. Frequency Stability

10.1 Limits

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

10.2 Test SET-UP (Block Diagram of Configuration)

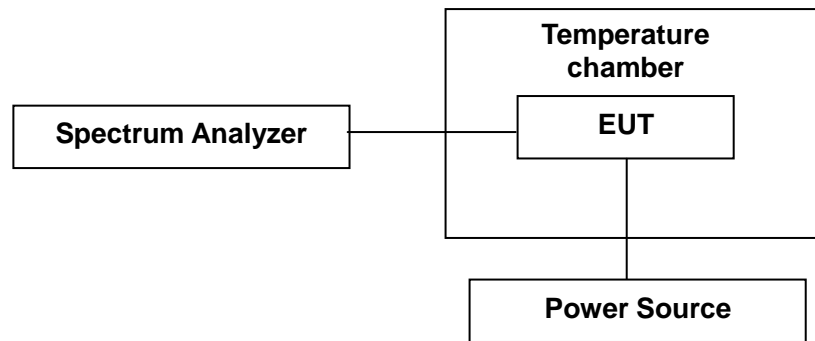

10.3 Test Procedure

1. The EUT was placed inside the environmental test chamber and powered by Power source.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Note: The EUT set at un-modulation mode during frequency stability test.

10.4 Measurement Results

Pass

Please refer to following tables.


Temperature :	0-40 °C	Humidity :	51 %			
Test By:	Sance	Test Date :	July 24, 2020			
U-NII-1 Band						
Lowest channel - 5180MHz						
Temperature (°C)	Power Supplied	Measured Frequency (MHz)				Test Result
		0 Minute	2 Minute	5 Minute	10 Minute	
0	AC 120V 60Hz	5180.0172	5180.0142	5180.0159	5180.0132	Pass
10		5180.0133	5180.0169	5180.0140	5180.0145	Pass
20		5180.0140	5180.0164	5180.0165	5180.0139	Pass
30		5180.0169	5180.0135	5180.0149	5180.0142	Pass
40		5180.0126	5180.0145	5180.0177	5180.0152	Pass
Highest channel - 5240MHz						
Temperature (°C)	Power Supplied	Measured Frequency (MHz)				Test Result
		0 Minute	2 Minute	5 Minute	10 Minute	
0	AC 120V 60Hz	5240.0121	5240.0227	5240.0170	5240.0135	Pass
10		5240.0154	5240.0132	5240.0135	5240.0144	Pass
20		5240.0137	5240.0149	5240.0151	5240.0136	Pass
30		5240.0175	5240.0127	5240.0156	5240.0159	Pass
40		5240.0139	5240.0135	5240.0135	5240.0141	Pass
U-NII-2A Band						
Lowest channel - 5260MHz						
Temperature (°C)	Power Supplied	Measured Frequency (MHz)				Test Result
		0 Minute	2 Minute	5 Minute	10 Minute	
0	AC 120V 60Hz	5260.0176	5260.0142	5260.0157	5260.0122	Pass
10		5260.0138	5260.0164	5260.0140	5260.0145	Pass
20		5260.0140	5260.0154	5260.0165	5260.0135	Pass
30		5260.0179	5260.0135	5250.0149	5260.0142	Pass
40		5260.0120	5260.0144	5260.0177	5260.0153	Pass
Highest channel - 5320MHz						
Temperature (°C)	Power Supplied	Measured Frequency (MHz)				Test Result
		0 Minute	2 Minute	5 Minute	10 Minute	
0	AC 120V 60Hz	5320.0128	5320.0223	5320.0179	5320.0135	Pass
10		5320.0154	5320.0134	5320.0135	5320.0144	Pass
20		5320.0135	5320.0147	5320.0154	5320.0136	Pass
30		5320.0176	5320.0120	5320.0150	5320.0159	Pass
40		5320.0133	5320.0134	5320.0137	5320.0141	Pass

Temperature :	0-40 °C	Humidity :	51 %			
Test By:	Sance	Test Date :	July 24, 2020			
U-NII-2C Band						
Lowest channel - 5500MHz						
Temperature (°C)	Power Supplied	Measured Frequency (MHz)				Test Result
		0 Minute	2 Minute	5 Minute	10 Minute	
0	AC 120V 60Hz	5500.0162	5500.0142	5500.0189	5500.0122	Pass
10		5500.0143	5500.0169	5500.0140	5500.0145	Pass
20		5500.0180	5500.0174	5500.0165	5500.0119	Pass
30		5500.0109	5500.0135	5500.0129	5500.0172	Pass
40		5500.0176	5500.0155	5500.0137	5500.0192	Pass
Highest channel - 5700MHz						
Temperature (°C)	Power Supplied	Measured Frequency (MHz)				Test Result
		0 Minute	2 Minute	5 Minute	10 Minute	
0	AC 120V 60Hz	5700.0111	5700.0282	5700.0107	5700.0121	Pass
10		5700.0176	5700.0123	5700.0153	5700.0144	Pass
20		5700.0125	5700.0194	5700.0155	5700.0166	Pass
30		5700.0126	5700.0172	5700.0165	5700.0195	Pass
40		5700.0193	5700.0156	5700.0153	5700.0114	Pass
U-NII-3 Band						
Lowest channel - 5745MHz						
Temperature (°C)	Power Supplied	Measured Frequency (MHz)				Test Result
		0 Minute	2 Minute	5 Minute	10 Minute	
0	AC 120V 60Hz	5745.0144	5745.0132	5745.0164	5745.0134	Pass
10		5745.0132	5745.0147	5745.0138	5745.0148	Pass
20		5745.0129	5745.0148	5745.0174	5745.0159	Pass
30		5745.0125	5745.0132	5745.0135	5745.0134	Pass
40		5745.0141	5745.0125	5745.0153	5745.0181	Pass
Highest channel - 5825MHz						
Temperature (°C)	Power Supplied	Measured Frequency (MHz)				Test Result
		0 Minute	2 Minute	5 Minute	10 Minute	
0	AC 120V 60Hz	5825.0139	5825.0141	5825.0139	5825.0175	Pass
10		5825.0155	5825.0165	5825.0177	5825.0123	Pass
20		5825.0133	5825.0160	5825.0134	5825.0139	Pass
30		5825.0145	5825.0138	5825.0142	5825.0176	Pass
40		5825.0159	5825.0143	5825.0154	5825.0175	Pass


11. Radiated Spurious Emissions and Restricted Bands

11.1 Test SET-UP (Block Diagram of Configuration)

11.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

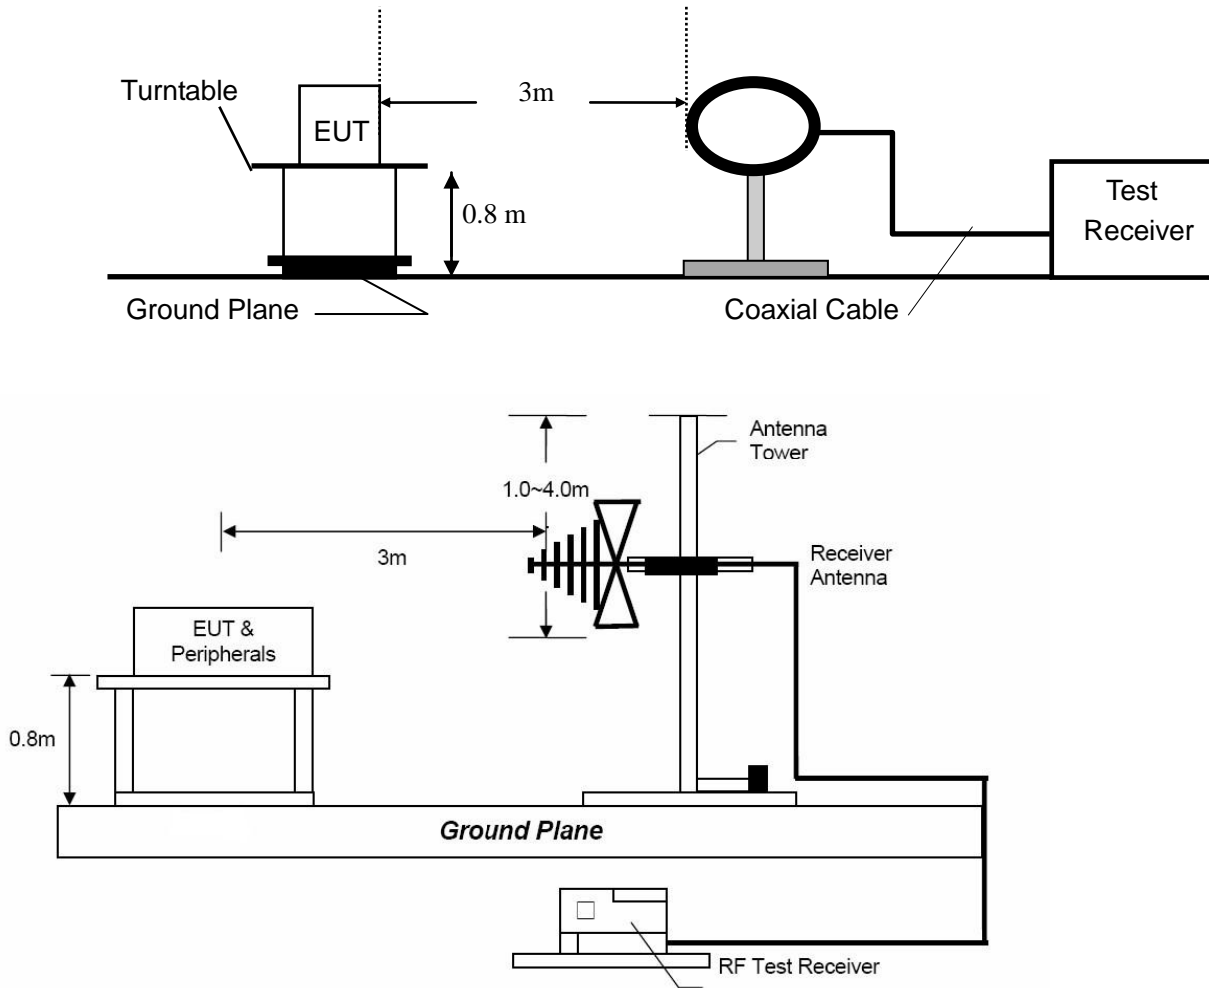

11.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

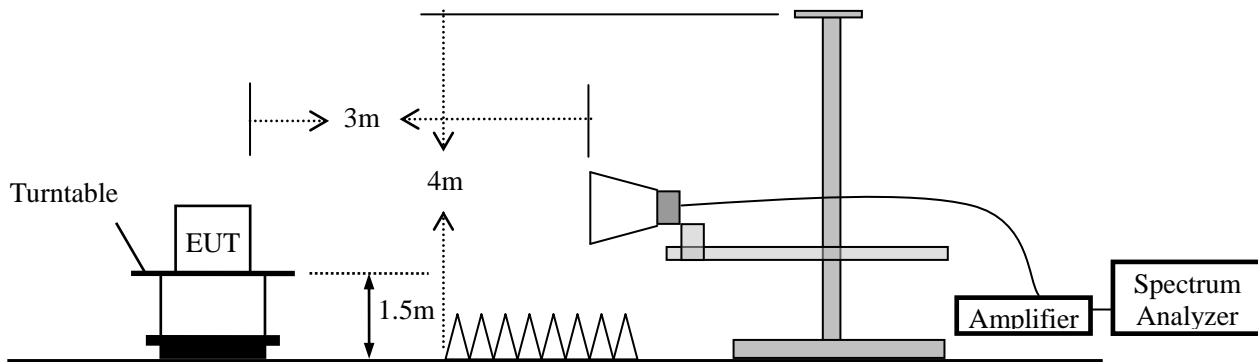

11.2 Measurement Procedure

- a. Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	1/T

11.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V}/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark: (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V}/\text{m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
 (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

11.4 Measurement Results

For U-NII-1 Band

Please refer to following plots of the worst case: 802.11n(HT20) low channel.

For U-NII-2A Band

Please refer to following plots of the worst case: 802.11n(HT20) low channel.

For U-NII-2C Band

Please refer to following plots of the worst case: 802.11ac(VHT40) low channel.

For U-NII-3 Band


Please refer to following plots of the worst case: 802.11n(HT40) High channel.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :SKI.WB7638U.1_MT7668BU Data :#37 Date: 2020/7/28 Time: 19:47:50

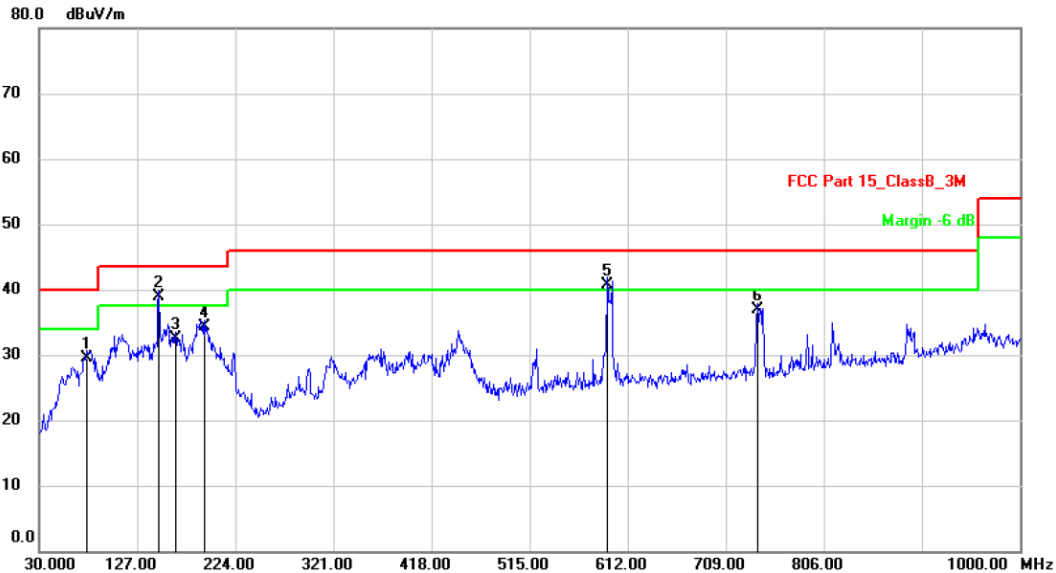

Site: 3m Chamber Polarization: **Horizontal** Temperature: 26
 Limit: FCC Part 15_ClassB_3M Power: AC120V/60Hz Humidity: 47 %
 EUT: WIFI Bluetooth module Distance: 3m
 M/N: SKI.WB7638U.1_MT7668BU
 Mode: TX(5.1G WLAN)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		77.5300	41.67	-12.07	29.60	40.00	-10.40	QP
2	*	148.3400	49.81	-10.91	38.90	43.50	-4.60	QP
3		164.8300	42.73	-10.23	32.50	43.50	-11.00	QP
4		192.9600	42.35	-8.05	34.30	43.50	-9.20	QP
5	!	591.6300	40.35	0.45	40.80	46.00	-5.20	QP
6		740.0400	34.03	2.87	36.90	46.00	-9.10	QP


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :SKI.WB7638U.1_MT7668BU Data :#38 Date: 2020/7/28 Time: 19:54:38

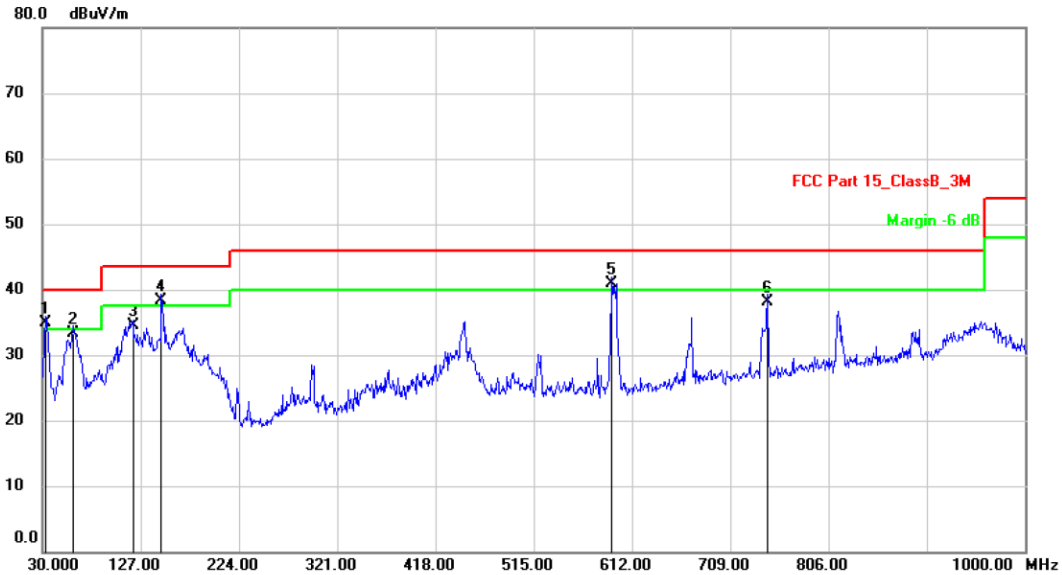

Site: 3m Chamber Polarization: **Vertical** Temperature: 26
 Limit: FCC Part 15_ClassB_3M Power: AC120V/60Hz Humidity: 47 %
 EUT: WIFI Bluetooth module Distance: 3m
 M/N: SKI.WB7638U.1_MT7668BU
 Mode: TX(5.1G WLAN)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	32.9100	44.39	-9.49	34.90	40.00	-5.10	QP
2		60.0700	40.99	-7.59	33.40	40.00	-6.60	QP
3		119.2400	45.55	-11.05	34.50	43.50	-9.00	QP
4	!	147.3700	50.05	-11.75	38.30	43.50	-5.20	QP
5	!	591.6300	41.41	-0.51	40.90	46.00	-5.10	QP
6		745.8600	35.23	2.97	38.20	46.00	-7.80	QP


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :SKI.WB7638U.1_MT7668BU Data :#42 Date: 2020/7/28 Time: 20:21:29

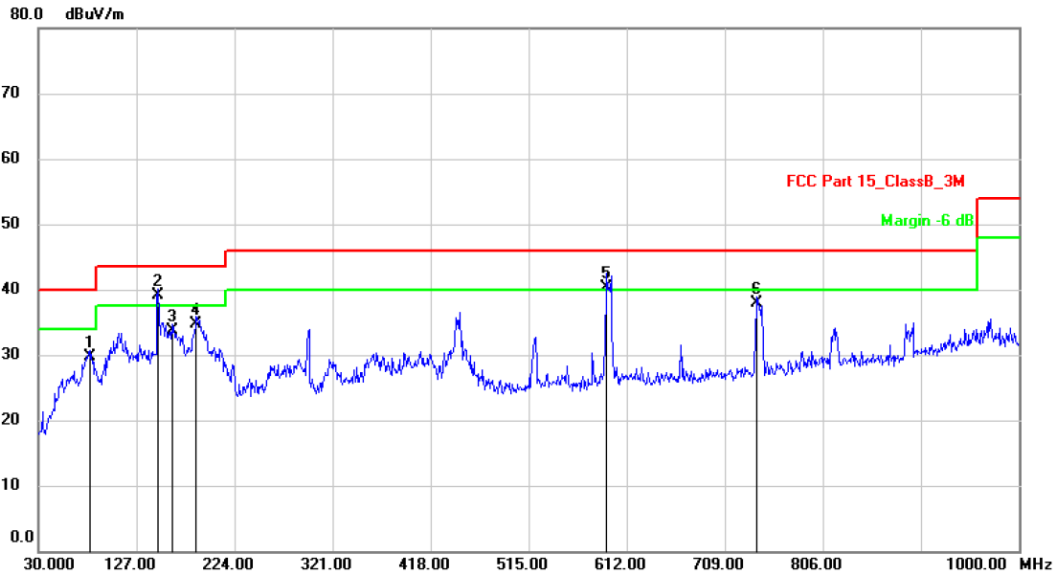

Site: 3m Chamber Polarization: *Horizontal* Temperature: 26
 Limit: FCC Part 15_ClassB_3M Power: AC120V/60Hz Humidity: 47 %
 EUT: WIFI Bluetooth module Distance: 3m
 M/N: SKI.WB7638U.1_MT7668BU
 Mode: TX(5.2G WLAN)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		81.4100	41.18	-11.48	29.70	40.00	-10.30	QP
2	*	148.3400	50.11	-10.91	39.20	43.50	-4.30	QP
3		161.9200	44.05	-10.35	33.70	43.50	-9.80	QP
4		186.1700	43.43	-8.63	34.80	43.50	-8.70	QP
5	!	591.6300	39.95	0.45	40.40	46.00	-5.60	QP
6		741.0100	35.02	2.88	37.90	46.00	-8.10	QP


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :SKI.WB7638U.1_MT7668BU Data :#41 Date: 2020/7/28 Time: 20:14:39
 80.0 dBuV/m

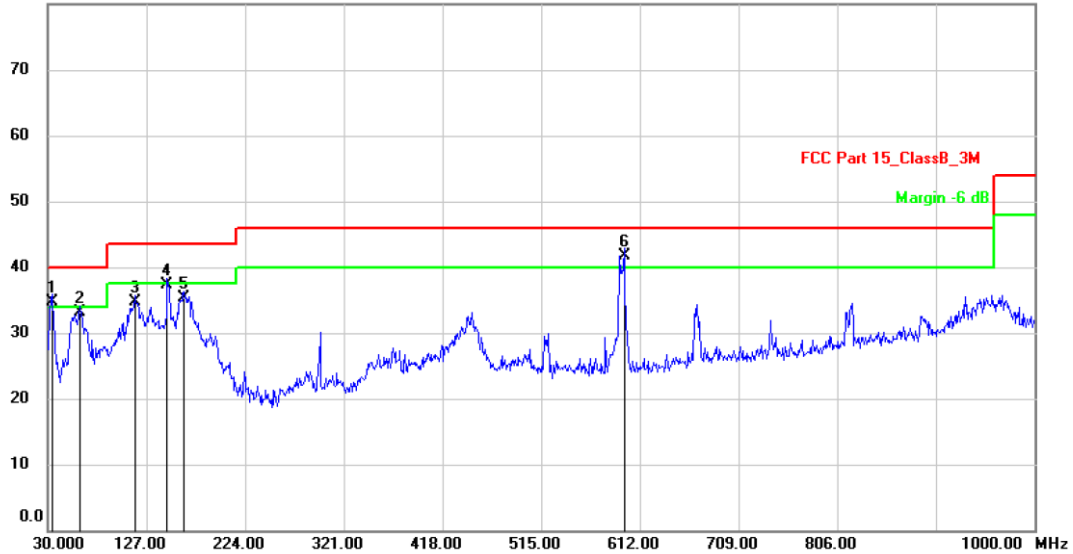

Site: 3m Chamber

Polarization: *Vertical*

Temperature: 26

Limit: FCC Part 15_ClassB_3M

Power: AC120V/60Hz

Humidity: 47 %

EUT: WIFI Bluetooth module

Distance: 3m

M/N: SKI.WB7638U.1_MT7668BU

Mode: TX(5.2G WLAN)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	33.8800	44.20	-9.40	34.80	40.00	-5.20	QP
2		61.0400	41.16	-7.96	33.20	40.00	-6.80	QP
3		115.3600	45.55	-10.85	34.70	43.50	-8.80	QP
4		147.3700	49.15	-11.75	37.40	43.50	-6.10	QP
5		163.8600	46.04	-10.64	35.40	43.50	-8.10	QP
6	*	596.4800	42.20	-0.40	41.80	46.00	-4.20	QP


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :SKI.WB7638U.1_MT7668BU Data :#43 Date: 2020/7/28 Time: 20:27:33

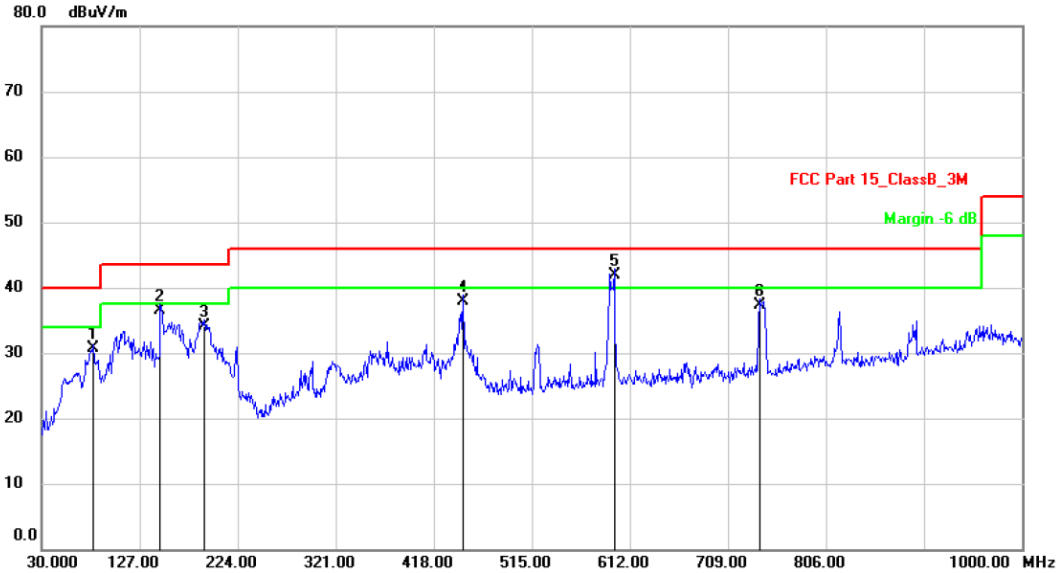

Site: 3m Chamber Polarization: *Horizontal* Temperature: 26
 Limit: FCC Part 15_ClassB_3M Power: AC120V/60Hz Humidity: 47 %
 EUT: WIFI Bluetooth module Distance: 3m
 M/N: SKI.WB7638U.1_MT7668BU
 Mode: TX(5.3G WLAN)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		81.4100	42.18	-11.48	30.70	40.00	-9.30	QP
2		147.3700	47.42	-10.92	36.50	43.50	-7.00	QP
3		191.0200	42.40	-8.20	34.20	43.50	-9.30	QP
4		447.1000	40.49	-2.59	37.90	46.00	-8.10	QP
5	*	596.4800	41.32	0.58	41.90	46.00	-4.10	QP
6		740.0400	34.53	2.87	37.40	46.00	-8.60	QP


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :SKI.WB7638U.1_MT7668BU Data :#116 Date: 2020/7/28 Time: 20:35:17

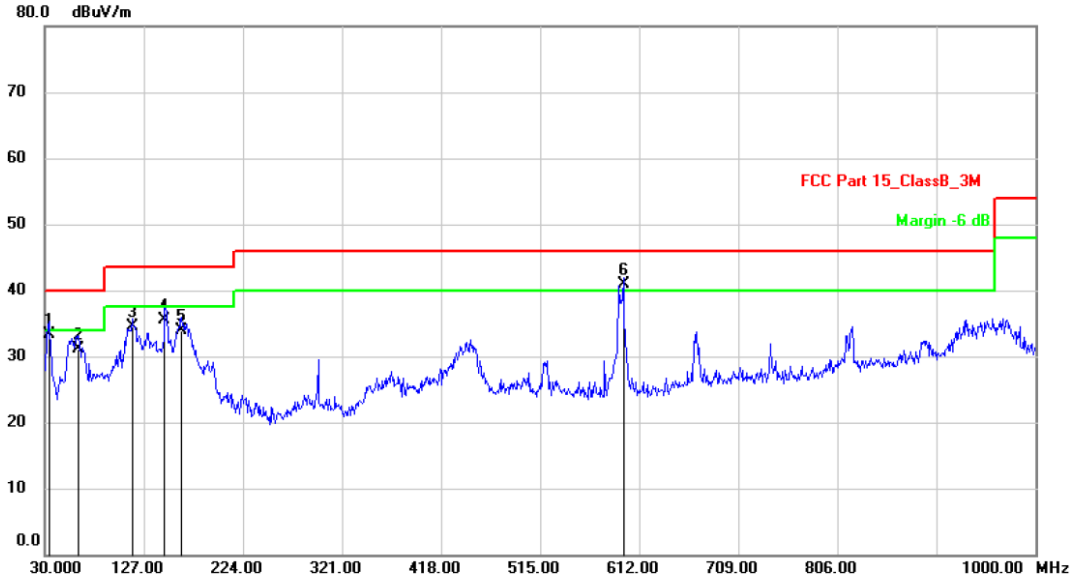

Site: 3m Chamber Polarization: *Vertical* Temperature: 26
 Limit: FCC Part 15_ClassB_3M Power: AC120V/60Hz Humidity: 47 %
 EUT: WIFI Bluetooth module Distance: 3m
 M/N: SKI.WB7638U.1_MT7668BU
 Mode: TX(5.3G WLAN)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		33.8800	42.80	-9.40	33.40	40.00	-6.60	QP
2		62.9800	39.88	-8.68	31.20	40.00	-8.80	QP
3		115.3600	45.45	-10.85	34.60	43.50	-8.90	QP
4		147.3700	47.35	-11.75	35.60	43.50	-7.90	QP
5		163.8600	44.54	-10.64	33.90	43.50	-9.60	QP
6	*	596.4800	41.40	-0.40	41.00	46.00	-5.00	QP


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :SKI.WB7638U.1_MT7668BU Data :#39 Date: 2020/7/28 Time: 20:01:43

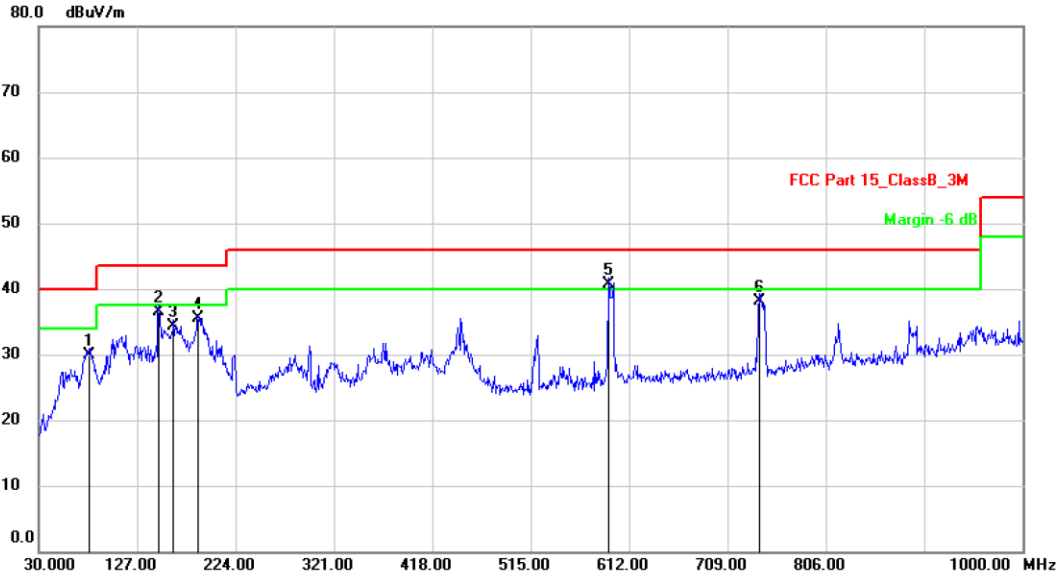

Site: 3m Chamber Polarization: *Horizontal* Temperature: 26
 Limit: FCC Part 15_ClassB_3M Power: AC120V/60Hz Humidity: 47 %
 EUT: WIFI Bluetooth module Distance: 3m
 M/N: SKI.WB7638U.1_MT7668BU
 Mode: TX(5.8G WLAN)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		79.4700	41.73	-11.83	29.90	40.00	-10.10	QP
2		148.3400	47.51	-10.91	36.60	43.50	-6.90	QP
3		162.8900	44.72	-10.32	34.40	43.50	-9.10	QP
4		187.1400	44.13	-8.53	35.60	43.50	-7.90	QP
5	*	591.6300	40.25	0.45	40.70	46.00	-5.30	QP
6		740.0400	35.33	2.87	38.20	46.00	-7.80	QP


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
 Tel: +86-769-22022444 Fax: +86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File : SKI.WB7638U.1_MT7668BU Data : #40 Date : 2020/7/28 Time : 20:07:35

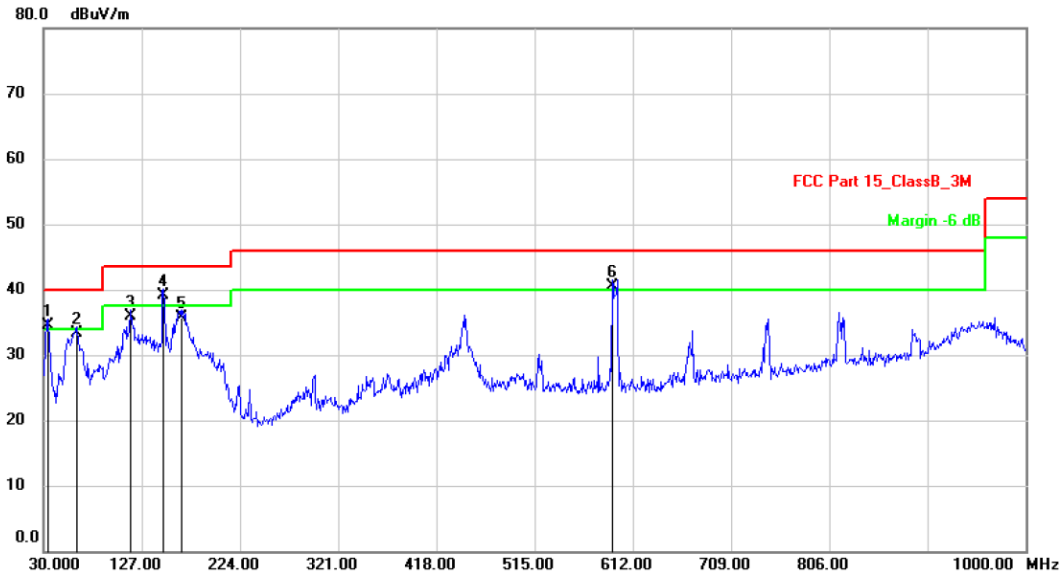

Site: 3m Chamber Polarization: **Vertical** Temperature: 26
 Limit: FCC Part 15_ClassB_3M Power: AC120V/60Hz Humidity: 47 %
 EUT: WIFI Bluetooth module Distance: 3m
 M/N: SKI.WB7638U.1_MT7668BU
 Mode: TX(5.8G WLAN)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	!	33.8800	43.90	-9.40	34.50	40.00	-5.50	QP
2		62.9800	42.08	-8.68	33.40	40.00	-6.60	QP
3		115.3600	46.75	-10.85	35.90	43.50	-7.60	QP
4	*	148.3400	50.91	-11.81	39.10	43.50	-4.40	QP
5		166.7700	46.25	-10.45	35.80	43.50	-7.70	QP
6	!	591.6300	41.01	-0.51	40.50	46.00	-5.50	QP

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit..

Temperature : 26 °C				Humidity : 47 %				Test Date: July 29, 2020			
Measured Distance: 3m				Test By: Sance				Test Result: PASS			
Frequency Range: 1-40GHz				Modulation: IEEE 802.11a (The Worst Case)				U-NII-1 Band			
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)		
		PK	AV		PK	AV	PK	AV	PK	AV	
Operation Mode: TX Mode (Low Channel)											
10360	V	45.78	31.43	14.04	59.82	45.47	74.00	54.00	-14.18	-8.53	
15540	V	48.50	30.53	19.00	67.50	49.53	74.00	54.00	-6.50	-4.47	

10360	H	46.70	31.44	14.04	60.74	45.48	74.00	54.00	-13.26	-8.52	
15540	H	46.27	29.00	21.12	67.39	50.12	74.00	54.00	-6.61	-3.88	

Operation Mode: TX Mode (Middle Channel)											
10400	V	45.10	31.31	14.12	59.22	45.43	74.00	54.00	-14.78	-8.57	
15600	V	48.27	31.13	19.06	67.33	50.19	74.00	54.00	-6.67	-3.81	

10400	H	46.03	31.31	14.12	60.15	45.43	74.00	54.00	-13.85	-8.57	
15600	H	45.72	28.75	20.82	66.54	49.57	74.00	54.00	-7.46	-4.43	

Operation Mode: TX Mode (High Channel)											
10480	V	45.28	30.97	14.29	59.57	45.26	74.00	54.00	-14.43	-8.74	
15720	V	47.26	31.01	19.16	66.42	50.17	74.00	54.00	-7.58	-3.83	

10480	H	45.02	31.02	14.29	59.31	45.31	74.00	54.00	-14.69	-8.69	
15720	H	45.74	29.92	20.20	65.94	50.12	74.00	54.00	-8.06	-3.88	

Remark: (1) All Readings are Peak Value and AV. (2) Emission Level= Reading Level + Factor (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.											

Temperature : 26 °C				Humidity : 47 %				Test Date: July 29, 2020			
Measured Distance: 3m				Test By: Sance				Test Result: PASS			
Frequency Range: 1-40GHz				Modulation: IEEE 802.11a (The Worst Case)				U-NII-2A Band			
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)		
		PK	AV		PK	AV	PK	AV	PK	AV	
Operation Mode: TX Mode (Low Channel)											
10520	V	45.42	30.85	14.37	59.79	45.22	74.00	54.00	-14.21	-8.78	
15780	V	45.59	30.15	19.23	64.82	49.38	74.00	54.00	-9.18	-4.62	

10520	H	44.78	30.94	14.37	59.15	45.31	74.00	54.00	-14.85	-8.69	
15780	H	44.81	29.52	19.91	64.72	49.43	74.00	54.00	-9.28	-4.57	

Operation Mode: TX Mode (Middle Channel)											
10600	V	45.27	30.27	14.48	59.75	44.75	74.00	54.00	-14.25	-9.25	
15900	V	45.97	31.37	19.33	65.30	50.70	74.00	54.00	-8.70	-3.30	

10600	H	44.41	30.27	14.48	58.89	44.75	74.00	54.00	-15.11	-9.25	
15600	H	45.24	30.53	19.29	64.53	49.82	74.00	54.00	-9.47	-4.18	

Operation Mode: TX Mode (High Channel)											
10640	V	44.65	30.46	14.53	59.18	44.99	74.00	54.00	-14.82	-9.01	
15960	V	53.76	30.48	19.39	73.15	49.87	74.00	54.00	-0.85	-4.13	

10640	H	44.30	29.99	14.53	58.83	44.52	74.00	54.00	-15.17	-9.48	
15960	H	54.16	31.33	18.99	73.15	50.32	74.00	54.00	-0.85	-3.68	

Remark: (1) All Readings are Peak Value and AV. (2) Emission Level= Reading Level + Factor (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.											

Temperature : 26 °C				Humidity : 47 %				Test Date: July 29, 2020			
Measured Distance: 3m				Test By: Sance				Test Result: PASS			
Frequency Range: 1-40GHz				Modulation: IEEE 802.11a (The Worst Case)				U-NII-2C Band			
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)		
		PK	AV		PK	AV	PK	AV	PK	AV	
Operation Mode: TX Mode (Low Channel)											
11000	V	44.29	30.29	15.03	59.32	45.32	74.00	54.00	-14.68	-8.68	
16500	V	46.68	30.67	19.09	65.77	49.76	74.00	54.00	-8.23	-4.24	

11000	H	44.80	30.20	15.03	59.83	45.23	74.00	54.00	-14.17	-8.77	
16500	H	47.07	30.55	19.64	66.71	50.19	74.00	54.00	-7.29	-3.81	

Operation Mode: TX Mode (Middle Channel)											
11200	V	42.54	28.42	15.77	58.31	44.19	74.00	54.00	-15.69	-9.81	
16800	V	45.59	29.72	20.51	66.10	50.23	74.00	54.00	-7.90	-3.77	

11200	H	40.83	28.48	15.77	56.60	44.25	74.00	54.00	-17.40	-9.75	
16800	H	45.81	29.53	20.73	66.54	50.26	74.00	54.00	-7.46	-3.74	

Operation Mode: TX Mode (High Channel)											
11400	V	43.16	28.59	16.52	59.68	45.11	74.00	54.00	-14.32	-8.89	
17100	V	46.46	28.34	21.78	68.24	50.12	74.00	54.00	-5.76	-3.88	

11400	H	43.26	28.76	16.52	59.78	45.28	74.00	54.00	-14.22	-8.72	
17100	H	46.63	27.91	21.78	68.41	49.69	74.00	54.00	-5.59	-4.31	

Remark: (1) All Readings are Peak Value and AV. (2) Emission Level= Reading Level + Factor (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.											

Temperature : 26 °C				Humidity : 47 %				Test Date: July 29, 2020			
Measured Distance: 3m				Test By: Sance				Test Result: PASS			
Frequency Range: 1-40GHz				Modulation: IEEE 802.11a (The Worst Case)				U-NII-3 Band			
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)		
		PK	AV		PK	AV	PK	AV	PK	AV	
Operation Mode: TX Mode (Low Channel)											
11490	V	42.84	28.78	16.86	59.70	45.64	74.00	54.00	-14.30	-8.36	
17235	V	45.52	28.11	22.23	67.75	50.34	74.00	54.00	-6.25	-3.66	

11490	H	42.96	28.77	16.86	59.82	45.63	74.00	54.00	-14.18	-8.37	
17235	H	45.87	28.09	22.23	68.10	50.32	74.00	54.00	-5.90	-3.68	

Operation Mode: TX Mode (Middle Channel)											
11570	V	42.04	28.07	17.01	59.05	45.08	74.00	54.00	-14.95	-8.92	
17355	V	45.15	27.33	22.62	67.77	49.95	74.00	54.00	-6.23	-4.05	

11570	H	42.84	28.10	17.01	59.85	45.11	74.00	54.00	-14.15	-8.89	
17355	H	45.71	27.49	22.62	68.33	50.11	74.00	54.00	-5.67	-3.89	

Operation Mode: TX Mode (High Channel)											
11650	V	42.05	28.05	17.16	59.21	45.21	74.00	54.00	-14.79	-8.79	
17475	V	46.81	27.32	23.01	69.82	50.33	74.00	54.00	-4.18	-3.67	

11650	H	42.20	27.68	17.16	59.36	44.84	74.00	54.00	-14.64	-9.16	
17475	H	46.60	27.21	23.01	69.61	50.22	74.00	54.00	-4.39	-3.78	

Remark: (1) All Readings are Peak Value and AV. (2) Emission Level= Reading Level + Factor (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.											

12. Antenna Application

12.1 Antenna requirement

According to of FCC part 15C section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section 15.203 of the rules.

And according to 47 CFR section 15.407(a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Measurement Results

The antenna is FPC antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 2.3dBi, Therefore the antenna is consider meet the requirement.

13. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 13, 2020	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2020	1 Year
3.	Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Mar. 13, 2020	1 Year
4.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 13, 2020	1 Year
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	101094	Mar. 13, 2020	1 Year
6.	Horn Antenna	Schwarzbeck	BBHA9170	9170-172	Mar. 22, 2019	2 Year
7.	Power Sensor	DARE	RPR3006W	15I00041SN O64	Mar. 13, 2020	1 Year
8.	Power Sensor	DARE	RPR3006W	15I00041SN O88	Mar. 13, 2020	1 Year
9.	Communication Tester	Rohde & Schwarz	CMW500	149004	Mar. 13, 2020	1 Year
10.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2020	1 Year
11.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 13, 2020	1 Year
12.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 13, 2020	1 Year
13.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2020	1 Year
14.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 14, 2020	1 Year
15.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 13, 2020	1 Year
16.	L.I.S.N	Rohde & Schwarz	ESH2-Z5	893606/014	Mar. 13, 2020	1 Year
17.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar.13, 2020	1 Year
18.	Temperature & Humidity Chamber	REMAFEE	SYHR225L	N/A	Mar. 13, 2020	1 Year
19.	DC Source	Maynuo	MY8811	N/A	Mar. 13, 2020	1 Year
20.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
21.	Chamber	SAEMC	9*7*7m	N/A	Jun. 20, 2019	2 Year
22.	Test Software	EZ	EZ_EMG	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---