

TEST REPORT

Report Number: 104395865MPK-001
Project Number: G104395865
August 23, 2020

Testing performed on
Beta Mask
Model: BETA MK 4

FCC ID: 2AWYY-BETA

to

FCC Part 15 Subpart C (15.247)
Industry Canada RSS-247 Issue 2

For

Sana Health, Inc

Test Performed by:

Intertek
1365 Adams Court
Menlo Park, CA 94025 USA

Test Authorized by:

Sana Health, Inc
130 Miners Drive, Suite 101
Lafayette, CO 80026 USA

Prepared by:



Minh Ly

Date: August 23, 2020

Reviewed by:



Krishna K Vemuri

Date: August 23, 2020

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

Report No. 104395865MPK-001

Equipment Under Test:	Beta Mask
Trade Name:	Sana Health, Inc
Model Number:	BETA MK 4
Applicant:	Sana Health, Inc
Contact:	Sam Pai
Address:	130 Miners Drive, Suite 101 Lafayette, CO 80026
Country:	USA
Tel. Number:	(303)862-1474
Email:	Sam@sana.io
Applicable Regulation:	FCC Part 15 Subpart C (15.247) Industry Canada RSS-247 Issue 2
Date of Test:	July 27 – August 19, 2020

We attest to the accuracy of this report:



Minh Ly
Project Engineer



Krishna K Vemuri
EMC Manager

TABLE OF CONTENTS

1.0	Summary of Tests	5
2.0	General Information.....	6
2.1	Product Description	6
2.2	Related Submittal(s) Grants	7
2.3	Test Facility	7
2.4	Test Methodology	7
2.5	Measurement Uncertainty.....	7
3.0	System Test Configuration.....	8
3.1	Support Equipment	8
3.2	Block Diagram of Test Setup.....	8
3.3	Justification.....	10
3.4	Software Exercise Program.....	10
3.5	Mode of Operation during Test.....	10
3.5	Modifications Required for Compliance	10
3.6	Additions, Deviations and Exclusions from Standards.....	10
3.7	Additions, Deviations and Exclusions from Standards.....	10
4.0	Measurement Results.....	11
4.1	6-dB Bandwidth and 99% Occupied Bandwidth	11
4.1.1	Requirement.....	11
4.1.2	Procedure	11
4.1.3	Test Result	11
4.2	Maximum Peak Conducted Output Power at Antenna Terminals.....	15
4.2.1	Requirement.....	15
4.2.2	Procedure	15
4.2.3	Test Result	15
4.3	Maximum Power Spectral Density	18
4.3.1	Requirement.....	18
4.3.2	Procedure	18
4.3.3	Test Result	18
4.4	Out of Band Antenna Conducted Emission	21
4.4.1	Requirement.....	21
4.4.2	Procedure	21
4.4.3	Test Result	21
4.5	Transmitter Radiated Emissions	25
4.5.1	Requirement.....	25
4.5.2	Procedure	25
4.5.3	Field Strength Calculation	26
4.5.4	Antenna-port conducted measurements	27
4.5.5	General Procedure for conducted measurements in restricted bands.....	27
4.5.4	Test Results.....	27
4.5.5	Test setup photographs	44
4.6	AC Line Conducted Emission	48
4.6.1	Requirement.....	48
4.6.2	Test Results.....	48

5.0	List of Test Equipment	49
6.0	Document History	50

1.0 Summary of Tests

Test	Reference FCC	Reference Industry Canada	Result
RF Output Power	15.247(b)(3)	RSS-247, 5.4.d)	Complies
6 dB Bandwidth	15.247(a)(2)	RSS-247, 5.2.a)	Complies
Power Density	15.247(e)	RSS-247, 5.2.b)	Complies
Out of Band Antenna Conducted Emission	15.247(d)	RSS-247, 5.5	Complies
Transmitter Radiated Emissions	15.247(d), 15.209, 15.205	RSS-247, 5.5	Complies
AC Line Conducted Emission	15.207	RSS-GEN	Not Applicable ¹
Antenna Requirement	15.203	RSS-GEN	Complies (Internal Antenna)

¹The EUT is battery operated under normal operation. According to manufacture, the BLE is turned off during charging mode.

EUT receive date: July 27, 2020

EUT receive condition: The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

Test start date: July 27, 2020

Test completion date: August 19, 2020

The test results in this report pertain only to the item tested.

2.0 General Information

2.1 Product Description

Sana Health, Inc supplied the following description of the EUT:

The BETA MK 4 is an audio-visual stimulation mask.

For more information, see user's manual provided by the manufacturer.

Information about the Bluetooth (BLE) radio is presented below:

For more information, refer to the following product specification, declared by the manufacturer.

Information about the 2.4 GHz radio is presented below:

Applicant	Sana Health, Inc
Model No.	BETA MK 4
FCC Identifier	2AWYY-BETA
Type of transmission	Digital Transmission System (DTS)
Rated RF Output	-1.04 dBm
Antenna(s) & Gain	Internal Antenna, Gain: +0.5 dBi peak
Frequency Range	2402 – 2480 MHz
Type of modulation	GFSK
Number of Channel(s)	40, Channel 0-39
Applicant Name & Address	Sana Health, Inc 130 Miners Drive, Suite 101 Lafayette, CO 80026 USA

2.2 Related Submittal(s) Grants

None.

2.3 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

2.4 Test Methodology

Antenna conducted measurements were performed according to the FCC documents “Guidance for Performing Compliance Measurement on Digital Transmission Systems (DTS) Operating under §15.247” (KDB 558074 D01 DTS Meas Guidance v05r02), and RSS-247 Issue 2, RSS-GEN Issue 5.

Radiated emissions and AC mains conducted emissions measurements were performed according to the procedures in ANSI C63.10: 2013. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “Data Sheet” of this report.

2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn't take into account the measurement uncertainty.

Estimated Measurement Uncertainty

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 1 GHz	1 GHz – 2.5 GHz	> 2.5 GHz
RF Power and Power Density – antenna conducted	-	0.7 dB	-
Unwanted emissions – antenna conducted	1.1 dB	1.3 dB	1.9 dB
Bandwidth – antenna conducted	-	30 Hz	-

Measurement	Expanded Uncertainty (k=2)			
	0.15 MHz – 30MHz	30 – 200 MHz	200 MHz – 1 GHz	1 GHz – 18 GHz
Radiated emissions	-	4.7	4.6	5.1 dB
AC mains conducted emissions	2.1 dB	-	-	-

3.0 System Test Configuration


3.1 Support Equipment

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
Earphone	Xiaomi	HSEJ03JY	Not listed


3.2 Block Diagram of Test Setup

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Beta mask – Conducted Unit	Sara Health, Inc	BETA MK 4	CA:F5:F3:67:B9:8F
Beta mask – Radiated Unit	Sara Health, Inc	BETA MK 4	C2:07:90:24:C4:EC

Antenna was removed and co-axial connector was installed for Conducted Measurements.

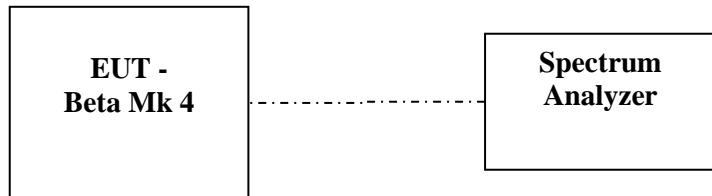

Radiated Measurements

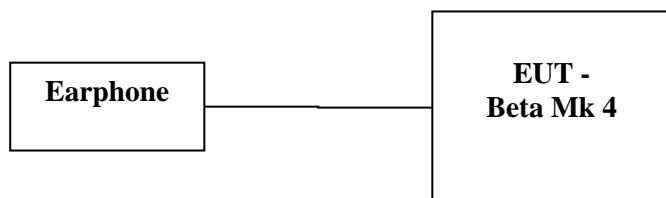

S = Shielded	F = With Ferrite
U = Unshielded	m = Length in Meters

EUT Photos



3.3 Justification

For radiated emission measurements the EUT is placed on a non-conductive table. The EUT is attached to peripherals and they are connected and operational (as typical as possible). During testing, all cables are manipulated to produce worst-case emissions.

The EUT is battery operated under normal operation. According to manufacturer, the BLE is turned off during charging mode.

The lowest clock frequency that used by the device is 32.768 kHz. Radiated Emission is investigated from 9kHz up to 25GHz.

3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was provided by Sana Health, Inc

3.5 Mode of Operation during Test

During transmitter testing, the transmitter was setup to transmit at maximum RF power on low, middle and high channel.

3.5 Modifications Required for Compliance

No modifications were made by the manufacturer or Intertek to the EUT in order to bring the EUT into compliance.

3.6 Additions, Deviations and Exclusions from Standards

No additions, deviations or exclusions from the standard were made.

3.7 Additions, Deviations and Exclusions from Standards

No additions, deviations or exclusions from the standard were made.

4.0 Measurement Results

4.1 6-dB Bandwidth and 99% Occupied Bandwidth
FCC Rule: 15.247(a)(2); RSS-247, 5.2.a) and RSS-GEN;

4.1.1 Requirement

The minimum 6-dB bandwidth shall be at least 500 kHz

4.1.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

For FCC 6dB Channel Bandwidth the Procedure described in the FCC Publication KDB 558074 D01 Meas Guidance v05r02 was used to determine the DTS occupied bandwidth. Section 11.8.1 Option 1 of ANSI 63.10 was used.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

For 99% power bandwidth measurement, the bandwidth was determined by using the built-in 99% occupied bandwidth function of the spectrum analyzer. The resolution bandwidth is set to 1% of the selected span as is without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.

4.1.3 Test Result

Frequency (MHz)	6-dB bandwidth FCC 15.247 & RSS-GEN, MHz	Occupied bandwidth, RSS-GEN, MHz	Plot
2402	0.7093	--	1.1
	--	1.061	1.4
2440	0.7043	--	1.2
	--	1.070	1.5
2480	0.7093	--	1.3
	--	1.058	1.6

Date of Test:	July 27, 2020
Results	Complies

Plot 1. 1



Plot 1. 2



Plot 1. 3



Plot 1. 4



Plot 1.5



14:11:35 27.07.2020

Plot 1.6



14:10:44 27.07.2020

4.2 Maximum Peak Conducted Output Power at Antenna Terminals
 FCC Rule: 15.247(b)(3); RSS-247, 5.4.d);

4.2.1 Requirement

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt or 30 dBm. For antennas with gains greater than 6 dBi, transmitter output level must be decreased appropriately, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2.2 Procedure

The procedure described in FCC Publication KDB 558074 D01 Meas Guidance v05r02 was used. Specifically, section 11.9.1.1 $\text{RBW} \geq \text{DTS}$ bandwidth in ANSI 63.10.

1. Set the $\text{RBW} \geq \text{DTS}$ Bandwidth
2. Set the $\text{VBW} \geq 3 \times \text{RBW}$
3. Set the span $\geq 3 \times \text{RBW}$
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max Hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

A spectrum analyzer was connected to the antenna port of the transmitter.


4.3.3 Test Result

Refer to the following plots 2.1 – 2.3 for the test details.


Frequency, MHz	Conducted Power (peak), dBm	Conducted Power (peak), mW	Plot
2402	-1.93	0.643	2.1
2440	-1.35	0.735	2.2
2480	-1.04	0.789	2.3

Date of Test:	July 27, 2020
Results	Complies


Plot 2. 1

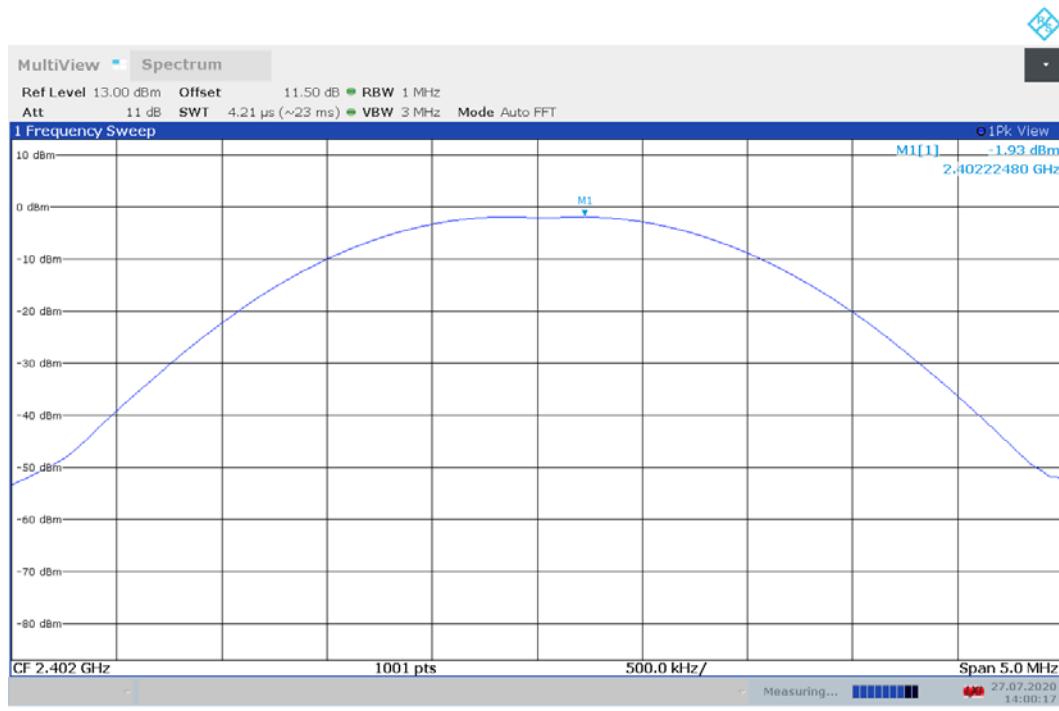

Plot 2. 2

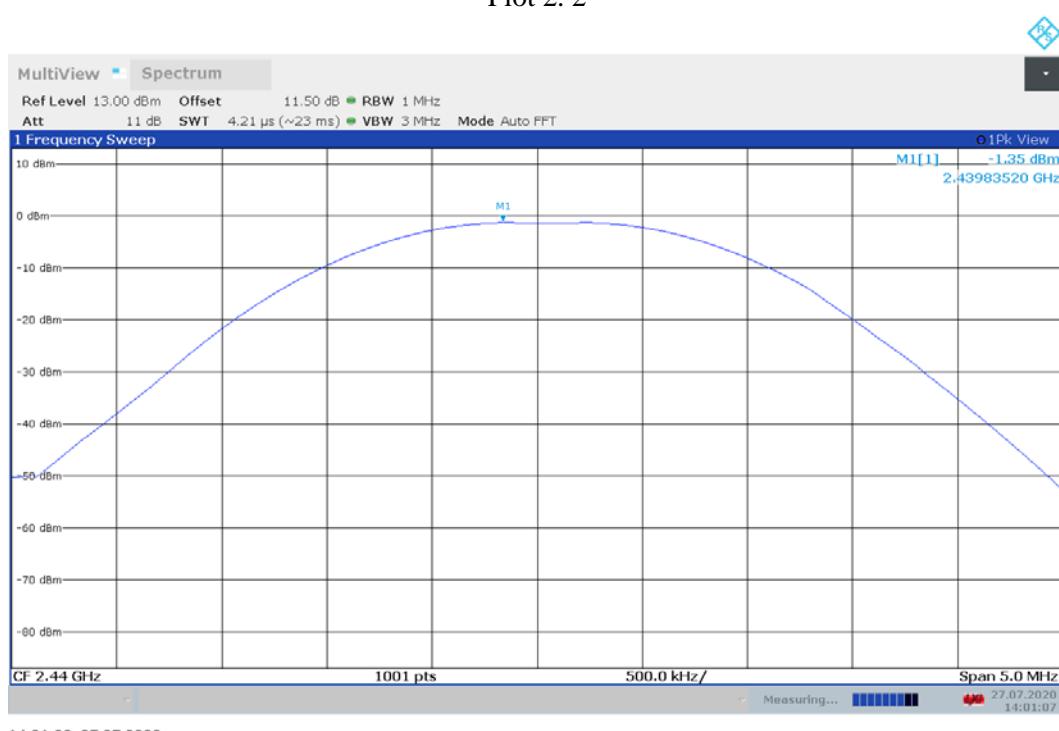

Plot 2. 3

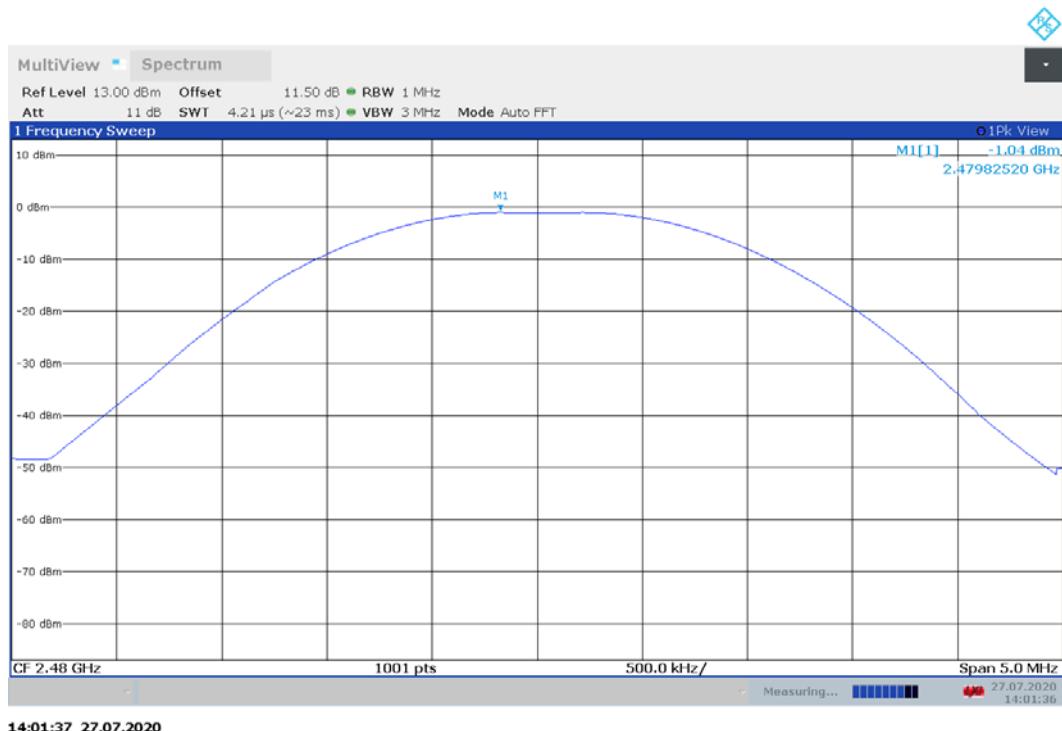

4.3 Maximum Power Spectral Density FCC: 15.247 (e); RSS-247, 5.2.b);

4.3.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna should not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

The procedure described in FCC Publication KDB 558074 D01 Meas Guidance v05r02, specifically section 11.10.2 Method PKPSD (peak PSD) of ANSI 63.10.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


4.3.3 Test Result

Refer to the following plots for the test result


Frequency, MHz	Maximum Power Spectral Density, dBm	Maximum Power Spectral Density Limit, dBm	Margin, dB	Plot
2402	-3.27	8.0	-11.27	3.1
2440	-2.69	8.0	-10.69	3.2
2480	-2.37	8.0	-10.37	3.3

Date of Test:	July 27, 2020
Results	Complies


Plot 3. 1

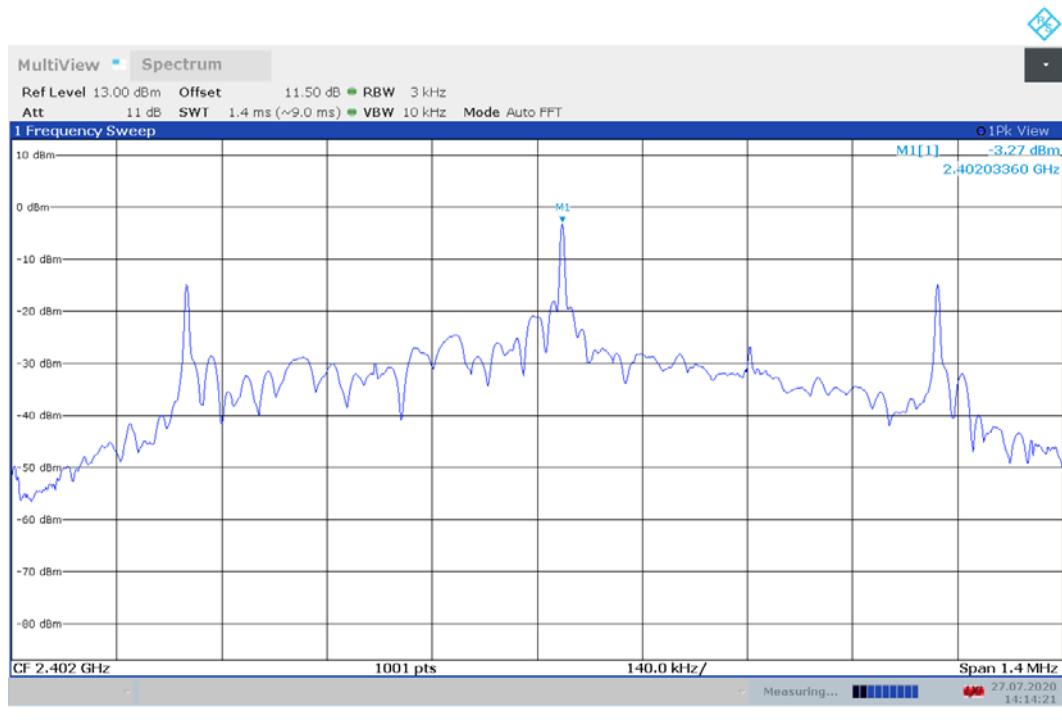

Plot 3. 2

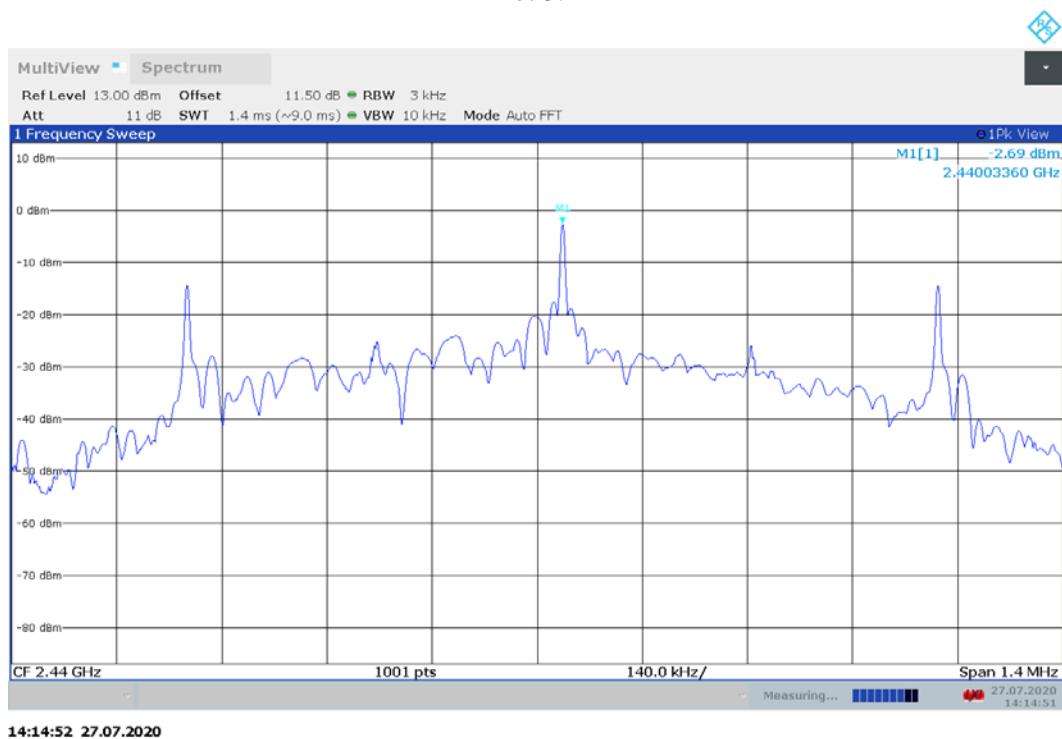

Plot 3. 3

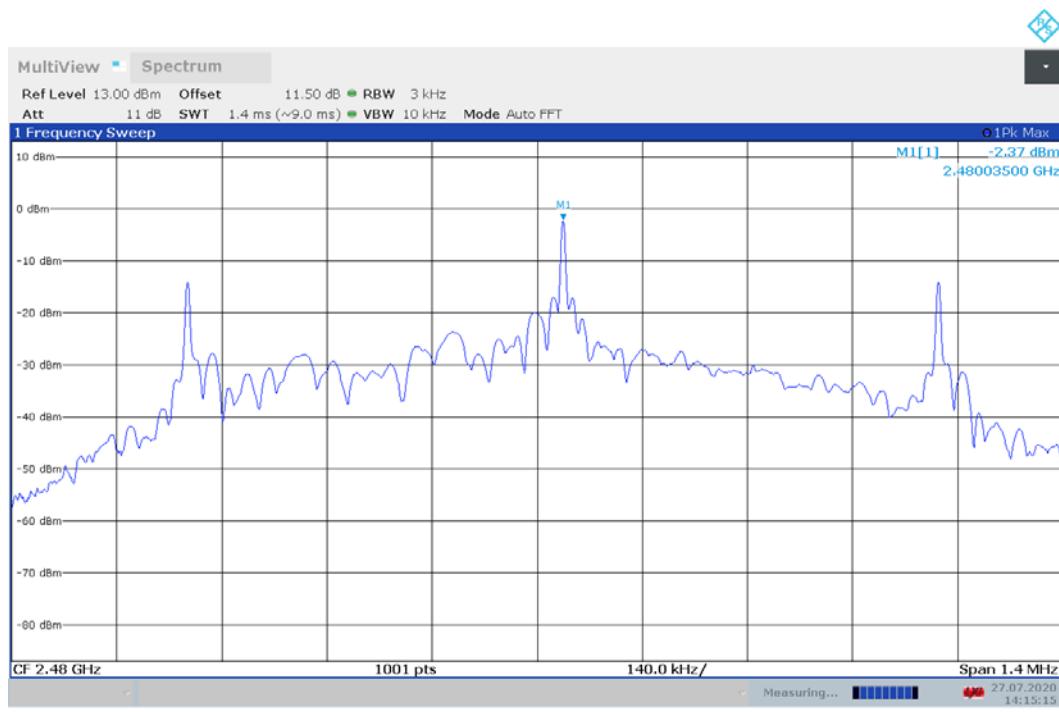

4.4 Out of Band Antenna Conducted Emission
FCC: 15.247(d); RSS-247, 5.5;

4.4.1 Requirement

In any 100 kHz bandwidth outside the EUT pass-band, the RF power shall be below the maximum in-band 100 kHz emissions by at least 20 dB (if peak power of in-band emission is measured) or 30 dB (if average power of in-band emission is measured).

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

4.4.2 Procedure

The procedure described in FCC Publication KDB 558074 D01 Meas Guidance v05r02, specifically section 11.11 DTS Emissions in non-restricted frequency bands of ANSI 63.10.

A spectrum analyzer was connected to the antenna port of the transmitter.

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 3 x RBW.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.


The unwanted emissions were measured from 30 MHz to 25 GHz. Plots below are corrected for cable loss and then compared to the limits.

4.4.3 Test Result


Refer to the following plots 4.1 – 4.5 for unwanted conducted emissions. The plot shows -20dB attenuation limit line.

Date of Test:	July 27, 2020
Results	Complies


Tx @ Low Channel, 2402 MHz
30MHz -25GHz Conducted Spurious
Plot 4.1

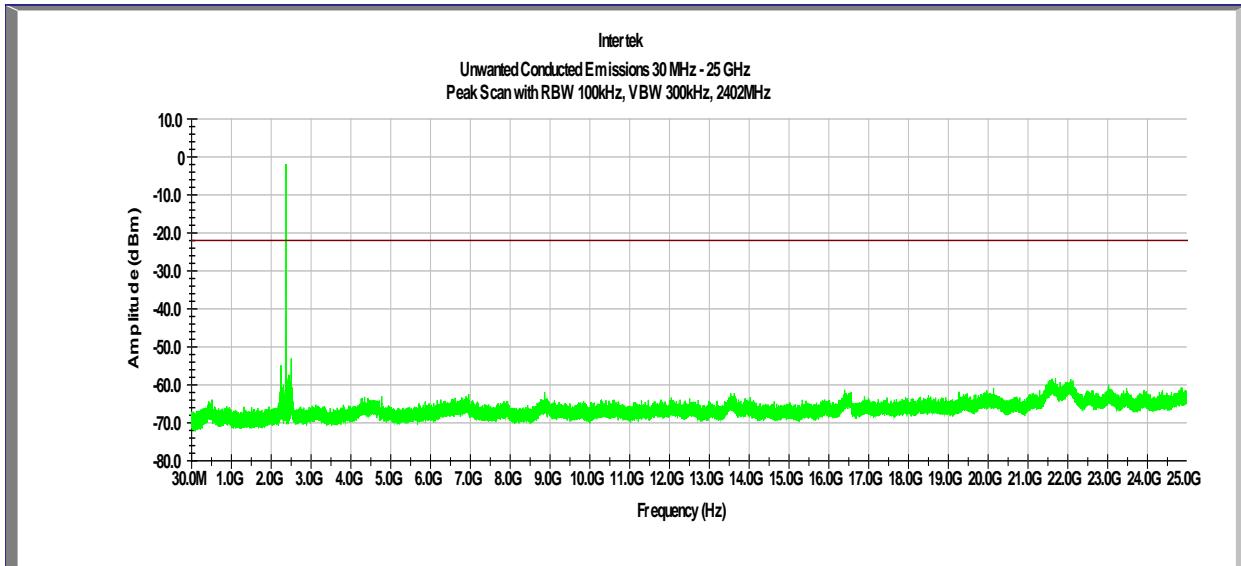


Tx @ Mid Channel, 2440 MHz
30MHz -25GHz Conducted Spurious
Plot 4.2

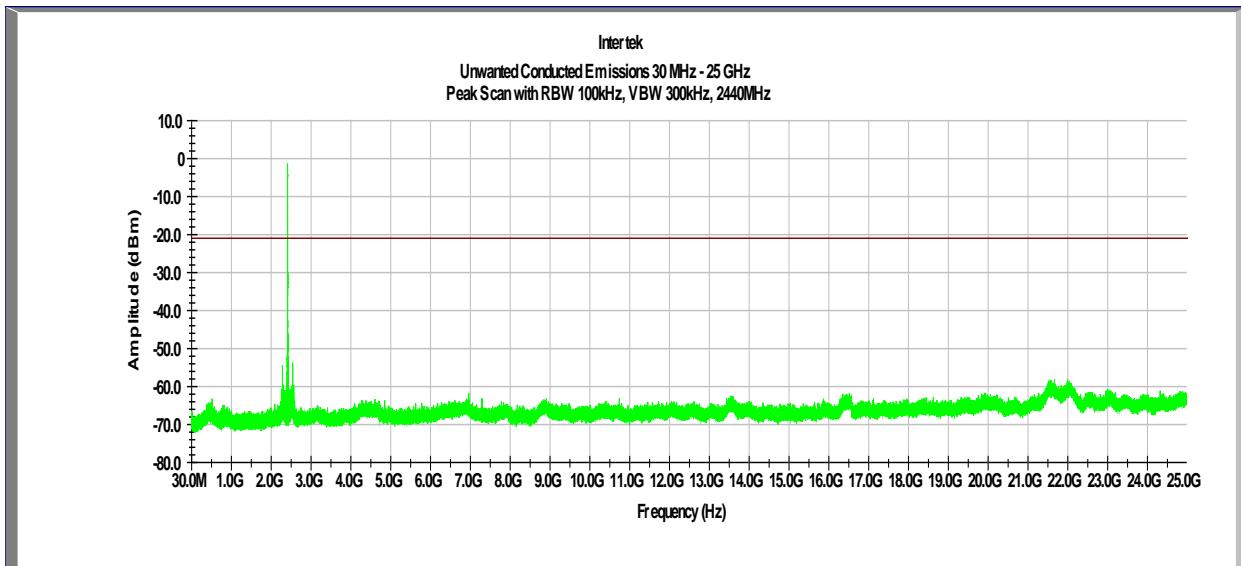

Tx @ High Channel, 2480 MHz
30MHz -25GHz Conducted Spurious
Plot 4.3

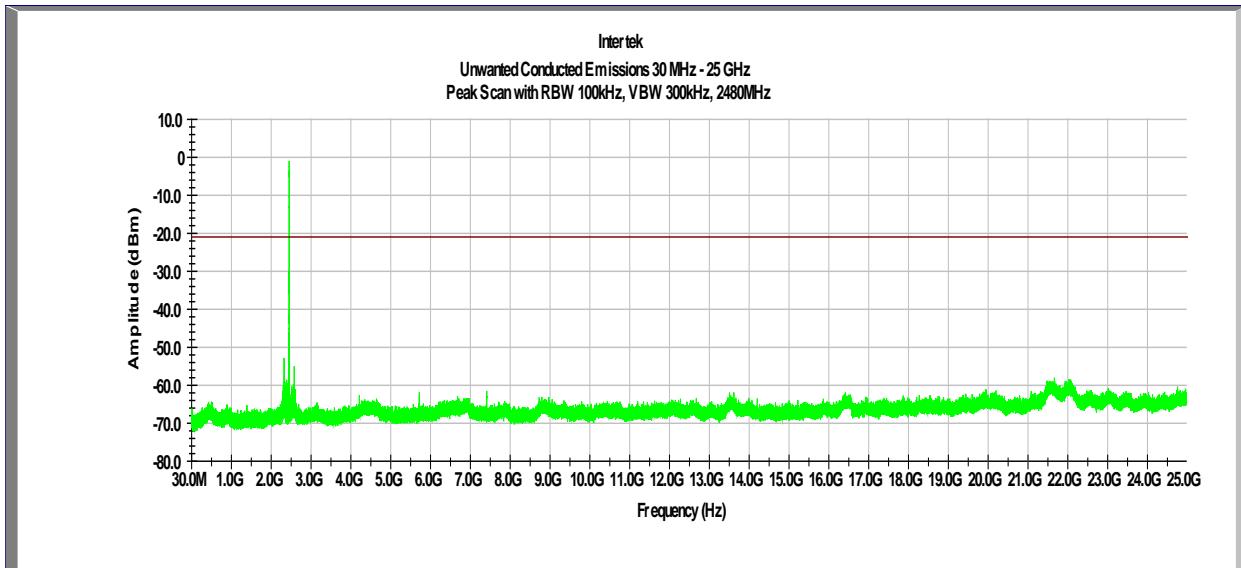

Plot 4.4
Conducted Band Edge, Low Channel

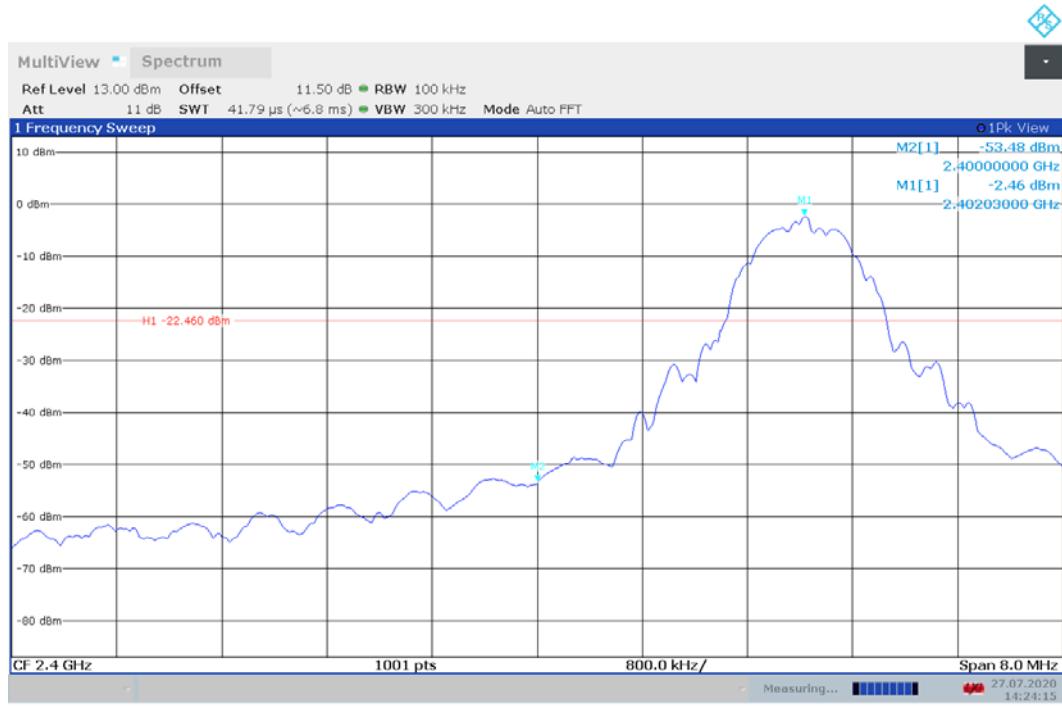

Plot 4.5
Conducted Band Edge, High Channel



4.5 Transmitter Radiated Emissions

FCC Rules: 15.247(d), 15.209, 15.205; RSS-247, 5.5;

4.5.1 Requirement

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For out of band radiated emissions (except for frequencies in restricted bands), in any 100 kHz bandwidths outside the EUT pass-band, the RF power shall be at least 20dB (peak) or 30 dB (average) below that of the maximum in-band 100 kHz emissions.

4.5.2 Procedure

Radiated emission measurements were performed from 9 kHz to 25 GHz according to the procedure described in ANSI C63.10: 2013. Spectrum Analyzer Resolution Bandwidth is 200Hz or greater for frequencies 9kHz to 30MHz, 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak and Average measurements were performed.

The EUT is placed on a plastic turntable that is 80 cm in height for below 1000MHz and 1.5m in height for above 1GHz. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters for frequencies above 1 GHz and at 10 meters for frequencies below 1 GHz.

Measurements made from 1 GHz to 18GHz had a 2.4-2.5GHz notch filter in place. A preamp was used from 30MHz to 26GHz.

All measurements were made with a Peak Detector and compared to QP limits for 30MHz – 1GHz and Average limits for 1GHz – 26GHz.

Radiated measurements were performed on the X, Y and Z orientation of the EUT. Data is presented with the worst-case configuration (the configuration which resulted in the highest emission levels).

EUT was tested with Internal Antenna. Measurements for Radiated Band Edge were performed at the lowest and highest channels.

Correlation measurements were performed below 30MHz between 10m ALSE and Open Field site according to FCC KDB 414788 D01 Radiated Test Site v01r01 section 2. All readings were within the acceptable tolerance.

4.5.3 Field Strength Calculation

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF – AG; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

RA = 52.0 dB(μ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

FS = 52.0+7.4+1.6-29.0 = 32 dB(μ V/m).

Level in μ V/m = Common Antilogarithm [(32 dB μ V/m)/20] = 39.8 μ V/m.

4.5.4 Antenna-port conducted measurements

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

4.5.5 General Procedure for conducted measurements in restricted bands


- a) Measure the conducted output power (in dBm) using the detector specified for determining quasi-peak, peak, and average conducted output power, respectively.
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies \leq 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies $>$ 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (*e.g.*, Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
$$E = EIRP - 20\log D + 104.8 + DCF$$
 (DCF for Average measurements)
where:
E = electric field strength in dB μ V/m,
EIRP = equivalent isotropic radiated power in dBm
D = specified measurement distance in meters.
DCF = Duty Cycle Correction Factor
- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test

4.5.4 Test Results

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Date of Test:	July 27, 2020 & August 19, 2020
Results	Complies


**Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2310–2390 MHz, Peak Scan with Average Limit
EUT in Horizontal Position**

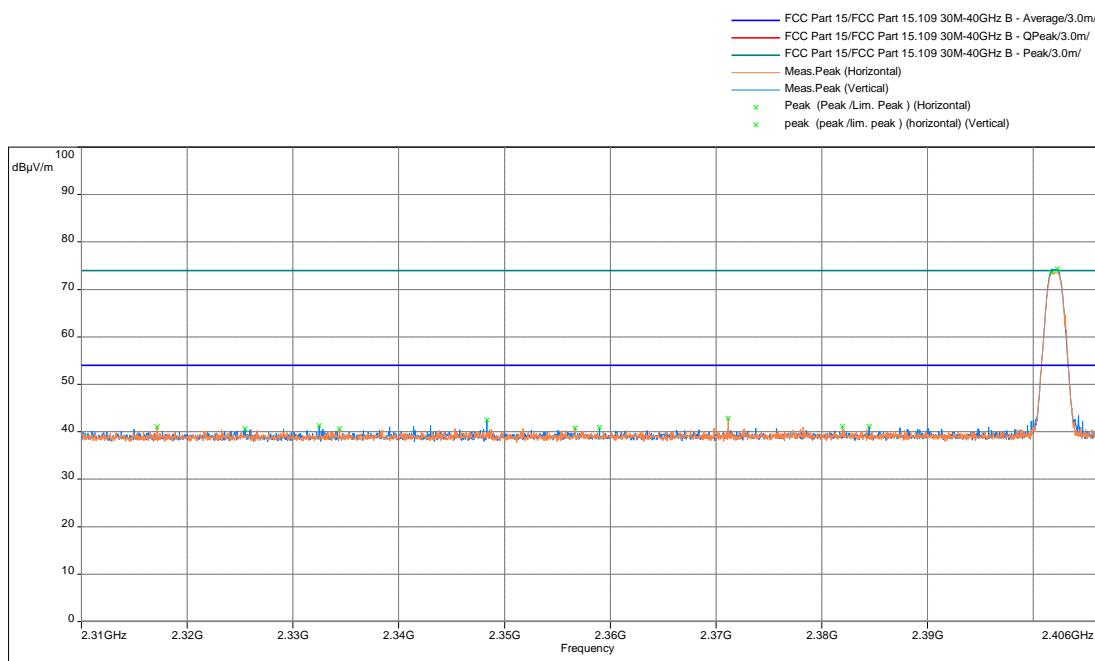

Frequency (MHz)	Peak FS@3m (dBμV/m)	Ave Limit@3m (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
2390.0	39.9	54.0	-14.2	2.5	2.5	Horizontal	54.4	-14.6
2390.0	40.7	54.0	-13.3	60.2	2.5	Vertical	55.2	-14.6

Note: FS@3m = RA + Correction
 Correction = AF + CF – Preamp

**Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2483.5–2500 MHz, Peak Scan with Average Limit
EUT in Horizontal Position**

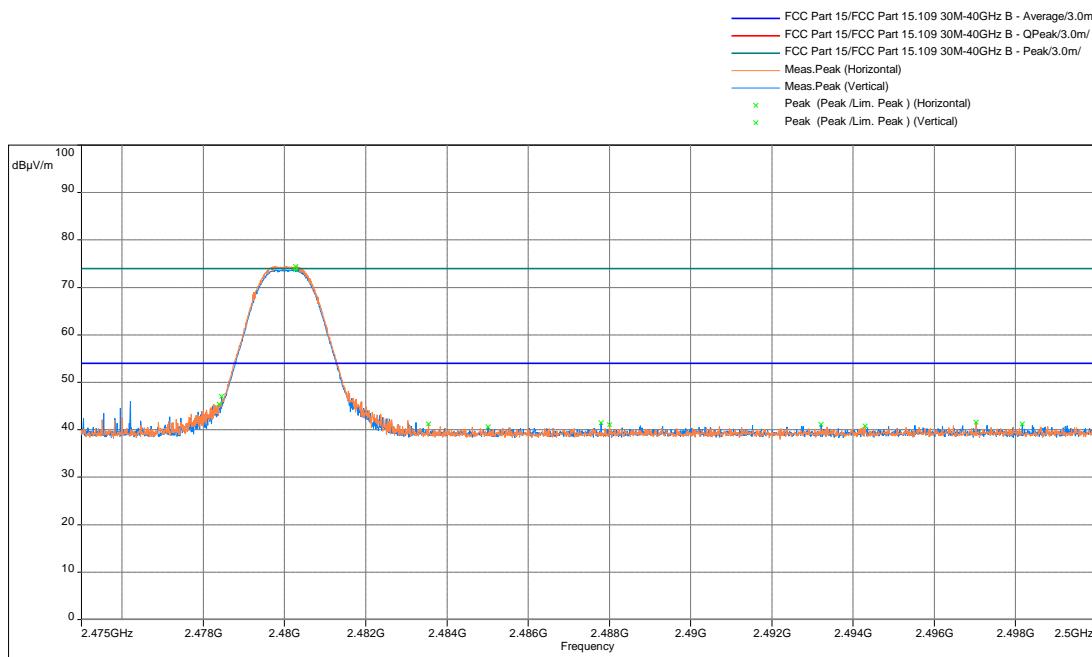


Model: ; Client: ; Comments: ; Test Date: 07/27/2020 18:55

Frequency (MHz)	Peak FS@3m (dBμV/m)	Ave Limit@3m (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
2483.5	40.4	54.0	-13.6	305.5	2.5	Horizontal	54.4	-14.1
2483.5	40.3	54.0	-13.7	240.5	1.5	Vertical	54.4	-14.1

Note: FS@3m = RA + Correction
Correction = AF + CF – Preamp

**Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2310–2390 MHz, Peak Scan with Average Limit
EUT in Vertical Position**

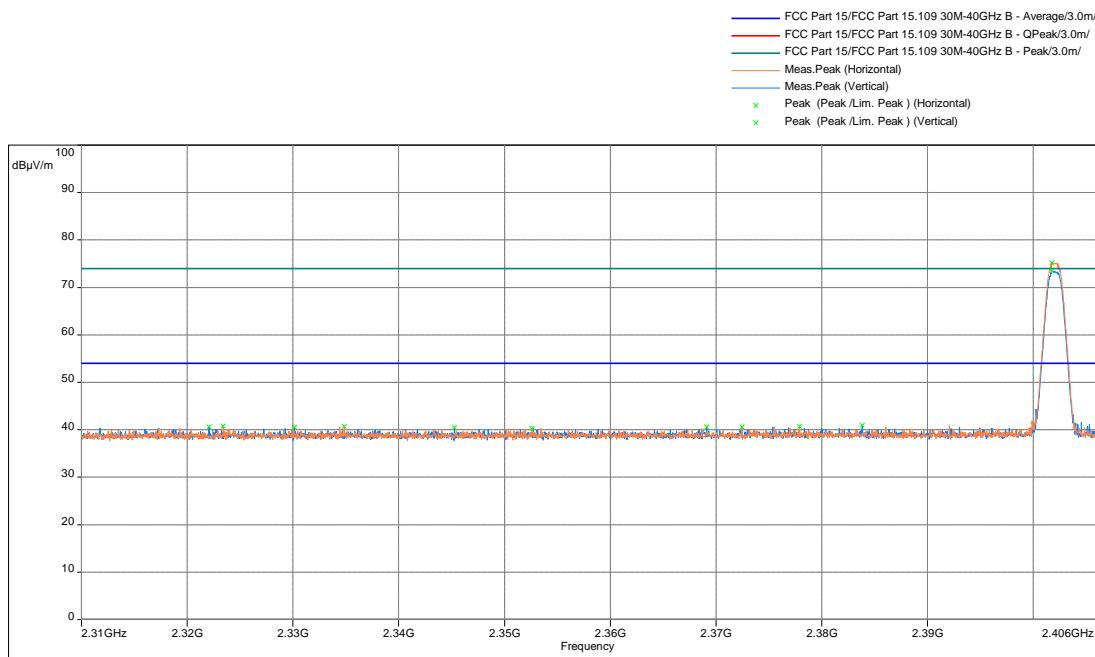


Model: ; Client: ; Comments: ; Test Date: 07/27/2020 20:44

Frequency (MHz)	Peak FS@3m (dB μ V/m)	Ave Limit@3m (dB μ V/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dB μ V)	Correction (dB)
2390.0	40.0	54.0	-14.0	261.0	1.7	Horizontal	54.6	-14.6
2390.0	40.2	54.0	-13.8	99.8	1.5	Vertical	54.7	-14.6

Note: FS@3m = RA + Correction
 Correction = AF + CF – Preamp


**Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2483.5–2500 MHz, Peak Scan with Average Limit
Normal Mode, EUT in Vertical Position**

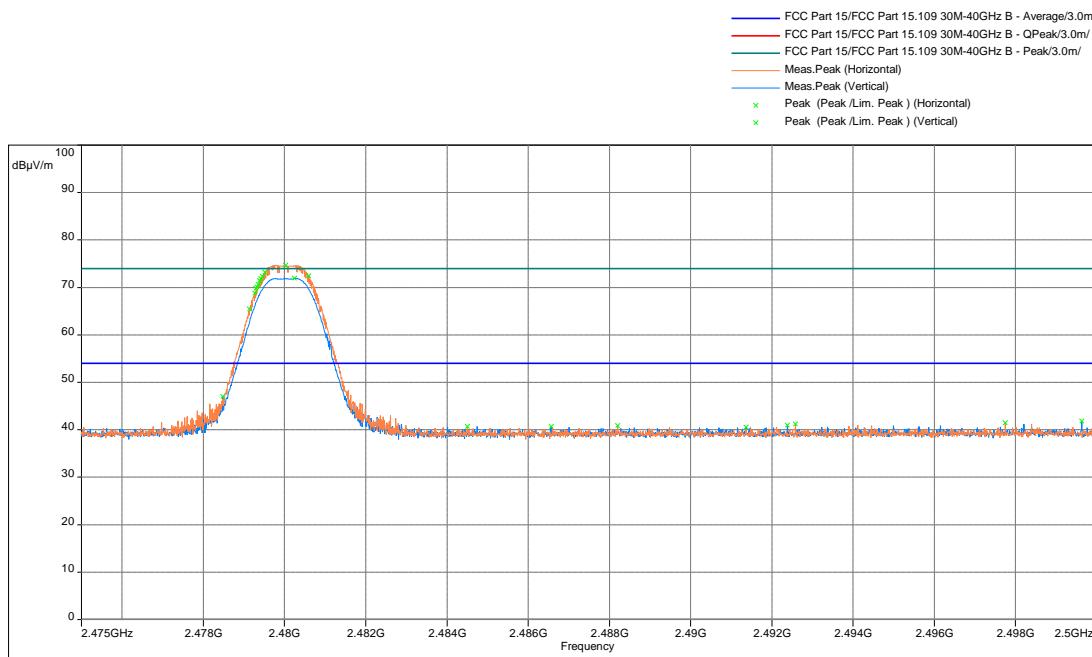


Frequency (MHz)	Peak FS@3m (dB μ V/m)	Ave Limit@3m (dB μ V/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dB μ V)	Correction (dB)
2483.5	40.5	54.0	-13.5	335.0	2.5	Horizontal	54.6	-14.1
2483.5	40.3	54.0	-13.7	40.3	2.1	Vertical	54.4	-14.1

Note: FS@3m = RA + Correction
Correction = AF + CF – Preamp

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 2402MHz

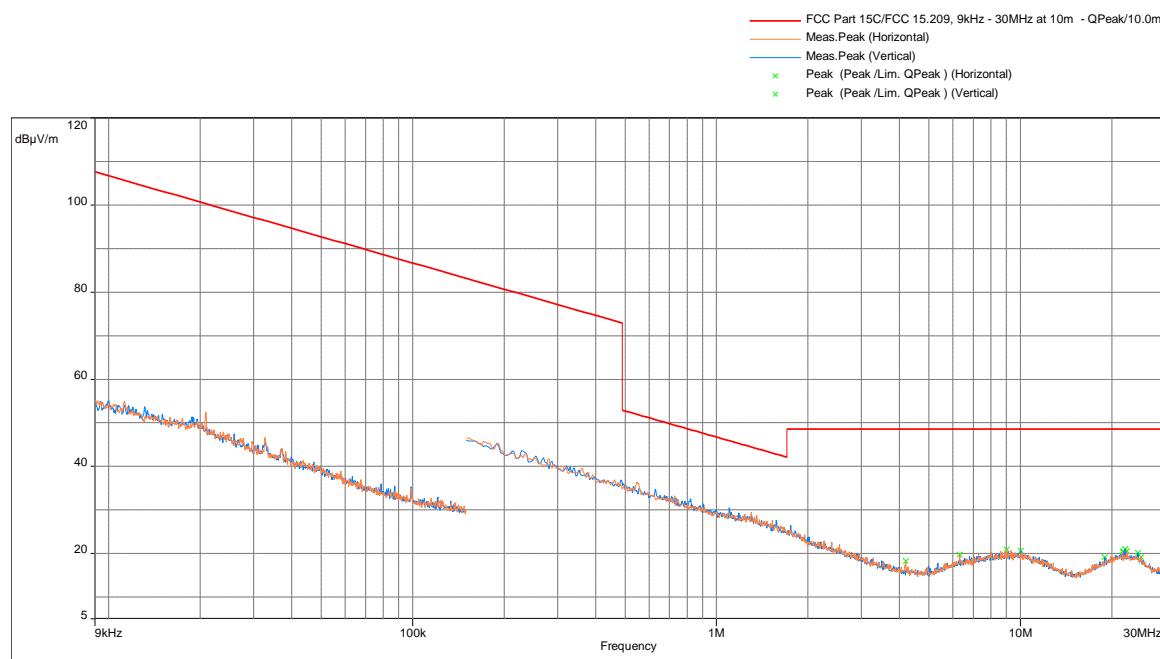
Radiated Spurious Emissions 9kHz - 30 MHz

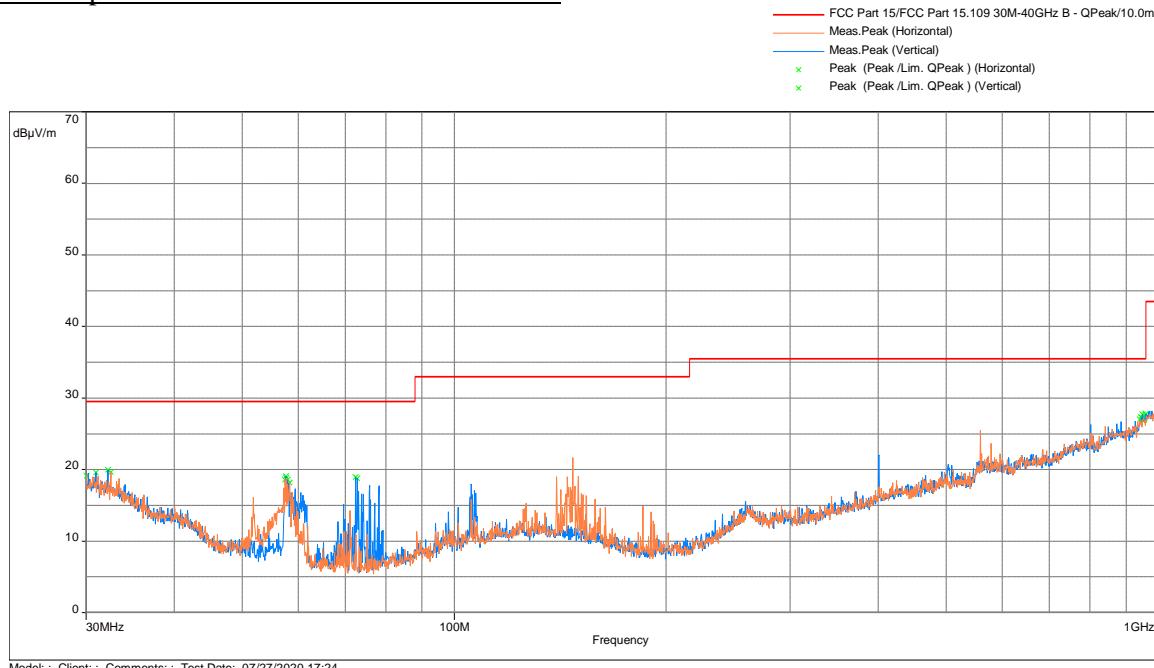Radiated Spurious Emissions 30 MHz - 1000 MHz


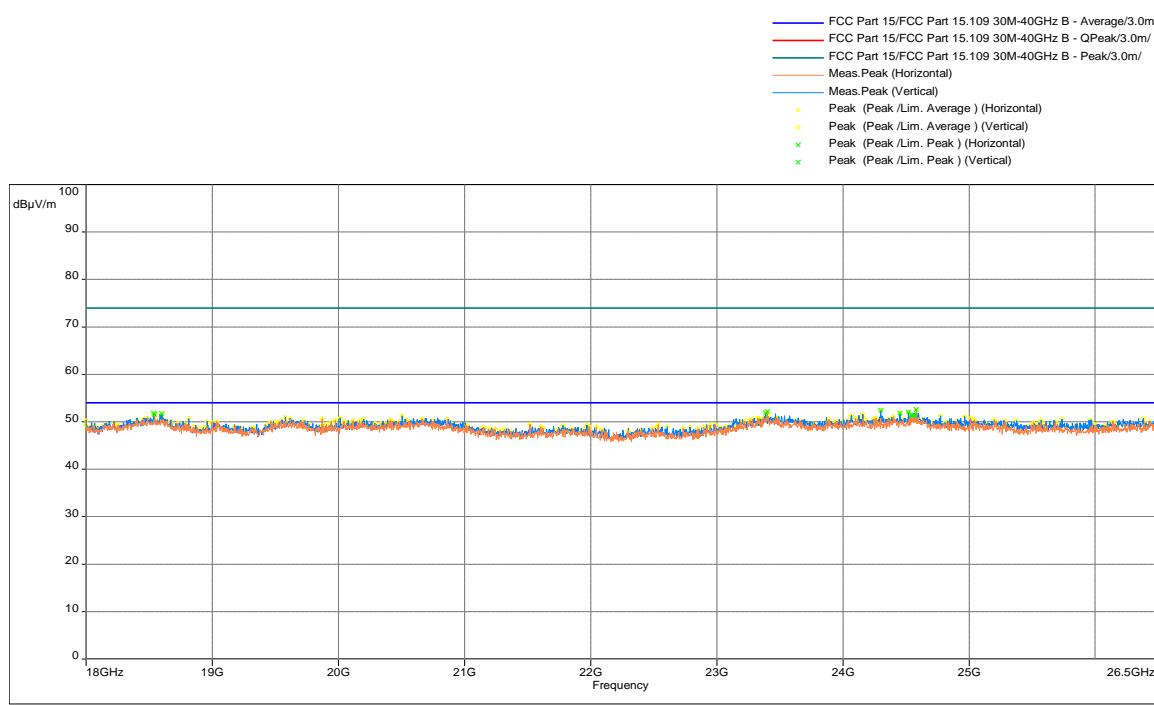
Frequency (MHz)	QP FS@10m (dB μ V/m)	Limit@10m (dB μ V/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dB μ V)	Correction (dB)
32.2	19.9	29.5	-9.6	262.0	4.0	Vertical	29.7	-9.8
32.5	19.7	29.5	-9.8	357.8	1.1	Horizontal	29.6	-10.0
57.7	19.1	29.5	-10.5	226.3	4.8	Vertical	40.8	-21.7
57.8	18.8	29.5	-10.7	0.0	4.0	Horizontal	40.6	-21.8
58.0	18.6	29.5	-10.9	226.3	3.9	Vertical	40.3	-21.8
72.4	18.9	29.5	-10.6	129.5	3.3	Vertical	39.7	-20.8

Note: FS@10m = RA + Correction
Correction = AF + CF - Preamp

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Average Limit

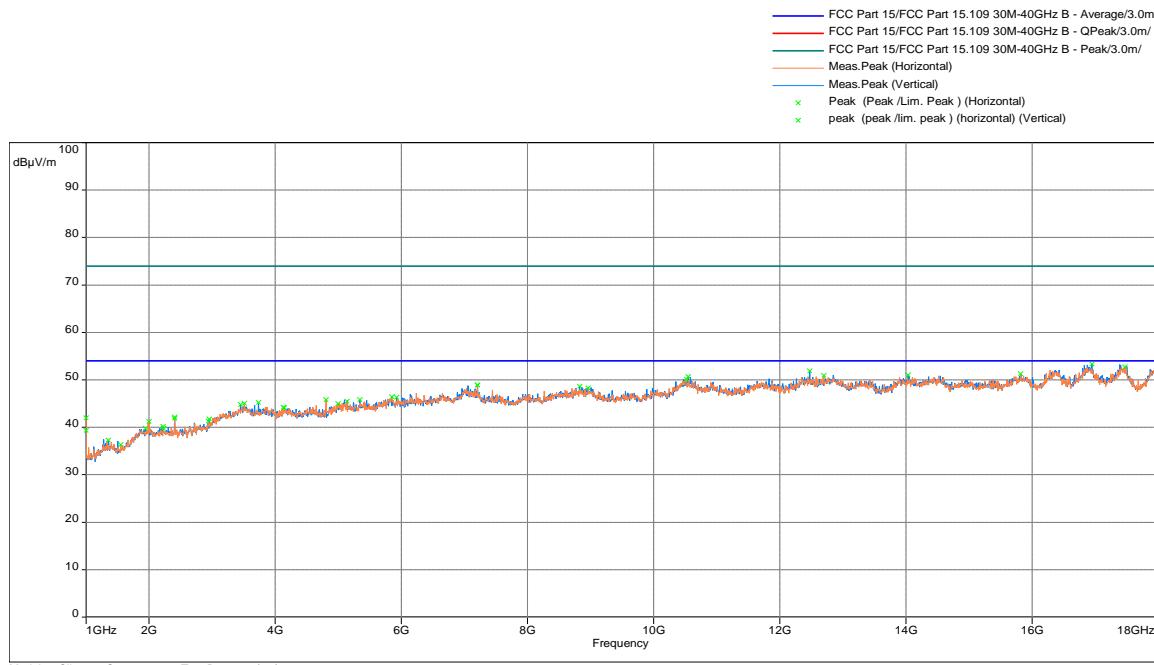

Radiated Spurious Emissions 18000 MHz – 26500MHz, Peak Scan vs Average Limit




Frequency (MHz)	Peak@3m (dB μ V/m)	Ave Limit@3m (dB μ V/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dB μ V)	Correction (dB)
1941.2	39.8	54.0	-14.2	248.8	2.3	Vertical	55.1	-15.3
1999.0	41.2	54.0	-12.8	238.5	3.7	Horizontal	56.3	-15.1
2217.8	40.2	54.0	-13.8	120.5	3.5	Vertical	55.1	-14.9
2228.0	39.7	54.0	-14.3	147.8	3.2	Horizontal	54.6	-14.9
16946.6	53.1	54.0	-0.9	311.5	3.5	Vertical	44.8	8.3
17470.7	52.7	54.0	-1.3	239.8	2.6	Horizontal	44.5	8.2

Note: FS@3m = RA + Correction


Correction = AF + CF - Preamp

Test Results: 15.209 Radiated Spurious Emissions Mid Channel, Tx at 2440MHz, Normal Mode

Radiated Spurious Emissions 9kHz - 30 MHz

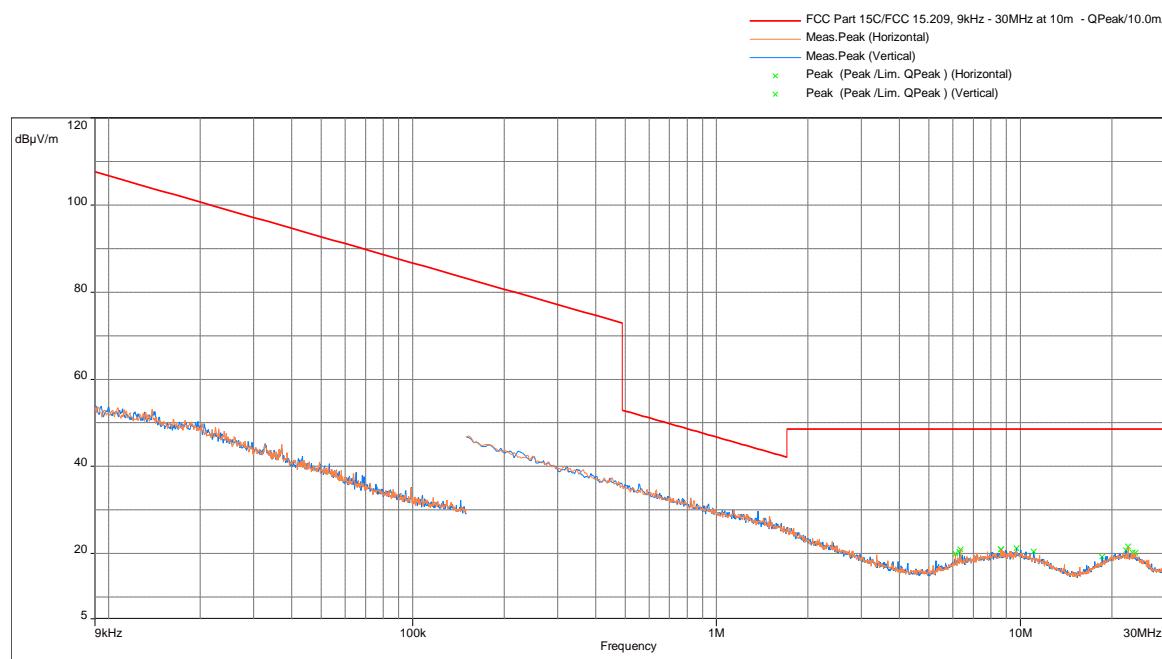



Model: ; Client: ; Comments: ; Test Date: 08/19/2020 18:17

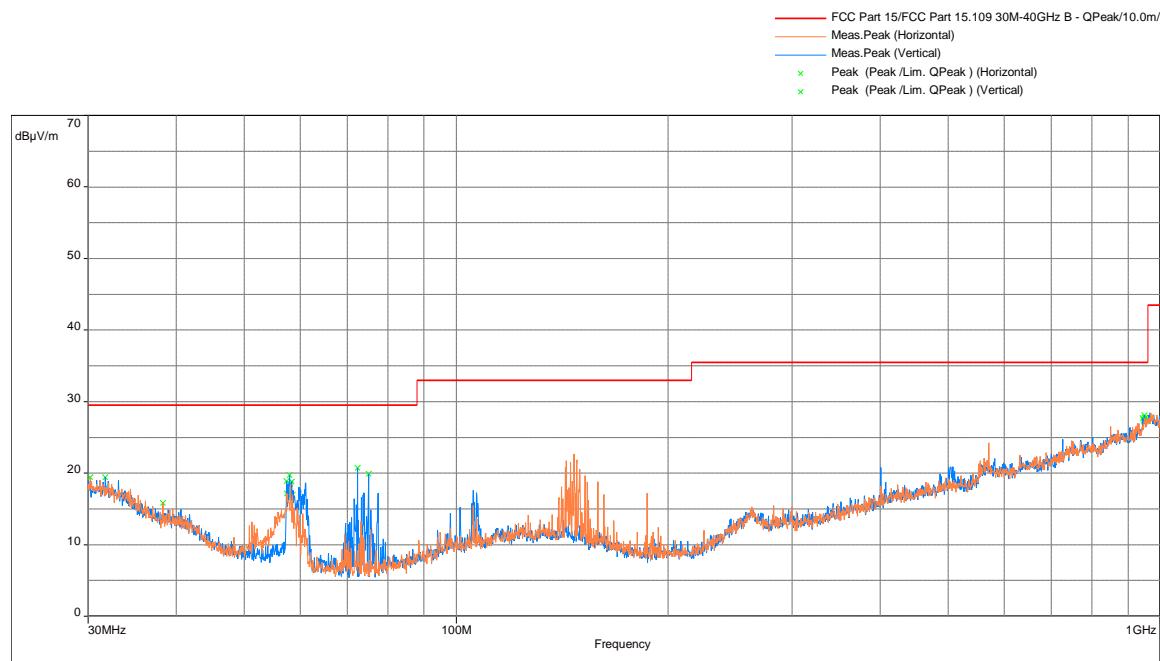Radiated Spurious Emissions 30 MHz - 1000 MHz


Frequency (MHz)	QP FS@10m (dB μ V/m)	Limit@10m (dB μ V/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dB μ V)	Correction (dB)
57.5	17.2	29.5	-12.3	220.3	3.7	Horizontal	38.9	-21.7
58.2	18.5	29.5	-11.0	233.5	3.0	Horizontal	40.3	-21.8
58.6	17.0	29.5	-12.5	220.3	4.0	Horizontal	38.8	-21.8
57.9	19.7	29.5	-9.8	235.8	4.0	Vertical	41.5	-21.8
58.4	18.8	29.5	-10.7	233.8	3.5	Vertical	40.6	-21.8
72.4	20.8	29.5	-8.7	72.5	3.1	Vertical	41.5	-20.8

Note: FS@10m = RA + Correction

Correction = AF + CF - Preamp

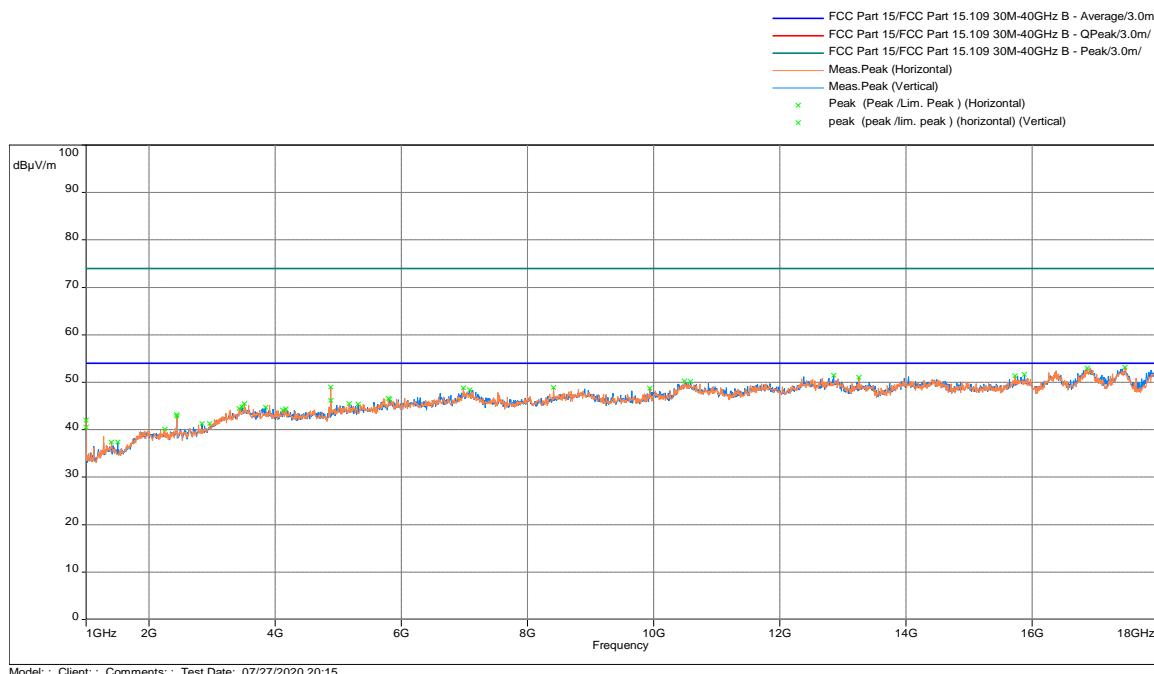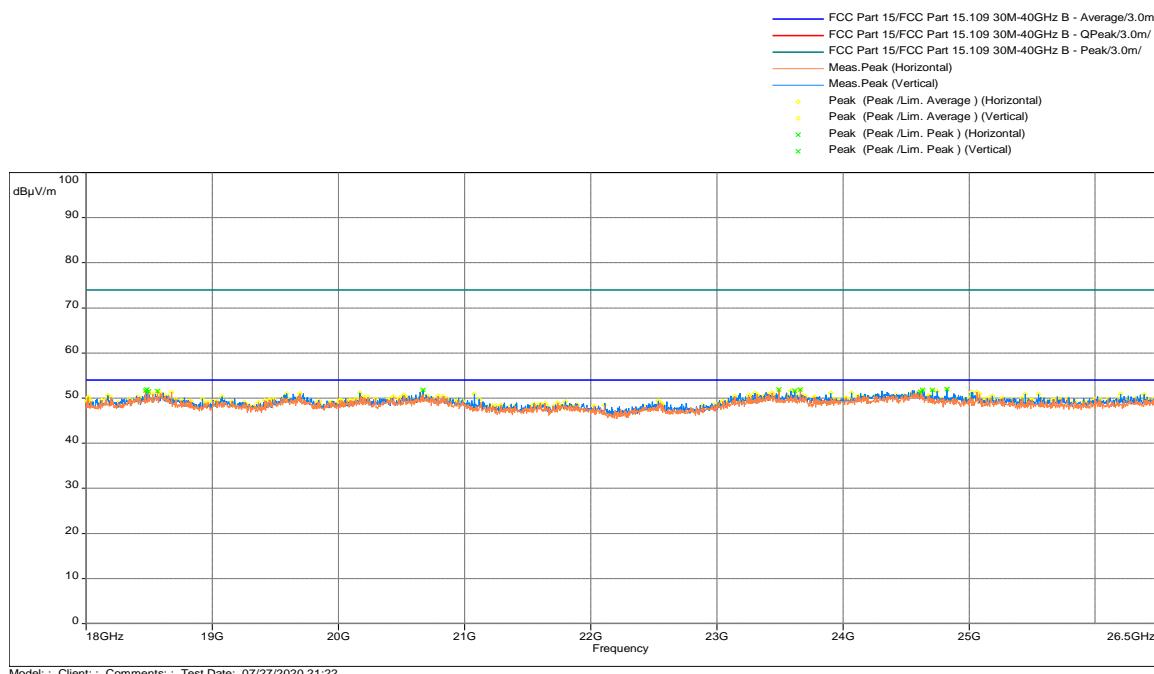Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Average Limit, Normal Mode

Radiated Spurious Emissions 18000 MHz – 26500MHz, Peak Scan vs Average Limit


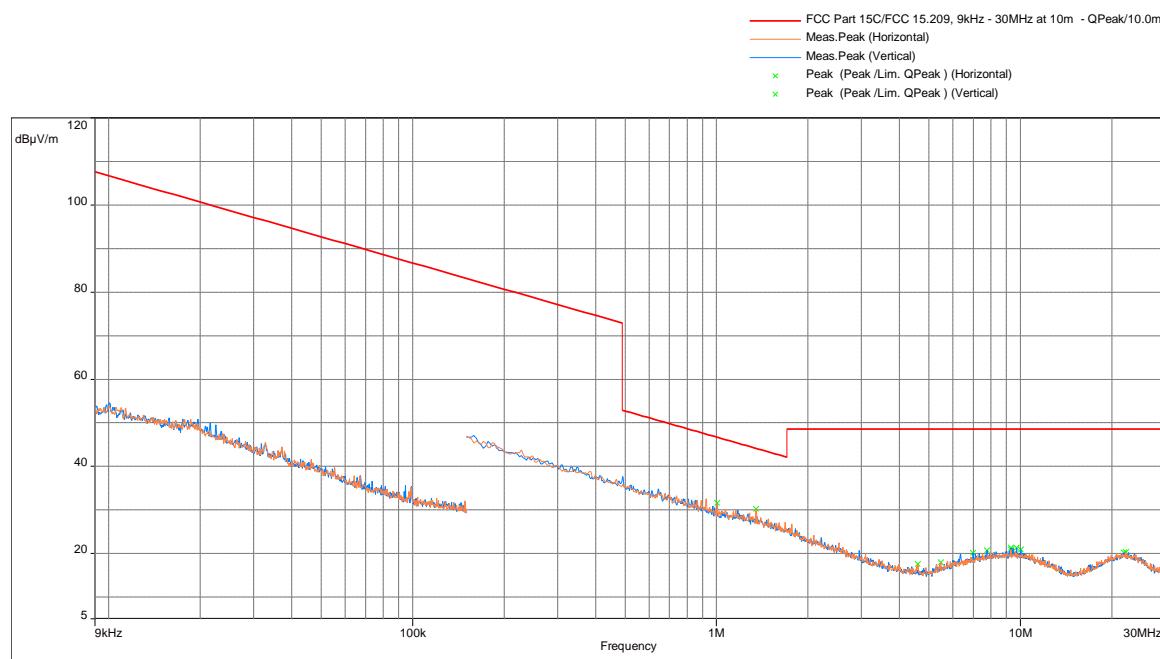
Frequency (MHz)	Peak@3m (dB μ V/m)	Ave Limit@3m (dB μ V/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dB μ V)	Correction (dB)
4164.3	44.4	54.0	-9.6	239.8	2.3	Horizontal	51.2	-6.8
4880.0	46.2	54.0	-7.9	293.0	2.4	Vertical	53.4	-7.2
4880.5	49.0	54.0	-5.0	285.0	2.5	Horizontal	56.2	-7.2
5315.7	45.4	54.0	-8.6	220.5	2.9	Vertical	51.4	-5.9
5804.8	46.4	54.0	-7.6	294.3	3.5	Vertical	50.2	-3.7
8414.3	48.9	54.0	-5.1	284.3	1.7	Horizontal	50.0	-1.1
16874.0	53.0	54.0	-1.0	294.3	3.5	Vertical	44.7	8.3


Note: FS@3m = RA + Correction

Correction = AF + CF - Preamp

Test Results: 15.209 Radiated Spurious Emissions High Channel, Tx at 2480MHz, Normal Mode

Radiated Spurious Emissions 9kHz - 30 MHz


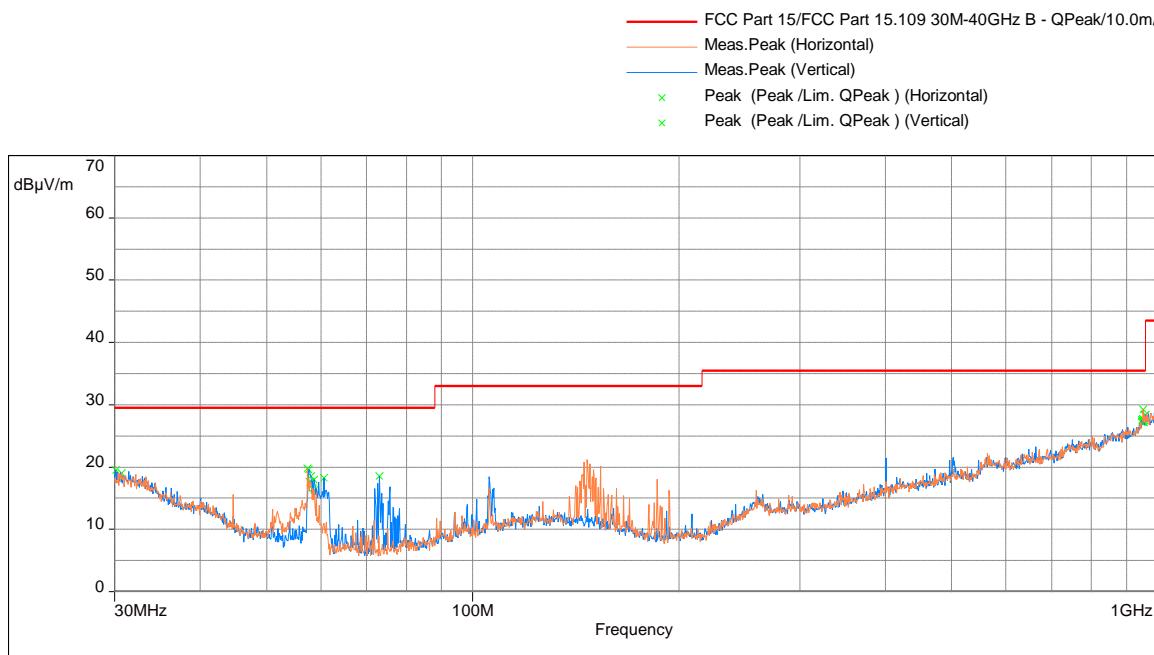


Radiated Spurious Emissions 30 MHz - 1000 MHz


Model: ; Client: ; Comments: ; Test Date: 07/27/2020 17:51

Frequency (MHz)	QP FS@10m (dBµV/m)	Limit@10m (dBµV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
57.4	19.8	29.5	-9.7	83.0	3.9	Horizontal	41.5	-21.7
57.6	19.6	29.5	-9.9	5.0	3.8	Vertical	41.4	-21.7
58.1	18.5	29.5	-11.0	320.8	4.0	Vertical	40.3	-21.8
58.6	16.3	29.5	-13.2	258.3	3.8	Horizontal	38.1	-21.8
73.0	18.5	29.5	-11.0	91.5	3.0	Vertical	39.3	-20.8
146.9	21.2	33.0	-11.8	0.0	3.8	Horizontal	36.9	-15.63

Note: FS@10m = RA + Correction
 Correction = AF + CF - Preamp

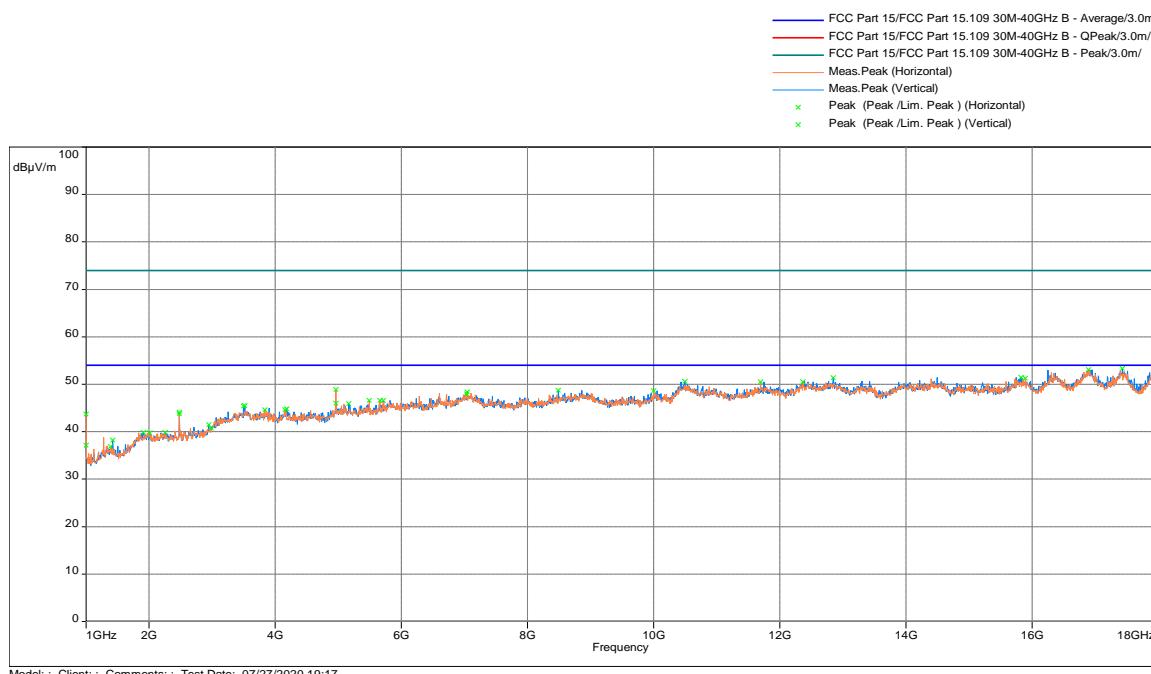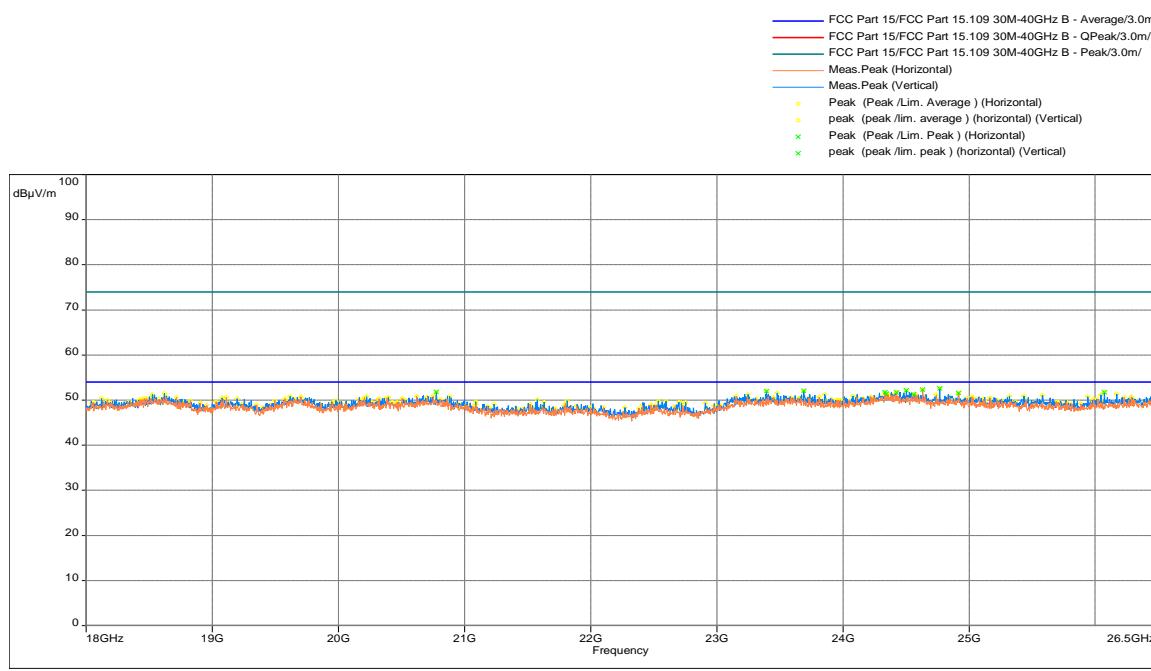Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Average Limit, Normal Mode

Radiated Spurious Emissions 18000 MHz – 26500MHz, Peak Scan vs Average Limit


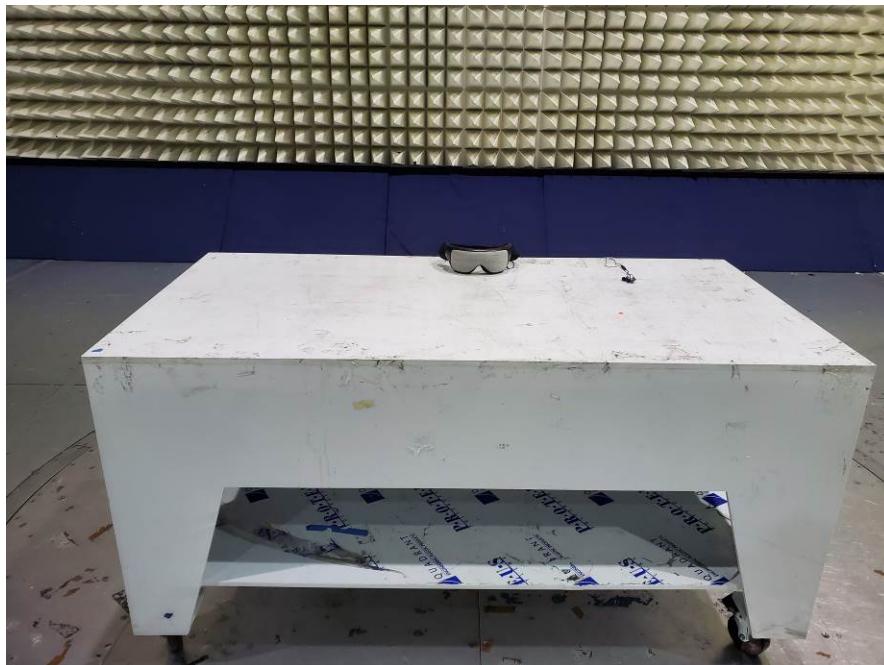
Frequency (MHz)	Peak@3m (dB μ V/m)	Ave Limit@3m (dB μ V/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dB μ V)	Correction (dB)
1000.0	43.7	54.0	-10.3	120.8	3.1	Horizontal	62.9	-19.2
1384.2	36.9	54.0	-17.1	75.3	1.6	Horizontal	55.1	-18.2
1908.9	39.9	54.0	-14.1	181.0	3.6	Vertical	55.2	-15.3
4959.9	48.9	54.0	-5.1	302.0	2.4	Horizontal	55.7	-6.7
4960.4	46.0	54.0	-8.0	339.8	2.7	Vertical	52.8	-6.7
16895.6	53.1	54.0	-0.9	347.5	2.5	Horizontal	44.8	8.3

Note: FS@3m = RA + Correction
 Correction = AF + CF - Preamp



Result:	Complies by 0.9 dB
----------------	---------------------------

4.5.5 Test setup photographs

The following photographs show the testing configurations used.





4.5.5 Test Setup Photographs (Continued)

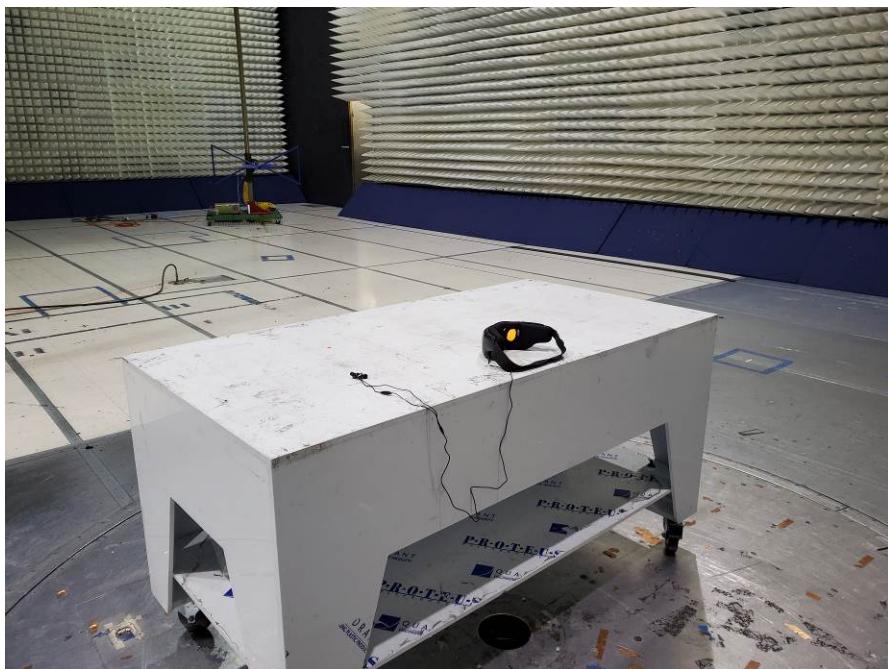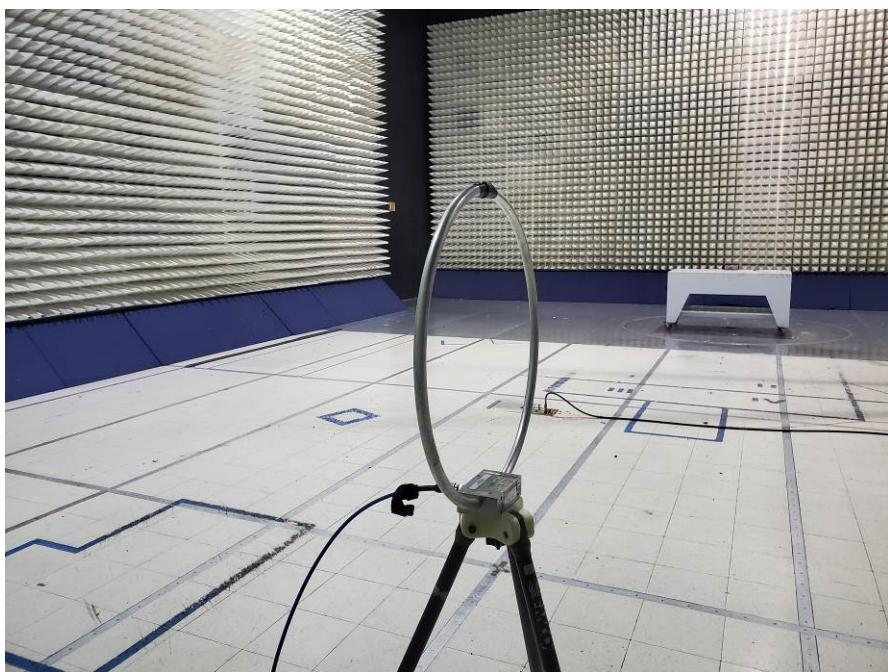

4.5.5 Test Setup Photographs (Continued)



4.5.5 Test Setup Photographs (Continued)

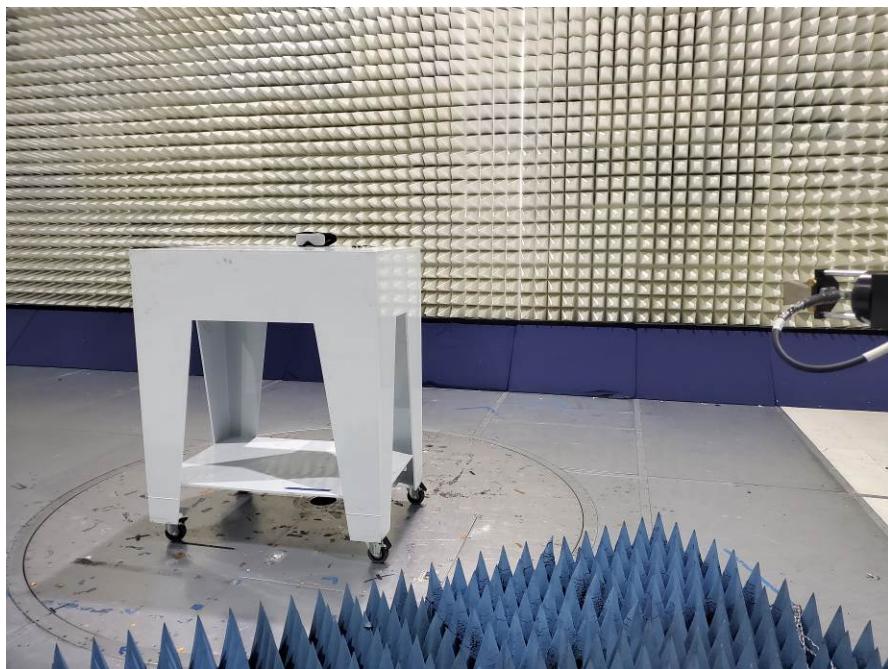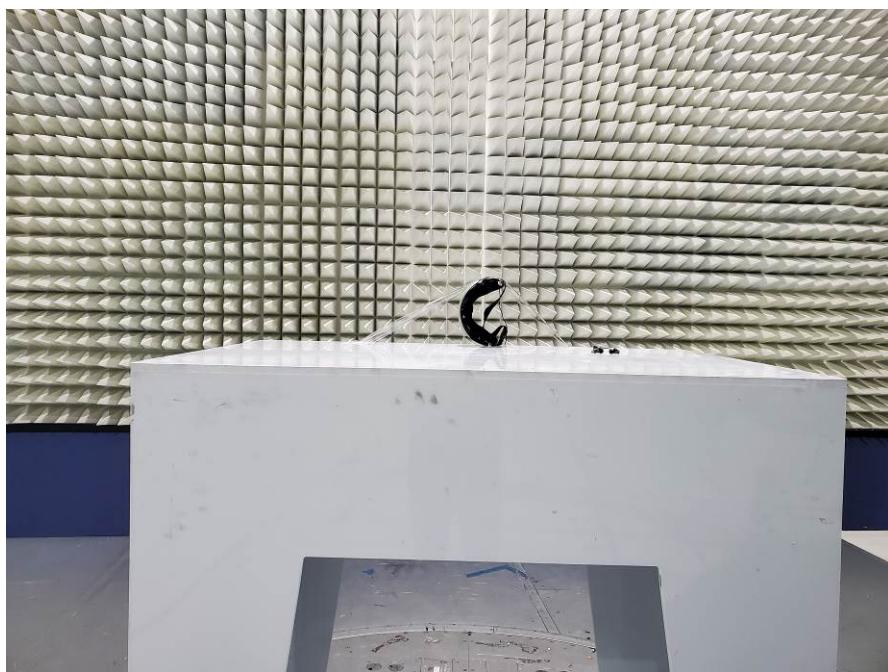

4.6 AC Line Conducted Emission
15.207; RSS-GEN;

4.6.1 Requirement

Frequency Band MHz	Class B Limit dB(µV)		Class A Limit dB(µV)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15-0.50	66 to 56 *	56 to 46 *	79	66
0.50-5.00	56	46	73	60
5.00-30.00	60	50	73	60

*Note: *Decreases linearly with the logarithm of the frequency. At the transition frequency the lower limit applies.*

4.6.2 Test Results

Not applicable. The EUT is battery operated under normal operation. According to manufacture, the BLE is turned off during charging mode.

5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Asset #	Cal Int	Cal Due
Spectrum Analyzer	Rohde and Schwarz	FSW	ITS 01818	12	07/09/21
EMI Receiver	Rohde & Schwarz	ESU40	ITS 00961	12	11/07/20
BI-Log Antenna	Teseq	CBL 6111D	ITS 01505	12	03/11/21
Preamp	Sonoma Preamp	310N	ITS 01714	12	11/11/20
Active Horn Antenna	ETS Lindgren	3117PA	ITS 01636	12	02/24/21
Pyramidal Horn Antenna	EMCO	3160-09	ITS 00571	#	#
Pre-Amplifier	Miteq	TTA1840-35-S-M	ITS 01393	12	03/02/21
10 dB Attenuator	Mini Circuits	BW-S10W5+	ITS 01582	12	10/07/20
Notch Filter	Micro-Tronics	BRM50702	ITS 01166	12	06/11/21
RE Cable	TRU Corporation	TRU CORE 300	ITS 01462	12	08/27/20
RE Cable	TRU Corporation	TRU CORE 300	ITS 01465	12	08/27/20
RE Cable	TRU Corporation	TRU CORE 300	ITS 01470	12	08/27/20
RF Cable	TRU Corporation	TRU CORE 300	ITS 01342	12	10/07/20
RF Cable	Mega Phase	TM40-K1K1-59	ITS 01655	12	07/29/20
10m chamber	Panashield	10m Semi-Anechoic	ITS 00984	36	09/11/21
Passive Loop Antenna	EMCO	6512	ITS 001598	12	10/22/20
Preamp	Sonoma Preamp	310N	ITS 00942	12	04/14/21

No Calibration required

Software used for emission compliance testing utilized the following:

Name	Manufacturer	Version	Template/Profile
Tile	Quantum Change	3.4.K.22	Conducted Spurious_30M-26GHz
BAT-EMC	Nexio	3.19.1.19	SaraHealth_07-27.bpp
RS Commander	Rohde Schwarz	1.6.4	Not Applicable (Screen grabber)

6.0 Document History

Revision/ Job Number	Writer Initials	Reviewers Initials	Date	Change
1.0 / G104395865	ML	KV	August 03, 2020	Original document
2.0 / G104395865	ML	KV	August 23, 2020	Added Radiated Spurious Emission 9kHz – 30MHz.